

## Exceptional new thick, high-grade drill results confirm potential for substantial resource growth at Kathleen Valley

*Latest results extend high-grade mineralisation along strike and down-dip including the highest-grade intersection to date – 12m @ 3.1% Li<sub>2</sub>O, located on northernmost line*

### HIGHLIGHTS

- New intersections from ongoing Reverse Circulation (RC) / diamond drilling program at the Kathleen Valley Lithium-Tantalum Project include:

25m @ 1.5% Li <sub>2</sub> O from 408m (KVDD0043), including: <ul style="list-style-type: none"> <li>○ 7m @ 2.7% Li<sub>2</sub>O from 412m</li> </ul>
64m @ 1.2% Li <sub>2</sub> O from 321m (KVDD0045), including: <ul style="list-style-type: none"> <li>• 9m @ 1.9% Li<sub>2</sub>O from 342m and</li> <li>• 10m @ 1.9% Li<sub>2</sub>O from 362m</li> </ul>
55m @ 1.7% Li <sub>2</sub> O from 301m (KVDD0046), including <ul style="list-style-type: none"> <li>• 6.2m @ 2.5% Li<sub>2</sub>O from 301.8 and</li> <li>○ 13m @ 2.2% Li<sub>2</sub>O from 312m and</li> <li>○ 9m @ 2.2% Li<sub>2</sub>O from 339m</li> </ul>
12m @ 3.1% Li <sub>2</sub> O from 218m (KVRC0266), including <ul style="list-style-type: none"> <li>○ 9m @ 3.8% Li<sub>2</sub>O from 219m</li> </ul>
22m @ 1.3% Li <sub>2</sub> O from 319m (KVRC0135A), including <ul style="list-style-type: none"> <li>○ 5m @ 2.1% Li<sub>2</sub>O from 325m</li> </ul>
11m @ 1.8% Li <sub>2</sub> O from 211m (KVRC0146A), including <ul style="list-style-type: none"> <li>○ 4m @ 3.7% Li<sub>2</sub>O from 212m</li> </ul>
19m @ 1.4% Li <sub>2</sub> O from 303m (KVRC0146A), including <ul style="list-style-type: none"> <li>○ 3m @ 1.9% Li<sub>2</sub>O from 304m</li> </ul>

*(True widths 80-100% of down-hole widths listed above – see Appendix 1 for further details)*

- Thick, high-grade mineralisation now intersected over a strike length of 1.4km with the system still open to the north and at depth.
- Drill holes KVDD0043, KVDD0045 and KVDD0046 confirm the down-dip continuity of the thick, high grade feeder zone which earlier this year returned multiple outstanding intercepts including 83m @ 1.5% Li<sub>2</sub>O in KVRC0249, 53m @ 1.6% Li<sub>2</sub>O in KVRC0207A, 74m @ 1.3% Li<sub>2</sub>O in KVRC0250 and 90m @ 1.3% Li<sub>2</sub>O in KVRC0220<sup>1</sup>.
- Latest results highlight the potential to substantially increase the Kathleen Valley Mineral Resource, which is currently Australia's 5<sup>th</sup> largest lithium deposit with a Mineral Resource Estimate (MRE) of 74.9Mt @ 1.3% Li<sub>2</sub>O and 140ppm Ta<sub>2</sub>O<sub>5</sub>.
- 15,000m drilling program in progress with two Reverse Circulation drilling rigs and one diamond rig operating on-site. Further drilling currently being planned.
- Work on a Pre-Feasibility Study (PFS) remains on track for completion by the end of 2019.

<sup>1</sup> See ASX releases dated 20<sup>th</sup> May and 24<sup>th</sup> June 2019.

Liontown Resources Limited (ASX: LTR, “Liontown” or “Company”) is pleased to report further outstanding results from the ongoing resource expansion drilling program at its 100%-owned **Kathleen Valley Lithium-Tantalum Project** in WA, with the latest assay results confirming the northern strike extension and down-dip continuity of the mineralised system.

The current drilling program is designed to test for a resource extension Exploration Target of **25 – 50Mt @ 1.2 – 1.5% Li<sub>2</sub>O**, which was defined based on testing for extensions of the current Mineral Resource Estimate from the limits of previous drill data to a vertical depth of ~500m below surface. This Exploration Target is in addition the current 74.9Mt MRE.

(The potential grade and tonnage of the Exploration Target is conceptual in nature and there has been insufficient exploration to estimate an expanded Mineral Resource. It is uncertain if further exploration will result in the estimation of an expanded Mineral Resource. See Table 1 for full explanation of assumptions used to estimate ranges.)

Drill holes KVRC0266, KVRC0135A and KVRC0146A (see **Appendices 1 and 2** for full listing of drill statistics) confirm the north-western extension of the high-grade mineralisation beneath shallow soil cover (**Figures 1 and 2**) and are interpreted to be up-dip and along strike of a thick (up to 75m wide) feeder zone, partially defined to the south and formed by the coalescence of multiple, outcropping pegmatites at depth.

Results from drill holes KVDD0043, KVDD0045 and KVDD0046 (**Figure 3**) confirm the down-dip continuity of this feeder zone.

The Kathleen Valley mineralised system, which has now been defined over a minimum strike length of 1.4km and to depth of 400m below surface, remains open to the north-west and down-dip and further drilling, in addition to the originally planned 15,000m program, will be required to delineate its extents prior to preparing an updated MRE.

A review is currently in progress to determine the amount of additional drilling required. This drilling will take into account ongoing results and is estimated to take another 2-4 months to complete.

In addition to the ongoing drilling program, a Pre-Feasibility Study (PFS), which will include an initial Ore Reserve estimate based on the current MRE of 74.9Mt, is scheduled for completion in Q4 2019.

Liontown envisages transitioning into a Definitive Feasibility Study (DFS) immediately following the PFS and will incorporate the results of latest drilling to prepare an updated MRE. This updated MRE will include both open pit and underground resources which are anticipated to provide the best outcome for the DFS.

Since drilling re-commenced in late August 2019, six new RC holes have been drilled, four previous RC holes have been extended and eleven new diamond core holes have been drilled for a total of 6,359m. Six of the diamond core holes have been drilled for geotechnical purposes.

This brings the total amount of drilling completed by Liontown at Kathleen Valley to 323 holes for 51,309m, comprising 270 RC holes for 45,853m and 53 diamond core holes for 8,456m. The total includes 32 RC holes which have been extended following receipt of results along strike that indicated the potential for deeper mineralisation.

Liontown’s Managing Director, David Richards, said the latest resource extension drilling results provided clear evidence of the substantial resource upside at Kathleen Valley, which is continuing to emerge as one of the more significant lithium-tantalum deposits in Australia.

*“The latest drilling has extended the high-grade mineralisation along strike to the north-west while also confirming the down-dip continuity of the thick feeder we encountered in drilling earlier this year,”* he said.

*“We now know that additional drilling will be required over and above the current 15,000m drilling program to fully delineate the potential of this high-quality lithium-tantalum resource. In the meantime, shareholders can look forward to the results of a Pre-Feasibility Study, including a maiden Ore Reserve, later this*

quarter. Results from the current drilling will underpin a major resource upgrade next year that will, in turn, form the basis of the Definitive Feasibility Study to be undertaken in 2020.”



DAVID RICHARDS  
Managing Director

*The Information in this report that relates to Exploration Results and Targets is based on and fairly represents information and supporting documentation prepared by Mr David Richards, who is a Competent Person and a member of the Australasian Institute of Geoscientists (AIG). Mr Richards is a full-time employee of the company. Mr Richards has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Richards consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.*

*The Information in this report that relates to Mineral Resources for the Kathleen Valley Project is extracted from the ASX announcement "Kathleen Valley Lithium Resource jumps 353% to 74.9Mt @ 1.3% Li<sub>2</sub>O" released on the 9<sup>th</sup> July 2019 which is available on [www.ltresources.com.au](http://www.ltresources.com.au).*

*The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.*

*This announcement contains forward-looking statements which involve a number of risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialise, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.*

**Table 1: Kathleen Valley Project – Exploration Target Parameters and Assumptions**

Parameter	KV Feeder Zone	KV North West	Rationale
Combined strike length of pegmatites	1100m	400	Based on previous drilling and extrapolation of block model used in preparation of Mineral Resource Estimate (released 4 <sup>th</sup> September 2018)
Average cumulative true width	>18m	>20m	
Down Dip extent	230 - 500m	600 - 1,100m	
Specific gravity	2.75	2.75	Measured from diamond core drilling
Total tonnage	12.5 - 27Mt	13 - 24Mt	Strike x width x dip x S.G
Average grade	1.2 – 1.5%	1.2 – 1.5%	Based on latest Mineral Resource Estimate

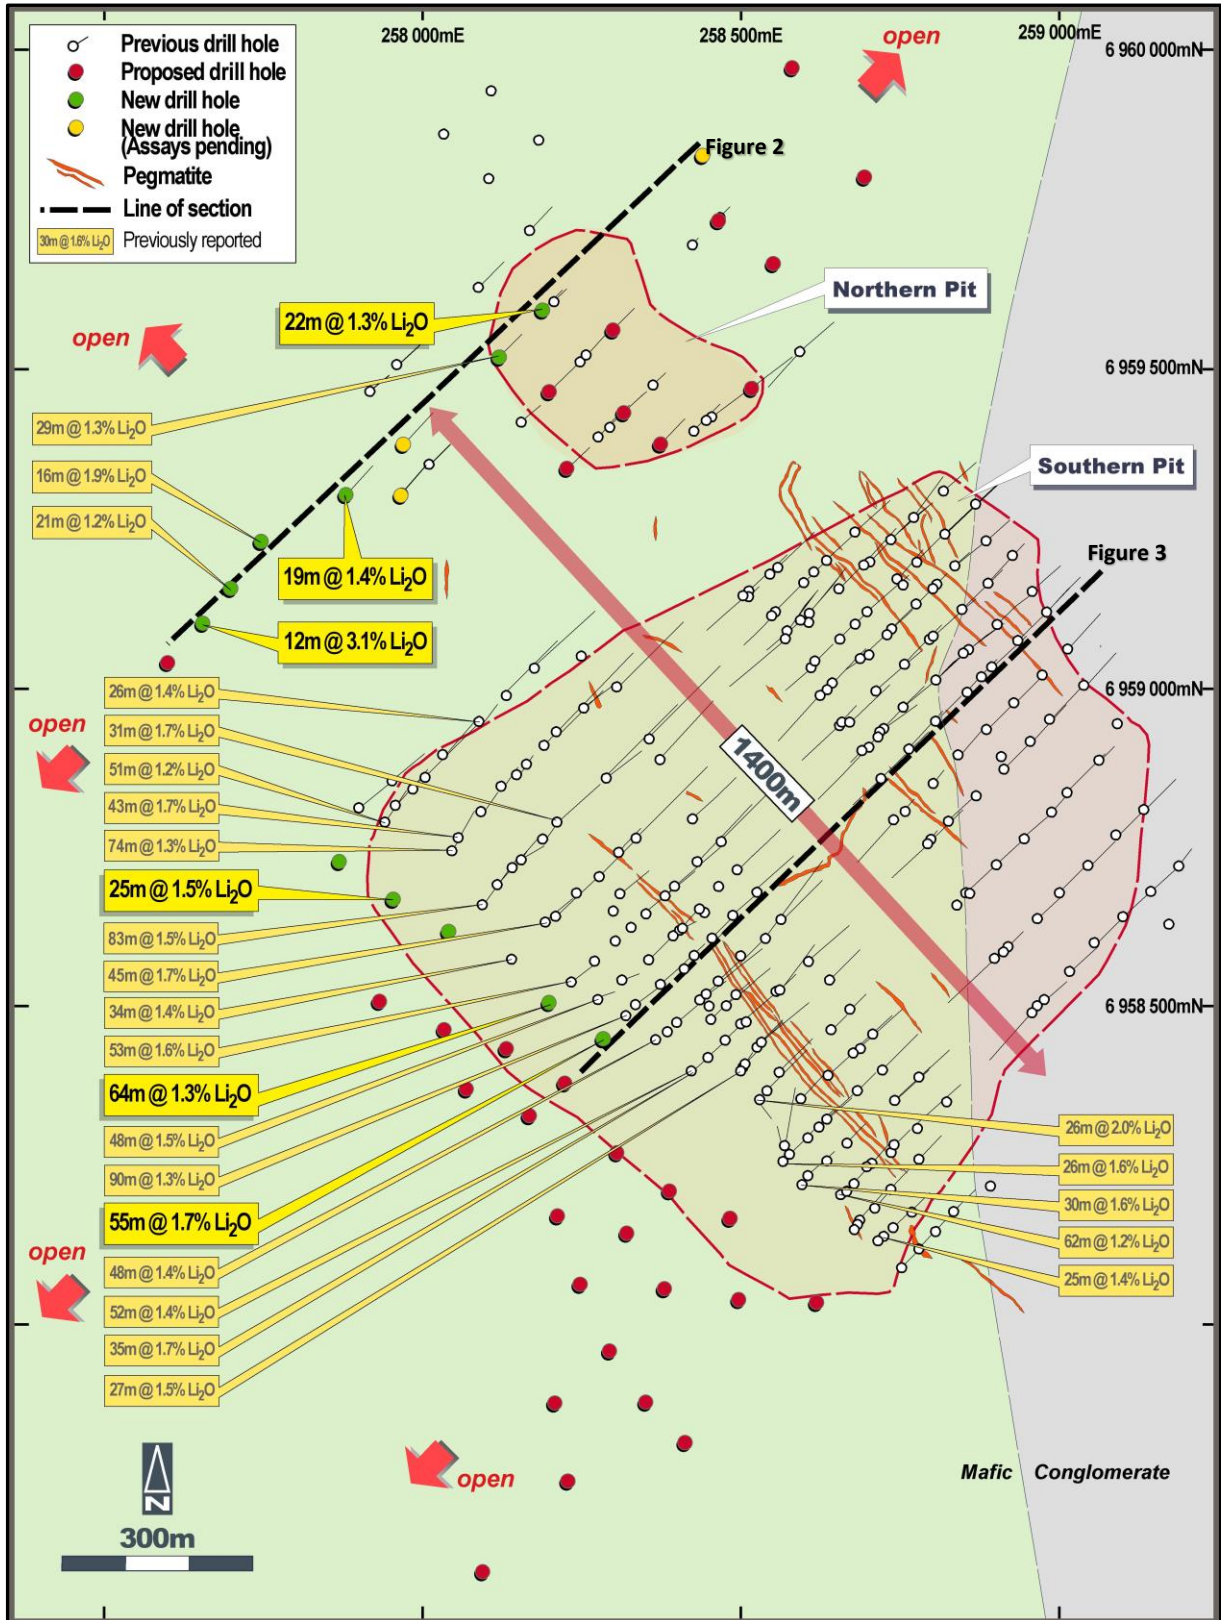


Figure 1: Kathleen Valley – Drill hole plan showing proposed holes and better lithium intersections from current and previous 2019 drilling program.

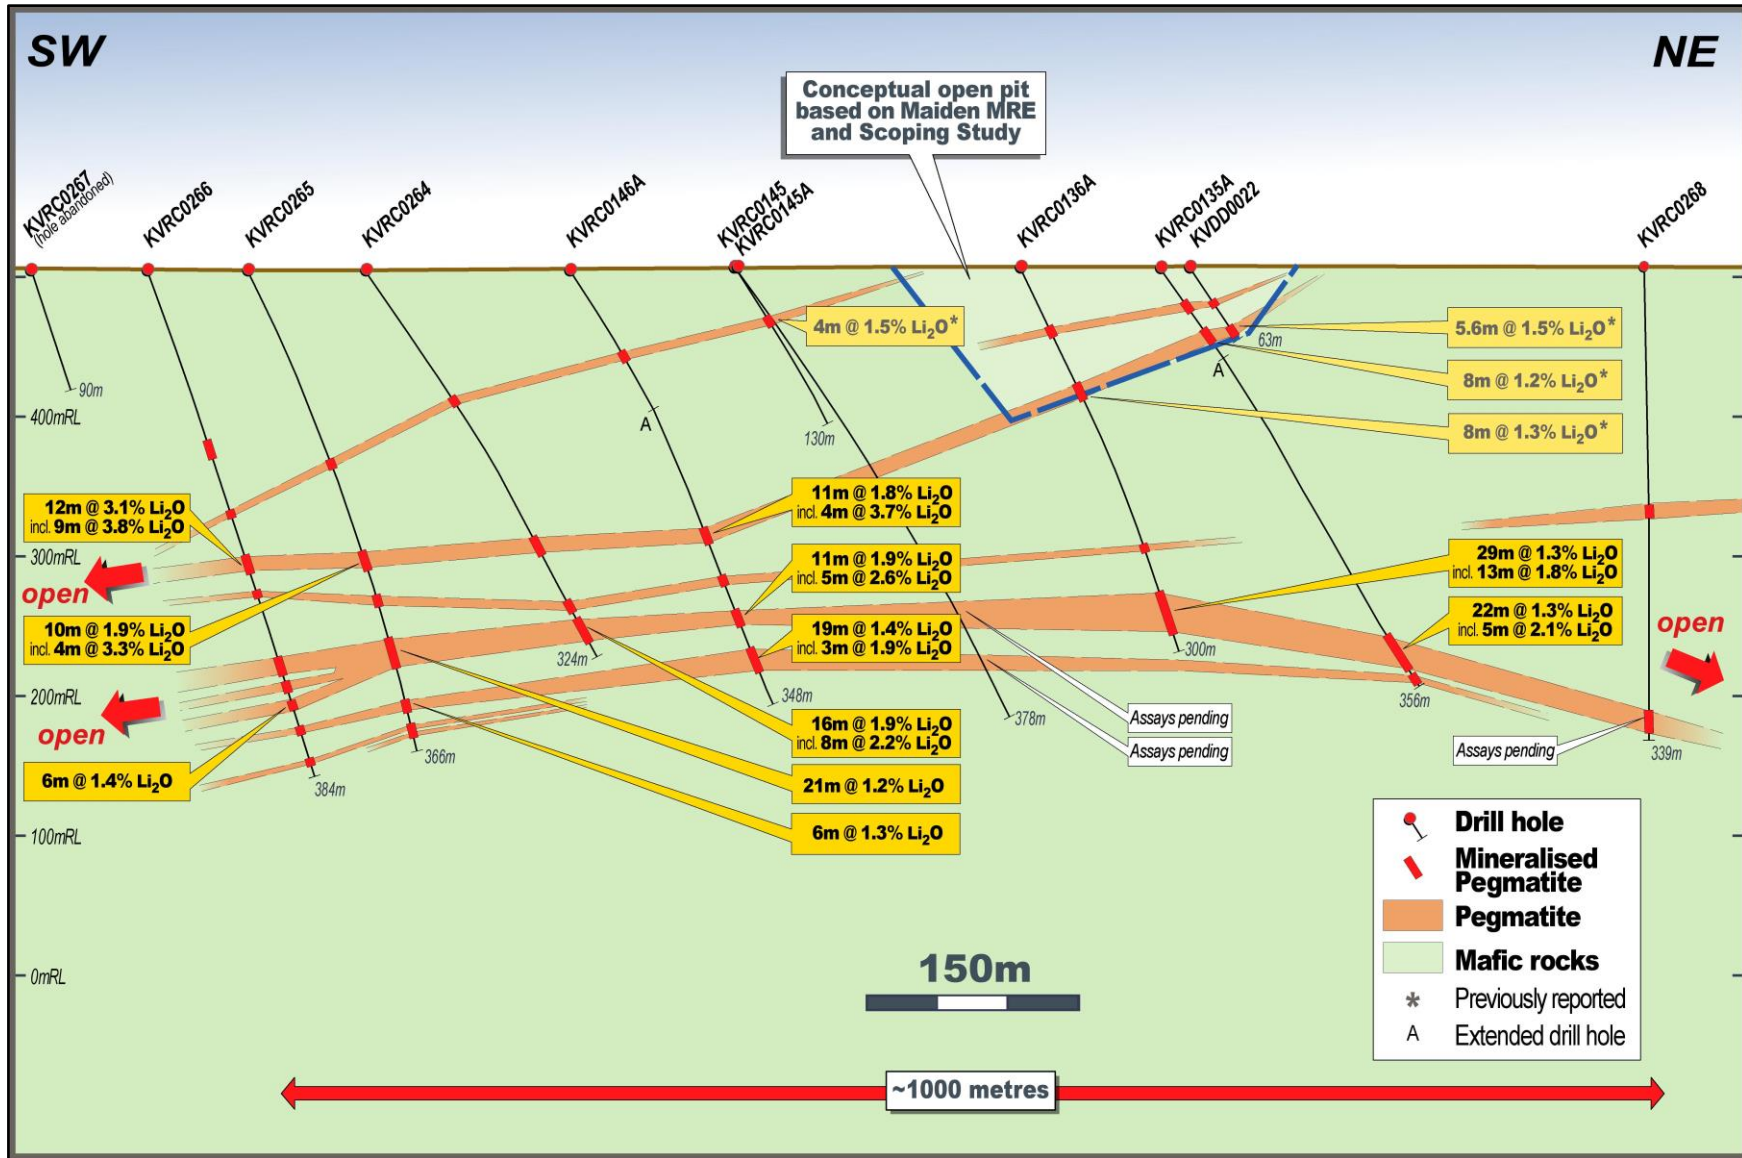


Figure 2: Kathleen Valley – New drill section showing mineralised pegmatites and better lithium intersections (see Figure 1 for location).

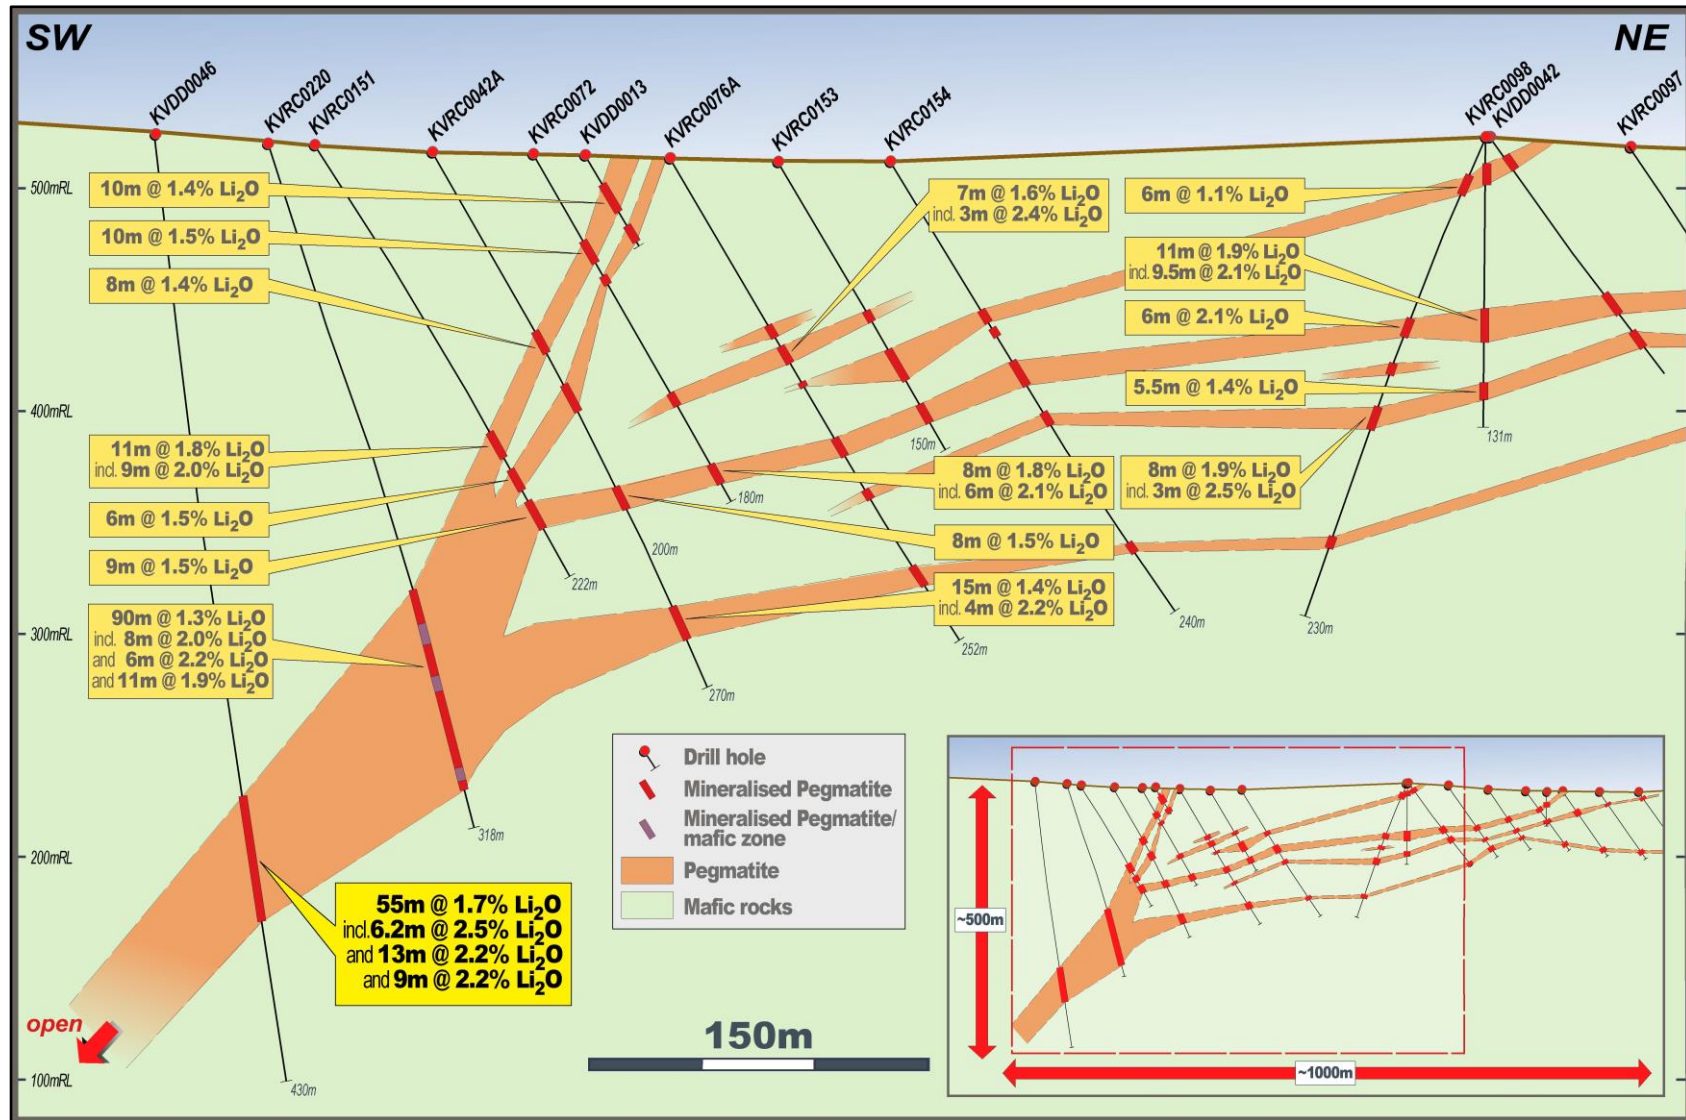


Figure 3: Kathleen Valley – Drill section showing new intersection (KVDD0046) confirming down dip extension of feeder zone (see Figure 1 for location).

## Appendix 1 – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0001	258306	6958744	509	-60	45	65	3	6	3	1	122
							10	11	1	1.1	85
							16	17	1	1.1	94
KVRC0002	258379	6958675	511	-60	225	109	0	13	13	1.6	114
							<b>incl. 9m @ 1.9% Li<sub>2</sub>O and 107ppm Ta<sub>2</sub>O<sub>5</sub> from 2m</b>				
							26	29	3	1.3	101
							35	36	1	1.6	127
							83	96	13	1.6	111
							<b>incl. 6m @ 2% Li<sub>2</sub>O and 113ppm Ta<sub>2</sub>O<sub>5</sub> from 88m</b>				
KVRC0003	258395	6958690	511	-59	225	155	91	105	14	1.7	163
							<b>incl. 8m @ 2% Li<sub>2</sub>O and 130ppm Ta<sub>2</sub>O<sub>5</sub> from 92m</b>				
KVRC0004						89	36	38	2	1	99
							45	56	11	1.2	100
KVRC0004A*	258348	6958645	512	-50	45	256	<b>incl. 3m @ 1.8% Li<sub>2</sub>O and 106ppm Ta<sub>2</sub>O<sub>5</sub> from 45m</b>				
							125	133	8	1.1	223
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 275ppm Ta<sub>2</sub>O<sub>5</sub> from 128m</b>				
							161	166	5	1.3	273
							<b>incl. 1m @ 2% Li<sub>2</sub>O and 167ppm Ta<sub>2</sub>O<sub>5</sub> from 162m</b>				
							215	234	19	1.6	138
							<b>incl. 1m @ 2.9% Li<sub>2</sub>O and 240ppm Ta<sub>2</sub>O<sub>5</sub> from 216m and 6m @ 1.8% Li<sub>2</sub>O and 140ppm Ta<sub>2</sub>O<sub>5</sub> from 218m and 3m @ 2.3% Li<sub>2</sub>O and 82ppm Ta<sub>2</sub>O<sub>5</sub> from 226m and 2m @ 2.2% Li<sub>2</sub>O and 156ppm Ta<sub>2</sub>O<sub>5</sub> from 232m</b>				
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 275ppm Ta<sub>2</sub>O<sub>5</sub> from 128m</b>				
KVRC0005	258276	6958707	510	-53	40	89	32	34	2	1.3	112
							39	40	1	1.5	132
KVRC0005A*						178	150	154	4	1.4	265
KVRC0006	258433	6958654	512	-50	227.5	80	<b>incl. 1m @ 1.9% Li<sub>2</sub>O and 229ppm Ta<sub>2</sub>O<sub>5</sub> from 152m</b>				
							37	43	6	1.1	153
KVRC0007	258452	6959426	508	-47	45	132	29	35	6	1.4	170
							<b>incl. 3m @ 1.9% Li<sub>2</sub>O and 166ppm Ta<sub>2</sub>O<sub>5</sub> from 30m</b>				
							39	40	1	1.1	198
							124	125	1	2.4	302
KVRC0008	258512	6959469	508	-50	55	130	81	82	1	1.2	310
							95	96	1	1	124
KVRC0009	258590	6959528	509	-50	45	113	57	59	2	0.7	248
							70	71	1	0.6	266
KVRC0010	258593	6959527	509	-50	225	130	83	85	2	1.1	211
							91	92	1	1.4	239
							100	106	6	1.2	284
KVRC0011	258208	6958788	508	-50	45	89	24	25	1	1	112
KVRC0012	258154	6958729	509	-55	45	65	No significant assays				
KVRC0013	258205	6958930	507	-50	45	108	No significant assays				
KVRC0014	258157	6958881	506	-50	45	113	12	17	5	0	240
							135	193	58	1.2	156
KVRC0015	258443	6958652	512	-50	180	241	<b>incl. 9m @ 1.8% Li<sub>2</sub>O and 220ppm Ta<sub>2</sub>O<sub>5</sub> from 141m and 13m @ 2.0% Li<sub>2</sub>O and 138ppm Ta<sub>2</sub>O<sub>5</sub> from 67m and</b>				
							206	230	24	1.3	139
							<b>incl. 3m @ 1.6% Li<sub>2</sub>O and 105ppm Ta<sub>2</sub>O<sub>5</sub> from 208m and 2m @ 2.6% Li<sub>2</sub>O and 271ppm Ta<sub>2</sub>O<sub>5</sub> from 217m and 4m @ 1.6% Li<sub>2</sub>O and 145ppm Ta<sub>2</sub>O<sub>5</sub> from 226m and</b>				
							<b>incl. 3m @ 1.8% Li<sub>2</sub>O and 220ppm Ta<sub>2</sub>O<sub>5</sub> from 141m and 13m @ 2.0% Li<sub>2</sub>O and 138ppm Ta<sub>2</sub>O<sub>5</sub> from 67m and</b>				
							<b>incl. 3m @ 1.6% Li<sub>2</sub>O and 105ppm Ta<sub>2</sub>O<sub>5</sub> from 208m and 2m @ 2.6% Li<sub>2</sub>O and 271ppm Ta<sub>2</sub>O<sub>5</sub> from 217m and 4m @ 1.6% Li<sub>2</sub>O and 145ppm Ta<sub>2</sub>O<sub>5</sub> from 226m and</b>				
KVRC0016	258331	6958764	509	-50	45	40	No significant assays				
KVRC0017	257899	6958809	507	-50	45	119	63	65	2	1.3	212
KVRC0018	257951	6958853	506	-50	45	101	1	2	1	1.4	93
KVRC0019	258252	6958969	507	-50	45	89	No significant assays				

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0020	258702	6958251	532	-60	45	80	26	48	22	1.2	170
							<b>incl. 5m @ 1.7% Li2O and 126ppm Ta2O5 from 26m</b>				
							<b>incl. 10m @ 1.6% Li2O and 244ppm Ta2O5 from 34m</b>				
KVRC0021	258675	6958223	535	-55	45	140	65	75	10	0.9	179
							<b>incl. 7m @ 1.1% Li2O and 205ppm Ta2O5 from 68m</b>				
							85	88	3	0.8	305
							<b>incl. 1m @ 1.3% Li2O and 277ppm Ta2O5 from 86m</b>				
							103	106	3	1.5	237
<b>incl. 2m @ 1.8% Li2O and 246ppm Ta2O5 from 103m</b>											
KVRC0022	258735	6958215	528	-55	45	80	20	30	10	1.3	199
							<b>incl. 6m @ 1.7% Li2O and 209ppm Ta2O5 from 24m</b>				
KVRC0023	258708	6958186	529	-55	45	100	52	58	6	1.5	260
							<b>incl. 5m @ 1.7% Li2O and 246ppm Ta2O5 from 53m</b>				
KVRC0024	258665	6958285	543	-55	45	112	18	33	15	1.4	139
							<b>incl. 11m @ 1.6% Li2O and 132ppm Ta2O5 from 20m</b>				
							49	51	2	0.7	141
							93	98	5	0.8	173
KVRC0025	258636	6958260	544	-55	45	160	61	75	14	1.6	121
							<b>incl. 13m @ 1.7% Li2O and 122ppm Ta2O5 from 61m</b>				
							84	85	1	1.7	106
							103	107	4	1.5	187
							<b>incl. 2m @ 2.5% Li2O and 218ppm Ta2O5 from 104m</b>				
							119	127	8	1.0	197
<b>incl. 2m @ 2.0% Li2O and 246ppm Ta2O5 from 123m</b>											
KVRC0026	258564	6958396	535	-55	45	120	32	44	12	1.4	136
							<b>incl. 8m @ 1.8% Li2O and 147ppm Ta2O5 from 35m</b>				
							58	61	3	1.2	93
							80	82	2	1.5	375
							<b>incl. 1m @ 2.5% Li2O and 398ppm Ta2O5 from 81m</b>				
KVRC0027	258535	6958367	534	-55	45	160	98	100	2	1	291
							<b>incl. 6m @ 2% Li2O and 112ppm Ta2O5 from 69m</b>				
							65	78	13	1.6	120
							93	97	4	1.5	161
							101	105	4	0.7	204
KVRC0028	258504	6958477	525	-55	45	120	129	135	6	0.8	107
							<b>incl. 5m @ 1.9% Li2O and 133ppm Ta2O5 from 32m</b>				
							30	39	9	1.5	133
							51	56	5	1.7	80
KVRC0029	258472	6958448	525	-55	45	196	95	97	2	1.4	350
							<b>incl. 7m @ 2.2% Li2O and 154ppm Ta2O5 from 77m</b>				
							75	85	10	1.8	170
							97	106	9	1.2	110
							<b>incl. 3m @ 1.7% Li2O and 89ppm Ta2O5 from 98m</b>				
							125	133	8	1.4	251
							<b>incl. 2m @ 2% Li2O and 300ppm Ta2O5 from 126m</b>				
							<b>incl. 2m @ 1.8% Li2O and 252ppm Ta2O5 from 129m</b>				
							176	177	1	1.1	74
							182	188	6	1.9	128
<b>incl. 4m @ 2.4% Li2O and 135ppm Ta2O5 from 183m</b>											
193	196	3	1	118							



**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0030	258464	6958540	520	-55	45	140	16	25	9	1.6	118
							<b>incl. 6m @ 2% Li2O and 124ppm Ta2O5 from 18m</b>				
							37	44	7	1.1	80
							<b>incl. 3m @ 1.8% Li2O and 123ppm Ta2O5 from 40m</b>				
							99	103	4	0.9	331
							113	117	4	1.3	492
KVRC0031	258435	6958512	521	-55	45	160	52	61	9	1.7	126
							<b>incl. 6m @ 2% Li2O and 121ppm Ta2O5 from 54m</b>				
							85	93	8	1.4	99
							<b>incl. 4m @ 1.8% Li2O and 113ppm Ta2O5 from 87m</b>				
							106	110	4	2	312
							116	118	2	1.5	268
KVRC0032	258426	6959404	511	-55	45	100	39	44	5	1.6	124
							<b>incl. 3m @ 2.1% Li2O and 150ppm Ta2O5 from 40m</b>				
							67	68	1	1.3	197
KVRC0033	258802	6959298	513	-55	45	140	6	9	3	0.9	223
							52	57	5	1.2	157
							<b>incl. 2m @ 2.2% Li2O and 167ppm Ta2O5 from 54m</b>				
KVRC0034	258653	6959155	518	-55	45	120	114	118	4	1.2	152
							18	19	1	0.6	112
							21	24	3	1.5	156
							<b>incl. 2m @ 1.9% Li2O and 187ppm Ta2O5 from 22m</b>				
							53	55	2	0.9	177
							60	64	4	1.4	160
							<b>incl. 2m @ 2% Li2O and 236ppm Ta2O5 from 61m</b>				
							68	70	2	1.2	123
							78	95	17	1.4	161
							<b>incl. 4m @ 2% Li2O and 268ppm Ta2O5 from 79m</b>				
							<b>incl. 4m @ 2.3% Li2O and 162ppm Ta2O5 from 90m</b>				
							106	108	2	0.8	453
							112	114	2	1.4	203
							<b>incl. 1m @ 1.7% Li2O and 195ppm Ta2O5 from 112m</b>				
KVRC0035	258694	6959195	516	-55	45	120	37	40	3	1.1	252
							47	49	2	1.9	225
							52	54	2	1.2	201
							<b>incl. 1m @ 1.9% Li2O and 283ppm Ta2O5 from 53m</b>				
							71	92	21	1.9	201
							<b>incl. 17m @ 2.2% Li2O and 220ppm Ta2O5 from 74m</b>				
							101	103	2	0.9	273
							108	110	2	1.3	94
KVRC0036	258733	6959232	514	-55	45	140	14	17	3	1.1	247
							23	24	1	2.2	375
							54	56	2	1.6	164
							<b>incl. 1m @ 2.2% Li2O and 105ppm Ta2O5 from 55m</b>				
							69	73	4	1.7	255
							<b>incl. 2m @ 2.5% Li2O and 328ppm Ta2O5 from 70m</b>				
							76	77	1	0.8	107
							101	103	2	0.7	186
115	119	4	1	223							

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0037	258730	6959085	516	-55	45	120	15	19	4	1.1	303
							63	77	14	1.7	168
							<b>incl. 2m @ 2.5% Li<sub>2</sub>O and 103ppm Ta<sub>2</sub>O<sub>5</sub> from 64m</b>				
							<b>incl. 7m @ 2.1% Li<sub>2</sub>O and 214ppm Ta<sub>2</sub>O<sub>5</sub> from 69m</b>				
							83	87	4	1.3	107
							<b>incl. 2m @ 2% Li<sub>2</sub>O and 184ppm Ta<sub>2</sub>O<sub>5</sub> from 85m</b>				
KVRC0038	258774	6959131	514	-55	45	120	37	42	5	1	178
							<b>incl. 2m @ 1.8% Li<sub>2</sub>O and 198ppm Ta<sub>2</sub>O<sub>5</sub> from 38m</b>				
							58	64	6	0.7	129
							76	85	9	1.7	255
							<b>incl. 4m @ 2.5% Li<sub>2</sub>O and 292ppm Ta<sub>2</sub>O<sub>5</sub> from 77m</b>				
							100	102	2	0.6	233
KVRC0039	258803	6959163	513	-55	45	120	8	16	8	1.1	131
							<b>incl. 3m @ 1.6% Li<sub>2</sub>O and 173ppm Ta<sub>2</sub>O<sub>5</sub> from 10m</b>				
							45	49	4	1.3	204
							<b>incl. 2m @ 1.7% Li<sub>2</sub>O and 243ppm Ta<sub>2</sub>O<sub>5</sub> from 46m</b>				
							85	90	5	1.9	143
							<b>incl. 3m @ 2.3% Li<sub>2</sub>O and 138ppm Ta<sub>2</sub>O<sub>5</sub> from 86m</b>				
KVRC0040	258836	6959192	512	-55	45	140	37	39	2	0.7	191
							115	123	8	1.1	176
							<b>incl. 2m @ 2.1% Li<sub>2</sub>O and 157ppm Ta<sub>2</sub>O<sub>5</sub> from 115m</b>				
							126	127	1	1.6	206
KVRC0041	258398	6958475	524	-60	52	220	107	118	11	1.6	120
							<b>incl. 6m @ 1.9% Li<sub>2</sub>O and 123ppm Ta<sub>2</sub>O<sub>5</sub> from 111m</b>				
							149	159	10	0.8	139
							<b>incl. 2m @ 1.8% Li<sub>2</sub>O and 136ppm Ta<sub>2</sub>O<sub>5</sub> from 156m</b>				
							183	197	14	1.6	83
							<b>incl. 6m @ 2.1% Li<sub>2</sub>O and 100ppm Ta<sub>2</sub>O<sub>5</sub> from 185m and 2m @ 2.2% Li<sub>2</sub>O and 113ppm Ta<sub>2</sub>O<sub>5</sub> from 194m</b>				
KVRC0041A*						280	222	229	7	0.9	95
KVRC0042	258373	6958534	519	-60	49	200	95	103	8	1.4	121
							<b>incl. 4m @ 1.9% Li<sub>2</sub>O and 124ppm Ta<sub>2</sub>O<sub>5</sub> from 98m</b>				
							120	130	10	1.1	119
							<b>incl. 2m @ 1.6% Li<sub>2</sub>O and 161ppm Ta<sub>2</sub>O<sub>5</sub> from 124m</b>				
							172	180	8	1.5	137
							<b>incl. 4m @ 1.9% Li<sub>2</sub>O and 138ppm Ta<sub>2</sub>O<sub>5</sub> from 173m</b>				
KVRC0042A*						270	231	246	15	1.4	122
	<b>incl. 4m @ 2.2% Li<sub>2</sub>O and 114ppm Ta<sub>2</sub>O<sub>5</sub> from 232m and 3m @ 1.7% Li<sub>2</sub>O and 131ppm Ta<sub>2</sub>O<sub>5</sub> from 238m and 1m @ 1.9% Li<sub>2</sub>O and 114ppm Ta<sub>2</sub>O<sub>5</sub> from 243m</b>										
KVRC0043	258815	6959306	512	-55	53	120	34	37	3	1.5	215
							83	84	1	1.1	906
KVRC0044	258605	6959116	519	-54	40	150	43	47	4	1.5	129
							<b>incl. 3m @ 1.8% Li<sub>2</sub>O and 155ppm Ta<sub>2</sub>O<sub>5</sub> from 44m</b>				
							65	80	15	1.1	204
							<b>incl. 1m @ 2.4% Li<sub>2</sub>O and 287ppm Ta<sub>2</sub>O<sub>5</sub> from 72m</b>				
							<b>incl. 2m @ 2.4% Li<sub>2</sub>O and 250ppm Ta<sub>2</sub>O<sub>5</sub> from 76m</b>				
							102	109	7	1.6	225
							<b>incl. 5m @ 1.9% Li<sub>2</sub>O and 238ppm Ta<sub>2</sub>O<sub>5</sub> from 102m</b>				
							114	116	2	0.9	118
							122	124	2	1.2	273
							127	131	4	1	172
<b>incl. 1m @ 2% Li<sub>2</sub>O and 181ppm Ta<sub>2</sub>O<sub>5</sub> from 128m</b>											
						138	140	2	1.5	266	

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0045	258571	6959089	521	-59	38	150	65	69	4	1.6	149
							<b>incl. 3m @ 1.9% Li2O and 173ppm Ta2O5 from 65m</b>				
							84	94	10	1.6	287
							<b>incl. 5m @ 2.3% Li2O and 317ppm Ta2O5 from 85m</b>				
							114	133	19	1.1	131
KVRC0046	258887	6959230	512	-54	48	93	<b>incl. 2m @ 2.1% Li2O and 236ppm Ta2O5 from 116m and 2m @ 2.4% Li2O and 98ppm Ta2O5 from 130m</b>				
							28	31	3	1.7	191
KVRC0047	258688	6959048	520	-56	46	200	34	36	2	0.9	307
							76	85	9	1.5	206
							<b>incl. 3m @ 2% Li2O and 128ppm Ta2O5 from 77m and 1m @ 2.3% Li2O and 234ppm Ta2O5 from 83m</b>				
							88	90	2	1.3	260
							100	102	2	2.5	173
							132	136	4	1.2	180
KVRC0048	258645	6959011	522	-55	47	120	<b>incl. 1m @ 2% Li2O and 314ppm Ta2O5 from 133m</b>				
							45	48	3	1.5	214
KVRC0049	258957	6959148	513	-57	47	120	85	99	14	1.6	236
							<b>incl. 9m @ 2% Li2O and 230ppm Ta2O5 from 87m</b>				
KVRC0050	258904	6959102	514	-56	49	120	109	113	4	1.4	200
							<b>incl. 1m @ 2.1% Li2O and 176ppm Ta2O5 from 109m and 1m @ 1.7% Li2O and 183ppm Ta2O5 from 111m</b>				
							5	7	2	1.1	84
KVRC0051	258855	6959056	516	-57	51	121	31	34	3	1	135
							100	108	8	1	123
							<b>incl. 2m @ 2.1% Li2O and 146ppm Ta2O5 from 100m</b>				
							13	17	4	0.9	114
							<b>incl. 1m @ 1.7% Li2O and 159ppm Ta2O5 from 14m</b>				
							21	23	2	1.6	130
							<b>incl. 1m @ 2% Li2O and 179ppm Ta2O5 from 21m</b>				
28	30	2	1.7	161							
KVRC0052	258807	6959015	515	-55	48	120	48	52	4	1.6	131
							<b>incl. 2m @ 2.2% Li2O and 145ppm Ta2O5 from 48m</b>				
							108	114	6	0.8	153
							<b>incl. 1m @ 2.2% Li2O and 238ppm Ta2O5 from 111m</b>				
KVRC0053	258757	6958966	519	-56	49	120	80	86	6	1.5	162
							<b>incl. 3m @ 2.2% Li2O and 160ppm Ta2O5 from 81m</b>				
							68	73	5	1.6	183
KVRC0054	258717	6958930	522	-57	52	160	<b>incl. 1m @ 2% Li2O and 233ppm Ta2O5 from 72m</b>				
							78	80	2	1	226
							106	115	9	1.7	126
							<b>incl. 6m @ 2.2% Li2O and 132ppm Ta2O5 from 108m</b>				
KVRC0055	258374	6959379	510	-55	47	100	27	30	3	0.9	263
							71	87	16	1.6	185
							<b>incl. 2m @ 2.4% Li2O and 241ppm Ta2O5 from 74m and 3m @ 2% Li2O and 260ppm Ta2O5 from 78m</b>				
KVRC0056	258318	6959435	510	-55	49	88	139	144	5	1	139
							<b>incl. 1m @ 2% Li2O and 167ppm Ta2O5 from 142m</b>				
KVRC0057	258360	6959477	511	-56	49	50	52	60	8	0.9	110
							52	58	6	1.3	93
KVRC0058	258274	6959395	509	-56	48	120	<b>incl. 2m @ 1.9% Li2O and 93ppm Ta2O5 from 53m</b>				
							28	32	4	0.6	126
KVRC0059	258254	6959520	511	-57	47	80	70	77	7	1.4	130
							<b>incl. 3m @ 1.9% Li2O and 189ppm Ta2O5 from 72m</b>				
KVRC0060	258298	6959565	510	-56	50	80	43	50	7	1.4	156
							<b>incl. 1m @ 2.6% Li2O and 305ppm Ta2O5 from 47m</b>				
KVRC0061	258194	6959467	507	-56	47	124	No significant assays				
							75	82	7	1.5	134
							<b>incl. 3m @ 1.9% Li2O and 114ppm Ta2O5 from 76m</b>				

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results									
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)					
KVRC0062	258563	6958526	520	-60	49	180	48	51	3	1	492					
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 336ppm Ta<sub>2</sub>O<sub>5</sub> from 48m</b>									
							94	99	5	1.1	143					
							<b>incl. 2m @ 2% Li<sub>2</sub>O and 288ppm Ta<sub>2</sub>O<sub>5</sub> from 94m</b>									
							105	108	3	1.2	142					
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 171ppm Ta<sub>2</sub>O<sub>5</sub> from 106m</b>									
							118	119	1	1.1	333					
KVRC0062A	258555	6958525	520	-60	49	250	No significant assays									
							Hole abandoned									
KVRC0062X	258555	6958525	520	-60	49	64										
KVRC0063	258833	6958178	523	-61	46	105	No significant assays									
KVRC0064	258805	6958151	521	-60	44	100										
KVRC0065	258780	6958123	524	-60	43	100										
KVRC0066	258754	6958091	524	-65	46	101										
KVRC0067	258449	6958419	524	-61	47	238	117	121	4	0.8	152					
							123	129	6	1.2	184					
							<b>incl. 2m @ 1.6% Li<sub>2</sub>O and 133ppm Ta<sub>2</sub>O<sub>5</sub> from 127m</b>									
							144	157	13	1.3	125					
							<b>incl. 4m @ 2% Li<sub>2</sub>O and 137ppm Ta<sub>2</sub>O<sub>5</sub> from 147m and 1m @ 2% Li<sub>2</sub>O and 100ppm Ta<sub>2</sub>O<sub>5</sub> from 153m</b>									
							184	195	11	1.4	72					
							<b>incl. 4m @ 2.2% Li<sub>2</sub>O and 84ppm Ta<sub>2</sub>O<sub>5</sub> from 188m</b>									
							199	201	2	0.8	93					
KVRC0067A*	258779	6958265	525	-59	46	100	203	212	9	1.2	77					
							<b>incl. 2m @ 1.7% Li<sub>2</sub>O and 138ppm Ta<sub>2</sub>O<sub>5</sub> from 210m</b>									
KVRC0068	258689	6958169	529	-66	43	130	274	277	3	1.2	57					
							<b>incl. 2m @ 1.7% Li<sub>2</sub>O and 77ppm Ta<sub>2</sub>O<sub>5</sub> from 275m</b>									
							72	78	6	NSR	129					
KVRC0069	258387	6958609	518	-59	55	80	69	78	9	1.5	178					
							<b>incl. 4m @ 1.8% Li<sub>2</sub>O and 171ppm Ta<sub>2</sub>O<sub>5</sub> from 71m</b>									
							83	94	11	1.2	184					
							<b>incl. 2m @ 2.2% Li<sub>2</sub>O and 249ppm Ta<sub>2</sub>O<sub>5</sub> from 83m</b>									
KVRC0070	258665	6958290	538	-61	47	100	96	100	4	0.6	110					
							0	4	4	1.6	124					
							39	42	3	1.5	118					
KVRC0071	258407	6958564	519	-60	49	180	55	61	6	1.3	119					
							<b>incl. 2m @ 1.8% Li<sub>2</sub>O and 109ppm Ta<sub>2</sub>O<sub>5</sub> from 57m</b>									
KVRC0072	258635	6958263	541	-65	45	140	31	46	15	1.6	129					
							<b>incl. 6m @ 2% Li<sub>2</sub>O and 116ppm Ta<sub>2</sub>O<sub>5</sub> from 35m and 3m @ 1.7% Li<sub>2</sub>O and 146ppm Ta<sub>2</sub>O<sub>5</sub> from 42m</b>									
							46	56	10	1.5	81					
KVRC0073	258354	6958569	518	-65	45	140	<b>incl. 5m @ 2% Li<sub>2</sub>O and 86ppm Ta<sub>2</sub>O<sub>5</sub> from 48m</b>									
							64	66	2	1.5	92					
							97	98	1	1.5	259					
							106	107	1	1.3	994					
							125	128	3	1.3	146					
							<b>incl. 1m @ 2.3% Li<sub>2</sub>O and 164ppm Ta<sub>2</sub>O<sub>5</sub> from 126m</b>									
							161	169	8	1.8	130					
<b>incl. 6m @ 2.1% Li<sub>2</sub>O and 143ppm Ta<sub>2</sub>O<sub>5</sub> from 162m</b>																
KVRC0074	258354	6958569	518	-65	45	140	72	90	18	1.4	145					
							<b>incl. 4m @ 1.9% Li<sub>2</sub>O and 153ppm Ta<sub>2</sub>O<sub>5</sub> from 75m and 5m @ 1.9% Li<sub>2</sub>O and 155ppm Ta<sub>2</sub>O<sub>5</sub> from 83m</b>									
							104	118	14	1.3	176					
							<b>incl. 5m @ 2% Li<sub>2</sub>O and 189ppm Ta<sub>2</sub>O<sub>5</sub> from 104m and 2m @ 2% Li<sub>2</sub>O and 226ppm Ta<sub>2</sub>O<sub>5</sub> from 111m</b>									
KVRC0074	258354	6958569	518	-65	45	140	88	99	11	1.4	97					
							<b>incl. 1m @ 1.9% Li<sub>2</sub>O and 96ppm Ta<sub>2</sub>O<sub>5</sub> from 88m and 6m @ 1.8% Li<sub>2</sub>O and 107ppm Ta<sub>2</sub>O<sub>5</sub> from 91m</b>									
							112	119	7	1.8	150					
<b>incl. 5m @ 2.2% Li<sub>2</sub>O and 143ppm Ta<sub>2</sub>O<sub>5</sub> from 114m</b>																

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0075	258686	6958371	539	-65	47	100	79	87	8	1	228
							<b>incl. 1m @ 1.8% Li2O and 344ppm Ta2O5 from 81m and 1m @ 1.6% Li2O and 149ppm Ta2O5 from 86m</b>				
							89	90	1	1.8	147
KVRC0076	258450	6958610	518	-65	45	130	98	105	7	1.6	281
							<b>incl. 3m @ 2.4% Li2O and 252ppm Ta2O5 from 99m</b>				
KVRC0076A*						190	173	177	1	0.6	123
KVRC0076B*						252	219	223	4	1.2	101
							<b>incl. 2m @ 1.8% Li2O and 82ppm Ta2O5 from 220m</b>				
KVRC0077	258573	6958267	545	-65	44	180	109	137	28	1.4	108
							<b>incl. 14m @ 2.2% Li2O and 147ppm Ta2O5 from 109m</b>				
							149	152	3	1.1	103
KVRC0078	258595	6959106	520	-69	230	190	<b>incl. 1m @ 2.1% Li2O and 115ppm Ta2O5 from 150m</b>				
							169	171	2	1	169
							73	91	18	1.5	207
							<b>incl. 6m @ 2.3% Li2O and 214ppm Ta2O5 from 80m and 1m @ 2.6% Li2O and 186ppm Ta2O5 from 89m</b>				
							114	120	6	2.1	171
							<b>incl. 5m @ 2.4% Li2O and 172ppm Ta2O5 from 114m</b>				
KVRC0079	258535	6958448	530	-65	45	120	127	147	20	1.5	147
							<b>incl. 11m @ 2% Li2O and 134ppm Ta2O5 from 134m</b>				
							178	181	3	1.8	134
							<b>incl. 2m @ 2.1% Li2O and 137ppm Ta2O5 from 178m</b>				
							24	36	12	1.9	132
KVRC0080	258632	6958999	524	-65	225	120	<b>incl. 7m @ 2.3% Li2O and 135ppm Ta2O5 from 29m</b>				
							55	62	7	1.5	96
							75	76	1	2.8	47
							103	104	1	0.9	132
KVRC0080A						210	40	41	1	1.5	213
							75	90	15	1.5	204
KVRC0081	258503	6958408	529	-65	45	125	<b>incl. 4m @ 2.2% Li2O and 281ppm Ta2O5 from 76m and 3m @ 2% Li2O and 148ppm Ta2O5 from 86m</b>				
							133	135	2	1.4	116
							<b>incl. 1m @ 1.9% Li2O and 111ppm Ta2O5 from 134m</b>				
KVRC0082	258477	6958503	523	-60	50	100	143	145	2	2.1	250
							<b>incl. 1m @ 3% Li2O and 313ppm Ta2O5 from 144m</b>				
							153	156	3	1.7	140
KVRC0083	258714	6958927	522	-65	227	136	<b>incl. 1m @ 2.6% Li2O and 159ppm Ta2O5 from 154m</b>				
							88	103	15	1.9	162
							<b>incl. 10m @ 2.1% Li2O and 175ppm Ta2O5 from 92m</b>				
							121	125	4	1.4	161
							<b>incl. 1m @ 1.9% Li2O and 162ppm Ta2O5 from 123m</b>				
KVRC0083A						200	41	50	9	1.8	150
							<b>incl. 7m @ 2.1% Li2O and 133ppm Ta2O5 from 42m</b>				
KVRC0084	258451	6958481	522	-64	47	130	58	63	5	1.4	110
							<b>incl. 3m @ 1.7% Li2O and 105ppm Ta2O5 from 58m</b>				
							13	14	1	1	325
							28	29	1	0.9	298
KVRC0085	258225	6959344	508	-70	49	120	94	106	12	1.9	202
							<b>incl. 7m @ 2.5% Li2O and 209ppm Ta2O5 from 95m</b>				
							116	117	1	0.6	132
KVRC0086	258153	6959419	509	-70	49	120	120	127	7	2	91
							<b>incl. 2m @ 2.7% Li2O and 92ppm Ta2O5 from 121m and 3m @ 2.2% Li2O and 96ppm Ta2O5 from 124m</b>				
KVRC0088A						200	160	162	2	1.1	104
							<b>incl. 1m @ 1.7% Li2O and 127ppm Ta2O5 from 160m</b>				
							189	191	2	1.2	98
KVRC0088B						200	71	80	9	1.1	115
							<b>incl. 2m @ 2.2% Li2O and 132ppm Ta2O5 from 75m</b>				
							98	105	7	1.1	156
KVRC0088C						200	110	116	6	1.3	194
							<b>incl. 3m @ 2.2% Li2O and 263ppm Ta2O5 from 111m</b>				
KVRC0088D						200	94	100	6	1.4	127
							<b>incl. 1m @ 1.8% Li2O and 110ppm Ta2O5 from 95m and 1m @ 1.7% Li2O and 121ppm Ta2O5 from 97m</b>				
KVRC0088E						200	92	100	8	1.2	128
							<b>incl. 3m @ 1.7% Li2O and 153ppm Ta2O5 from 93m</b>				

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0087	258320	6958621	513	-49	50	112	29	34	5	1.4	99
							<b>incl. 2m @ 2% Li2O and 114ppm Ta2O5 from 30m</b>				
							68	71	3	1.3	84
							<b>incl. 1m @ 2.2% Li2O and 96ppm Ta2O5 from 69m</b>				
							78	84	6	1.2	65
							<b>incl. 3m @ 1.9% Li2O and 98ppm Ta2O5 from 81m</b>				
KVRC0087A*	258320	6958621	513	-49	50	112	88	92	4	1.7	121
							<b>incl. 2m @ 2.1% Li2O and 118ppm Ta2O5 from 89m</b>				
							135	139	4	0.6	193
KVRC0088	258302	6958603	514	-60	49	148	172	176	4	2	103
							<b>incl. 2m @ 2.8% Li2O and 94ppm Ta2O5 from 173m</b>				
							91	94	3	1.6	83
							<b>incl. 2m @ 1.9% Li2O and 85ppm Ta2O5 from 92m</b>				
							100	106	6	1.4	82
							<b>incl. 2m @ 2% Li2O and 75ppm Ta2O5 from 102m</b>				
KVRC0088A*	258302	6958603	514	-60	49	208	136	142	6	1.6	139
							<b>incl. 3m @ 2% Li2O and 151ppm Ta2O5 from 138m</b>				
							162	169	7	1.6	161
KVRC0088B*	258302	6958603	514	-60	49	264	201	202	1	0.9	166
							210	236	26	1.3	115
							<b>incl. 1m @ 1.7% Li2O and 217ppm Ta2O5 from 211m and 10m @ 1.9% Li2O and 127ppm Ta2O5 from 220m and 2m @ 1.8% Li2O and 144ppm Ta2O5 from 233m</b>				
KVRC0089	258593	6958356	542	-60	46	118	29	40	11	1.6	127
							<b>incl. 5m @ 1.9% Li2O and 122ppm Ta2O5 from 32m</b>				
KVRC0090	258766	6958178	525	-59	46	70	97	98	1	1.1	150
KVRC0091	258738	6958153	525	-59	46	90	18	21	3	0.1	228
KVRC0092	258978	6959117	513	-55	47	130	34	37	3	1.3	126
							14	16	2	1.2	110
							<b>incl. 1m @ 1.8% Li2O and 159ppm Ta2O5 from 14m</b>				
KVRC0093	258935	6959074	514	-55	46	132	117	122	5	1.6	161
							<b>incl. 3m @ 2.1% Li2O and 204ppm Ta2O5 from 118m</b>				
							23	26	3	1.5	173
							<b>incl. 1m @ 2% Li2O and 128ppm Ta2O5 from 24m</b>				
KVRC0094	258893	6959032	515	-55	49	126	93	94	1	1.1	118
							117	119	2	1	96
							1	5	4	1.6	149
							<b>incl. 1m @ 1.8% Li2O and 121ppm Ta2O5 from 1m</b>				
							42	49	7	1	66
KVRC0095	258852	6958991	516	-54	43	120	<b>incl. 1m @ 2.8% Li2O and 89ppm Ta2O5 from 47m</b>				
							102	103	1	1	120
							112	117	5	1.4	161
							<b>incl. 2m @ 2.1% Li2O and 169ppm Ta2O5 from 114m</b>				
							39	43	4	1.5	130
KVRC0096	258806	6958949	517	-55	47	120	<b>incl. 3m @ 1.8% Li2O and 130ppm Ta2O5 from 40m</b>				
							61	65	4	1.6	135
							<b>incl. 3m @ 1.8% Li2O and 132ppm Ta2O5 from 62m</b>				
							73	75	2	1	78
							103	110	7	0	229
KVRC0097	258763	6958905	518	-56	46	138	14	20	6	0	230
							56	66	10	0	191
							82	86	4	1.1	136
							<b>incl. 1m @ 1.7% Li2O and 178ppm Ta2O5 from 83m</b>				
KVRC0097	258763	6958905	518	-56	46	138	90	98	8	0	122
							78	85	7	1.2	247
							<b>incl. 1m @ 1.9% Li2O and 182ppm Ta2O5 from 80m and 1m @ 2.4% Li2O and 129ppm Ta2O5 from 84m</b>				
							92	94	2	1	149
							103	105	2	1.1	79
KVRC0097	258763	6958905	518	-56	46	138	121	123	2	1.9	112

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0098	258721	6958858	519	-55	48	168	13	16	3	1.4	171
							<b>incl. 1m @ 1.9% Li2O and 104ppm Ta2O5 from 13m</b>				
							89	96	7	1.3	219
							<b>incl. 3m @ 1.7% Li2O and 213ppm Ta2O5 from 90m and 1m @ 1.9% Li2O and 125ppm Ta2O5 from 95m</b>				
							110	111	1	1.2	73
							113	116	3	1	76
							161	165	4	1.4	103
							<b>incl. 2m @ 1.7% Li2O and 92ppm Ta2O5 from 163m</b>				
KVRC0099	258720	6958856	519	-66	227	150	21	27	6	1.1	282
							<b>incl. 2m @ 2.2% Li2O and 319ppm Ta2O5 from 24m</b>				
							89	95	6	2.1	252
							<b>incl. 5m @ 2.2% Li2O and 233ppm Ta2O5 from 89m</b>				
							112	114	2	1.5	266
							<b>incl. 1m @ 1.9% Li2O and 256ppm Ta2O5 from 112m</b>				
							131	139	8	1.9	119
							<b>incl. 3m @ 2.5% Li2O and 121ppm Ta2O5 from 131m and 2m @ 2.3% Li2O and 133ppm Ta2O5 from 135m and 1m @ 2.3% Li2O and 139ppm Ta2O5 from 138m</b>				
KVRC0099A					230	192	193	1	0.5	116	
KVRC0100	258677	6959246	509	-56	50	144	25	27	2	1.4	247
							35	37	2	1	175
							78	98	21	1.1	146
							<b>incl. 6m @ 1.7% Li2O and 147ppm Ta2O5 from 78m and 4m @ 1.9% Li2O and 317ppm Ta2O5 from 93m and 1m @ 1.7% Li2O and 272ppm Ta2O5 from 115m</b>				
							6	11	5	1.6	105
							<b>incl. 3m @ 2.1% Li2O and 101ppm Ta2O5 from 7m</b>				
KVRC0101	258636	6959202	510	-57	47	126	56	61	5	0.9	141
							<b>incl. 2m @ 1.6% Li2O and 260ppm Ta2O5 from 58m</b>				
							66	68	2	1.5	174
							<b>incl. 1m @ 1.7% Li2O and 142ppm Ta2O5 from 66m</b>				
							81	89	8	1.5	263
							<b>incl. 3m @ 1.9% Li2O and 257ppm Ta2O5 from 82m and 2m @ 1.8% Li2O and 243ppm Ta2O5 from 86m</b>				
							94	108	14	1	97
							<b>incl. 1m @ 2.1% Li2O and 54ppm Ta2O5 from 97m and 2m @ 2% Li2O and 167ppm Ta2O5 from 106m</b>				
KVRC0102	258599	6959167	513	-59	46	120	26	33	7	1.2	116
							<b>incl. 2m @ 2.4% Li2O and 120ppm Ta2O5 from 29m</b>				
							70	78	8	1.8	197
							<b>incl. 6m @ 2.1% Li2O and 197ppm Ta2O5 from 71m</b>				
							86	98	12	1.1	141
							<b>incl. 3m @ 2.3% Li2O and 312ppm Ta2O5 from 92m</b>				
							104	105	1	1.2	263
112	117	5	1.3	211							
KVRC0103	258548	6959116	520	-55	47	144	64	70	6	1.3	126
							<b>incl. 1m @ 1.7% Li2O and 65ppm Ta2O5 from 64m and 1m @ 1.6% Li2O and 190ppm Ta2O5 from 67m</b>				
							91	100	9	1.9	262
							<b>incl. 2m @ 2.4% Li2O and 199ppm Ta2O5 from 92m and 5m @ 2.2% Li2O and 313ppm Ta2O5 from 95m</b>				
							117	125	8	1.3	168
							<b>incl. 4m @ 1.8% Li2O and 240ppm Ta2O5 from 118m</b>				
							128	130	2	1	197
							135	138	3	1.8	111
KVRC0103A						200	141	143	2	0.9	171
							179	180	1	1.5	185

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0104	258544	6959111	520	-68	225	178	81	83	2	1.5	187
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 120ppm Ta<sub>2</sub>O<sub>5</sub> from 81m</b>				
							92	105	13	1.6	251
							<b>incl. 4m @ 2.1% Li<sub>2</sub>O and 213ppm Ta<sub>2</sub>O<sub>5</sub> from 92m and 3m @ 2.2% Li<sub>2</sub>O and 282ppm Ta<sub>2</sub>O<sub>5</sub> from 98m</b>				
							121	125	4	1.5	163
							<b>incl. 1m @ 2.3% Li<sub>2</sub>O and 170ppm Ta<sub>2</sub>O<sub>5</sub> from 122m and 1m @ 2% Li<sub>2</sub>O and 149ppm Ta<sub>2</sub>O<sub>5</sub> from 124m</b>				
							136	139	3	1.5	191
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 164ppm Ta<sub>2</sub>O<sub>5</sub> from 138m</b>				
							148	161	13	1.9	165
							<b>incl. 3m @ 2.2% Li<sub>2</sub>O and 182ppm Ta<sub>2</sub>O<sub>5</sub> from 148m and 8m @ 2% Li<sub>2</sub>O and 164ppm Ta<sub>2</sub>O<sub>5</sub> from 152m</b>				
							170	172	2	1.3	125
KVRC0105	258868	6959291	517	-59	50	112	28	29	1	0.5	18
KVRC0106	258821	6959242	518	-60	49	160	4	5	1	0.5	107
							8	9	1	0.5	115
							35	38	3	1.5	247
							<b>incl. 2m @ 1.9% Li<sub>2</sub>O and 261ppm Ta<sub>2</sub>O<sub>5</sub> from 36m</b>				
							109	111	2	1.1	172
KVRC0107	258774	6959200	519	-60	46	124	7	9	2	1	253
							21	24	3	1.1	203
							<b>incl. 1m @ 2% Li<sub>2</sub>O and 286ppm Ta<sub>2</sub>O<sub>5</sub> from 22m</b>				
							48	49	1	0.8	189
							52	54	2	1.2	256
							<b>incl. 1m @ 1.8% Li<sub>2</sub>O and 303ppm Ta<sub>2</sub>O<sub>5</sub> from 52m</b>				
							59	60	1	1.1	181
							73	75	2	0.5	103
							90	95	5	0.9	156
KVRC0108	258739	6959165	519	-59	42	124	26	27	1	1	248
							40	46	6	1.4	233
							<b>incl. 3m @ 1.7% Li<sub>2</sub>O and 301ppm Ta<sub>2</sub>O<sub>5</sub> from 41m</b>				
							63	70	7	1.1	138
							<b>incl. 2m @ 2% Li<sub>2</sub>O and 233ppm Ta<sub>2</sub>O<sub>5</sub> from 68m</b>				
							80	88	8	1	120
							<b>incl. 1m @ 2.6% Li<sub>2</sub>O and 160ppm Ta<sub>2</sub>O<sub>5</sub> from 86m</b>				
110	112	2	1.2	230							
KVRC0109	258696	6959120	520	-54	48	124	17	18	1	1.4	254
							20	22	2	1.5	77
							<b>incl. 1m @ 2.4% Li<sub>2</sub>O and 115ppm Ta<sub>2</sub>O<sub>5</sub> from 20m</b>				
							62	77	15	1.5	191
							<b>incl. 10m @ 2% Li<sub>2</sub>O and 258ppm Ta<sub>2</sub>O<sub>5</sub> from 67m</b>				
							85	90	5	1.4	161
<b>incl. 1m @ 2% Li<sub>2</sub>O and 216ppm Ta<sub>2</sub>O<sub>5</sub> from 89m</b>											
KVRC0110	258655	6959076	523	-56	47	124	97	98	1	1	126
							44	46	2	1.4	159
							<b>incl. 1m @ 2% Li<sub>2</sub>O and 125ppm Ta<sub>2</sub>O<sub>5</sub> from 45m</b>				
							75	87	12	1.6	205
							<b>incl. 8m @ 2% Li<sub>2</sub>O and 206ppm Ta<sub>2</sub>O<sub>5</sub> from 77m</b>				
KVRC0111	258609	6959034	523	-55	46	130	91	92	1	1.1	162
							100	108	8	1.5	129
							<b>incl. 2m @ 2.2% Li<sub>2</sub>O and 134ppm Ta<sub>2</sub>O<sub>5</sub> from 105m</b>				
						61	64	3	1.1	260	
						93	84	1	1.6	247	
						<b>incl. 5m @ 1.9% Li<sub>2</sub>O and 292ppm Ta<sub>2</sub>O<sub>5</sub> from 89m</b>					
KVRC0111A						190	114	117	3	0.4	22
							133	146	13	1.7	112
					<b>incl. 9m @ 2.1% Li<sub>2</sub>O and 133ppm Ta<sub>2</sub>O<sub>5</sub> from 134m</b>						



**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0112	258608	6959031	523	-69	227	154	75	89	14	1.5	202
							<b>incl. 3m @ 2.1% Li2O and 310ppm Ta2O5 from 78m and 3m @ 2.2% Li2O and 157ppm Ta2O5 from 84m</b>				
							126	136	10	1.9	93
							<b>incl. 7m @ 2.2% Li2O and 97ppm Ta2O5 from 128m</b>				
							141	142	1	1.7	250
							146	150	4	1.5	148
							<b>incl. 1m @ 2.8% Li2O and 123ppm Ta2O5 from 123m</b>				
KVRC0112A						190	155	156	1	1.1	2
							161	164	3	1.1	131
							<b>incl. 1m @ 2.3% Li2O and 179ppm Ta2O5 from 162m</b>				
KVRC0113	258928	6959208	508	-54	45	124	22	24	2	2.7	182
							<b>incl. 1m @ 4.2% Li2O and 156ppm Ta2O5 from 22m</b>				
KVRC0114	258885	6959166	514	-55	45	130	33	36	3	0.1	329
							114	119	5	0.1	146
KVRC0115	258845	6959125	501	-54	46	130	0	6	6	0.6	154
							24	25	1	1.1	204
							37	41	4	1.4	163
							<b>incl. 2m @ 1.9% Li2O and 200ppm Ta2O5 from 38m</b>				
							114	117	3	2	188
							<b>incl. 2m @ 2.4% Li2O and 196ppm Ta2O5 from 114m</b>				
KVRC0116	258800	6959080	504	-55	50	140	41	48	7	1.2	223
							<b>incl. 3m @ 1.7% Li2O and 245ppm Ta2O5 from 43m</b>				
							53	59	6	1	131
							<b>incl. 1m @ 1.9% Li2O and 210ppm Ta2O5 from 53m</b>				
							80	85	5	1.3	214
							<b>incl. 2m @ 2.2% Li2O and 219ppm Ta2O5 from 81m</b>				
KVRC0117	258755	6959038	519	-54	47	140	128	130	2	0.6	111
							0	5	5	0.9	179
							73	91	18	1.6	212
							<b>incl. 2m @ 2.1% Li2O and 180ppm Ta2O5 from 74m and 1m @ 2.4% Li2O and 231ppm Ta2O5 from 80m and 8m @ 2% Li2O and 213ppm Ta2O5 from 82m</b>				
							104	107	3	0.9	134
KVRC0118	258710	6958997	520	-55	49	172	22	24	2	0.9	297
							83	97	14	1.2	217
							<b>incl. 1m @ 2.5% Li2O and 201ppm Ta2O5 from 84m and 2m @ 2.1% Li2O and 253ppm Ta2O5 from 89m and 1m @ 1.9% Li2O and 163ppm Ta2O5 from 96m</b>				
							128	134	6	1.4	178
							<b>incl. 3m @ 1.9% Li2O and 157ppm Ta2O5 from 128m</b>				
							85	100	15	1.1	197
KVRC0119	258671	6958948	522	-53	48	142	<b>incl. 1m @ 2.2% Li2O and 408ppm Ta2O5 from 88m and 5m @ 1.6% Li2O and 133ppm Ta2O5 from 94m</b>				
							56	58	2	1.6	323
KVRC0120	258668	6958944	523	-53	228	140	98	119	21	1.5	197
							<b>incl. 3m @ 2.3% Li2O and 243ppm Ta2O5 from 99m and 5m @ 2.8% Li2O and 238ppm Ta2O5 from 105m and 1m @ 1.7% Li2O and 377ppm Ta2O5 from 114m and 1m @ 1.9% Li2O and 361ppm Ta2O5 from 117m</b>				
							28	35	7	0.6	109
							<b>incl. 1m @ 1.7% Li2O and 309ppm Ta2O5 from 33m</b>				
							96	103	7	0.8	172
KVRC0121	258556	6959190	513	-56	47	142	<b>incl. 1m @ 1.7% Li2O and 225ppm Ta2O5 from 99m</b>				
							114	123	9	0.9	111
							<b>incl. 2m @ 1.8% Li2O and 140ppm Ta2O5 from 115m</b>				
							128	131	3	1.1	270
							<b>incl. 1m @ 1.9% Li2O and 227ppm Ta2O5 from 129m</b>				
							134	135	1	2.3	193

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0122	258514	6959152	521	-56	45	148	51	53	2	1.2	176
							67	71	4	1.1	157
							99	121	22	1.5	218
							<b>incl. 6m @ 2.5% Li2O and 254ppm Ta2O5 from 100m and 5m @ 1.7% Li2O and 292ppm Ta2O5 from 126m</b>				
							126	138	12	1.3	122
							<b>incl. 5m @ 1.9% Li2O and 128ppm Ta2O5 from 127m</b>				
KVRC0123	258510	6959142	521	-84	53	160	52	54	2	1	182
							66	68	2	1.4	291
							<b>incl. 1m @ 2% Li2O and 296ppm Ta2O5 from 66m</b>				
							82	94	12	1.7	223
							<b>incl. 5m @ 2.5% Li2O and 279ppm Ta2O5 from 87m</b>				
							102	106	4	1	169
							113	125	12	1.8	161
							<b>incl. 2m @ 1.8% Li2O and 212ppm Ta2O5 from 113m and 6m @ 2.5% Li2O and 189ppm Ta2O5 from 118m</b>				
							141	153	12	0.9	131
							<b>incl. 4m @ 1.8% Li2O and 210ppm Ta2O5 from 148m</b>				
KVRC0124	258502	6959142	521	-59	228	172	79	80	1	1.4	183
							93	109	16	1.4	196
							<b>incl. 4m @ 1.9% Li2O and 183ppm Ta2O5 from 93m and 6m @ 2.1% Li2O and 204ppm Ta2O5 from 100m</b>				
							134	140	6	1.3	120
							<b>incl. 2m @ 2% Li2O and 174ppm Ta2O5 from 136m</b>				
							147	150	3	1.1	279
							<b>incl. 1m @ 1.7% Li2O and 358ppm Ta2O5 from 147m</b>				
							154	163	9	1.4	135
							<b>incl. 2m @ 2.6% Li2O and 157ppm Ta2O5 from 154m and 1m @ 2% Li2O and 133ppm Ta2O5 from 158m</b>				
							166	169	3	1.3	139
<b>incl. 1m @ 2.1% Li2O and 173ppm Ta2O5 from 167m</b>											
KVRC0125	258636	6959000	523	-84	44	120	74	84	10	1.4	239
							<b>incl. 6m @ 2% Li2O and 200ppm Ta2O5 from 74m</b>				
KVRC0125A						180	97	99	2	0.6	144
							122	129	7	1.4	151
<b>incl. 3m @ 1.9% Li2O and 128ppm Ta2O5 from 123m</b>											
KVRC0126	258713	6958924	520	-87	46	160	80	83	3	1.2	134
							<b>incl. 1m @ 2.1% Li2O and 147ppm Ta2O5 from 81m</b>				
							126	127	1	1	114
							149	150	1	2	252
KVRC0127	258823	6958791	519	-55	46	120	10	12	2	0.6	313
							68	70	2	1.6	212
							<b>incl. 1m @ 2.6% Li2O and 282ppm Ta2O5 from 69m</b>				
							81	84	3	0.8	127
							87	89	2	1.3	65
KVRC0128	258796	6958757	522	-53	44	120	11	14	3	1.4	230
							<b>incl. 1m @ 2% Li2O and 334ppm Ta2O5 from 13m</b>				
							45	48	3	0.7	203
							57	58	1	1.2	105
							91	99	8	0	134
KVRC0129	258795	6958758	523	-55	224	120	7	10	3	1.2	319
							<b>incl. 1m @ 2.2% Li2O and 381ppm Ta2O5 from 8m</b>				
							16	19	3	1.1	207
							27	28	1	2	285
							86	98	12	1.4	204
<b>incl. 6m @ 1.9% Li2O and 183ppm Ta2O5 from 86m</b>											

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0130	258795	6958755	523	-88	53	120	8	10	2	0.6	130
							12	14	2	1.9	353
							34	36	2	0.7	256
							55	57	2	0.9	77
							84	93	9	1.3	187
							<b>incl. 4m @ 1.9% Li<sub>2</sub>O and 200ppm Ta<sub>2</sub>O<sub>5</sub> from 87m</b>				
KVRC0130A					160	No significant assays					
KVRC0131	258371	6958888	513	-55	41	214	81	82	1	0.9	285
							90	93	3	0.5	107
							114	116	2	1.2	320
							142	143	1	0.8	421
							148	156	8	1.8	83
							<b>incl. 3m @ 2.4% Li<sub>2</sub>O and 65ppm Ta<sub>2</sub>O<sub>5</sub> from 148m</b>				
							162	163	1	0.6	166
							175	187	12	1.2	160
							<b>incl. 4m @ 2.1% Li<sub>2</sub>O and 164ppm Ta<sub>2</sub>O<sub>5</sub> from 175m</b>				
							198	208	10	1.5	151
							<b>incl. 1m @ 2.9% Li<sub>2</sub>O and 132ppm Ta<sub>2</sub>O<sub>5</sub> from 199m and 4m @ 1.8% Li<sub>2</sub>O and 162ppm Ta<sub>2</sub>O<sub>5</sub> from 202m</b>				
KVRC0132	258421	6958793	512	-54	48	160	100	104	4	2	252
							<b>incl. 3m @ 2.4% Li<sub>2</sub>O and 283ppm Ta<sub>2</sub>O<sub>5</sub> from 100m</b>				
							141	145	4	1.8	164
KVRC0132A*						228	<b>incl. 3m @ 2.2% Li<sub>2</sub>O and 189ppm Ta<sub>2</sub>O<sub>5</sub> from 142m</b>				
							152	153	1	0.9	150
							176	181	5	0.9	92
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 24ppm Ta<sub>2</sub>O<sub>5</sub> from 178m</b>				
							184	189	5	1.5	108
<b>incl. 3m @ 1.9% Li<sub>2</sub>O and 92ppm Ta<sub>2</sub>O<sub>5</sub> from 185m</b>											
204	210	6	1.4	136							
<b>incl. 2m @ 2% Li<sub>2</sub>O and 137ppm Ta<sub>2</sub>O<sub>5</sub> from 206m</b>											
KVRC0133	258494	6958713	514	-55	45	170	70	72	2	1.4	185
							96	98	2	1.1	266
							108	113	5	1.6	226
							<b>incl. 3m @ 2% Li<sub>2</sub>O and 252ppm Ta<sub>2</sub>O<sub>5</sub> from 108m</b>				
KVRC0133A*						240	131	133	2	1.7	103
							188	199	11	1.3	124
							<b>incl. 3m @ 2.4% Li<sub>2</sub>O and 132ppm Ta<sub>2</sub>O<sub>5</sub> from 192m</b>				
KVRC0134	258606	6958572	520	-55	49	160	217	220	3	0.7	59
							41	44	3	1	332
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 270ppm Ta<sub>2</sub>O<sub>5</sub> from 42m</b>				
							86	95	9	1.7	296
							<b>incl. 5m @ 2.3% Li<sub>2</sub>O and 405ppm Ta<sub>2</sub>O<sub>5</sub> from 88m</b>				
							103	105	2	1.1	120
							<b>incl. 1m @ 1.8% Li<sub>2</sub>O and 215ppm Ta<sub>2</sub>O<sub>5</sub> from 103m</b>				
							106	110	4	1.3	150
							<b>incl. 2m @ 1.7% Li<sub>2</sub>O and 153ppm Ta<sub>2</sub>O<sub>5</sub> from 107m</b>				
							131	133	2	0.9	159
KVRC0135A	258189	6959595	510	-54	46	80	56	64	8	1.2	122
							<b>incl. 3m @ 2% Li<sub>2</sub>O and 183ppm Ta<sub>2</sub>O<sub>5</sub> from 59m</b>				
						356	128	130	2	0.8	99
							319	341	22	1.3	132
<b>incl. 1m @ 2.4% Li<sub>2</sub>O and 112ppm Ta<sub>2</sub>O<sub>5</sub> from 321m and 5m @ 2.1% Li<sub>2</sub>O and 109ppm Ta<sub>2</sub>O<sub>5</sub> from 325m</b>											
KVRC0136					110	95	103	8	1.3	120	
KVRC0136A	258120	6959522	510	-64	46	300	<b>incl. 1m @ 3.7% Li<sub>2</sub>O and 136ppm Ta<sub>2</sub>O<sub>5</sub> from 98m</b>				
							219	222	3	1.3	211
							<b>incl. 1m @ 2.1% Li<sub>2</sub>O and 213ppm Ta<sub>2</sub>O<sub>5</sub> from 220m</b>				
							256	285	29	1.3	171
<b>incl. 13m @ 1.8% Li<sub>2</sub>O and 189ppm Ta<sub>2</sub>O<sub>5</sub> from 261m and 1m @ 2.3% Li<sub>2</sub>O and 158ppm Ta<sub>2</sub>O<sub>5</sub> from 282m</b>											
KVRC0137	258083	6959629	510	-60	46	120	No significant assays				
KVRC0138	258164	6959718	510	-55	45	100					
KVRC0139	258184	6959859	510	-55	44	100					
KVRC0140	258105	6959801	510	-55	44	130					
KVRC0141	258037	6959868	512	-62	44	124					
KVRC0142	258109	6959937	512	-55	41	112	91	94	3	0	507
KVRC0143	258464	6959736	508	-56	47	94	85	86	1	0	237
KVRC0144	258422	6959693	508	-55	42	106	63	65	2	0	158

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0145	257970	6959380	508	-57	42	130	23	28	5	0	166
							44	48	4	1.5	166
							<b>incl. 2m @ 2.5% Li<sub>2</sub>O and 133ppm Ta<sub>2</sub>O<sub>5</sub> from 45m</b>				
KVRC0146	257880	6959300	508	-56	45	118	No significant assays				
KVRC0146A						211	222	11	1.8	51	
						<b>incl. 4m @ 3.7% Li<sub>2</sub>O and 29ppm Ta<sub>2</sub>O<sub>5</sub> from 212m</b>					
						249	255	6	1	105	
						273	284	11	1.9	116	
						<b>incl. 5m @ 2.6% Li<sub>2</sub>O and 112ppm Ta<sub>2</sub>O<sub>5</sub> from 274m</b>					
						303	322	19	1.4	197	
<b>incl. 3m @ 1.9% Li<sub>2</sub>O and 195ppm Ta<sub>2</sub>O<sub>5</sub> from 274m</b>											
KVRC0147	258005	6959346	508	-54	47	120	29	33	4	0	192
KVRC0148	257963	6959302	508	-56	42	120	42	45	3	1.2	214
							<b>incl. 1m @ 2% Li<sub>2</sub>O and 183ppm Ta<sub>2</sub>O<sub>5</sub> from 43m</b>				
KVRC0149	257957	6959503	508	-55	45	120	97	101	4	0	251
KVRC0150	257914	6959462	508	-54	46	120	90	93	3	0	251
							149	160	11	1.8	129
							<b>incl. 9m @ 2% Li<sub>2</sub>O and 135ppm Ta<sub>2</sub>O<sub>5</sub> from 150m</b>				
							167	173	6	1.5	117
							<b>incl. 5m @ 1.6% Li<sub>2</sub>O and 114ppm Ta<sub>2</sub>O<sub>5</sub> from 168m</b>				
							183	192	9	1.5	165
							<b>incl. 5m @ 1.8% Li<sub>2</sub>O and 146ppm Ta<sub>2</sub>O<sub>5</sub> from 183m and 1m @ 1.8% Li<sub>2</sub>O and 164ppm Ta<sub>2</sub>O<sub>5</sub> from 190m</b>				
KVRC0153	258484	6958642	511	-59	43	150	79	83	4	0.5	218
							101	102	1	1.1	531
							104	112	8	1.1	284
							<b>incl. 3m @ 1.7% Li<sub>2</sub>O and 361ppm Ta<sub>2</sub>O<sub>5</sub> from 106m</b>				
							114	120	6	0.5	1
							128	132	4	1.5	109
							<b>incl. 1m @ 1.9% Li<sub>2</sub>O and 190ppm Ta<sub>2</sub>O<sub>5</sub> from 131m</b>				
KVRC0154	258521	6958677	510	-59	46	150	80	81	1	1.2	129
							88	91	3	0.5	123
							106	114	8	1.1	249
							<b>incl. 2m @ 1.9% Li<sub>2</sub>O and 197ppm Ta<sub>2</sub>O<sub>5</sub> from 107m</b>				
KVRC0154A*	258264	6958571	514	-59	45	240	204	209	5	8	106
<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 109ppm Ta<sub>2</sub>O<sub>5</sub> from 205m</b>											
KVRC0155						152	161	9	1.6	108	
	<b>incl. 4m @ 1.9% Li<sub>2</sub>O and 111ppm Ta<sub>2</sub>O<sub>5</sub> from 155m</b>										
	180	186	6	1.7	181						
	<b>incl. 4m @ 2.1% Li<sub>2</sub>O and 184ppm Ta<sub>2</sub>O<sub>5</sub> from 180m</b>										
	189	195	6	0.9	58						
	<b>incl. 2m @ 1.6% Li<sub>2</sub>O and 105ppm Ta<sub>2</sub>O<sub>5</sub> from 192m</b>										
	198	204	6	0.6	78						
	220	223	3	1.3	76						
	<b>incl. 1m @ 1.9% Li<sub>2</sub>O and 92ppm Ta<sub>2</sub>O<sub>5</sub> from 221m</b>										
	226	246	20	1.4	112						
KVRC0155A*	258745	6958797	524	-54	222	168	<b>incl. 5m @ 2.4% Li<sub>2</sub>O and 121ppm Ta<sub>2</sub>O<sub>5</sub> from 234m</b>				
							252	258	6	1.8	127
							<b>incl. 5m @ 2.1% Li<sub>2</sub>O and 143ppm Ta<sub>2</sub>O<sub>5</sub> from 253m</b>				
KVRC0156	258756	6958807	523	-79	40	150	30	32	2	1	396
							35	38	3	0.8	237
							98	113	15	1.3	244
							<b>incl. 8m @ 1.8% Li<sub>2</sub>O and 221ppm Ta<sub>2</sub>O<sub>5</sub> from 103m</b>				
KVRC0157	258756	6958807	523	-79	40	150	14	17	3	1	180
							63	64	1	1.9	138
							77	87	10	1.5	247
<b>incl. 2m @ 2.1% Li<sub>2</sub>O and 244ppm Ta<sub>2</sub>O<sub>5</sub> from 77m and 3m @ 2.1% Li<sub>2</sub>O and 138ppm Ta<sub>2</sub>O<sub>5</sub> from 83m</b>											
KVRC0157A*	258756	6958807	523	-71	220	150	115	116	1	1.1	140
							172	176	4	1.7	136
							<b>incl. 2m @ 2.3% Li<sub>2</sub>O and 148ppm Ta<sub>2</sub>O<sub>5</sub> from 173m</b>				
KVRC0158	258756	6958807	523	-71	220	150	19	21	2	1.2	204
							79	82	3	1.2	50
							<b>incl. 1m @ 1.9% Li<sub>2</sub>O and 71ppm Ta<sub>2</sub>O<sub>5</sub> from 80m</b>				
							85	93	8	1.1	189
							<b>incl. 1m @ 2% Li<sub>2</sub>O and 285ppm Ta<sub>2</sub>O<sub>5</sub> from 89m</b>				
KVRC0158A*	258756	6958807	523	-71	220	150	134	135	1	1.2	84
							137	138	1	0.3	118
							209	211	2	1.5	274

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0159	258798	6958849	519	-74	39	120	59	60	1	2.1	116
							68	74	6	1.6	215
							<b>incl. 4m @ 2.1% Li2O and 87ppm Ta2O5 from 69m</b>				
KVRC0159A*	258798	6958849	519	-74	39	160	87	89	2	1.2	133
							127	131	4	1.3	96
						<b>incl. 1m @ 2.5% Li2O and 114ppm Ta2O5 from 128m</b>					
KVRC0160	258841	6958892	516	-67	41	120	75	77	2	1	144
KVRC0161	258429	6958726	511	-56	43	226	110	111	1	0.8	455
							137	144	7	0	206
							188	192	4	0	294
							198	210	12	0	166
KVRC0162	258883	6958933	514	-61	45	120	40	42	2	0.7	191
							70	77	7	0	257
KVRC0163	258206	6958638	515	-59	45	274	105	108	3	1.2	112
							<b>incl. 1m @ 1.7% Li2O and 109ppm Ta2O5 from 105m</b>				
							110	112	2	0.6	55
							125	133	8	1.1	93
							<b>incl. 3m @ 2% Li2O and 124ppm Ta2O5 from 129m</b>				
							136	143	7	1.2	76
							<b>incl. 2m @ 1.8% Li2O and 94ppm Ta2O5 from 137m and 1m @ 1.8% Li2O and 81ppm Ta2O5 from 141m</b>				
							169	171	2	1.1	82
							177	180	3	1.2	102
							<b>incl. 1m @ 1.8% Li2O and 110ppm Ta2O5 from 178m</b>				
							189	194	5	1.2	199
							<b>incl. 1m @ 1.5% Li2O and 287ppm Ta2O5 from 190m and 1m @ 1.5% Li2O and 158ppm Ta2O5 from 192m</b>				
							207	210	3	1.4	127
							214	226	12	1.6	95
							<b>incl. 4m @ 2.6% Li2O and 79ppm Ta2O5 from 214m and 3m @ 1.9% Li2O and 104ppm Ta2O5 from 220m</b>				
							239	246	7	1.1	101
							<b>incl. 2m @ 2.2% Li2O and 74ppm Ta2O5 from 240m</b>				
249	257	8	0.9	122							
<b>incl. 1m @ 1.6% Li2O and 120ppm Ta2O5 from 252m</b>											
KVRC0164	258927	6958975	513	-50	42	120	74	76	2	0.8	250
							98	99	1	0.8	111
KVRC0165	258867	6958830	515	-48	41	132	78	81	3	1.4	148
							<b>incl. 1m @ 2.2% Li2O and 112ppm Ta2O5 from 79m</b>				
KVRC0166	258969	6959017	513	-51	42	120	86	91	5	0.9	174
							6	8	2	0.8	49
							48	49	1	1.7	177
						<b>incl. 2m @ 2.2% Li2O and 157ppm Ta2O5 from 102m</b>					
KVRC0167	258909	6958872	514	-48	46	140	102	105	3	1.7	167
							49	52	3	1.5	157
							<b>incl. 2m @ 2% Li2O and 211ppm Ta2O5 from 50m</b>				
KVRC0168	259012	6959060	513	-51	41	120	59	61	2	1	134
							93	95	2	1	190
							10	11	1	1.9	165
						<b>incl. 1m @ 1.6% Li2O and 120ppm Ta2O5 from 252m</b>					
KVRC0169	259037	6959000	513	-49	46	120	106	109	3	0.7	166
							14	15	1	0.8	104
							37	38	1	0.9	416
							82	83	1	1.3	93
						<b>incl. 1m @ 1.6% Li2O and 120ppm Ta2O5 from 252m</b>					
						<b>incl. 1m @ 1.5% Li2O and 287ppm Ta2O5 from 190m and 1m @ 1.5% Li2O and 158ppm Ta2O5 from 192m</b>					
						<b>incl. 4m @ 2.6% Li2O and 79ppm Ta2O5 from 214m and 3m @ 1.9% Li2O and 104ppm Ta2O5 from 220m</b>					
						<b>incl. 2m @ 2.2% Li2O and 74ppm Ta2O5 from 240m</b>					
						<b>incl. 1m @ 1.6% Li2O and 120ppm Ta2O5 from 252m</b>					
						<b>incl. 1m @ 1.5% Li2O and 287ppm Ta2O5 from 190m and 1m @ 1.5% Li2O and 158ppm Ta2O5 from 192m</b>					
						<b>incl. 1m @ 1.8% Li2O and 110ppm Ta2O5 from 178m</b>					
						<b>incl. 2m @ 1.8% Li2O and 94ppm Ta2O5 from 137m and 1m @ 1.8% Li2O and 81ppm Ta2O5 from 141m</b>					
						<b>incl. 3m @ 2% Li2O and 124ppm Ta2O5 from 129m</b>					
						<b>incl. 1m @ 1.7% Li2O and 109ppm Ta2O5 from 105m</b>					
						<b>incl. 1m @ 2.5% Li2O and 114ppm Ta2O5 from 128m</b>					

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0170	258332	6958764	509	-49	45	250	101	102	1	1	499
							110	113	3	1.7	429
							<b>incl. 1m @ 2.1% Li2O and 367ppm Ta2O5 from 110m</b>				
							168	173	5	1.5	294
							<b>incl. 3m @ 1.7% Li2O and 327ppm Ta2O5 from 169m</b>				
							185	196	11	1.3	98
							<b>incl. 4m @ 2% Li2O and 120ppm Ta2O5 from 186m</b>				
							207	215	8	1.7	151
							<b>incl. 4m @ 2.1% Li2O and 121ppm Ta2O5 from 208m and 1m @ 2.5% Li2O and 243ppm Ta2O5 from 213m</b>				
							220	226	6	1.9	85
<b>incl. 4m @ 2.4% Li2O and 95ppm Ta2O5 from 221m</b>											
KVRC0171	259037	6959000	513	-50	44	120	79	83	4	1.5	105
							<b>incl. 2m @ 2.1% Li2O and 117ppm Ta2O5 from 80m</b>				
KVRC0172	258839	6958662	520	-55	227	170	30	34	4	1.6	237
							<b>incl. 2m @ 2% Li2O and 257ppm Ta2O5 from 30m</b>				
							86	87	1	0.8	246
							94	97	3	1.4	152
<b>incl. 1m @ 2.7% Li2O and 235ppm Ta2O5 from 95m</b>											
KVRC0173	258977	6958945	513	-49	44	120	61	62	1	1.7	125
KVRC0174	258209	6958787	508	-48	47	278	19	23	4	1.5	118
							<b>incl. 1m @ 2.3% Li2O and 107ppm Ta2O5 from 21m</b>				
							192	223	31	1.7	223
							<b>incl. 10m @ 1.9% Li2O and 281ppm Ta2O5 from 193m and 1m @ 2.6% Li2O and 95ppm Ta2O5 from 205m and 9m @ 2% Li2O and 138ppm Ta2O5 from 208m and 1m @ 2.1% Li2O and 367ppm Ta2O5 from 221m</b>				
							245	250	5	1.1	14
							<b>incl. 1m @ 2% Li2O and 48ppm Ta2O5 from 246m and 1m @ 1.7% Li2O and 141ppm Ta2O5 from 249m</b>				
							25	28	3	1.3	220
							<b>incl. 1m @ 1.9% Li2O and 164ppm Ta2O5 from 26m</b>				
KVRC0175	258854	6958677	518	-69	43	148	82	85	3	1.6	193
							<b>incl. 2m @ 2.3% Li2O and 208ppm Ta2O5 from 83m</b>				
							87	88	1	0.9	577
KVRC0176	258351	6958919	511	-53	44	258	116	118	2	0.7	222
							<b>147</b>	<b>155</b>	<b>8</b>	<b>2</b>	<b>81</b>
							169	177	8	1.1	149
							<b>incl. 4m @ 1.7% Li2O and 191ppm Ta2O5 from 173m</b>				
							186	197	11	1	174
							<b>incl. 1m @ 1.6% Li2O and 150ppm Ta2O5 from 193m</b>				
							204	208	4	1.5	149
							<b>incl. 2m @ 2% Li2O and 187ppm Ta2O5 from 205m</b>				
							217	220	3	1.3	126
							<b>incl. 2m @ 1.8% Li2O and 117ppm Ta2O5 from 217m</b>				
KVRC0177	258939	6958762	513	-61	46	118	42	44	2	1.2	110
							<b>incl. 1m @ 1.9% Li2O and 116ppm Ta2O5 from 43m</b>				
							50	56	6	0.9	219
							<b>incl. 1m @ 1.9% Li2O and 184ppm Ta2O5 from 51m</b>				
83	85	2	1.7	165							
<b>incl. 1m @ 2% Li2O and 169ppm Ta2O5 from 84m</b>											
KVRC0178	259009	6958839	513	-49	44	130	65	70	5	1.5	164
							<b>incl. 2m @ 2.2% Li2O and 192ppm Ta2O5 from 66m</b>				
KVRC0179	258897	6958576	518	-55	226	172	92	93	1	1.4	152
							20	23	3	1	234
							25	26	1	1	243
							112	116	4	1.7	144
<b>incl. 2m @ 2.5% Li2O and 154ppm Ta2O5 from 114m</b>											

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results											
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)							
KVRC0180	258204	6958928	507	-49	43	280	168	180	12	1	127							
							<b>incl. 1m @ 1.9% Li2O and 158ppm Ta2O5 from 175m</b>											
							185	197	12	1.3	191							
							<b>incl. 5m @ 2.1% Li2O and 224ppm Ta2O5 from 188m</b>											
							210	215	5	1.9	140							
							<b>incl. 4m @ 2.2% Li2O and 149ppm Ta2O5 from 210m</b>											
							218	224	6	8	81							
							<b>incl. 1m @ 1.7% Li2O and 131ppm Ta2O5 from 221m</b>											
							227	232	5	1.4	169							
							<b>incl. 2m @ 1.9% Li2O and 161ppm Ta2O5 from 229m</b>											
KVRC0181	258998	6958677	514	-60	42	118	240	250	10	1.4	165							
							<b>incl. 3m @ 1.7% Li2O and 182ppm Ta2O5 from 242m</b>											
							259	261	2	1.1	182							
							47	52	5	1.5	220							
							<b>incl. 3m @ 2% Li2O and 200ppm Ta2O5 from 48m</b>											
							KVRC0182	258913	6958592	517	-69	43	118	24	32	8	1.5	236
														<b>incl. 1m @ 4.2% Li2O and 325ppm Ta2O5 from 26m and 1m @ 1.9% Li2O and 291ppm Ta2O5 from 29m</b>				
														63	66	3	1.2	95
														<b>incl. 1m @ 1.6% Li2O and 78ppm Ta2O5 from 64m</b>				
							KVRC0183	258305	6959000	508	-50	46	234	150	152	2	1	229
158	169	11	1.7	211														
<b>incl. 1m @ 2.7% Li2O and 294ppm Ta2O5 from 158m and 1m @ 2% Li2O and 97ppm Ta2O5 from 162m and 5m @ 2.4% Li2O and 350ppm Ta2O5 from 164m</b>																		
173	174	1	2.1	137														
180	187	7	1.6	143														
<b>incl. 3m @ 2.3% Li2O and 141ppm Ta2O5 from 181m</b>																		
195	212	17	1.3	147														
<b>incl. 5m @ 2% Li2O and 205ppm Ta2O5 from 199m and 5m @ 1.7% Li2O and 170ppm Ta2O5 from 207m</b>																		
KVRC0184	259083	6958762	514	-50	46	118								71	73	2	0.9	115
														75	80	5	0.8	122
							84	86	2	1.7	93							
							<b>incl. 1m @ 2.2% Li2O and 106ppm Ta2O5 from 85m</b>											
KVRC0185	258002	6958860	511	-58	46	274	68	72	4	1.1	128							
							<b>incl. 1m @ 1.8% Li2O and 138ppm Ta2O5 from 70m</b>											
							114	117	3	1	96							
							235	237	2	0.6	113							
							240	260	20	1	203							
							<b>incl. 3m @ 1.7% Li2O and 194ppm Ta2O5 from 256m</b>											
KVRC0186	258954	6958493	518	-55	221	170	264	270	6	1.6	214							
							<b>incl. 5m @ 1.8% Li2O and 220ppm Ta2O5 from 265m</b>											
							49	56	7	1.5	189							
							<b>incl. 1m @ 2% Li2O and 190ppm Ta2O5 from 50m and 1m @ 2.6% Li2O and 396ppm Ta2O5 from 52m and 2m @ 1.6% Li2O and 136ppm Ta2O5 from 54m</b>											
KVRC0187	258968	6958507	517	-70	51	150	138	140	2	2.3	158							
							<b>incl. 1m @ 2.1% Li2O and 190ppm Ta2O5 from 49m</b>											
KVRC0188	259053	6958592	514	-59	47	120	49	53	4	1.3	229							
							<b>incl. 1m @ 1.6% Li2O and 147ppm Ta2O5 from 63m</b>											
KVRC0189	259138	6958677	514	-53	47	120	69	71	2	1.2	77							
							7	8	1	1.3	327							
							63	65	2	0.5	143							
							84	86	2	0.9	75							

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0190	258172	6959029	513	-59	45	264	144	147	3	0.4	158
							190	193	3	0.9	429
							205	213	8	1.6	166
							<b>incl. 6m @ 2% Li<sub>2</sub>O and 198ppm Ta<sub>2</sub>O<sub>5</sub> from 206m</b>				
							217	224	7	1.6	202
							<b>incl. 5m @ 1.8% Li<sub>2</sub>O and 177ppm Ta<sub>2</sub>O<sub>5</sub> from 217m</b>				
							227	231	4	1	270
							240	242	2	0.8	163
						246	248	2	0.6	184	
KVRC0191	258676	6958155	529	-69	230	150	No significant assays				
KVRC0192	258661	6958209	535	-88	309	148	No significant assays				
KVRC0193	258775	6958314	525	-56	42	166	64	67	3	1.7	167
							<b>incl. 1m @ 2.5% Li<sub>2</sub>O and 76ppm Ta<sub>2</sub>O<sub>5</sub> from 64m</b>				
KVRC0194	258500	6958335	530	-86	141	324	163	181	18	1.7	160
							<b>incl. 8m @ 2.1% Li<sub>2</sub>O and 142ppm Ta<sub>2</sub>O<sub>5</sub> from 163m and 4m @ 1.9% Li<sub>2</sub>O and 200ppm Ta<sub>2</sub>O<sub>5</sub> from 174m</b>				
							184	199	15	1.1	76
							<b>incl. 1m @ 2.6% Li<sub>2</sub>O and 175ppm Ta<sub>2</sub>O<sub>5</sub> from 185m and 2m @ 2.5% Li<sub>2</sub>O and 176ppm Ta<sub>2</sub>O<sub>5</sub> from 195m</b>				
							242	254	12	1.5	67
							<b>incl. 6m @ 2% Li<sub>2</sub>O and 64ppm Ta<sub>2</sub>O<sub>5</sub> from 243m</b>				
KVRC0195	258740	6958352	531	-60	47	172	<b>incl. 1m @ 2.2% Li<sub>2</sub>O and 155ppm Ta<sub>2</sub>O<sub>5</sub> from 77m</b>				
KVRC0196	258720	6958401	533	-61	45	172	56	58	2	0.7	264
							70	74	4	2	242
							<b>incl. 2m @ 2.7% Li<sub>2</sub>O and 94ppm Ta<sub>2</sub>O<sub>5</sub> from 71m</b>				
KVRC0197	258568	6958279	546	-57	8	174	115	136	21	1.2	214
							<b>incl. 5m @ 1.7% Li<sub>2</sub>O and 115ppm Ta<sub>2</sub>O<sub>5</sub> from 120m</b>				
							141	143	2	0.9	61
							159	167	8	0.8	181
KVRC0198	258672	6958425	537	-60	47	262	59	62	3	0.8	220
							69	74	5	1.1	235
							118	121	3	1	173
							141	142	1	0.8	165
							144	146	2	1.2	152
KVRC0199	258595	6958225	544	-84	41	300	139	169	30	1.6	185
							<b>incl. 13m @ 2.1% Li<sub>2</sub>O and 150ppm Ta<sub>2</sub>O<sub>5</sub> from 143m and 2m @ 2.1% Li<sub>2</sub>O and 270ppm Ta<sub>2</sub>O<sub>5</sub> from 164m</b>				
							172	182	10	1.1	113
							<b>incl. 1m @ 2.6% Li<sub>2</sub>O and 187ppm Ta<sub>2</sub>O<sub>5</sub> from 176m and 2m @ 1.8% Li<sub>2</sub>O and 176ppm Ta<sub>2</sub>O<sub>5</sub> from 180m</b>				
							285	289	4	0.9	327
							<b>incl. 1m @ 1.5% Li<sub>2</sub>O and 165ppm Ta<sub>2</sub>O<sub>5</sub> from 288m</b>				
KVRC0200	258087	6958945	512	-61	42	280	32	34	2	1.2	89
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 122ppm Ta<sub>2</sub>O<sub>5</sub> from 32m</b>				
							168	179	11	1.9	85
							<b>incl. 7m @ 2.6% Li<sub>2</sub>O and 63ppm Ta<sub>2</sub>O<sub>5</sub> from 169m</b>				
							208	234	26	1.4	183
							<b>incl. 3m @ 2.2% Li<sub>2</sub>O and 179ppm Ta<sub>2</sub>O<sub>5</sub> from 212m and 10m @ 1.9% Li<sub>2</sub>O and 252ppm Ta<sub>2</sub>O<sub>5</sub> from 218m</b>				
							246	257	11	1.3	146
							<b>incl. 4m @ 1.9% Li<sub>2</sub>O and 129ppm Ta<sub>2</sub>O<sub>5</sub> from 246m and 1m @ 2.8% Li<sub>2</sub>O and 337ppm Ta<sub>2</sub>O<sub>5</sub> from 256m</b>				



**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0201	258568	6958279	547	-79	343	228	154	160	6	1.2	136
							incl. 3m @ 1.9% Li2O and 169ppm Ta2O5 from 155m				
							167	188	21	1.6	157
							incl. 8m @ 2.1% Li2O and 142ppm Ta2O5 from 170m and 5m @ 2.1% Li2O and 144ppm Ta2O5 from 182m				
							201	211	10	1.1	108
							incl. 1m @ 2.7% Li2O and 164ppm Ta2O5 from 209m				
KVRC0202	258123	6958843	507	-80	42	262	174	176	2	2.3	41
							incl. 2m @ 1.6% Li2O and 101ppm Ta2O5 from 182m				
							182	186	4	1.2	118
							incl. 6m @ 2.1% Li2O and 142ppm Ta2O5 from 205m and 2m @ 1.9% Li2O and 156ppm Ta2O5 from 216m and 2m @ 2% Li2O and 181ppm Ta2O5 from 219m				
							204	224	20	1.5	150
							incl. 1m @ 2% Li2O and 243ppm Ta2O5 from 237m				
KVRC0203	258563	6958257	546	-79	46	228	141	167	26	1.6	176
							incl. 12m @ 1.9% Li2O and 166ppm Ta2O5 from 142m and 9m @ 1.8% Li2O and 172ppm Ta2O5 from 158m				
							187	197	10	0.9	64
							incl. 2m @ 1.6% Li2O and 89ppm Ta2O5 from 191m				
KVRC0204	258420	6958398	525	-69	48	294	180	184	4	0.8	113
							incl. 10m @ 2% Li2O and 129ppm Ta2O5 from 202m and 2m @ 1.8% Li2O and 155ppm Ta2O5 from 216m and 1m @ 2.2% Li2O and 141ppm Ta2O5 from 220m and 7m @ 2% Li2O and 103ppm Ta2O5 from 227m and 2m @ 1.9% Li2O and 129ppm Ta2O5 from 238m and 1m @ 2.4% Li2O and 118ppm Ta2O5 from 243m				
							198	250	52	1.4	113
							incl. 4m @ 1.9% Li2O and 138ppm Ta2O5 from 261m and 5m @ 1.8% Li2O and 107ppm Ta2O5 from 268m				
							260	276	16	1.4	114
							incl. 1m @ 1.9% Li2O and 244ppm Ta2O5 from 191m				
							189	195	6	1.3	191
							incl. 4m @ 1.9% Li2O and 122ppm Ta2O5 from 203m				
KVRC0205	258158	6958878	506	-62	46	270	197	199	2	0.5	218
							incl. 1m @ 1.9% Li2O and 244ppm Ta2O5 from 191m				
							202	208	6	1.5	125
KVRC0206	258495	6958398	510	-89	199	324	168	174	6	1.4	198
							incl. 1m @ 2% Li2O and 126ppm Ta2O5 from 170m				
							176	182	6	1.7	210
							incl. 2m @ 2.8% Li2O and 108ppm Ta2O5 from 180m				
							206	233	27	1.5	103
							incl. 5m @ 1.9% Li2O and 131ppm Ta2O5 from 206m and 3m @ 2% Li2O and 180ppm Ta2O5 from 213m and 5m @ 1.9% Li2O and 116ppm Ta2O5 from 221m and 2m @ 1.8% Li2O and 92ppm Ta2O5 from 227m				
							238	241	3	1.8	87
							262	269	7	1.2	143
							incl. 2m @ 1.6% Li2O and 245ppm Ta2O5 from 266m				
							272	276	4	0.7	51
KVRC0207	258228	6958536	519	-73	44	280	239	242	3	0.9	37
							incl. 4m @ 2% Li2O and 79ppm Ta2O5 from 253m and 2m @ 2% Li2O and 88ppm Ta2O5 from 261m				
							246	266	20	1.2	82
KVRC0207A*	258228	6958536	519	-73	44	354	289	342	53	1.6	115
							incl. 3m @ 2.4% Li2O and 85ppm Ta2O5 from 291m and 15m @ 2% Li2O and 97ppm Ta2O5 from 300m and 18m @ 1.8% Li2O and 121ppm Ta2O5 from 321m				

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0208	258382	6958460	518	-69	43	282	154	168	14	1.7	110
							<b>incl. 9m @ 2.1% Li2O and 116ppm Ta2O5 from 157m</b>				
							189	207	18	1.6	104
							<b>incl. 12m @ 2.2% Li2O and 135ppm Ta2O5 from 190m</b>				
							209	213	4	1.3	138
							<b>incl. 2m @ 1.9% Li2O and 221ppm Ta2O5 from 210m</b>				
							218	228	10	1.2	72
							<b>incl. 5m @ 1.6% Li2O and 101ppm Ta2O5 from 218m</b>				
							251	263	12	1.2	132
<b>incl. 2m @ 2.3% Li2O and 162ppm Ta2O5 from 252m and 3m @ 1.7% Li2O and 117ppm Ta2O5 from 256m</b>											
KVRC0209	258465	6958760	513	-51	44	244	66	69	3	0.7	155
							108	113	5	1.2	171
							<b>incl. 2m @ 2.1% Li2O and 209ppm Ta2O5 from 108m</b>				
							138	141	3	0.8	167
							176	186	10	1.3	149
							<b>incl. 3m @ 2% Li2O and 138ppm Ta2O5 from 180m</b>				
							195	200	5	0.8	51
<b>incl. 1m @ 2.1% Li2O and 79ppm Ta2O5 from 196m</b>											
KVRC0210	258535	6958607	513	-53	35	250	85	90	5	1.2	401
							<b>incl. 2m @ 2.1% Li2O and 466ppm Ta2O5 from 86m</b>				
							96	99	3	0.4	4
							101	104	3	0.9	244
							110	125	15	1.5	198
							<b>incl. 5m @ 2.2% Li2O and 253ppm Ta2O5 from 114m and 3m @ 2% Li2O and 251ppm Ta2O5 from 120m</b>				
							229	230	1	1	64
							234	235	1	0.7	93
KVRC0211	258367	6958445	518	-79	45	306	242	290	48	1.4	115
							<b>incl. 1m @ 2% Li2O and 117ppm Ta2O5 from 244m and 1m @ 2.3% Li2O and 107ppm Ta2O5 from 246m and 8m @ 2.3% Li2O and 95ppm Ta2O5 from 251m and 2m @ 1.9% Li2O and 107ppm Ta2O5 from 268m and 4m @ 2.2% Li2O and 138ppm Ta2O5 from 272m</b>				
							91	93	2	0.8	235
							103	108	5	1.2	185
							<b>incl. 2m @ 1.8% Li2O and 323ppm Ta2O5 from 104m</b>				
KVRC0212	258461	6958687	512	-71	47	240	126	131	5	1.3	185
							<b>incl. 2m @ 2% Li2O and 241ppm Ta2O5 from 127m</b>				
							82	88	6	0.5	126
KVRC0213	258498	6958573	514	-67	43	252	95	100	5	1.7	290
							<b>incl. 3m @ 2.5% Li2O and 371ppm Ta2O5 from 95m</b>				
							131	142	11	1.3	114
							<b>incl. 8m @ 1.6% Li2O and 144ppm Ta2O5 from 134m</b>				
							213	218	5	1.8	123
							<b>incl. 3m @ 2.1% Li2O and 108ppm Ta2O5 from 214m</b>				
KVRC0214	258387	6958606	513	-75	44	244	55	67	12	1.7	115
							<b>incl. 1m @ 2.1% Li2O and 150ppm Ta2O5 from 55m and 7m @ 2% Li2O and 111ppm Ta2O5 from 58m</b>				
							86	95	9	1.5	132
							<b>incl. 5m @ 1.9% Li2O and 117ppm Ta2O5 from 89m</b>				
							111	113	2	0.8	191
							142	149	7	1.9	224
							<b>incl. 4m @ 2.8% Li2O and 288ppm Ta2O5 from 144m</b>				
							190	211	21	1.5	93
							<b>incl. 3m @ 2% Li2O and 103ppm Ta2O5 from 197m and 3m @ 2.3% Li2O and 63ppm Ta2O5 from 202m and 1m @ 2.2% Li2O and 123ppm Ta2O5 from 208m</b>				



**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results											
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)							
KVRC0222	258153	6958728	509	-54	43	300	66	68	2	1.5	126							
							93	97	4	1.3	119							
							123	126	3	1.3	79							
							<b>incl. 2m @ 1.6% Li2O and 101ppm Ta2O5 from 124m</b>											
							149	151	2	1	82							
							192	216	24	1.2	137							
							<b>incl. 3m @ 1.7% Li2O and 202ppm Ta2O5 from 192m and 4m @ 1.9% Li2O and 175ppm Ta2O5 from 198m and 2m @ 1.8% Li2O and 128ppm Ta2O5 from 208m and 2m @ 2% Li2O and 205ppm Ta2O5 from 213m</b>											
							220	222	2	0.6	61							
							226	234	8	1.2	138							
							<b>incl. 2m @ 2.1% Li2O and 181ppm Ta2O5 from 231m</b>											
							237	252	15	1.3	86							
							<b>incl. 2m @ 2.3% Li2O and 94ppm Ta2O5 from 241m and 2m @ 2.2% Li2O and 100ppm Ta2O5 from 247m</b>											
							277	280	3	1	134							
							<b>incl. 1m @ 1.7% Li2O and 97ppm Ta2O5 from 278m</b>											
							KVRC0223	258185	6958903	507	-57	44	262	169	184	15	1.1	123
														<b>incl. 1m @ 1.9% Li2O and 485ppm Ta2O5 from 169m and 2m @ 1.6% Li2O and 125ppm Ta2O5 from 172m and 1m @ 1.8% Li2O and 152ppm Ta2O5 from 182m</b>				
192	202	10	1.3	230														
<b>incl. 3m @ 1.8% Li2O and 255ppm Ta2O5 from 193m and 1m @ 2.1% Li2O and 447ppm Ta2O5 from 198m</b>																		
209	219	10	1.2	135														
<b>incl. 2m @ 2.1% Li2O and 115ppm Ta2O5 from 210m</b>																		
226	233	7	1.6	161														
<b>incl. 3m @ 2.2% Li2O and 188ppm Ta2O5 from 226m</b>																		
241	247	6	1.7	137														
<b>incl. 3m @ 2.1% Li2O and 136ppm Ta2O5 from 241m</b>																		
255	257	2	1.2	111														
<b>incl. 1m @ 1.7% Li2O and 143ppm Ta2O5 from 256m</b>																		
KVRC0224	258050	6958766	513	-78	40	300								106	109	3	0.9	133
							153	155	2	1.1	125							
							158	171	13	1.1	101							
							<b>incl. 3m @ 1.7% Li2O and 177ppm Ta2O5 from 159m</b>											
							173	182	9	1.4	124							
							<b>incl. 3m @ 1.9% Li2O and 156ppm Ta2O5 from 178m</b>											
							186	187	1	1.3	101							
							201	202	1	1.1	56							
							240	283	43	1.7	108							
							<b>incl. 5m @ 2.1% Li2O and 88ppm Ta2O5 from 240m and 5m @ 2% Li2O and 127ppm Ta2O5 from 256m and 10m @ 2% Li2O and 107ppm Ta2O5 from 263m and 5m @ 2% Li2O and 116ppm Ta2O5 from 277m</b>											
							KVRC0225	258284	6958860	510	-49	46	268	105	107	2	1.4	203
<b>incl. 1m @ 2.4% Li2O and 269ppm Ta2O5 from 105m</b>																		
172	181	9	1.5	185														
<b>incl. 1m @ 2.8% Li2O and 368ppm Ta2O5 from 176m</b>																		
184	187	3	1.1	214														
<b>incl. 1m @ 1.9% Li2O and 336ppm Ta2O5 from 186m</b>																		
189	207	18	1.1	166														
<b>incl. 5m @ 1.9% Li2O and 214ppm Ta2O5 from 189m</b>																		
210	220	10	1.2	108														
<b>incl. 3m @ 2.5% Li2O and 144ppm Ta2O5 from 214m</b>																		
238	247	9	1.2	130														
<b>incl. 3m @ 1.9% Li2O and 158ppm Ta2O5 from 240m</b>																		

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0226	258116	6958690	510	-68	42	285	122	124	2	1.1	114
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 112ppm Ta<sub>2</sub>O<sub>5</sub> from 122m</b>				
							133	135	2	0.6	172
							149	151	2	1.2	146
							165	177	12	1.4	102
							<b>incl. 6m @ 1.9% Li<sub>2</sub>O and 97ppm Ta<sub>2</sub>O<sub>5</sub> from 168m</b>				
							201	203	2	0.8	103
							210	217	7	1.2	109
							<b>incl. 1m @ 3.1% Li<sub>2</sub>O and 30ppm Ta<sub>2</sub>O<sub>5</sub> from 211m and 1m @ 2% Li<sub>2</sub>O and 57ppm Ta<sub>2</sub>O<sub>5</sub> from 214m</b>				
							222	235	13	1.7	179
							<b>incl. 3m @ 2% Li<sub>2</sub>O and 174ppm Ta<sub>2</sub>O<sub>5</sub> from 223m and 4m @ 2.2% Li<sub>2</sub>O and 164ppm Ta<sub>2</sub>O<sub>5</sub> from 228m</b>				
							245	257	12	1.8	136
							<b>incl. 5m @ 2.5% Li<sub>2</sub>O and 92ppm Ta<sub>2</sub>O<sub>5</sub> from 245m</b>				
							265	266	1	1.2	80
							270	280	10	1.1	111
							<b>incl. 3m @ 1.9% Li<sub>2</sub>O and 117ppm Ta<sub>2</sub>O<sub>5</sub> from 272m</b>				
							KVRC0227	258310	6958672	510	-58
62	65	4	1.5	140							
<b>incl. 3m @ 1.7% Li<sub>2</sub>O and 140ppm Ta<sub>2</sub>O<sub>5</sub> from 62m</b>											
70	71	1	1.1	118							
141	144	3	1.1	309							
<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 322ppm Ta<sub>2</sub>O<sub>5</sub> from 142m</b>											
156	159	3	1.8	248							
<b>incl. 2m @ 2.2% Li<sub>2</sub>O and 242ppm Ta<sub>2</sub>O<sub>5</sub> from 156m</b>											
186	195	9	1.6	147							
<b>incl. 3m @ 2.2% Li<sub>2</sub>O and 128ppm Ta<sub>2</sub>O<sub>5</sub> from 187m</b>											
204	221	17	1.7	136							
<b>incl. 10m @ 2.1% Li<sub>2</sub>O and 126ppm Ta<sub>2</sub>O<sub>5</sub> from 208m</b>											
KVRC0228	258192	6958628	515	-79	43	298	185	196	11	1.4	115
							<b>incl. 5m @ 2% Li<sub>2</sub>O and 145ppm Ta<sub>2</sub>O<sub>5</sub> from 189m</b>				
							210	27	17	1.8	124
							<b>incl. 8m @ 2.4% Li<sub>2</sub>O and 120ppm Ta<sub>2</sub>O<sub>5</sub> from 211m</b>				
							236	282	45	1.7	116
<b>incl. 23m @ 2.1% Li<sub>2</sub>O and 113ppm Ta<sub>2</sub>O<sub>5</sub> from 239m and 3m @ 2% Li<sub>2</sub>O and 112ppm Ta<sub>2</sub>O<sub>5</sub> from 264m</b>											
KVRC0229	258715	6958131	525	-76	228	180	No significant assays				
KVRC0230	258720	6958137	525	-69	45	120	55	60	5	1.3	211
							<b>incl. 2m @ 2% Li<sub>2</sub>O and 204ppm Ta<sub>2</sub>O<sub>5</sub> from 57m</b>				
							97	102	5	1.5	251
<b>incl. 1m @ 2.3% Li<sub>2</sub>O and 469ppm Ta<sub>2</sub>O<sub>5</sub> from 97m and 1m @ 2.5% Li<sub>2</sub>O and 115ppm Ta<sub>2</sub>O<sub>5</sub> from 99m</b>											
KVRC0231	258637	6958543	520	-90	358	225	36	43	7	0.8	260
							<b>incl. 1m @ 2.2% Li<sub>2</sub>O and 215ppm Ta<sub>2</sub>O<sub>5</sub> from 36m</b>				
							86	89	3	1.1	207
							<b>incl. 1m @ 1.8% Li<sub>2</sub>O and 230ppm Ta<sub>2</sub>O<sub>5</sub> from 86m</b>				
							106	111	5	1.2	103
							<b>incl. 1m @ 2.1% Li<sub>2</sub>O and 137ppm Ta<sub>2</sub>O<sub>5</sub> from 108m</b>				
							117	122	5	1.5	114
							<b>incl. 3m @ 1.8% Li<sub>2</sub>O and 118ppm Ta<sub>2</sub>O<sub>5</sub> from 117m</b>				
							126	128	2	1.2	122
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 168ppm Ta<sub>2</sub>O<sub>5</sub> from 126m</b>				
134	138	4	0.9	109							
<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 177ppm Ta<sub>2</sub>O<sub>5</sub> from 136m</b>											

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0232	258679	6958155	530	-79	222	170	119	144	25	1.4	181
							<b>incl. 9m @ 1.8% Li2O and 153ppm Ta2O5 from 129m and 2m @ 1.9% Li2O and 225ppm Ta2O5 from 141m</b>				
KVRC0233	258637	6958461	531	-87	167	230	54	57	3	0.8	264
							69	73	4	0.7	112
							94	97	3	1	123
							137	141	4	1.3	199
							<b>incl. 1m @ 1.9% Li2O and 219ppm Ta2O5 from 140m</b>				
							148	152	4	0.7	179
							174	179	5	1.3	111
							<b>incl. 2m @ 2.7% Li2O and 101ppm Ta2O5 from 175m</b>				
KVRC0234	258736	6958280	529	-54	41	172	86	93	7	0.8	224
							<b>incl. 1m @ 1.8% Li2O and 126ppm Ta2O5 from 89m</b>				
KVRC0235	258896	6958719	514	-66	42	192	37	42	5	1.2	133
							<b>incl. 2m @ 2.1% Li2O and 149ppm Ta2O5 from 39m</b>				
							46	48	2	1.2	141
							<b>incl. 1m @ 1.8% Li2O and 161ppm Ta2O5 from 46m</b>				
							87	89	2	1.1	112
KVRC0236	258630	6958386	540	-58	44	192	52	62	10	0.7	210
							<b>incl. 1m @ 1.7% Li2O and 140ppm Ta2O5 from 61m</b>				
							111	123	12	0.7	140
KVRC0237	258960	6958500	518	-80	226	120	42	48	6	1.1	238
							<b>incl. 1m @ 2.6% Li2O and 169ppm Ta2O5 from 44m</b>				
							104	107	3	1.3	105
KVRC0238	258653	6958203	535	-71	222	228	<b>incl. 1m @ 1.9% Li2O and 111ppm Ta2O5 from 105m</b>				
							155	217	62	1.2	171
							<b>incl. 14m @ 1.9% Li2O and 164ppm Ta2O5 from 159m and 7m @ 2% Li2O and 199ppm Ta2O5 from 175m and 5m @ 1.9% Li2O and 201ppm Ta2O5 from 187m and 4m @ 1.9% Li2O and 182ppm Ta2O5 from 207m</b>				
KVRC0239	258810	6958348	523	-54	47	154	45	50	5	0.9	182
							<b>incl. 1m @ 2.1% Li2O and 204ppm Ta2O5 from 46m</b>				
KVRC0240	259010	6958549	514	-66	44	78	133	134	1	2.3	153
							<b>incl. 1m @ 2.2% Li2O and 68ppm Ta2O5 from 54m</b>				
KVRC0241	259095	6958634	514	-56	42	84	52	56	4	1.3	187
KVRC0242	258773	6958382	526	-59	47	154	61	63	2	1.2	243
							<b>incl. 1m @ 1.7% Li2O and 222ppm Ta2O5 from 61m</b>				
KVRC0243	259180	6958719	514	-50	38	60	58	64	6	1	223
KVRC0244	258904	6958583	518	-80	225	120	45	46	1	0.9	131
							24	25	1	2.1	332
							92	94	2	0.9	337
							54	56	2	1.9	324
							<b>incl. 1m @ 2.6% Li2O and 431ppm Ta2O5 from 54m</b>				
KVRC0245	258672	6958425	537	-88	193	168	72	77	5	1.5	219
							<b>incl. 2m @ 2% Li2O and 150ppm Ta2O5 from 74m</b>				
							153	159	6	1.3	195
							<b>incl. 3m @ 2% Li2O and 200ppm Ta2O5 from 155m</b>				
KVRC0246	258147	6958575	510	-84	40	414	364	370	6	0.9	193
							<b>incl. 1m @ 2.1% Li2O and 382ppm Ta2O5 from 365m</b>				
							377	411	34	1.4	88
KVRC0247	258740	6958352	531	-88	177	150	<b>incl. 8m @ 2.5% Li2O and 69ppm Ta2O5 from 381m and 1m @ 2.3% Li2O and 162ppm Ta2O5 from 402m</b>				
							78	87	9	1.5	314
							<b>incl. 2m @ 2.2% Li2O and 267ppm Ta2O5 from 80m and 1m @ 3.3% Li2O and 93ppm Ta2O5 from 84m</b>				

## Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li <sub>2</sub> O (>0.4%) and Ta <sub>2</sub> O <sub>5</sub> (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li <sub>2</sub> O (%)	Ta <sub>2</sub> O <sub>5</sub> (ppm)
KVRC0248	258668	6958493	527	-56	40	168	57	61	4	1.4	304
							<b>incl. 2m @ 2% Li<sub>2</sub>O and 291ppm Ta<sub>2</sub>O<sub>5</sub> from 58m</b>				
							97	99	2	1.2	295
							<b>incl. 1m @ 1.8% Li<sub>2</sub>O and 378ppm Ta<sub>2</sub>O<sub>5</sub> from 97m</b>				
							103	104	1	1	166
							116	118	2	1	257
							121	124	3	1.5	142
<b>incl. 1m @ 3% Li<sub>2</sub>O and 94ppm Ta<sub>2</sub>O<sub>5</sub> from 122m</b>											
KVRC0249	258088	6958659	514	-74	41	340	223	306	85	1.5	106
							<b>incl. 2m @ 2.1% Li<sub>2</sub>O and 130ppm Ta<sub>2</sub>O<sub>5</sub> from 224m and 3m @ 2.1% Li<sub>2</sub>O and 93ppm Ta<sub>2</sub>O<sub>5</sub> from 240m and 4m @ 2.8% Li<sub>2</sub>O and 62ppm Ta<sub>2</sub>O<sub>5</sub> from 266m and 20m @ 1.9% Li<sub>2</sub>O and 121ppm Ta<sub>2</sub>O<sub>5</sub> from 285m</b>				
							269	343	74	1.3	96
							<b>incl. 4m @ 1.8% Li<sub>2</sub>O and 59ppm Ta<sub>2</sub>O<sub>5</sub> from 286m and 6m @ 2.1% Li<sub>2</sub>O and 113ppm Ta<sub>2</sub>O<sub>5</sub> from 299m and 3m @ 2.6% Li<sub>2</sub>O and 99ppm Ta<sub>2</sub>O<sub>5</sub> from 319m and 3m @ 2.1% Li<sub>2</sub>O and 116ppm Ta<sub>2</sub>O<sub>5</sub> from 336m</b>				
KVRC0250	258039	6958747	511	-87	41	358	260	262	2	0.8	74
							265	277	12	1.2	89
							<b>incl. 2m @ 1.9% Li<sub>2</sub>O and 108ppm Ta<sub>2</sub>O<sub>5</sub> from 268m and 1m @ 4.3% Li<sub>2</sub>O and 66ppm Ta<sub>2</sub>O<sub>5</sub> from 275m</b>				
							279	282	3	0.7	73
							284	285	1	1.7	208
							288	290	2	0.5	69
							294	345	51	1.2	146
<b>incl. 13m @ 1.8% Li<sub>2</sub>O and 149ppm Ta<sub>2</sub>O<sub>5</sub> from 302m</b>											
KVRC0251	257938	6958787	513	-80	37	362	37	40	3	1.1	355
							<b>incl. 1m @ 2% Li<sub>2</sub>O and 390ppm Ta<sub>2</sub>O<sub>5</sub> from 37m</b>				
KVRC0252	259040	6958719	514	-54	45	90	56	58	2	1.1	163
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 192ppm Ta<sub>2</sub>O<sub>5</sub> from 50m</b>				
KVRC0253	258955	6958634	514	-64	43	100	38	44	6	1.4	136
KVRC0254	258981	6958804	514	-55	43	100	58	62	4	1.3	159
							<b>incl. 2m @ 1.8% Li<sub>2</sub>O and 141ppm Ta<sub>2</sub>O<sub>5</sub> from 59m</b>				
KVRC0255	258904	6958889	513	-49	45	50	26	27	1	0.8	67
KVRC0256	259125	6958804	514	-50	43	80	50	52	2	1.1	176
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 192ppm Ta<sub>2</sub>O<sub>5</sub> from 50m</b>				
KVRC0257	258238	6958671	512	-56	48	120	3	7	4	1.1	104
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 133ppm Ta<sub>2</sub>O<sub>5</sub> from 4m</b>				
							63	69	6	1.1	83
							72	74	2	1.2	93
							81	83	2	1.2	102
							<b>incl. 1m @ 1.6% Li<sub>2</sub>O and 120ppm Ta<sub>2</sub>O<sub>5</sub> from 81m</b>				
							86	91	5	0.6	37
107	109	2	0.9	121							
KVRC0258	257977	6958836	506	-66	45	170	25	27	2	0.6	121
KVRC0259	258183	6958757	510	-50	47	80	60	64	4	1.4	121
							<b>incl. 2m @ 1.8% Li<sub>2</sub>O and 133ppm Ta<sub>2</sub>O<sub>5</sub> from 62m</b>				
KVRC0260	258087	6958802	509	-79	42	150	85	90	5	1.1	124
							<b>incl. 1m @ 1.7% Li<sub>2</sub>O and 117ppm Ta<sub>2</sub>O<sub>5</sub> from 62m</b>				
							118	120	2	1.3	168

**Appendix 1 (cont.) – Kathleen Valley – Reverse Circulation Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVRC0261	258136	6958710	508	-61	44	160	100	102	2	1	92
							122	127	5	1.6	111
							<b>incl. 4m @ 1.8% Li2O and 107ppm Ta2O5 from 123m</b>				
							150	153	3	1.6	75
							<b>incl. 2m @ 2% Li2O and 84ppm Ta2O5 from 150m</b>				
KVRC0262	258025	6958889	505	-54	43	90	42	43	1	0.4	109
KVRC0263	258142	6958856	506	-71	45	96	40	41	1	1.1	140
							84	86	2	0.8	170
KVRC0264	257745	6959231	505	-55	46	324	230	239	9	1.1	26
							<b>incl. 1m @ 3.7% Li2O and 14ppm Ta2O5 from 232m</b>				
							294	310	16	1.9	139
							<b>incl. 8m @ 2.2% Li2O and 124ppm Ta2O5 from 294m and 2m @ 2.3% Li2O and 84ppm Ta2O5 from 305m</b>				
KVRC0265	257699	6959157	505	-64	44	366	219	229	10	1.9	72
							<b>incl. 1m @ 2.8% Li2O and 41ppm Ta2O5 from 221m and 4m @ 3.2% Li2O and 65ppm Ta2O5 from 223m</b>				
							284	305	21	1.2	112
							<b>incl. 4m @ 1.7% Li2O and 111ppm Ta2O5 from 293m</b>				
							330	336	6	1.3	182
							<b>incl. 2m @ 2% Li2O and 120ppm Ta2O5 from 330m</b>				
							348	349	1	1.5	188
							353	355	2	1	101
KVRC0266	257653	6959101	505	-70	37	384	218	230	12	3.1	38
							<b>incl. 9m @ 3.8% Li2O and 25ppm Ta2O5 from 219m</b>				
							294	298	4	0.4	69
							304	307	3	0.8	67
							327	333	6	1.4	215
							<b>incl. 2m @ 2.1% Li2O and 220ppm Ta2O5 from 327m</b>				
							348	351	3	1.3	122
<b>incl. 1m @ 1.9% Li2O and 131ppm Ta2O5 from 348m</b>											
KVRC0267	257597	6959039	505	-71	46	90	Hole abandoned				
KVRC0268	258440	6959838	506	-85	110.3	339	Assays Pending				

True widths estimated as follows:

Holes drilled towards NE (~045) and intersecting Kathleen's Corner lodes - true widths 85-100% of downhole width

Holes drilled towards NE (~045) and intersecting Mt Mann lodes - true widths 65-80% of downhole width

Holes drilled towards SW (~225) and intersecting Kathleen's Corner lodes - true widths 65-75% of downhole width

Holes drilled towards SW (~225) and intersecting Mt Mann lodes, true widths 30-50% of downhole width

Suffixes "A" and "B" denote re-entered holes



**Appendix 2 – Kathleen Valley – Diamond Core Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVDD0001	258690	6959191	512	-55	39	141.2	39.05	41.24	2.19	2.1	291
							<b>incl. 1m @ 2.5% Li2O and 289ppm Ta2O5 from 40m</b>				
							47.07	49	1.93	2.7	258
							53	54.87	1.87	1.7	230
							<b>incl. 0.87m @ 2.2% Li2O and 217ppm Ta2O5 from 54m</b>				
							70.65	85.55	14.9	1.4	190
							<b>incl. 4m @ 2.1% Li2O and 288ppm Ta2O5 from 72m and 4m @ 1.8% Li2O and 178ppm Ta2O5 from 81m</b>				
							102.26	103.71	1.45	1.4	336
							124	125	1	1	243
							KVDD0002	258738	6959090	514	-55
59.29	76	16.71	1.6	215							
<b>incl. 3m @ 2.2% Li2O and 124ppm Ta2O5 from 63m and 6m @ 2.3% Li2O and 241ppm Ta2O5 from 68m</b>											
80.48	83	2.52	1.7	153							
<b>incl. 1.52m @ 2% Li2O and 110ppm Ta2O5 from 80.48m</b>											
122.19	123	0.81	1	238							
130	130.9	0.9	0.9	204							
72	87	15	1.4	233							
KVDD0003	258722	6958935	520	-55	41	159.2	<b>incl. 7m @ 2% Li2O and 212ppm Ta2O5 from 75m and 1m @ 1.9% Li2O and 116ppm Ta2O5 from 86m</b>				
							134.06	141	6.94	1.5	148
							<b>incl. 1m @ 2.1% Li2O and 74ppm Ta2O5 from 135m and 2m @ 2.1% Li2O and 172ppm Ta2O5 from 137m</b>				
							42	50.12	8.12	1.4	125
							<b>incl. 2m @ 2.1% Li2O and 99ppm Ta2O5 from 46m</b>				
KVDD0004	258444	6958521	521	-54	50	189.2	66.2	66.85	0.65	1.1	87
							70.22	76	5.78	1.5	106
							<b>incl. 1.34m @ 1.9% Li2O and 98ppm Ta2O5 from 71m and 2m @ 1.8% Li2O and 134ppm Ta2O5 from 74m</b>				
							103.91	108	4.09	1.9	301
							115.75	117	1.25	0.6	82
							141	141.9	0.9	1.1	232
							162	170	8	1.5	82
							<b>incl. 3m @ 2.1% Li2O and 81ppm Ta2O5 from 167m</b>				
							173.8	178.5	4.7	1.3	119
							KVDD0005	258528	6958434	531	-60
<b>incl. 8m @ 2.1% Li2O and 137ppm Ta2O5 from 44m</b>											
79	83	4	1.1	99							
102.04	103.83	1.79	1.4	337							
130.03	136	5.97	1.8	155							
165.42	170.44	5.02	1.3	138							
<b>incl. 1.6m @ 2% Li2O and 148ppm Ta2O5 from 167m</b>											
181.98	191	9.02	1.5	160							
<b>incl. 1.93m @ 1.9% Li2O and 103ppm Ta2O5 from 183m and 2m @ 2.2% Li2O and 256ppm Ta2O5 from 188m</b>											
KVDD0006	258621	6958311	545	-55	44	185.6					
							<b>incl. 7m @ 1.9% Li2O and 118ppm Ta2O5 from 43m</b>				
							65.99	66.89	0.9	1.7	188
							95.16	100	4.84	1	196
							115	118	3	1.7	174

## Appendix 2 (cont.) – Kathleen Valley – Diamond Core Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVDD0007	258569	6959079	520	-60	228	231.6	88.45	98.91	10.46	1.3	205
							incl. 5m @ 2% Li2O and 198ppm Ta2O5 from 88.45m				
							108.13	114.17	6.04	1.6	155
							incl. 4m @ 1.9% Li2O and 151ppm Ta2O5 from 108.13m				
							145.08	148.26	3.18	1.4	423
							156.75	163.85	7.1	1.5	165
							incl. 4.7m @ 1.8% Li2O and 193ppm Ta2O5 from 156.75m				
							165.73	169.7	3.97	1.3	159
							incl. 1.97m @ 2% Li2O and 158ppm Ta2O5 from 165.73m				
							184.23	186.35	2.12	1.1	184
							incl. 1m @ 1.8% Li2O and 245ppm Ta2O5 from 184.23m				
							KVDD0008	258629	6958992	523	-48
205.11	207.1	1.99	1.1	129							
217.76	218.76	1	1.2	154							
123.47	132.4	8.93	1.3	196							
incl. 1m @ 2% Li2O and 315ppm Ta2O5 from 123.47m and 1m @ 1.9% Li2O and 238ppm Ta2O5 from 125.47m and 0.93m @ 2.6% Li2O and 100ppm Ta2O5 from 129.47m											
KVDD0009	258696	6958909	521	-52	221	177.5	137.48	137.98	0.5	1.4	100
							39.1	43	3.9	1.4	448
							105.23	106.22	0.99	2	224
							incl. 0.77m @ 2.4% Li2O and 123ppm Ta2O5 from 105.23m				
KVDD0010	258450	6958480	519	-64	46	189.1	113.5	120.1	6.6	0	338
							164.1	172.2	8.1	1.3	98
							incl. 4.9m @ 1.8% Li2O and 107ppm Ta2O5 from 164.1m				
KVDD0011	258474	6958501	519	-60	48	180	181.39	185.39	4	1.8	107
							99.66	105.66	6	1	288
							incl. 2m @ 2.1% Li2O and 591ppm Ta2O5 from 100.66m				
							154.73	163.14	8.41	1.8	95
							incl. 6m @ 2% Li2O and 89ppm Ta2O5 from 156.48m				
KVDD0012	258401	6958622	513	-59	42	40.3	166.61	173.19	6.58	1.4	106
							incl. 2.83m @ 1.7% Li2O and 126ppm Ta2O5 from 169.28m				
							11	18.44	7.44	1.3	119
KVDD0013	258423	6958581	514	-60	44	46.6	incl. 1m @ 1.8% Li2O and 123ppm Ta2O5 from 17m				
							21.91	24.9	2.99	1	172
							19	29	10	1.4	108
KVDD0014	258490	6958517	519	-55	44	41.6	incl. 5m @ 1.8% Li2O and 131ppm Ta2O5 from 22m				
							37.1	40.93	3.83	1	89
							incl. 1m @ 1.7% Li2O and 170ppm Ta2O5 from 39m				
							13	14	1	1.2	137
							16.78	23	6.22	1.6	154
KVDD0015	258498	6958473	522	-55	44	65.3	incl. 3m @ 1.9% Li2O and 147ppm Ta2O5 from 19m				
							32.76	39.15	6.39	1.3	132
							incl. 1m @ 1.7% Li2O and 125ppm Ta2O5 from 34m and 2m @ 1.7% Li2O and 127ppm Ta2O5 from 36m				
							34.08	44.65	10.57	1.5	167
KVDD0015	258498	6958473	522	-55	44	65.3	incl. 8m @ 1.8% Li2O and 149ppm Ta2O5 from 35m				
							57	62	5	1.5	92
							incl. 3m @ 1.8% Li2O and 100ppm Ta2O5 from 59m				

**Appendix 2 (cont.) – Kathleen Valley – Diamond Core Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results						
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)		
KVDD0016*	258500	6958406	527	-80	44	132.1	125.62	132.1	6.48	1.4	133	<b>incl. 2m @ 2.1% Li2O and 158ppm Ta2O5 from 126m</b>	
KVDD0017	258538	6958369	533	-80	44	160.6	104	129.86	25.86	2	155	<b>incl. 19m @ 2.2% Li2O and 160ppm Ta2O5 from 110m</b>	
							151.05	157	5.95	1.3	120	<b>incl. 1m @ 3.9% Li2O and 181ppm Ta2O5 from 152m</b>	
							45	61.49	16.49	1.4	124	<b>incl. 8m @ 2% Li2O and 123ppm Ta2O5 from 48m</b>	
KVDD0018	258593	6958355	542	-80	44	104	79.82	81.5	1.68	1.8	221	<b>incl. 1.18m @ 2% Li2O and 263ppm Ta2O5 from 79.82m</b>	
							113.8	128	14.2	1.5	192	<b>incl. 9.69m @ 1.9% Li2O and 170ppm Ta2O5 from 115.9m</b>	
							132.52	134.98	2.46	1.9	185	<b>incl. 1.12m @ 2.4% Li2O and 299ppm Ta2O5 from 84.88m</b>	
KVDD0019	258603	6958234	544	-70	44	165.3	143.3	145.93	2.63	2	126	<b>incl. 1.12m @ 2.4% Li2O and 299ppm Ta2O5 from 84.88m</b>	
							148	148.83	0.83	1.1	96	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
							32.8	37.43	4.63	1.8	157	<b>incl. 1.12m @ 2.4% Li2O and 299ppm Ta2O5 from 84.88m</b>	
							44.2	54.7	10.5	1.4	205	<b>incl. 4m @ 1.7% Li2O and 184ppm Ta2O5 from 48m and 0.7m @ 2% Li2O and 123ppm Ta2O5 from 54m</b>	
KVDD0020	258696	6958248	534	-60	44	55.9	80	92	12	1.6	196	<b>incl. 0.74m @ 2.2% Li2O and 79ppm Ta2O5 from 81m and 2.82m @ 2% Li2O and 117ppm Ta2O5 from 83m and 3m @ 2.2% Li2O and 186ppm Ta2O5 from 88m</b>	
							93.49	95.98	2.49	0.6	109	<b>incl. 1m @ 1.6% Li2O and 183ppm Ta2O5 from 32m</b>	
							101	105	4	0.9	196	<b>incl. 2m @ 1.9% Li2O and 125ppm Ta2O5 from 55m</b>	
							32	34	2	1	165	<b>incl. 1m @ 1.7% Li2O and 68ppm Ta2O5 from 47m</b>	
KVDD0021	258676	6958152	530	-75	44	108.4	66.01	72	5.99	1.3	150	<b>incl. 1.9m @ 2.1% Li2O and 216ppm Ta2O5 from 47m</b>	
							99.49	105	4	0.9	196	<b>incl. 1.9m @ 2.1% Li2O and 216ppm Ta2O5 from 47m</b>	
							33	38	5	1.1	162	<b>incl. 1m @ 1.9% Li2O and 187ppm Ta2O5 from 33m</b>	
KVDD0022	258204	6959605	510	-55	44	62.8	51	56	5	1.4	103	<b>incl. 2m @ 2% Li2O and 107ppm Ta2O5 from 54m</b>	
							84.54	92.67	8.13	1.8	259	<b>incl. 2.2m @ 1.9% Li2O and 245ppm Ta2O5 from 54m</b>	
							96.11	98.73	2.62	2.1	300	<b>incl. 1m @ 1.9% Li2O and 441ppm Ta2O5 from 70m</b>	
KVDD0023	258244	6959510	508	-55	44	61.3	100.97	105.32	4.35	1.5	189	<b>incl. 1.12m @ 2.4% Li2O and 299ppm Ta2O5 from 84.88m</b>	
							108.2	114.13	5.87	2	159	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
							58	60	2	1	141	<b>incl. 6m @ 1.9% Li2O and 257ppm Ta2O5 from 123m</b>	
KVDD0024	258291	6959409	508	-55	44	74.9	69	72	3	1.1	304	<b>incl. 1m @ 1.9% Li2O and 441ppm Ta2O5 from 70m</b>	
							84.88	86.54	1.66	2.1	257	<b>incl. 1.12m @ 2.4% Li2O and 299ppm Ta2O5 from 84.88m</b>	
							91.19	98.92	7.73	1.5	369	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
KVDD0025	258444	6959419	508	-50	44	40.8	109.62	112.99	3.37	1.9	317	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
							121.49	131.52	10.03	1.5	245	<b>incl. 6m @ 1.9% Li2O and 257ppm Ta2O5 from 123m</b>	
							51	56	5	1.4	103	<b>incl. 2m @ 2% Li2O and 107ppm Ta2O5 from 54m</b>	
KVDD0026	258544	6959179	511	-90	359	120.1	84.88	86.54	1.66	2.1	257	<b>incl. 1.12m @ 2.4% Li2O and 299ppm Ta2O5 from 84.88m</b>	
							91.19	98.92	7.73	1.5	369	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
							109.62	112.99	3.37	1.9	317	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
							121.49	131.52	10.03	1.5	245	<b>incl. 6m @ 1.9% Li2O and 257ppm Ta2O5 from 123m</b>	
							58	60	2	1	141	<b>incl. 1m @ 1.9% Li2O and 441ppm Ta2O5 from 70m</b>	
							69	72	3	1.1	304	<b>incl. 1m @ 1.9% Li2O and 441ppm Ta2O5 from 70m</b>	
KVDD0027	258501	6959144	512	-90	359	133.1	84.88	86.54	1.66	2.1	257	<b>incl. 1.12m @ 2.4% Li2O and 299ppm Ta2O5 from 84.88m</b>	
							91.19	98.92	7.73	1.5	369	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
							109.62	112.99	3.37	1.9	317	<b>incl. 4.81m @ 1.9% Li2O and 356ppm Ta2O5 from 91.19m</b>	
							121.49	131.52	10.03	1.5	245	<b>incl. 6m @ 1.9% Li2O and 257ppm Ta2O5 from 123m</b>	
							58	60	2	1	141	<b>incl. 1m @ 1.9% Li2O and 441ppm Ta2O5 from 70m</b>	
							69	72	3	1.1	304	<b>incl. 1m @ 1.9% Li2O and 441ppm Ta2O5 from 70m</b>	

## Appendix 2 (cont.) – Kathleen Valley – Diamond Core Drill hole statistics

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVDD0028	258613	6959181	512	-90	359	109.5	16	24	8	0.9	100
							incl. 1m @ 1.8% Li2O and 170ppm Ta2O5 from 16m and 1m @ 2.1% Li2O and 82ppm Ta2O5 from 21m				
							62.41	70	7.59	1.6	248
							incl. 5m @ 2.1% Li2O and 269ppm Ta2O5 from 63m				
							80	86	6	1.5	239
							incl. 3m @ 2.2% Li2O and 310ppm Ta2O5 from 81m				
							92.04	94.37	2.33	0.7	127
							99.89	105.5	5.61	0.9	95
							incl. 1.11m @ 1.6% Li2O and 183ppm Ta2O5 from 103.89m				
KVDD0029	258550	6959117	518	-90	359	109.5	69.23	71.74	2.51	1.5	244
							incl. 1.77m @ 1.9% Li2O and 288ppm Ta2O5 from 69.23m				
							83.64	91.9	8.26	1.6	280
							incl. 5m @ 2.1% Li2O and 312ppm Ta2O5 from 85m				
							104.1	107.98	3.88	1.7	247
incl. 2.98m @ 1.8% Li2O and 240ppm Ta2O5 from 105m											
KVDD0030	258701	6959198	512	-90	359	74.2	34.86	36.3	1.44	1.2	224
							40.97	45.72	4.75	2.1	231
							61.18	66	4.82	1.7	300
							incl. 1.96m @ 2.2% Li2O and 260ppm Ta2O5 from 61.18m and 0.59m @ 2.1% Li2O and 372ppm Ta2O5 from 63.41m				
							70.9	74.2	3.3	2.7	207
KVDD0031	258604	6959103	519	-90	359	124.6	51.44	56.43	4.99	1.4	110
							incl. 3m @ 1.8% Li2O and 107ppm Ta2O5 from 53m				
							67.35	75	7.65	2.2	281
							incl. 6.65m @ 2.4% Li2O and 281ppm Ta2O5 from 67.35m				
							100.86	105.15	4.29	1.4	187
							incl. 3.14m @ 1.8% Li2O and 186ppm Ta2O5 from 100.86m				
							106.89	110.4	3.51	1.4	131
							incl. 1m @ 2% Li2O and 81ppm Ta2O5 from 108m and 0.4m @ 1.8% Li2O and 196ppm Ta2O5 from 110m				
							114.41	114.75	0.34	1.4	248
							116.14	120.94	4.8	1.4	195
incl. 3.86m @ 1.7% Li2O and 205ppm Ta2O5 from 116.14m											
KVDD0032	258753	6959162	513	-90	359	75.1	17	20	3	0.6	103
							39	43	4	2	185
							incl. 2.77m @ 2.3% Li2O and 214ppm Ta2O5 from 40m				
							52.32	58.32	6	1.5	262
							incl. 3.81m @ 2% Li2O and 317ppm Ta2O5 from 53.19m				
							64.31	67.78	3.47	1.7	234
							incl. 2.69m @ 1.9% Li2O and 213ppm Ta2O5 from 64.31m				
KVDD0033	258677	6959100	518	-90	359	94.65	73.43	74.23	0.8	1.2	501
							31	35	4	0.7	252
							61.7	71	9.3	1.5	180
incl. 5m @ 1.8% Li2O and 185ppm Ta2O5 from 63m											
KVDD0034	258615	6959042	522	-90	273	130.6	55	60	5	1	168
							incl. 2m @ 1.6% Li2O and 220ppm Ta2O5 from 56m				
							66	78.18	12.18	1.8	206
							incl. 10.03m @ 2% Li2O and 225ppm Ta2O5 from 67.6m				
							109	110.58	1.58	1.6	163
							incl. 1m @ 2% Li2O and 170ppm Ta2O5 from 109m				
							114.69	119.05	4.36	1.7	205
							incl. 1m @ 2.6% Li2O and 118ppm Ta2O5 from 115m and 1.05m @ 1.8% Li2O and 360ppm Ta2O5 from 118m				
							123	128.64	5.64	1.6	135
							incl. 2m @ 1.9% Li2O and 152ppm Ta2O5 from 123m and 2m @ 1.8% Li2O and 106ppm Ta2O5 from 126m				

**Appendix 2 (cont.) – Kathleen Valley – Diamond Core Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVDD0035	258800	6959155	510	-89	314	72.1	17.44	25.04	7.6	1.2	211
							<b>incl. 2m @ 1.7% Li2O and 241ppm Ta2O5 from 21m</b>				
							50	52.66	2.66	1.2	267
							58.93	64.69	5.76	1.5	208
							<b>incl. 2m @ 2.6% Li2O and 196ppm Ta2O5 from 60m</b>				
KVDD0036	258700	6959052	518	-90	359	87.1	68.2	80	11.8	1.6	216
							<b>incl. 2m @ 2.2% Li2O and 108ppm Ta2O5 from 69m</b>				
							<b>and 4m @ 2% Li2O and 314ppm Ta2O5 from 73m</b>				
KVDD0037	258795	6959077	512	-88	268	75.1	54	57	3	1.4	288
							<b>incl. 1m @ 2.2% Li2O and 439ppm Ta2O5 from 55m</b>				
							58.96	71	12.04	1.5	179
							<b>incl. 6.2m @ 2% Li2O and 196ppm Ta2O5 from 60.8m</b>				
KVDD0038	258660	6958947	524	-90	359	79	71	74	3	1.8	201
							77	78	1	1	195
KVDD0039	258855	6959059	511	-89	298	61.6	22.7	29.51	6.81	1.1	139
							<b>incl. 1.3m @ 2.2% Li2O and 244ppm Ta2O5 from 23.7m</b>				
							43.96	46.01	2.05	1.5	137
KVDD0040	258690	6958900	523	-89	144	120.1	25	27	2	1.4	188
							<b>incl. 1m @ 1.6% Li2O and 183ppm Ta2O5 from 26m</b>				
							83.15	92	8.85	1.6	254
							<b>incl. 7m @ 1.9% Li2O and 262ppm Ta2O5 from 84m</b>				
							106	111.4	5.4	2.3	113
KVDD0041	258876	6959018	510	-90	321	56	19.6	24.2	4.6	1.2	170
							<b>incl. 1m @ 1.6% Li2O and 110ppm Ta2O5 from 20m</b>				
							<b>and 1.2m @ 1.6% Li2O and 181ppm Ta2O5 from 23m</b>				
							47.74	52.2	4.46	1.5	112
							<b>incl. 1m @ 1.7% Li2O and 111ppm Ta2O5 from 48m</b>				
							<b>and 2.07m @ 1.8% Li2O and 125ppm Ta2O5 from 50.13m</b>				
KVDD0042	258717	6958858	522	-90	289	130.6	14	20	6	1	195
							<b>incl. 2m @ 2.2% Li2O and 403ppm Ta2O5 from 14m</b>				
							77.96	89	11.04	1.9	265
							<b>incl. 9.6m @ 2.1% Li2O and 284ppm Ta2O5 from 78.4m</b>				
							110.24	115.79	5.55	1.4	199
KVDD0043	257955	6958667	518	-85	49	498.8	408	433	25	1.5	86
							<b>incl. 1m @ 3.1% Li2O and 42ppm Ta2O5 from 408m</b>				
							<b>and 7m @ 2.7% Li2O and 70ppm Ta2O5 from 412m</b>				
							<b>and 1m @ 2.7% Li2O and 161ppm Ta2O5 from 431m</b>				
KVDD0044	258040	6958614	520	-84	53	457	498.3	498.8	0.5	1.3	18
							389.21	391	1.8	1.6	49
							394	397	3	1.2	54
							399	406	7	0.4	119
							410	414	4	0.5	86
							415.55	426	10.45	1.3	111
							<b>incl. 3m @ 1.6% Li2O and 97ppm Ta2O5 from 418m</b>				
<b>and 1m @ 2.1% Li2O and 98ppm Ta2O5 from 425m</b>											
KVDD0045	258199	6958503	522	-83	43	462.6	320.93	385	64.07	1.3	93
							<b>incl. 9m @ 1.8% Li2O and 122ppm Ta2O5 from 342m</b>				
							<b>and 10m @ 1.8% Li2O and 70ppm Ta2O5 from 362m</b>				
							<b>and 4m @ 1.8% Li2O and 97ppm Ta2O5 from 379m</b>				
							397	409.09	12.09	1.6	137
<b>incl. 4m @ 2.1% Li2O and 77ppm Ta2O5 from 403m</b>											
KVDD0046	258286	6958445	525	-84	43	430.2	301	356	55	1.7	96
							<b>incl. 6.2m @ 2.5% Li2O and 73ppm Ta2O5 from 301.8m</b>				
							<b>and 13m @ 2.2% Li2O and 91ppm Ta2O5 from 312m</b>				
							<b>and 5.6m @ 2.1% Li2O and 99ppm Ta2O5 from 331.5m</b>				
							<b>and 9m @ 2.2% Li2O and 90ppm Ta2O5 from 339m</b>				
							398	403	5	1.1	78
<b>incl. 2m @ 1.9% Li2O and 62ppm Ta2O5 from 400m</b>											

**Appendix 2 (cont.) – Kathleen Valley – Diamond Core Drill hole statistics**

Hole_ID	East	North	RL	Dip	Azimuth	Depth (m)	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
							From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
KVDD0047	257869	6958726	511	-85	36	500.9	412	414.2	2.2	0.9	110
							420.2	424.1	3.9	0.9	131
							429	438	9	0.9	113
							440	444	4	1.4	112
							489	490.6	1.6	1.9	63

True widths estimated as follows:

Holes drilled towards NE (~045) and intersecting Kathleen's Corner lodes - true widths 85-100% of downhole width

Holes drilled towards NE (~045) and intersecting Mt Mann lodes - true widths 65-80% of downhole width

Holes drilled towards SW (~225) and intersecting Kathleen's Corner lodes - true widths 65-75% of downhole width

Holes drilled towards SW (~225) and intersecting Mt Mann lodes, true widths 30-50% of downhole width

### Appendix 3 – Kathleen Valley – JORC Code 2012 Table 1 Criteria

The table below summaries the assessment and reporting criteria used for the Kathleen's Corner and Mt Mann deposits, Kathleen Valley Lithium Project Mineral Resource estimate and reflects the guidelines in Table 1 of *The Australasian Code for the Reporting of Exploration Results, Mineral Resources and Ore Reserves* (the JORC Code, 2012).

#### Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> <li>Sub-surface samples have been collected by reverse circulation (RC) and diamond core drilling techniques (see below).</li> <li>Drillholes are oriented perpendicular to the interpreted strike of the mineralised trend except in rare occasions where limited access necessitates otherwise.</li> </ul>
	<p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<ul style="list-style-type: none"> <li>RC samples are collected by the metre from the drill rig cyclone as two 1 m cone split samples in calico bags and a bulk sample in plastic mining bags.</li> <li>The 1 m samples from the cyclone are retained for check analysis. Only samples of pegmatite and adjacent wall rock (~4 m) are collected for assay.</li> <li>Diamond core has been sampled in intervals of ~ 1 m (up to 1.18 m) where possible, otherwise intervals less than 1 m have been selected based on geological boundaries. Geological boundaries have not been crossed by sample intervals.</li> </ul>
<b>Drilling techniques</b>	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<p>Drilling techniques used at Kathleen Valley comprise:</p> <ul style="list-style-type: none"> <li>Reverse Circulation (RC/5.5") with a face sampling hammer</li> <li>NQ Diamond Core, standard tube to a depth of ~450 m.</li> <li>HQ Diamond Core, standard tube to a depth of ~200-250 m.</li> <li>PQ Diamond Core, standard tube to a depth of ~200m.</li> <li>Diamond core holes drilled directly from surface or from bottom of RC precollars. Core orientation was provided by an ACT REFLEX (ACT II RD) tool.</li> </ul>
<b>Drill sample recovery</b>	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	<ul style="list-style-type: none"> <li>Sample recoveries are estimated for RC by correlating sample heights in the green mining bag to estimate a recovery for each metre.</li> <li>For diamond core the recovery is measured and recorded for every metre.</li> </ul>
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	<ul style="list-style-type: none"> <li>RC drill collars are sealed to prevent sample loss and holes are normally drilled dry to prevent poor recoveries and contamination caused by water ingress. Wet intervals are noted in case of unusual results.</li> <li>For diamond core loss, core blocks have been inserted in sections where core loss has occurred. This has then been written on the block and recorded during the logging process and with detailed photography of dry and wet core.</li> </ul>
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	<ul style="list-style-type: none"> <li>It has been demonstrated that no relationship exists between sample recovery and grade. No grade bias was observed with sample size variation.</li> </ul>
<b>Logging</b>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of</i>	<ul style="list-style-type: none"> <li>All RC drillholes are logged on 1 m intervals and the following observations recorded: <ul style="list-style-type: none"> <li>Recovery, quality (i.e. degree of contamination), wet/dry, hardness, colour, grainsize, texture,</li> </ul> </li> </ul>

Criteria	JORC Code explanation	Commentary
	<i>detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	<p>mineralogy, lithology, structure type and intensity, pegmatite and vein type and %, lithium mineralogy and %, alteration assemblage, UV fluorescence.</p> <ul style="list-style-type: none"> <li>Diamond core is logged in its entirety as per detailed geological description listed above. Geotechnical logging has been completed for the entire hole.</li> </ul>
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	<ul style="list-style-type: none"> <li>Logging is quantitative, based on visual field estimates.</li> <li>Diamond core is photographed post metre marking, for the entire length of the hole, two trays at a time, wet and dry.</li> </ul>
	<i>The total length and percentage of the relevant intersections logged.</i>	<ul style="list-style-type: none"> <li>Holes are logged in their entirety.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	<ul style="list-style-type: none"> <li>The core has been cut in half and then quartered for sample purposes. Half core will be used for metallurgical studies with the remaining quarter stored as a library sample.</li> <li>Density measurements have been taken on all quarter core samples using the Archimedes method.</li> </ul>
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	<ul style="list-style-type: none"> <li>RC samples are collected as rotary split samples. Samples are typically dry.</li> </ul>
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	<ul style="list-style-type: none"> <li>Sample preparation follows industry best practice standards and is conducted by internationally recognised laboratories; i.e.                             <ul style="list-style-type: none"> <li>Oven drying, jaw crushing and pulverising so that 80% passes -75 microns.</li> </ul> </li> </ul>
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	<ul style="list-style-type: none"> <li>Duplicates and blanks submitted approximately every 1/20 samples.</li> <li>Standards are submitted every 20 samples or at least once per hole.</li> <li>Cross laboratory checks and blind checks have been used at a rate of 5%.</li> </ul>
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	<ul style="list-style-type: none"> <li>Measures taken include:                             <ul style="list-style-type: none"> <li>regular cleaning of cyclones and sampling equipment to prevent contamination</li> <li>industry standard insertion of standards, blanks and duplicate samples</li> </ul> </li> <li>Analysis of duplicates (field, laboratory and umpire) was completed and no issues identified with sampling representatively.</li> <li>Analysis of results from blanks and standards indicates no issues with contamination (or sample mix-ups) and a high level of accuracy.</li> </ul>
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	<ul style="list-style-type: none"> <li>Sample size is considered appropriate for the preparation of a Mineral Resource Estimate</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	<ul style="list-style-type: none"> <li>Initial assaying (2017) completed by ALS Perth. Subsequent assaying (2018 onwards) completed by Nagrom laboratories Perth.</li> <li>Both laboratories use industry standard procedures for rare metals such as Li and Ta. Analytical techniques are total.</li> </ul>
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	<ul style="list-style-type: none"> <li>None used.</li> </ul>
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	<ul style="list-style-type: none"> <li>Duplicates and blanks submitted approximately every 20 samples.</li> <li>Standards are submitted every 20 samples or at least once per hole.</li> <li>Cross laboratory checks and blind checks have been used at a rate of 5%.</li> <li>Analysis of reference blanks, standards and duplicate samples show the data to be of acceptable accuracy and precision for the Mineral Resource estimation and classification applied.</li> </ul>
	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	<ul style="list-style-type: none"> <li>Internal review by alternate company personnel.</li> </ul>
	<i>The use of twinned holes.</i>	<ul style="list-style-type: none"> <li>12 diamond holes have been drilled as twins or in</li> </ul>



Criteria	JORC Code explanation	Commentary
<b>Verification of sampling and assaying</b>		close proximity to existing RC drill holes. Results compare well with the original RC drill holes.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	<ul style="list-style-type: none"> <li>Drilling and logging data is entered directly into Microsoft Excel spreadsheets onsite while drilling is ongoing. Data is then entered into Access Database and validated before being processed by industry standard software packages such as MapInfo and Micromine.</li> <li>Representative chip samples are collected for later reference.</li> </ul>
	<i>Discuss any adjustment to assay data.</i>	<ul style="list-style-type: none"> <li>Li% is converted to Li<sub>2</sub>O% by multiplying by 2.15, Ta ppm is converted to Ta<sub>2</sub>O<sub>5</sub> ppm by multiplying by 1.22.</li> </ul>
<b>Location of data points</b>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	<ul style="list-style-type: none"> <li>All drill collars and geochemical samples are initially located using a handheld GPS.</li> <li>Drill collars are subsequently surveyed accurately by a licensed surveyor using DGPS techniques. Eastings and northings are measured to within +/- 2cm while elevations are measured to within +/- 10cm.</li> <li>All RC drillholes have been surveyed by a multi-shot digital downhole camera provided by the drilling contractor.</li> <li>All diamond drillholes have been surveyed with a REFLEX EZI-SHOT (1001) magnetic single shot camera.</li> </ul>
	<i>Specification of the grid system used.</i>	<ul style="list-style-type: none"> <li>GDA 94 Zone 51</li> </ul>
	<i>Quality and adequacy of topographic control.</i>	<ul style="list-style-type: none"> <li>Initial collar elevations are based on regional topographic dataset and GPS.</li> <li>Drillhole collars are surveyed post drilling with DGPS.</li> <li>Further topographic data (20cm contours) has been provided for the Project by a LIDAR flown by Fugro.</li> </ul>
<b>Data spacing and distribution</b>	<i>Data spacing for reporting of Exploration Results.</i>	<ul style="list-style-type: none"> <li>Varies due to initial drill programmes largely designed to test the down-dip potential of mineralised outcrops. The drill section spacing is 40 m to 100 m and on-section spacing is generally 30 m to 60 m.</li> </ul>
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	<ul style="list-style-type: none"> <li>The data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource estimation and classification applied.</li> </ul>
	<i>Whether sample compositing has been applied.</i>	<ul style="list-style-type: none"> <li>None undertaken.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	<ul style="list-style-type: none"> <li>Drilling is typically oriented perpendicular to the interpreted strike of mineralisation.</li> <li>KVRC0015 was oriented at 45° to strike due to access issues and the need to test the main outcrop zone.</li> </ul>
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	<ul style="list-style-type: none"> <li>Drilling orientation intersects the mineralisation at appropriate angles so as to be mostly unbiased and suitable for resource estimation of the major pegmatite bodies.</li> </ul>
<b>Sample security</b>	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> <li>Sample security is not considered to be a significant risk given the location of the deposit and bulk-nature of mineralisation.</li> <li>Nevertheless, the use of recognised transport providers, sample dispatch procedures directly from the field to the laboratory, and the large number of samples are considered sufficient to ensure appropriate sample security.</li> <li>Company geologist supervises all sampling and subsequent storage in field. The same geologist arranges delivery of samples to Nagrom laboratories in Perth via courier.</li> </ul>
<b>Audits or reviews</b>	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> <li>Independent, expert competent person reviews have been completed by Michelle Wild of Wildfire Resources Pty Ltd and Christine Standing of Optiro Limited on the resource drilling, sampling protocols and data.</li> </ul>

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>This included a laboratory visit to Nagrom by Michelle Wild.</li> <li>Results have not indicated any significant discrepancies.</li> </ul>

**Section 2 Reporting of Exploration Results**

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	<ul style="list-style-type: none"> <li>The Kathleen Valley Project is located ~680 km NE of Perth and ~45 km NNW of Leinster in Western Australia. The Project comprises four granted mining leases - MLs 36/264, 265, 459, 460 and one Exploration License - E36/879.</li> <li>The mining leases (MLs) were acquired from Ramelius Resources Limited via a Sales Agreement completed in 2016. The MLs have been transferred to LRL (Aust) Pty Ltd, a wholly owned subsidiary of Liontown Resources Limited (Liontown).</li> <li>Ramelius acquired 100% of the Kathleen Valley Project MLs in June 2014 from Xstrata Nickel Operations Pty Ltd (Xstrata). Xstrata retains rights to any nickel discovered over the land package via an Offtake and Clawback Agreement.</li> <li>LRL (Aust) Pty Ltd has assumed the following Agreement:                             <ul style="list-style-type: none"> <li>Bullion and Non-Bullion Royalty Agreement of a 2% Gross Production Royalty affecting M36/264-265 and 459-460.</li> </ul> </li> <li>The EL is in the name of Liontown Resources Limited with no third-party obligations apart from statutory requirements.</li> <li>The tenements are covered by the Tjiwarl Determined Native Title Claim (WC11/7). Liontown has signed Access Agreements with the NT group.</li> <li>LRL (Aust) Pty Ltd has received Section 18 consent to drill on certain areas within M36/459 and M36/460</li> </ul>
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	<ul style="list-style-type: none"> <li>All tenements are in good standing.</li> </ul>
<b>Exploration done by other parties</b>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<ul style="list-style-type: none"> <li>Multiple phases of exploration have previously been completed for gold and nickel.</li> <li>There has been limited sporadic prospecting for Li, Ta and Sn, principally by Jubilee Mines (subsequently taken over by Xstrata). Work comprised geological mapping, broad spaced soil sample lines and rock chip sampling of the pegmatites. Details of the methods and procedures used have not been documented.</li> <li>There has been no previous drill testing of the Li and Ta prospective pegmatites prior to Liontown acquiring the Project.</li> </ul>
<b>Geology</b>	<i>Deposit type, geological setting and style of mineralisation.</i>	<ul style="list-style-type: none"> <li>The Project is located on the western edge of the Norseman- Wiluna Belt within the Archaean Yilgarn Craton.</li> <li>The Kathleen Valley Project contains a series of quartz-feldspar-muscovite-spodumene pegmatites hosted in mafic rocks related to the Kathleen Valley Gabbro or the Mt Goode Basalts.</li> <li>The pegmatites are LCT type lithium bearing-pegmatites.</li> </ul>
<b>Drillhole Information</b>	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i> <ul style="list-style-type: none"> <li><i>easting and northing of the drillhole collar</i></li> <li><i>elevation or RL (elevation above sea level in metres) of the drillhole collar</i></li> <li><i>dip and azimuth of the hole</i></li> <li><i>down hole length and interception depth</i></li> </ul>	<ul style="list-style-type: none"> <li>When reporting Exploration Results, see figures and appendices in accompanying report</li> <li>When reporting Mineral Resource Estimate, diagrams in the announcement show the location of and distribution of drill holes in relation to the resource.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>hole length.</li> </ul>	
<b>Data aggregation methods</b>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	<ul style="list-style-type: none"> <li>Li<sub>2</sub>O intercepts calculated using 0.4% cut off with a maximum 2m internal dilution typically applied except where drill hole logging (e.g. continuous pegmatite) and assays indicate wider dilution is warranted as overall grade is high enough to allow mining to take entire geological unit.</li> <li>Higher grade intervals calculated using 1.5% Li<sub>2</sub>O cut off. No upper cuts applied.</li> <li>Ta<sub>2</sub>O<sub>5</sub> values only quoted when lithium intersections reported.</li> <li>Not relevant when only reporting definition of Mineral Resource Estimation.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i>	<ul style="list-style-type: none"> <li>Estimates of true widths provided at end of Appendices attached to ASX announcements which list drill hole statistics</li> <li>Not relevant when only reporting definition of Mineral Resource Estimation.</li> </ul>
<b>Diagrams</b>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	<ul style="list-style-type: none"> <li>When reporting Exploration Results, see figures and appendices in accompanying report</li> <li>Not relevant if only reporting definition of a Mineral Resource estimate.</li> </ul>
<b>Balanced reporting</b>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	<ul style="list-style-type: none"> <li>All recent exploration results reported and tabulated.</li> <li>Not relevant if only reporting definition of a Mineral Resource estimate.</li> </ul>
<b>Other substantive exploration data</b>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	<ul style="list-style-type: none"> <li>Where relevant, this information has been included or referred to elsewhere in this Table.</li> </ul>
<b>Further work</b>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	<ul style="list-style-type: none"> <li>Further RC and diamond core drilling (~15,000m) to expand current MRE</li> <li>Studies including metallurgical test work, hydrology, environmental surveys, pit optimisations, geotechnical analysis of drill core, review of infrastructure requirements and financial analyses.</li> <li>Results of above to be incorporated into a PFS report due Q4 2019.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

Criteria	JORC Code explanation	Commentary
<b>Database integrity</b>	<i>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</i>	<ul style="list-style-type: none"> <li>Drillhole data was extracted directly from the Company's drillhole database, which includes internal data validation protocols.</li> <li>Data was further validated by Optiro upon receipt, and prior to use in the estimation.</li> </ul>
	<i>Data validation procedures used.</i>	<ul style="list-style-type: none"> <li>Validation of the data was confirmed using mining software (Datamine) validation protocols, and visually in plan and section views.</li> </ul>
<b>Site visits</b>	<i>Comment on any site visits undertaken by the Competent Persons and the outcome of those visits.</i>	<ul style="list-style-type: none"> <li>Liontown personnel Mr Richards and Mr Day have visited the site on numerous occasions to supervise the drilling programmes.</li> <li>Ms Wild (Principal Geologist and Director of Wildfire Resources Pty Ltd) and Mrs Standing (Optiro Limited) have visited the site on separate occasions during resource definition drilling programmes to review sampling procedures.</li> <li>Ms Wild (Principal Geologist and Director of Wildfire Resources Pty Ltd) visited the site during the resource definition drilling programme to review sampling procedures. Ms Wild reported that, in</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>general, site practices were quite good, core quality was excellent and RC sample quality was moderate.</p> <ul style="list-style-type: none"> <li>Mrs Standing has confirmed site practices are appropriate and satisfactory for the preparation of a Mineral Resource Estimate.</li> </ul>
<b>Geological interpretation</b>	<i>Confidence in (or conversely, the uncertainty of the geological interpretation of the mineral deposit.</i>	<ul style="list-style-type: none"> <li>The confidence in the geological interpretation is reflected by the assigned resource classification.</li> </ul>
	<i>Nature of the data used and of any assumptions made.</i>	<ul style="list-style-type: none"> <li>Both assay and geological data were used for the mineralisation interpretation.</li> <li>The lithium mineralisation is defined by a nominal 0.4% Li<sub>2</sub>O cut-off grade.</li> <li>Continuity between drillholes and sections is good.</li> </ul>
	<i>The effect, if any, of alternative interpretations on Mineral Resource estimation.</i>	<ul style="list-style-type: none"> <li>No alternative interpretations were considered.</li> <li>Any alternative interpretations are unlikely to significantly affect the Mineral Resource estimate.</li> </ul>
	<i>The use of geology in guiding and controlling Mineral Resource estimation.</i>	<ul style="list-style-type: none"> <li>Geological logging (including spodumene crystal orientation from the diamond core) has been used for interpretation of the pegmatites.</li> </ul>
	<i>The factors affecting continuity both of grade and geology.</i>	<ul style="list-style-type: none"> <li>The mineralisation is contained within pegmatite veins that are readily distinguished from the surrounding rocks.</li> <li>Sectional interpretation and wireframing indicates good continuity of the interpreted pegmatite veins both on-section and between sections.</li> <li>The confidence in the grade and geological continuity is reflected by the assigned resource classification.</li> </ul>
<b>Dimensions</b>	<i>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</i>	<ul style="list-style-type: none"> <li>Seventeen mineralised pegmatites have been identified at the Kathleen Valley Project which extend from surface to a depth of 400 m.</li> <li>Eleven sub-horizontal pegmatites (dip of 0° to -10° to west) have been drilled over an area of 1,100 m by 600 m at Kathleen's Corner. These pegmatites outcrop at Kathleen's Corner, extend down dip to Mt Mann and have an average thickness of 5 m.</li> <li>In addition, there are four moderately dipping (-15° to -45° to the west) pegmatites at Kathleen's Corner with an average thickness of 3 m.</li> <li>An additional sub-horizontal pegmatite, which is obscured by shallow cover, has been drilled within the north-western area of Kathleen's Corner with a strike length of 400 m and an average thickness of 7 m.</li> <li>At Mt Mann two steeply dipping (-70° west) pegmatites have been drilled over a strike length of 900 m and to a vertical depth of 260 m. The pegmatites have an average thickness of 8 m and 10 m.</li> <li>The pegmatites merge at depth to form a single, up to 75m thick feeder zone.</li> </ul>
<b>Estimation and modelling techniques</b>	<i>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i>	<ul style="list-style-type: none"> <li>Lithium oxide (Li<sub>2</sub>O) % and tantalum pentoxide (Ta<sub>2</sub>O<sub>5</sub>) ppm block grades were estimated using ordinary kriging (OK). Optiro considers OK to be an appropriate estimation technique for this type of mineralisation.</li> <li>The nominal spacing of the drillholes is 50 m by 50 m. The along section spacing ranges from 40 m to 100 m and on-section spacing ranges from generally 30 m to 60 m.</li> <li>A maximum extrapolation distance of 50 m was applied along and across strike and the steeply dipping pegmatites at Mt Mann were extrapolated to a maximum of 100 m down-dip.</li> <li>Data analysis and estimation was undertaken using Snowden Supervisor and Datamine software.</li> <li>Over 93% of the assay data is from samples of 1 m intervals, 0.3% is from sample of &gt;1 m (to a maximum of 1.18 m) and 6% is from intervals of less than 1 m. The data was composited to 1 m intervals for analysis and grade estimation.</li> <li>Variogram analysis was undertaken to determine the</li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>kriging estimation parameters used for OK estimation of <math>\text{Li}_2\text{O}</math> and <math>\text{Ta}_2\text{O}_5</math>.</p> <ul style="list-style-type: none"> <li>• <math>\text{Li}_2\text{O}</math> mineralisation continuity was interpreted from variogram analyses to have an along strike range of 110 m to 140 m and a down-dip (or across strike) range of 32 m to 112 m.</li> <li>• <math>\text{Ta}_2\text{O}_5</math> mineralisation continuity was interpreted from variogram analyses to have an along strike range of 110 m to 130 m and a down-dip (or across strike) range of 35 m to 93 m.</li> <li>• Kriging neighbourhood analysis was performed in order to determine the block size, sample numbers and discretisation levels.</li> <li>• Three estimation passes were used for <math>\text{Li}_2\text{O}</math> and <math>\text{Ta}_2\text{O}_5</math>; the first search was based upon the variogram ranges; the second search was two times the initial search and the third search was up to seven times the second search and second and third searches had reduced sample numbers required for estimation. The majority of <math>\text{Li}_2\text{O}</math> block grades (almost 63%) were estimated in the first pass, 22% in the second pass and the remaining 5% in the third pass.</li> <li>• The <math>\text{Li}_2\text{O}</math> and <math>\text{Ta}_2\text{O}_5</math> estimated block model grades were visually validated against the input drillhole data and comparisons were carried out against the declustered drillhole data and by northing, easting and elevation slice.</li> </ul>
	<p><i>Description of how the geological interpretation was used to control the resource estimates.</i></p>	<ul style="list-style-type: none"> <li>• Geological interpretations were completed on sections which were wireframed to create a 3D interpretation of the mineralised pegmatites.</li> <li>• The interpretation of mineralisation was by Liontown based on geological logging and <math>\text{Li}_2\text{O}</math> content. A nominal grade of 0.4% <math>\text{Li}_2\text{O}</math> was used to define the mineralisation within the interpreted pegmatites.</li> <li>• The mineralised domain is considered geologically robust in the context of the resource classification applied to the estimate.</li> </ul>
	<p><i>Discussion of basis for using or not using grade cutting or capping.</i></p>	<ul style="list-style-type: none"> <li>• <math>\text{Li}_2\text{O}</math> and <math>\text{Ta}_2\text{O}_5</math> have low coefficients of variation (CV). Some higher-grade outliers were noted and both the <math>\text{Li}_2\text{O}</math> and <math>\text{Ta}_2\text{O}_5</math> grades were capped (top-cut). The top-cut levels were determined using a combination of top-cut analysis tools, including grade histograms, log probability plots and the CV.</li> </ul>
	<p><i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i></p>	<ul style="list-style-type: none"> <li>• Mineral Resources have not previously been reported for this deposit area and no production has occurred.</li> </ul>
	<p><i>The assumptions made regarding recovery of by-products.</i></p>	<ul style="list-style-type: none"> <li>• No assumptions have been applied for the recovery of by-products.</li> <li>• Metallurgical test work is ongoing to determine the recoveries that could be expected.</li> </ul>
	<p><i>Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).</i></p>	<ul style="list-style-type: none"> <li>• Deleterious elements were not considered for the Mineral Resource estimate.</li> <li>• Metallurgical testwork is in progress. Results to date indicate very low levels of Fe within the interpreted mineralised pegmatite domains.</li> <li>• Sulphur assays have been determined for more than 27,000 host rock samples – results indicate that acid mine drainage will not be a significant environmental factor.</li> </ul>
	<p><i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i></p>	<ul style="list-style-type: none"> <li>• Grade estimation was into parent blocks of 10 mE by 15 mN by 1.0 mRL.</li> <li>• Block dimensions were selected from kriging neighbourhood analysis and reflect the variability of the deposit as defined by the current drill spacing.</li> <li>• Sub-cells to a minimum dimension of 2 mE by 2.5 mN by 0.5 mRL were used to represent volume.</li> </ul>
	<p><i>Any assumptions behind modelling of selective mining units.</i></p>	<p>Selective mining units were not modelled.</p>

Criteria	JORC Code explanation	Commentary
	<p><i>Any assumptions about correlation between variables.</i></p> <p><i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i></p>	<ul style="list-style-type: none"> <li>Li<sub>2</sub>O and Ta<sub>2</sub>O<sub>5</sub> are not correlated. Both Li<sub>2</sub>O and Ta<sub>2</sub>O<sub>5</sub> were estimated independently.</li> <li>No production has taken place and thus no reconciliation data is available.</li> </ul>
<b>Moisture</b>	<p><i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i></p>	<ul style="list-style-type: none"> <li>Tonnages have been estimated on a dry basis.</li> </ul>
<b>Cut-off parameters</b>	<p><i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i></p>	<ul style="list-style-type: none"> <li>The Mineral Resource estimate for the Kathleen Valley Deposit has been reported above a cut-off grade of 0.5 % Li<sub>2</sub>O to represent the portion of the resource that may be considered for eventual economic extraction.</li> <li>This cut-off grade has been selected by Liontown Resources in consultation with Optiro based on current experience and in-line with cut-off grades applied for reporting of Mineral Resources of lithium hosted in spodumene bearing pegmatites elsewhere in Australia.</li> </ul>
<b>Mining factors or assumptions</b>	<p><i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous.</i></p>	<ul style="list-style-type: none"> <li>The mineralisation at Kathleen's Corner and Mt Mann extends from surface and would be suitable for open pit mining.</li> <li>The Kathleen Valley Lithium Project is located in a well-established mining region and in close proximity to existing close to existing transport, energy and camp infrastructure.</li> <li>On the basis of these assumptions, it is considered that there are no mining factors which are likely to affect the assumption that the deposit has reasonable prospects for eventual economic extraction.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<p><i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous.</i></p>	<ul style="list-style-type: none"> <li>Metallurgical testwork was conducted at Nagrom's metallurgical laboratory in Perth, Western Australia and supervised by Lycopodium Minerals Pty Ltd.</li> <li>Testwork was completed on a 300kg composite sample created from 6 diamond core holes that were sited to endure collection of material representative of the Mineral Resource.</li> <li>The testwork flow sheet included: <ul style="list-style-type: none"> <li>Crushing and screening to -6.3 +1mm followed by 2-stage heavy media separation to produce a 5.9% Li<sub>2</sub>O grade concentrate and a throwaway tail;</li> <li>Pre-concentration of the middlings and -1mm fines to produce a tantalum concentrate; and</li> <li>Grinding of the tantalum tails to 150µm and de-limiting prior to froth flotation to produce a flotation concentrate containing 5.5% Li<sub>2</sub>O with low levels of iron (Fe<sub>2</sub>O<sub>3</sub> &lt;0.50%).</li> </ul> </li> <li>A tantalum concentrate was produced during the testwork program; however, the low mass recovery precluded the implementation of a subsequent upgrade process. Further sample will be collected in Q1 2019 for a larger scale testwork program.</li> <li>Further metallurgical test work is ongoing at ALS laboratories in Perth. Data from this work will be incorporated into a PFS study due for release in Q4 2019. Results to date support the process flowsheet development in the previous scoping study</li> <li>A large drill core sample (~4t) has been collected to conduct a larger scale test work program on tantalum recovery once the PFS metallurgical test work has been completed.</li> </ul>
<b>Environmental factors or assumptions</b>	<p><i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation.</i></p>	<ul style="list-style-type: none"> <li>Baseline flora and fauna studies have been completed and it is considered unlikely given current knowledge that impacts on conservation significant flora, fauna and ecological communities will result from development of the project.</li> <li>Further baseline studies are scheduled during the PFS and DFS</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Bulk density</b>	<i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i>	<ul style="list-style-type: none"> <li>Bulk density was measured for 575 core samples from diamond holes using Archimedes measurements.</li> <li>The density data has a range of 2.08 to 3.34 t/m<sup>3</sup>.</li> <li>A bulk density of 2.69 t/m<sup>3</sup> was assigned to the oxide and transitional material and 2.74 t/m<sup>3</sup> was assigned to the fresh material.</li> </ul>
<b>Classification</b>	<i>The basis for the classification of the Mineral Resources into varying confidence categories.</i>	<ul style="list-style-type: none"> <li>Mineral Resources have been classified as Measured, Indicated or Inferred.</li> <li>In general, the pegmatites at Kathleen's Corner that have been tested by the 50 m by 50 m spaced drill holes, have high confidence in the geological interpretation and have higher estimation quality have been classified as Measured. Areas tested by the 50 m by 50 m spaced drill and with poorer estimation quality were classified as Indicated, and areas where the drill spacing is up to 60 m by 100 m have been classified as Inferred.</li> </ul>
	<i>Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</i>	<ul style="list-style-type: none"> <li>The Mineral Resource has been classified on the basis of confidence in geological and grade continuity and taking into account the quality of the sampling and assay data, data density and confidence in estimation of Li<sub>2</sub>O and Ta<sub>2</sub>O<sub>5</sub> content (from the kriging metrics).</li> </ul>
	<i>Whether the result appropriately reflects the Competent Person's view of the deposit</i>	<ul style="list-style-type: none"> <li>The assigned classification of Measured, Indicated and Inferred reflects the Competent Persons' assessment of the accuracy and confidence levels in the Mineral Resource estimate.</li> </ul>
<b>Audits or reviews</b>	<i>The results of any audits or reviews of Mineral Resource estimates.</i>	<ul style="list-style-type: none"> <li>The Mineral Resource has been reviewed internally as part of normal validation processes by Optiro.</li> <li>No external audit or review of the current Mineral Resource has been conducted.</li> </ul>
<b>Discussion of relative accuracy/ confidence</b>	<i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person.</i>	<ul style="list-style-type: none"> <li>The assigned classification of Measured, Indicated and Inferred reflects the Competent Persons' assessment of the accuracy and confidence levels in the Mineral Resource estimate.</li> </ul>
	<i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i>	<ul style="list-style-type: none"> <li>The confidence levels reflect potential production tonnages on a quarterly basis, assuming open pit mining.</li> </ul>
	<i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i>	<ul style="list-style-type: none"> <li>No production has occurred from the deposit.</li> </ul>