



New zones of magmatic sulphide mineralisation intersected at Akelikongo nickel-copper discovery

Multiple new intercepts of disseminated, stringer, net textured and massive sulphides

Highlights

- Eight new diamond holes for 3,330.8m drilled since October with the 2019 program now complete.
- **Five of the eight holes have intersected new magmatic sulphide mineralised zones** – at Akelikongo down-plunge, Akelikongo West and two zones 500m west of Akelikongo.
- The drilling highlights much larger regional potential for ultramafic-hosted, disseminated and massive sulphide mineralisation at and around Akelikongo.
- Samples are currently en-route to laboratory in Perth with **assays expected by mid-January 2020**.

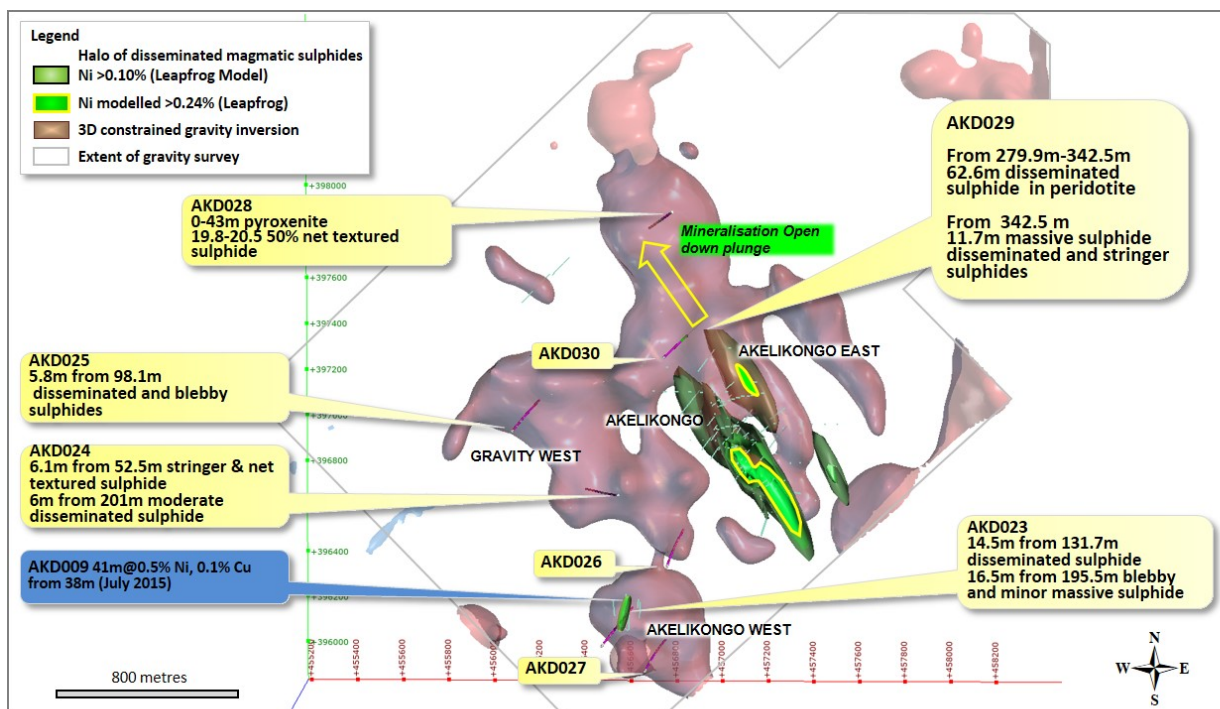


Figure 1: Location of the eight new diamond holes, AKD023-AKD030, drilled in the Akelikongo area. Akelikongo mineralisation model shown as halo of disseminated magmatic sulphides >0.1% Ni shown in pale green and >0.24% Ni in bright green.

Sipa Resources Limited (ASX: **SRI**) (**Sipa**) is pleased to advise that it has completed the most recent phase of diamond drilling at its **Kitgum Pader Nickel-Copper Project** in Northern Uganda with eight new holes drilled for a total 3,326.9m.

The 100%-owned Kitgum-Pader Base Metals Project contains the Akelikongo intrusive-hosted nickel-copper sulphide discovery.



The Project is a joint venture between Sipa and Rio Tinto Mining & Exploration Limited (Rio Tinto). The current exploration program is being managed by Sipa on behalf of Rio Tinto, which is currently earning a 51% interest in the Project as part of a Farm-in and JV Agreement announced in May 2018, under which Rio Tinto can fund up to US\$57 million of exploration expenditure and make US\$2 million in cash payments to earn up to a 75% interest the Project.

Since exploration commenced in August 2018, the joint venture exploration program has included extensive ground gravity and ground magnetic surveying, geological mapping and litho-geochemical sampling over selected prospects and a total of 7,414.1 metres of diamond drilling. Additional regional soil sampling programs have also been conducted.

Akelikongo Project

In the past year, diamond drilling, down-hole EM and AMT (Audio Magneto Telluric) surveys have been conducted at Akelikongo. Five holes for 1,993.9m were drilled late in 2018 and in the first half of 2019, resulting in further nickel and copper sulphide intersections at Akelikongo Main and also at the emerging "Eastern Zone" towards the base of the intrusive complex. The Eastern Zone is located around 200m to the east of the main outcropping mineralisation drilled by Sipa during 2015-2017 (ASX 20-June 2019).

The most recent program of eight holes for 3,330.8m was designed to test numerous modelled gravity, AMT and down-hole EM targets in the surrounding area, including down-plunge of the main zone of mineralisation at Akelikongo.

Further mineralisation has been observed in 5 of 8 holes drilled in the most recent program.

At **Akelikongo Main**, disseminated and massive, stringer and net textured nickel and copper sulphide mineralisation was intersected in AKD029, 100m down-plunge of AKD022. The mineralisation remains open to the north-west down-plunge and the footprint of the known mineralisation now extends for a strike length of over 1km.

In addition, a new 0.7m zone of pyroxenite-hosted net textured magmatic sulphide was intersected at 19.8m down-hole in hole AKD028 targeted nearly 600m along strike from the Akelikongo mineralisation.

In other geophysically targeted areas around Akelikongo, nickel-copper sulphide mineralisation was intersected at:

- **Akelikongo West** – two zones of mineralisation have extended mineralisation a further 50m in AKD023.
- **Gravity West** – 500m west of Akelikongo, three new 5-6m wide zones of magmatic sulphide mineralisation in ultramafic host rocks were intersected in two holes AKD024 and AKD025 over 500m away from each other.



Figure 2: Disseminated, semi and massive magmatic sulphides in AKD029 from 342.5m to 352.1m down-hole

Table 1 summarises hole co-ordinates and depths.

These results broaden the mineralised footprint at Akelikongo and potentially provide numerous follow-up target positions. Samples are currently en-route to the laboratory with assays expected in mid-January 2020.

Hole_ID	East	North	RL m	EOH_m	Grid azimuth	Dip	Grid	Zone	Located with	Hole Type
AKD023	456476	396138	950	350.7	45	-60	WGS84 UTM	36N	handheld GPS	DD
AKD024	456555	396771	941	399.3	255	-67	WGS84 UTM	36N	handheld GPS	DD
AKD025	456121	397038	931	434.7	45	-70	WGS84 UTM	36N	handheld GPS	DD
AKD026	456753	396424	945	293.4	25	-60	WGS84 UTM	36N	handheld GPS	DD
AKD027	456684	395993	952	437.9	45	-75	WGS84 UTM	36N	handheld GPS	DD
AKD028	456770	397938	963	530.9	225	-75	WGS84 UTM	36N	handheld GPS	DD
AKD029	456733	397338	942	440.0	55	-65	WGS84 UTM	36N	handheld GPS	DD
AKD030	456731	397334	942	443.9	58	-80	WGS84 UTM	36N	handheld GPS	DD

Table 1. Drill coordinates, orientations and depths.



Competent Person's Statement

The information in this report that relates to Exploration Results is based on, and fairly represents, information and supporting documentation compiled by Ms Lynda Burnett, who is a Member of The Australasian Institute of Mining and Metallurgy. Ms Burnett is a full-time employee of Sipa Resources Limited. Ms Burnett has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which she is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Ms Burnett consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

This release has been approved for issuance by Lynda Burnett.

For more information:

Lynda Burnett
Managing Director
Sipa Resources Limited
+61 (0) 8 9388 1551
info@sipa.com.au

Media Inquiries:

Nicholas Read
Read Corporate
+61 (0) 8 9388 1474
nicholas@readcorporate.com.au

About Sipa

Sipa Resources Limited (ASX: SRI) is an Australian-based exploration company aiming to discover significant new gold-copper and base metal deposits in established and emerging mineral provinces with world-class potential.

In Northern Uganda, the 100%-owned Kitgum-Pader Base Metals Project contains an intrusive-hosted nickel-copper sulphide discovery at Akelikongo, one of the most significant recent nickel sulphide discoveries globally.

In May 2018 Sipa announced a Landmark Farm-in and JV Agreement with Rio Tinto to underpin accelerated nickel-copper exploration at the Kitgum Pader Base Metals Project in Northern Uganda in which Rio Tinto can fund up to US\$57M of exploration expenditure and make US\$2M in cash payments to earn up to a 75% interest the project.

The Joint Venture commenced in August 2018 and Sipa is manager of the project for the first 18 months, after which Rio can elect to become manager or continue to have Sipa manage the project.

In Australia, Sipa has an 87% interest in Joint Venture with Ming Gold at the Paterson North Copper Gold Project in the Paterson Province of North West Western Australia, where polymetallic intrusive related mineralisation was intersected at the Obelisk prospect. The mineralisation is the closest known to Rio's large Winu copper gold discovery announced in February 2019 where over \$88 million has been spent during 2018 and 2019 to define a resource.

The Paterson Province is a globally recognized, strongly endowed and highly prospective mineral belt hosting the plus 25Moz world-class Telfer gold and copper deposits, Magnum and Calibre gold and copper deposits, Nifty copper and Kintyre uranium deposits and the O'Callaghans tungsten deposit.

Sipa also has number of other landholdings in Northern Australia including Barbwire Terrace, Wolfe Basin, and Billiluna projects and the Clara gold project in Northwest Queensland.



AUSTRALIAN PROJECT LOCATIONS



Figure 3 Sipa's Tenement Locations in Australia.

UGANDA PROJECT LOCATION



Figure 4 Sipa's Tenement Location in Uganda



Glossary

Chalcopyrite

Chalcopyrite is a copper iron sulphide mineral with the formulae CuFeS_2 . The principle three sulphide minerals in nickel sulphide deposits are pyrrhotite, pentlandite and chalcopyrite in decreasing order of abundance.

Cumulate

Cumulate rocks are the typical product of precipitation of solid crystals from a fractionating magma chamber. These accumulations typically occur on the floor of the magma chamber. Cumulates are typically found in ultramafic intrusions, in the base of large ultramafic lava tubes in komatiite and magnesium rich basalt flows and also in some granitic intrusions.

Gneiss

Gneiss is a high grade metamorphic rock, meaning that it has been subjected to higher temperatures and pressures than schist. It is formed by the metamorphosis of granite, or sedimentary rock. **Gneiss** displays distinct foliation, representing alternating layers composed of different minerals

Harzburgite

an ultramafic intrusive rock made up of Olivine and Orthopyroxene. Peridotite is the generic name when pyroxene not identified

Norite

mafic intrusive igneous rock composed largely of the calcium-rich plagioclase orthopyroxene, and olivine

MgO content

Method of mafic and ultramafic rock classification, with high MgO ultramafic rocks generally comprising greater than 25% MgO. The higher the MgO content the more nickel the rock can contain in silicate form with modifying factors up to 3000ppm.

Migmatite

Migmatite is a rock that is a mixture of metamorphic rock and igneous rock. It is created when a metamorphic rock such as gneiss partially melts, and then that melt recrystallizes into an igneous rock, creating a mixture of the unmelted metamorphic part with the recrystallized igneous part.

Nickel tenor

Nickel grade in 100% massive sulphide.

Oikocrysts

Part of the definition of poikilitic texture. Poikilitic texture is a texture in which small, randomly orientated, crystals are enclosed within larger crystals of another mineral. The term is most commonly applied to igneous rock textures. The smaller enclosed crystals are known as chadacrysts, whilst the larger crystals are known as oikocrysts.

Pentlandite

Pentlandite is an iron-nickel sulphide mineral with the formula, $(\text{Fe,Ni})_9\text{S}_8$.

Peridotite

Peridotite is a dense, coarse-grained igneous rock, consisting mostly of the minerals olivine and pyroxene. Peridotite is ultramafic, as the rock contains less than 45% silica.



Pyroxenite

Pyroxenite is an ultramafic igneous rock consisting essentially of minerals of the pyroxene group, such as augite and diopside, hypersthene, bronzite or enstatite. They are classified into clinopyroxenites, orthopyroxenites, and websterites which contain both clino and orthopyroxene.

Pyrrhotite

Pyrrhotite is an iron sulphide mineral with the formula $\text{Fe}_{(1-x)}\text{S}$ ($x = 0$ to 0.2).

Saprolite

In situ deeply weathered rock usually consisting of a large percentage of clay minerals

Sulphide textures

- *Massive*

Solid sulphide 100%

- *Semi-massive*

Large blocks and pieces greater than 10mm in diameter of massive sulphide, often chaotic in texture but commonly taking up more than 20% of the rock volume. Stringer sulphides (where sulphides form elongate irregular veins and ribbons) often occur with semi-massive sulphides

- *Net textured (matrix)*

Descriptive term to describe the visual appearance of a net with the sulphides forming the net and the other rock forming minerals the matrix, also known as matrix sulphides. Generally 20-50% of rock volume

- *Blebbly*

Grain size more than about 5mm and resembling droplets

- *Disseminated*

Fine to medium grained (0.5 to 3mm) sprinkling of sulphides scattered throughout the ultramafic rock. Coarsening and increasing grade may occur within the disseminated zone towards the gravitational base of the intrusion at the time of crystallisation.

Xenomelt

Melt of a foreign rock typically the country rock, through which the hot ultramafic magma intrudes, interacts and partially melts and absorbs.

Ultramafic

Generic term for rocks composed of usually greater than 90% mafic minerals (dark colored, high in magnesium and iron) also have <45% silica. As opposed to mafic rocks which has 45-51% silica. The origin of ultramafic rocks is generally from deep within the earth's mantle.



JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none">• Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.• Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.• Aspects of the determination of mineralisation that are Material to the Public Report.• In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	<ul style="list-style-type: none">• See Sub sampling techniques (for drilling)
Drilling techniques	<ul style="list-style-type: none">• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	<ul style="list-style-type: none">• Diamond drilling consisting of HQ coring from surface then reducing to NQ2 from fresh rock.• Core was oriented using Reflex ActII RD Rapid Descent Orientation
Drill sample recovery	<ul style="list-style-type: none">• Method of recording and assessing core and chip sample recoveries and results assessed.• Measures taken to maximise sample recovery and ensure representative nature of the samples.• Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of	<ul style="list-style-type: none">• The recovery was very high, normally 100%• Groundwater was encountered in many holes.



Criteria	JORC Code explanation	Commentary
Logging	<p>fine/coarse material.</p> <ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> Logging was conducted on all holes using a digital quantitative and qualitative logging system to a level of detail which would support a mineral resource estimation.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Drillcore samples were cut in half using a core saw with one half going to the laboratory. The entire sample is crushed and split at the laboratory.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> For the samples selected for laboratory analysis multielement assaying is done via a commercial laboratory using Whole rock analysis plus trace elements using Li-borate fusion and four acid digest supertrace analyses . For all samples additional assaying for Au Pt and Pd is by and 30g Fire Assay with ICP finish. S by four acid digest and by LECO. Lab Standards: every 10m either a duplicate, a standard, or a blank was assayed



Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<ul style="list-style-type: none">• The verification of significant intersections by either independent or alternative company personnel.• The use of twinned holes.• Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.• Discuss any adjustment to assay data.	<ul style="list-style-type: none">• This is an early drill test into a newly identified prospect. No verification has been completed yet.• Twinned holes are not undertaken• Data entry is checked by Perth Based Data Management Geologist and by Rio Tinto's internal data management systems• Assays have not been adjusted
Location of data points	<ul style="list-style-type: none">• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.• Specification of the grid system used.• Quality and adequacy of topographic control.	<ul style="list-style-type: none">• Drill holes and soil and rock points have been located via hand held GPS.
Data spacing and distribution	<ul style="list-style-type: none">• Data spacing for reporting of Exploration Results.• Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.• Whether sample compositing has been applied.	<ul style="list-style-type: none">• No Mineral Resource or Ore Reserve Estimation has been calculated. Drill hole spacing sufficient for current level of exploration and evaluation.
Orientation of data in relation to geological structure	<ul style="list-style-type: none">• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.• If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	<ul style="list-style-type: none">• Although this is an early stage drilling program the drilling has been designed to cut at as orthogonal as possible to the mineralised bodies.
Sample security	<ul style="list-style-type: none">• The measures taken to ensure sample security.	<ul style="list-style-type: none">• Drill samples are sent by truck and accompanied to Entebbe by a Sipa employee with sealed, unique bag tags. From the freight depot they are consigned by air to the laboratory in Perth.



Criteria	JORC Code explanation	Commentary
Audits or reviews	<ul style="list-style-type: none">The results of any audits or reviews of sampling techniques and data.	<ul style="list-style-type: none">A preliminary review of sampling and assaying and drillhole spacing for JORC resource planning by CSA Global was conducted in 2016. Results of this audit are that a higher grade standard has been added to the lower grade standard for assay QA/QC. Also a more detailed drill spacing has been recommended for JORC resource calculation purposes.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none">Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	<ul style="list-style-type: none">The results reported in this Announcement are on granted Exploration Licences held by Sipa Exploration Uganda Limited, a 100% beneficially owned subsidiary of Sipa Resources Limited.Rio Tinto Exploration is earning equity into the joint venture by funding exploration.At this time the tenements are believed to be in good standing. There are no known impediments to obtain a license to operate, other than those set out by statutory requirements which have not yet been applied for.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	No previous mineral exploration activity has been conducted prior to Sipa.



Criteria	JORC Code explanation	Commentary
Geology	Deposit type, geological setting and style of mineralisation.	The Kitgum-Pader Project covers reworked, high grade metamorphic, Archaean and Proterozoic supracrustal rocks heavily overprinted by the Panafrican Neoproterozoic event of between 600 and 700Ma. The tectonostratigraphy includes felsic ortho- and para-gneisses and mafic and ultramafic amphibolites and granulites and is situated on the northeastern margin of the Congo Craton. The geology and tectonic setting is prospective for magmatic Ni, Broken Hill type base metal and orogenic Au deposits
Drillhole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none">› easting and northing of the drill hole collar› elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar› dip and azimuth of the hole› down hole length and interception depth› hole length. <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	Reported in Text
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in</p>	Assay results >0.25% Ni (with generally less than 1m internal dilution) for Akelikongo have been reported. Where data has been aggregated a length weighted average technique has been used.



Criteria	JORC Code explanation	Commentary
	detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	These widths approximate true width where possible. However due to the pipe like and variable nature of the body some intercepts may not be true width. The geometry is generally dipping vertically or moderately to the east and plunging shallowly to the north west.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Reported in Text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Assay results >0.25% Ni (with generally less than 1m internal dilution) are reported for Akelikongo. Assay results for the current drilling program are expected in January 2020.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	As reported in the text