

ASX ANNOUNCEMENT

17 February 2020

# OUTSTANDING COPPER LEACHING RESULTS & SCOPING STUDY COMMENCED

#### HIGHLIGHTS

The performance of the copper leaching from column test-work on the Hollandaire deposit has been outstanding and the results include:

- Copper extraction of 91.9% on Column A in only 34 days
- Copper extraction of 91.7% on Column B in only 21 days
- Columns A and B net acid producing
- Scoping study commenced

Cyprium Metals Limited ("**CYM**" or "**the Company**") is pleased to advise that metallurgical column test-work has progressed on the samples of the massive and semi-massive sulphides from the known copper mineralisation at the Hollandaire prospect (refer to CYM ASX announcement dated 14 October 2019).

This metallurgical column test-work has been undertaken to determine the viability of our unique copper leaching method, hence the optimal copper extraction method, and has leached copper into solution (refer to CYM ASX Announcement 27 November 2019).

Executive Director Barry Cahill commented "We are exceptionally pleased with the results received to date. Our expectation was that our unique leaching process would have the ability to both accelerate the leach time and produce excess acid on the Hollandaire material. The rapid leach time of the copper, using our unique leaching processes and parameters, has been astounding and outperformed our expectations.

The additional benefit of the leach reaction being acid producing is that it will generate surplus acid for use where the mineralised material is acid consuming, thus reducing the operating costs of the process.

The initial metallurgical results, in conjunction with recent drilling success, has given the Company the confidence to bring forward the commencement of a scoping study for the project. The study will focus on a heap leach operation designed to treat the Hollandaire copper deposits. The work to be undertaken will include a mineral resource update, further resource definition and extensional drilling, metallurgical test-work and commercial analysis on the potential for a rapid project start-up. A Project Manager has been appointed and has commenced work on the study."



#### **Metallurgical Drill Holes**

The metallurgical diamond drill programme (refer to CYM ASX announcement dated 14 October 2019) consisted of three holes for 320 metres into the mineralised envelope of the Hollandaire Prospect at the Cue Copper Project to provide representative samples for test-work to be undertaken as illustrated in Figure 1.

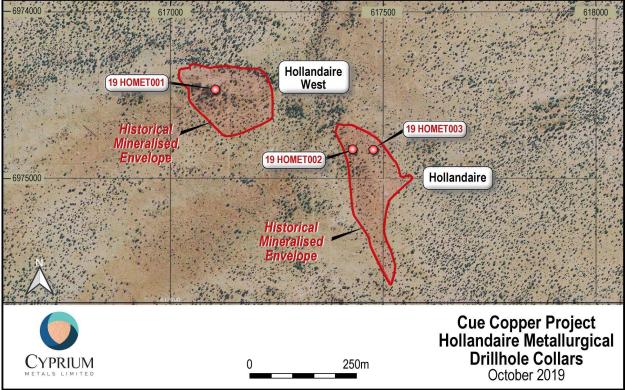


Figure 1 | Hollandaire Metallurgical Diamond Drill Hole Locations

The first hole in the metallurgical diamond drilling programme, 19HOMET001, was drilled into the Hollandaire West deposit and returned disseminated copper sulphide mineralisation. The second and third diamond drill holes in the programme, 19HOMET002 and 19HOMET003, targeted representative sections of the Hollandaire deposit and returned semi-massive to massive sulphide mineralisation. The results from the metallurgical diamond drill holes included:

- 10.4m @ 14.9% Cu in drill hole 19HOMET003 from 84.5m downhole including:
  - 4.5m @ 21.9% Cu from 90.4m;
- 19.1m @ 1.3% Cu in drill hole 19HOMET002 from 85.9m downhole including:
  - 6.4m @ 2.1% Cu from 98.6m;
- 27.9m @ 1.1% Cu in drill hole 19HOMET001 from 45.7m downhole including:
  - 9.0m @ 1.6% Cu from 63.2m.




#### **Hollandaire Metallurgical Test-Work Results**

At the completion of drilling, core samples from the Cue Copper Project were received at the metallurgical laboratory in September 2019. The drill core was crushed, split and assayed for multi-element grades. Composites were then created for the Hollandaire deposit and the Hollandaire West deposit. Hollandaire samples were composited from holes 19HOMET002 and 19HOMET003 to create two column samples, Columns A and B, with copper grades of 5.10% and 5.24% respectively.

Diagnostic testing and mineralogical analysis were undertaken on the samples to determine the optimal parameters to use to undertake the column test-work.

The composites were then leached in separate columns with the resultant copper recovery over time under leach presented in Graph 1 below.

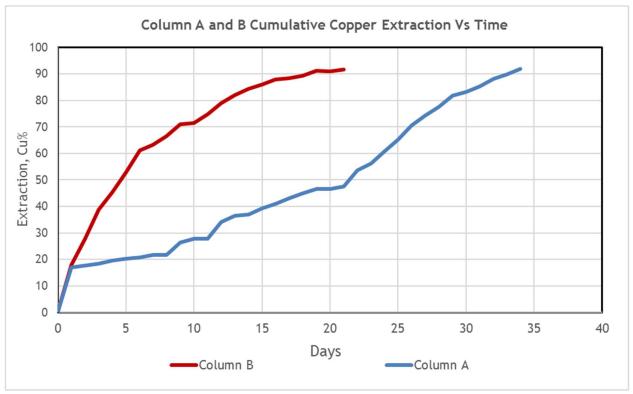

Graph 1 / Copper Extraction

The leaching of these columns is continuing with final results to be reported once this test-work has been completed.

Indicative acid generation potential testing of the two columns was undertaken with the results demonstrating the potential for positive net acid production. This result is important as it allows the acid generated to be used on mineralised material that are not as positive acid producers or are effectively net acid consumers.





Image 1 / Column C Leach Solution

#### **Implications for the Project**

#### Hollandaire West Metallurgical Test-Work

The drill core from Hollandaire West, obtained from drill hole 19HOMET002, was treated separately and composited for testing in a third column, Column C, with an average grade of only 0.76% copper.

This column test commenced in February 2020, with very good early results, as can be seen in Image 1. The leached solution achieved breakthrough within 20 minutes and the visual assessment shows copper leaching into solution. The leaching of this column will continue and updates on progress will be reported in due course.

The metallurgical test-work programme is now proceeding to the process of electro-winning copper metal from the leached solution. Updates on the progress of this part of the test-work will be reported by the end of February 2020.

The initial Hollandaire metallurgical test results have shorter leach time than expected. The effect of the very short leach times on a potential project is significant as it decreases the size of the heap leach pads, and consequently reduces the capital and operating cost requirements over the life of the operation.

Combined with the successful extensional resource drilling at Hollandaire (refer to CYM ASX Announcement 20 January 2020) has encouraged the Company that the critical mass of copper resource required for project development is close to being achieved.

Consequently, the Company has embarked upon a scoping study based on a heap leach operation designed to treat the Hollandaire copper deposits and to produce copper metal on-site. This study will utilise the knowledge the Company has gained over the previous 6 months to determine the optimal parameters required. A Project Manager for the study has been appointed and various consultants and suppliers have been contacted for input into various elements of the study.

Concurrently, planning has commenced for the next phase of drilling of the Hollandaire and Hollandaire West deposits, including the drilling of diamond core for further metallurgical testwork, as well as preparation for a mineral resource update. Future metallurgical test-work will focus on refining the operating parameters and reducing the cost inputs of the process to the lowest level possible.



#### Earn-in and Joint Venture

Pursuant to an agreement between a wholly owned subsidiary of CYM and Musgrave Minerals Limited (ASX: MGV), an option has been granted by Musgrave Minerals Limited to earn-in and joint venture for an 80% interest in the non-gold rights over the tenements at the Cue Copper Project (CYM ASX Release 25 March 2019).

This ASX announcement was approved and authorised by the Board

#### For further information:

Barry Cahill Executive Director

Wayne Apted Chief Financial Officer and Company Secretary

T +61 8 6169 3050 E info@cypriummetals.com

#### **Competent Persons**

The information in this report that relates to Exploration Targets, Exploration Results, Mineral Resources and/or Mineral Reserves is an accurate representation of the available data and is based on information compiled by Mr. Peter van Luyt who is a member of the Australian Institute of Geoscientists. Mr. Peter van Luyt is the Chief Geologist of Cyprium Australia Pty Ltd, in which he is also a shareholder. Mr. van Luyt has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person (CP). Mr. van Luyt consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.



#### Appendix 1: Hollandaire Prospect metallurgical drillholes collar table

			M	GA 94 Zon	e 50			
Hole ID	Hole Type	East	North	RL m	Dip °	Azimuth °	Depth	Comments
19HOMET001	DD	617480	6973587	476	-90		100	Hollandaire west lode
19HOMET002	DD	617430	6973587	476	-90	-	122	Hollandaire east lode
19HOMET003	DD	617480	6973587	476	-90		100.7	Hollandaire east lode

## Appendix 2: Hollandaire Prospect September 2019 Metallurgical Diamond Drilling Programme significant intersections table

Hole_ID	m From	m To	Intercept Cu
19HOMET001	45.7	78.2	32.5m @ 1.00%
19HOMET001	79.7	88.4	8.7m @ 0.46%
19HOMET002	85.9	89.0	3.1m @ 1.16%
19HOMET002	91.0	105.0	14.0m @ 1.47%
19HOMET003	75.8	97.2	21.4m @ 8.15%

Minimum interval 3m, minimum interval grade 0.1% Cu, No internal waste - break interval if result <0.1% Cu.



### JORC Code, 2012 Edition – Table 1 report

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling	Nature and quality of sampling (e.g. cut	Hollandaire Prospect
techniques	measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the	Cyprium Metals Diamond Drilling
		Mineralised diamond core has been logged, photographed and submitted whole to the ALS metallurgical laboratory in Balcatta WA for metallurgical analysis. Unmineralised material has been retained and stored by Cyprium Metals at their field facility at Nallan Station, via Cue.
	Include reference to measures taken to	Hollandaire Prospect
	ensure sample representivity and the appropriate calibration of any	Cyprium Metals Diamond Drilling
	measurement tools or systems used.	Sample representivity has been ensured by following company quality control (QC) sampling procedures. Quality Assurance has been addressed by inserting certified standards and blanks (CRMs) into the submitted assay batches. Excessive variance or inaccuracy of the CRMs will be investigated by Cyprium Metals staff for causes and corrective actions if required.
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	Hollandaire Prospect Cyprium Metals Diamond Drilling Whole core diamond drilling samples have been submitted to ALS Balcatta WA for metallurgical analysis. Mineralised intervals were selected by Cyprium geological and metallurgical staff, crushed to passing 19mm mesh then 1 kg samples split from the crushed intervals for assay analysis.
Drilling	Drill type (e.g. core, reverse circulation,	Hollandaire Prospect
techniques	open-hole hammer, rotary air blast,	Cyprium Metals Diamond Drilling
	auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc).	Diamond drilling for metallurgical samples was completed by Westralian Diamond Drillers Pty Ltd using a KL900 drill rig. HQ drill rods and bits were used to obtain 63.5mm diameter core for use in the first phase of Hollandaire metallurgical testing. Drillholes were vertical and not oriented. Downhole surveys were completed at with a north seeking



Criteria	JORC Code explanation	Commentary
		gyroscopic tool, not subject to downhole magnetic interference.
Drill sample	Method of recording and assessing	Hollandaire Prospect
recovery	core and chip sample recoveries and results assessed.	Cyprium Metals Diamond Drilling
		Core recoveries detailed in the geotechnical logging of the drillholes in the mineralised zones of each diamond metallurgical sample hole were as follows;
		<ul> <li>19HOMET001, 98.2%</li> <li>19HOMET002, 97.1%</li> <li>19HOMET003, 95.2%.</li> </ul>
		The geotechnical logs include measuring recovered core against the drillers core block measurements to calculate the core recovered percentages.
	Measures taken to maximise sample	Hollandaire Prospect
	recovery and ensure representative nature of the samples.	Cyprium Metals Diamond Drilling
		Diamond core was checked for recovery and depth, noted inconsistencies were reconciled against the core blocks and/or driller's run sheets if required.
	Whether a relationship exists between	Hollandaire Prospect
	sample recovery and grade and whether sample bias may have	Cyprium Metals Diamond Drilling
	occurred due to preferential loss/gain of fine/coarse material.	Not relevant to diamond core samples in competent ground.
Logging	Whether core and chip samples have	Hollandaire Prospect
	been geologically and geotechnically logged to a level of detail to support	Cyprium Metals Diamond Drilling
	appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Logging to industry standards for resource, mining and metallurgical studies has been completed for lithology, mineralisation, alteration, veining and weathering. Geotechnical logging has also been completed for the Diamond drilled metallurgical sample holes.
	Whether logging is qualitative or	Hollandaire Prospect
	quantitative in nature. Core (or costean, channel, etc) photography.	Cyprium Metals Diamond Drilling
		Qualitative lithology, mineralisation, alteration, veining and weathering logging has been completed.
		Quantitative/qualitative geotechnical logging of metallurgical sample diamond core has been completed. All drillhole core has been photographed, non-mineralised zones have been retained at the Cyprium field facility for future reference.



Criteria	JORC Code explanation	Commentary
	The total length and percentage of the	Hollandaire Prospect
	relevant intersections logged.	Cyprium Metals Diamond Drilling
		All diamond core has been logged in detail by Cyprium geologists at the Nallan Station field facility into excel spreadsheets or Ocris logging software.
Sub-	If core, whether cut or sawn and	Hollandaire Prospect
sampling techniques	whether quarter, half or all core taken.	Cyprium Metals Diamond Drilling
and sample preparation		Whole core of mineralised sections despatched to ALS Balcatta for metallurgical test-work.
	If non-core, whether riffled, tube	Hollandaire Prospect
	sampled, rotary split, etc and whether sampled wet or dry.	Not applicable
	For all sample types, the nature, quality and appropriateness of the sample	Hollandaire Prospect
	preparation technique.	Not applicable
	Quality control procedures adopted for	Hollandaire Prospect
	all sub-sampling stages to maximise representivity of samples.	Cyprium Metals Diamond Drilling
		Certified Reference Materials and blanks are submitted with the samples to the laboratory and analysed for their performance. Cyprium undertakes remedial action including re-assaying samples if required.
	Measures taken to ensure that the	Hollandaire Prospect
	sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	Not applicable
	Whether sample sizes are appropriate	Hollandaire Prospect
	to the grain size of the material being sampled.	Cyprium Metals Diamond Drilling
		The sample sizes are industry standard and considered by Cyprium to be appropriate to sample the Hollandaire mineralisation.
Quality of	The nature, quality and	Hollandaire Prospect
assay data and	appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Cyprium Metals Diamond Drilling
laboratory tests		The core samples were crushed and pulverised at ALS Balcatta. A 0.4g charge is split from the pulp which is fused with 9g of lithium metaborate and lithium tetraborate flux then analysed for copper and base metals by a Panalytical Axios X-ray Fluorescence machine which is an industry standard total analytical technique.
		Gold was analysed by 50g fire assay with ICP-MS finish which is an industry standard total analytical technique.



Criteria	JORC Code explanation	Commentary
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Not applicable
	Nature of quality control procedures	Hollandaire Prospect
	adopted (e.g. standards, blanks, duplicates, external laboratory checks)	Cyprium Metals Diamond Drilling
	and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	Certified Reference Materials (CRM) and blanks have been submitted with the laboratory samples at a rate of 1 CRM or blank in 20. The CRM/blank results when returned by the lab will be analysed by Cyprium metals for their performance and remedial actions commenced should they be quired.
		Bureau Veritas also conducts their own quality control standards and blanks, the results of which will be provided to Cyprium Metals.
Verification of sampling	The verification of significant intersections by either independent or	Hollandaire Prospect
and	alternative company personnel.	Cyprium Metals Diamond Drilling
assaying		The Cyprium Chief Geologist and Senior Project Geologist have visually verified significant mineralisation intersections in diamond core at the Hollandaire Prospect.
	The use of twinned holes.	Hollandaire Prospect
		Cyprium Metals Drilling
		5 twinned holes of previous operator's drilling have been completed in July and August 2019. Analysis of these drillholes will be completed as the data becomes available to Cyprium staff.
	Documentation of primary data, data	Hollandaire Prospect
	entry procedures, data verification, data storage (physical and electronic)	Cyprium Metals Drilling
	protocols.	Data for the completed drillholes has been collected using spreadsheet templates prepared by WPData consultants and Ocris logging software on Panasonic Toughbook laptop computers utilising standardised library lookup tables. Data is being sent to WPData consultants for validation and compilation into an SQL database hosted by WPData
	Discuss any adjustment to assay data.	No adjustments have been made to the assay data received for the drilling programme the subject of this announcement or for the Hollandaire prospect generally
Location of	Accuracy and quality of surveys used to	Hollandaire Prospect
data points	locate drill holes (collar and down-hole surveys), trenches, mine workings and	Cyprium Metals Diamond Drilling



Criteria	JORC Code explanation	Commentary
	other locations used in Mineral Resource estimation.	Drillhole collars were set out using a handheld Garmin GPS with an accuracy of +/- 3m. The completed drillhole collars will be picked up with a differential GPS when a survey contractor is available to mobilise to site.
		Downhole surveys were completed at with a north seeking gyroscopic tool, not subject to downhole magnetic interference.
	Specification of the grid system used.	GDA94, zone 50.
	Quality and adequacy of topographic control.	The Hollandaire natural surface was aerial surveyed by Arvista Surveys on 21/8/2019. The survey was subsequently processed into a digital terrain model which was provided to Cyprium which now comprises the topographical control at the prospect.
Data spacing and	Data spacing for reporting of Exploration Results.	Not applicable – metallurgical test holes.
distribution	Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	No Mineral Resource or Ore Reserve estimation procedures apply to the exploration data being reported in this announcement.
	Whether sample compositing has been	Hollandaire Prospect
	applied.	Cyprium Metals Diamond Drilling
		Metallurgical sample compositing has been completed within the mineralised zones using the following metallurgical sample drillholes:
		Composite 1:
		• 19HOMET001: 45.70m to 88.4m
		42.7m for 221.76 kg @ 0.76% Cu
		Composite 2:
		<ul> <li>19HOMET002: 82.40m to 110.10m</li> <li>19HOMET003: 75.80m to 97.20m</li> </ul>
		49.1m for 302.80 kg @ 5.20% Cu.
Orientation	Whether the orientation of sampling	Hollandaire Prospect
of data in relation to	achieves unbiased sampling of possible structures and the extent to which this	Cyprium Metals Diamond Drilling
geological structure	is known, considering the deposit type.	The metallurgical sample drillholes were designed to provide first pass samples of the Hollandaire prospect and have been drilled through well mineralised sections of the deposit. The drillholes are oriented at 90° to maximise sample return for



Criteria	JORC Code explanation	Commentary
		metallurgical testing and while the drilling is not perpendicular to the overall mineralisation envelope no deviation of the drillholes was noted and no bias is expected in their sample return.
	If the relationship between the drilling	Hollandaire Prospect
	orientation and the orientation of key mineralised structures is considered to	Cyprium Metals Diamond Drilling
	have introduced a sampling bias, this should be assessed and reported if material.	Cyprium believes that the orientation of the diamond drillholes on the metallurgical drilling programme achieves unbiased sampling of the Hollandaire deposit.
Sample	The measures taken to ensure sample	Hollandaire Prospect
security	security.	Cyprium Metals Diamond Drilling
		Core was delivered in trays secured to pallets to the Cue depot of the McMahon Burnett Transport Company for delivery to ALS laboratories Balcatta WA. Company personnel inspected the core on arrival, no damage or interference with the samples was noted and assay determinations reflect visual quantities of copper sulphides in the drill core.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews of the sampling techniques or data have been conducted.



#### Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral	Type, reference name/number, location	Hollandaire Prospect
tenement and land tenure status	and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	The Hollandaire Prospect is located on exploration tenements E20/699 and E20/629 which form part of the Cue Copper Project, a joint venture with Musgrave Minerals that is the subject of the CYM ASX announcement dated 25 March 2019.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	Exploration tenements E20/699 and E20/629 are current and in good standing.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The Hollandaire, Colonel, Mt Eelya, Eelya South and Rapier prospects in the Cue Project were identified in the 1970's by their outcropping gossans (oxidised sulphide material) in field mapping campaigns by Western Mining Corporation.
		Some exploration and development work was undertaken on the Cue project prospects from the 1980's to 2007 by Westgold Resources NL and Tectonic Resources NL however this was generally focussed on potential gold resources.
		Silver Lake Resources acquired the Cue Project from Tectonic Resources in 2007 and commenced regional exploration which also focussed on gold but did include multi-element geochemical analytical work. This further defined the previously identified copper/gold/silver anomalism at Hollandaire.
		Silver Lake commenced aircore drilling at Hollandaire in 2011 and discovered the sulphide copper/gold mineralisation in the same year.
		Hollandaire was resource definition drilled in 2011 and 2012 with the first 2004 JORC mineral resource estimate completed by Silver Lake towards the end of 2012.
		Musgrave Minerals acquired the Cue project in November 2015 from Silver Lake Resources and commenced exploration planning that year with drilling and geophysical work on the Cue project beginning in 2016.
		Musgrave Minerals last completed field work in the Cue Project before signing the Joint Venture with Cyprium Metals was a surface geophysical moving loop transient electro-magnetic survey over 14 previously identified anomalies. Robust conductor models were generated for testing, which now



Criteria	JORC Code explanation	Commentary
		forms part of Cyprium Metals proposed exploration programme in 2019 and 2020.
Geology	Deposit type, geological setting and	Hollandaire Prospect
	style of mineralisation.	Variously identified as VMS (Volcanogenic Massive Sulphide), VHMS (Volcanic Hosted Massive Sulphide) or epigenetic structurally hosted copper/gold mineralisation depending on the author.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:	Refer to table at Appendix 1.
	easting and northing of the drill hole collar	
	elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar	
	dip and azimuth of the hole	
	down hole length and interception depth	
	hole length.	
	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	No material drill hole information has been excluded from this announcement.
Data	In reporting Exploration Results,	Hollandaire Prospect
aggregation methods	weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	Metallurgical master composites have been generated from 19HOMET001 to 19HOMET003 core samples the results of which are presented in Appendix 2.
		No top cutting has been applied nor is necessary for the reporting of significant intersections in the Hollandaire prospect.
	Where aggregate intercepts	Hollandaire Prospect
	incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Metallurgical composites generated to best represent potential ore grade material for a conceptual operation at the Hollandaire Prospect.



Criteria	JORC Code explanation	Commentary
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	Not applicable
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.	Hollandaire Prospect Metallurgical diamond sample drilling intercepts are expected to be approximately true width for 19HOMET001, 20% greater than true mineralisation width for 19HOMET002 and 10 to 20% greater than true mineralisation width for 19 HOMET003 depending on yet to be fully determined mineralisation orientations in these holes.
	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	Hollandaire Prospect The metallurgical diamond sample drilling has been designed to intercept the known mineralisation at Hollandaire at 60°.
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	Hollandaire Prospect The metallurgical diamond sample drilling has been designed to intercept the known mineralisation at Hollandaire at 60°: downhole intersections are considered by Cyprium to equal true widths of the mineralisation for 19HOMET001 and be variously 10% to 20% greater for 19HOMET002 and 19HOMET003.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to the plan and sections in the text of this announcement.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All copper values considered to be significant are presented in Appendix 2.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics;	All relevant exploration data is presented in the text, tables and figures of the announcement.



Criteria	JORC Code explanation	Commentary
	potential deleterious or contaminating substances.	
Further work	The nature and scale of planned further	Hollandaire Prospect
	work (e.g. tests for lateral extensions or depth extensions or large-scale step- out drilling).	Phase 2 drillholes and geophysical have been designed and are expected to commence in late 2019 or 1H 2020.
	Diagrams clearly highlighting the areas	Hollandaire Prospect
	of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	To form the basis of a separate announcement.