



25 February 2020

Follow Up Assays Confirm High Grade Potential at Utah Projects

Trump Administration to Support US Uranium Producers

Highlights

- Follow-up sampling assays confirm the presence of high-grade mineralisation at the acquired Henry Mountains uranium and vanadium projects in Utah.
- Underground trenching sampling assay grades up to 1,167 ppm (0.12%) U_3O_8 and 38,917 (3.89%) ppm V_2O_5 .
- Further historical drill holes located at the Jeffrey project area.
- Trump administration 2021 budget proposes building a US\$1.5B uranium reserve through 10 years of purchasing US\$150m p.a. of domestic uranium.
- US uranium miners positioning to increase production.

GTi Resources Ltd (**GTi** or the **Company**) is pleased to advise that chemical assay results from follow-up sampling at the Jeffrey Project confirms the high-grade uranium and vanadium potential at the project.

The sampling program involved underground channel sampling within the historic mine workings and was conducted by SRK Consulting (Denver office). These assay results, when combined with previously reported assay results (ASX Announcement dated 29 October 2019) and XRF assay results (ASX Announcement dated 1 July 2019), further confirm the presence of high-grade uranium and vanadium mineralisation within the claim groups acquired by GTi. The highlights of the assay samples include a U_3O_8 grade of 1,167 ppm (0.12%) and 38,917 (3.89%) V_2O_5 from a sample collected from historic mine workings within the Jeffrey claim group.

The Company is further encouraged by these results which confirm the potential for high grade uranium and vanadium within the Jeffrey claim group.

The Company has also identified 12 additional open historical drill holes at the Jeffrey project which hold the potential to enhance the Company's understanding of the mineralisation potential at the Jeffrey project. GTi is evaluating the possibility of conducting a down-hole geophysical logging program on these holes in the Utah spring season. Analysis of eU_3O_8 values from these drill holes will allow for further leveraging of the significant exploration and mining activities that occurred within the project and will facilitate further refinement of drill targets prior to commencing with a permitted drill program.

Trump Administration Announces Support for US Domestic Uranium Producers

In a move targeted to provide strategic support for US domestic uranium producers, President Trump's 2021 budget includes expenditure of \$150m p.a. for 10 years to create a US\$1.5B strategic uranium reserve. The administration is seeking to support US uranium miners and the nuclear fuel supply chain.¹

In response to this news Energy Fuels Inc. (NYSE American: UUUU; TSX: EFR), owner of the White Mesa processing plant in Utah, announced that it had completed a US\$16.6m capital raising to fund activities to increase uranium &/or vanadium production at the Company's properties in response to the President of the United States' budget for fiscal year 2021".²

Uranium Energy Corp (NYSE American: UEC) also welcomed the news of the Trump administration's first move to support the industry. Former US Secretary of Energy and current UEC Chairman, Spencer Abraham, stated: "The establishment of a Uranium Reserve will allow domestic uranium companies to restart some operations and begin to rebuild domestic uranium mining capability." UEC President and CEO, Amir Adnani, added: "We are pleased President Trump has taken the first step to act on the recommendations of the NFWG by initiating a program to purchase U.S. mined uranium for America's strategic Uranium Reserve. This is great news for the domestic uranium mining industry, and we look forward to working with the NFWG to help fulfil the program's objectives."³

GTI is encouraged by this news and sees it as broadly supportive of the Company's US strategy to develop its uranium and vanadium properties in Utah.

Assay Results

A total of 43 samples were collected from 4 sample sites within the historical underground workings within the Jeffrey claim group. Samples were collected from vertical channels on the working faces at the northern and western extent of the workings and are indicative of potential extensions of known mineralization. The location of the samples was further guided by visible mineralization and in-field radiometric measurement (as shown in Figure 1). The sampling program was designed to mimic vertical drill hole intercepts, and utilized a 75mm vertical channel width, with samples divided into approximately 150mm (6-inch) lengths. Following this sampling protocol, sample weights averaged 0.5 kg. Assay results are presented in Table 1 below. All channel sample locations were within an unnamed historical underground production development within the Jeffrey claim group. The development is located along the southern boundary of the claim group and extends to the north. The adit is located within the Jeffrey 4 claim; & the coordinates for the adit can be found on page 6 in the JORC Table 1.

Samples were shipped to ALS USA Inc. with sample preparation occurring in the ALS' Reno, Nevada laboratory, and analytical services completed at ALS Vancouver. Reported assays are based on inductively coupled plasma atomic adsorption spectroscopy (ICP-AES) analytical methods, utilizing a four-acid digestion. In addition to the standard analytical QA/QC program employed by ALS, uranium grades were confirmed through sample splits and secondary analysis of uranium via Fusion XRF laboratory methods. In review, the comparison of uranium assay values measured via ICP-AES and Fusion XRF methods was favourable with no noted discrepancies.


¹ <https://uk.reuters.com/article/us-usa-trump-budget-uranium/trump-budget-proposes-150-million-for-creation-of-uranium-reserve-idUKKBN2042JM>

² <https://www.energyfuels.com/2020-02-20-Energy-Fuels-Announces-Closing-of-Previously-Announced-US-16-611-000-Bought-Deal-Offering>

³ <https://www.morningstar.com/news/pr-newswire/20200212to17080/uranium-energy-corp-welcomes-president-trumps-2021-budget-for-the-purchase-of-domestic-uranium>

The presented samples & analysis cannot be interpreted as indicating mineral resources and are limited in interpretation to identifying and confirming the presence of uranium and vanadium mineralization within several of the claim groups that comprise GTI's Henry Mountains projects (Figure 2).

Figure 1. Interpreted mineralization across an historical underground working face within the Jeffrey claim group at the location of the 'Sample Site A' face-cut channel samples.

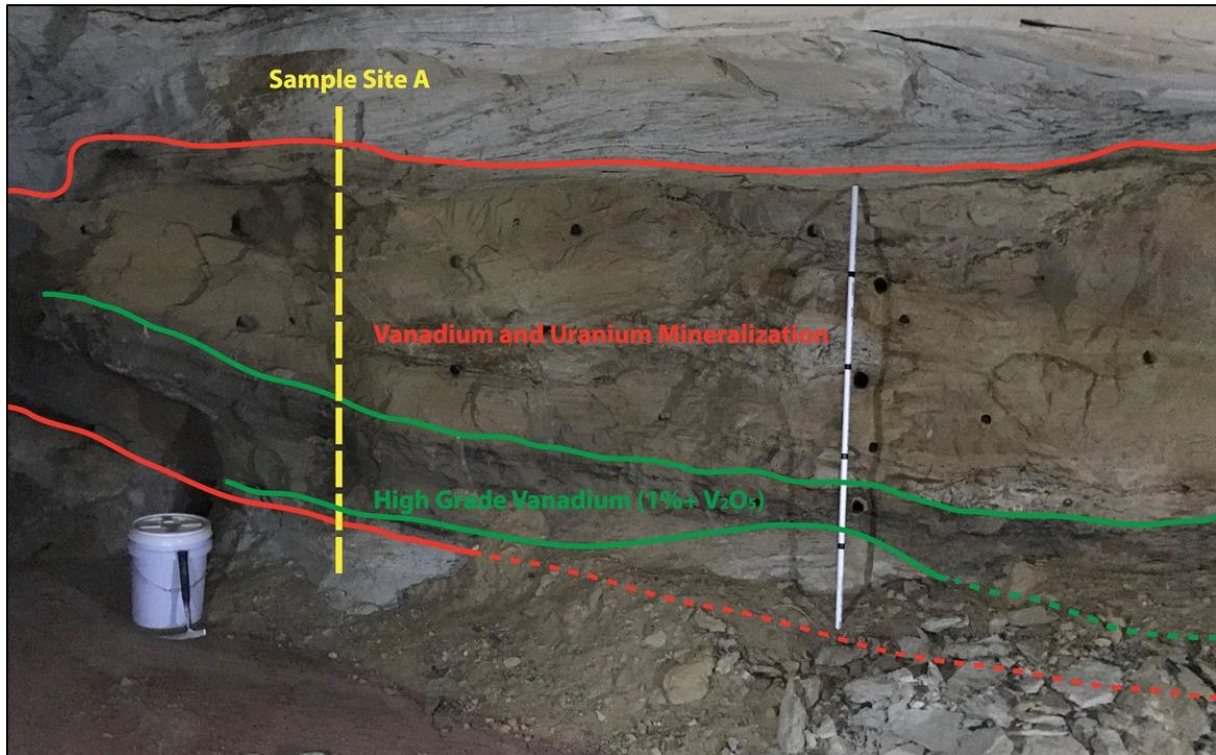


Other Projects

GTI continues to evaluate its other projects in Western Australia whilst also reviewing potential new gold, base metals and energy metals project opportunities.

Table 1. Assay results (ICP-AES method) for underground trenching samples collected from the Jeffrey project in the Henry Mountains projects.

Channel Sample Group	Sample ID	U (ppm)	Equivalent U ₃ O ₈ (%)	V (ppm)	Equivalent V ₂ O ₅ (%)	Interval V ₂ O ₅ %
Channel Sample A	1010	<50	-	1590	0.284	1.5m @ 0.573%
	1011	<50	-	400	0.071	
	1012	<50	-	340	0.061	
	1013	<50	-	280	0.050	
	1014	<50	-	290	0.052	
	1015	200	0.024	800	0.143	
	1016	<50	-	980	0.175	
	1017	990	0.117	12800	2.285	
	1018	220	0.026	7960	1.421	
	1019	200	0.024	8280	1.478	
	1020	<50	-	1600	0.286	
Channel Sample B	1021	220	0.026	5270	0.941	1.5 m @ 0.402%
	1022	50	0.006	1140	0.204	
	1023	220	0.026	910	0.162	
	1024	410	0.048	320	0.057	
	1025	130	0.015	370	0.066	
	1026	100	0.012	970	0.173	
	1027	90	0.011	3780	0.675	
	1028	160	0.019	9020	1.610	
	1029	<50	-	400	0.071	
	1030	<50	-	350	0.062	
Channel Sample C	1031	280	0.033	4690	0.837	1.5 m @ 0.277%
	1032	290	0.034	8630	1.541	
	1033	<50	-	370	0.066	
	1034	<50	-	340	0.061	
	1035	<50	-	180	0.032	
	1036	<50	-	200	0.036	
	1037	<50	-	260	0.046	
	1038	<50	-	280	0.050	
	1039	<50	-	280	0.050	
	1040	<50	-	300	0.054	
Channel Sample D	1041	140	0.017	21800	3.892	1.8 m @ 1.088%
	1042	410	0.048	14000	2.499	
	1043	210	0.025	5810	1.037	
	1044	300	0.035	6560	1.171	
	1045	170	0.020	14700	2.624	
	1046	90	0.011	5960	1.064	
	1047	70	0.008	990	0.177	
	1048	90	0.011	850	0.152	
	1049	<50	-	1490	0.266	
	1050	<50	-	170	0.030	
	1051	<50	-	710	0.127	
	1052	<50	-	110	0.020	

Figure 2: Henry Mountains (Utah) Claim Group Location Map

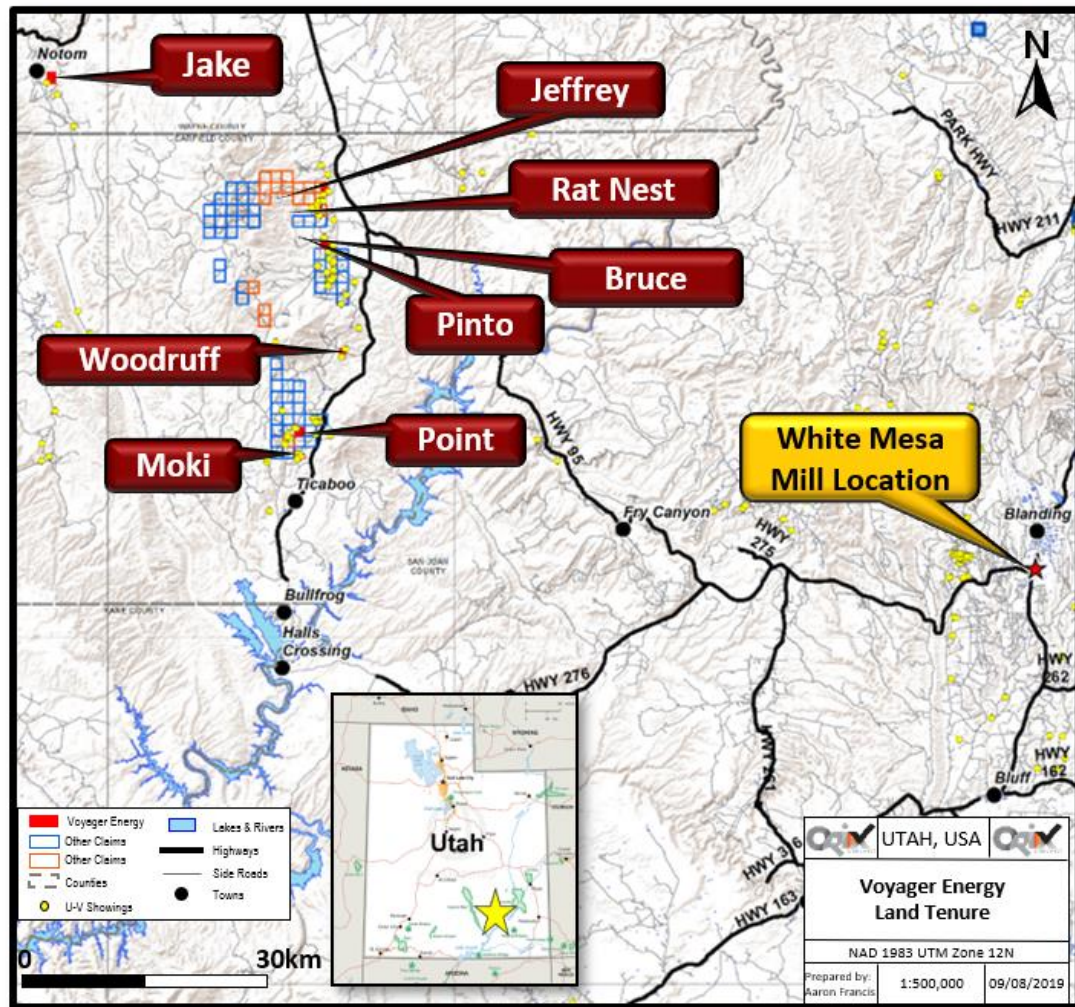

-Ends-

Competent Persons Statement

The information in this announcement that relates to the Exploration Results on the Henry Mountains project is based on information compiled and fairly represented by Matthew Hartmann. Mr. Hartmann is a Principal Consultant with SRK Consulting (U.S) Inc. with over 20 years of experience in mineral exploration and project evaluation. Mr. Hartmann is a Member of the Australasian Institute of Mining and Metallurgy (318271) and a Registered Member of the Society of Mining, Metallurgy and Exploration (4170350RM). Mr Hartmann has sufficient experience relevant to the style of mineralisation and type of deposit under consideration, and to the activity which has been undertaken in 2019 and 2020, to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of exploration results, Mineral Resources and Ore Reserves. Mr Hartmann provides his consent to the inclusion in this report of the matter based on this information in the form and context in which it appears.

1. JORC CODE, 2012 EDITION – TABLE 1 REPORT TEMPLATE

1.1 Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Channel cut samples were collected from working faces in historical underground developments. Sample collection mimicked HQ drill core size, and were 75mm in width, and divided along the vertical channel in 150mm lengths. Samples averaged 0.5 kg in size. The sampling method was used for initial assessment of exposed mineralization in historical workings to aid in drill targeting outside of the underground development area. The method is considered adequate for this purpose
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> No drilling is being reported
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> No drilling is being reported
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate 	<ul style="list-style-type: none"> Sampling was undertaken as a first pass indication of mineralisation. Geological context was noted.

Criteria	JORC Code explanation	Commentary
	<p><i>Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <ul style="list-style-type: none"> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> Geological logging was qualitative in nature
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> No drilling is being reported The sampling techniques are appropriate as a first pass estimation of mineralisation potential Sampling was focused on visible mineralisation, confirmed with field instrumentation. Radiometric measurements were taken in field with an alpha/beta/gamma pancake type sonde connected to a Ludlum Model 3 ratemeter. Field instrument readings were not calibrated and are not reported here. The material and sample sizes are considered appropriate given the style of mineralisation being targeted
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> The sampling procedure is indicative of mineralisation potential only The grab samples were prepped at ALS Reno, Nevada, with laboratory analyses completed at ALS Vancouver. Samples were subject to ICP-AES with a four acid digestion, and XRF for high grade uranium assay confirmation. ALS Vancouver followed industry standard QA/QC protocols for mineral assays.
Verification of sampling and assaying	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> No drilling reported Primary data collected in the field and entered into database No adjustments made to assay data
Location of data points	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> 	<ul style="list-style-type: none"> Samples collected from historical underground workings were roughly surveyed. Detailed underground surveys have not yet been completed. All samples were collected from an underground workings accessed by an adit located at 531157m E, 4214105m N, UTM NAD83

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> All sample locations were photographed and labelled in the field to provide further sample location reference.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Sampling was conducted on an ad hoc basis No compositing has been applied
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> No drilling reported.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples were transported by SRK staff from the field in a locked case. SRK staff shipped the samples in a sealed container to ALS Reno.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No audits or reviews reported

1.2 Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Henry Mountains projects are federal unpatented lode mineral claims held by Voyager Energy LLC, a wholly owned subsidiary of GTI Resources Ltd. All claims are in good standing

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Significant past exploration and production in the region was for uranium and vanadium mineralisation. Limited work has been completed in the district over the past 30 years.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> Sandstone hosted uranium/vanadium deposits associated with carbon replacement in fluvial channels, oxidation/reduction boundaries, and disseminated geometries. Mineralization is most prominent in the lower sands of the Salt Wash Member of the Morrison Formation.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> No drilling reported
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Not Applicable, information has been included. Reported values include equivalent oxide concentrations (%) for U₃O₈ and V₂O₅. These have been factored using standard industry conversion values.
Relationship between mineralisation widths and intercept	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> No Drilling reported All samples were grab samples, with no mineralization geometries associated.

Criteria	JORC Code explanation	Commentary
<i>lengths</i>		
<i>Diagrams</i>	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate diagrams shown
<i>Balanced reporting</i>	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All uranium and vanadium assay results have been reported for the ICP-AES analysis. Fusion XRF values for uranium correspond very well with the ICP-AES values, but are not reported here.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> All material results have been reported
<i>Further work</i>	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Further work suggested included, radiological surveys, underground and surface mapping, further sampling and trenching followed by drilling programs and bulk sampling for metallurgical testing