

BONANZA GOLD INTERCEPT FROM SHALLOW AIR-CORE DRILLING AT COMEDY KING, CARDINIA GOLD PROJECT

Exceptional intercept of 4m at 113g/t Au demonstrates high-grade potential as drilling highlights coherent zone of mineralisation along the Comedy King-Faye Marie trend

Highlights

- Significant new assays received for 12 Reverse Circulation (RC) holes drilled at Comedy King as well as 104 air-core holes drilled at Comedy King and 51 air-core holes drilled along the Faye Marie trend at the 100%-owned Cardinia Gold Project in WA:

Comedy King AC 4m at 113g/t Au from 0m (CK20AC193)

Comedy King RC 2m at 8.10g/t Au from 37m (CK20RC142)
3m at 1.50g/t Au from 70m (CK20RC146)
2m at 1.98g/t Au from 7m (CK20RC131)

Faye Marie AC 8m at 3.01g/t Au from 36m (FM20AC019)
4m at 1.29g/t Au from 20m (FM20AC028)

- The latest results demonstrate an emerging coherent zone of shallow gold mineralisation extending for up to 3km along the Comedy King-Faye Marie trend, building on previously announced air-core results from Comedy King including:

Comedy King AC 12m at 14.9g/t Au from 4m*
4m at 8.3g/t Au from 20m (EOH)*
20m at 2.3g/t Au from surface*
12m at 2.7g/t Au from surface*

** Previously reported in February 2020*

- Further exploration is planned in this area, which is one of several emerging greenfields discoveries at Cardinia.
- Assays are still pending for RC drilling at Lewis East and Cardinia Hill.

Kin Mining NL (ASX: KIN or “the Company”) is pleased to report further outstanding assay results from recent air-core and Reverse Circulation (RC) drilling at its 100%-owned **Cardinia Gold Project** near Leonora in Western Australia, where its exploration-focused strategy continues to gain momentum.

The Company has now received assay results from RC drilling at the Comedy King prospect and air-core (AC) drilling at Comedy King and the Faye Marie prospects, located approximately 2.7km north-west of the proposed processing plant site at Cardinia.

The results build on the exceptional air-core drilling results announced previously at Comedy King and, together with the recent drilling at Faye Marie supported by strong surface gold geochemistry, demonstrate a coherent zone of gold mineralisation extending over a strike length of up to 3km.

The latest assays also highlight the potential for the Cardinia area to host extremely high-grade gold, including a bonanza grade intercept of **4m at 113g/t Au** from surface at Comedy King – an exceptional result for this stage of AC drilling.

The latest results are also highlighting the importance of having a detailed understanding of the geology of the area in order to maximise exploration success, with the better developed gold mineralisation generally associated with north east trending, second order faults initiated from the regional scale Keith-Kilkenny Fault, one of the major gold-hosting geological structures in Western Australia.

Commenting on the latest drill results, Managing Director Andrew Munckton said: *“Our exploration-driven strategy at the Cardinia Gold Project is continuing to gather momentum, with the latest batch of results demonstrating the potential for a large and coherent gold system extending from Faye Marie to Black Chief in the south and across to Comedy King.*

“The bonanza grade intercept of 4m at 113g/t from surface is a standout for air-core drilling, and clearly demonstrates the potential for exceptionally high gold grades at the Cardinia Project. We are also developing a clearer understanding of the orientation and controls of the mineralisation in the Comedy King-Faye Marie-Black Chief corridor, and this area will be one of a number of areas to follow up in our next phase of drilling.

“In the meantime, a significant number of assay results are still in the pipeline from Cardinia Hill and Lewis East. We expect to receive these results over the next week or so with the objective of wrapping up all of the results from this phase of drilling by early June and planning our next exploration campaign thereafter.”

Comedy King

A total of 19 RC drill-holes were completed at Comedy King for 1,803m. These targeted north-dipping veins initially identified in a surface sampling campaign, and later intersected in air-core drilling completed in December 2019.

Results including **2m @ 8.1g/t from 37m** (CK20RC142) clearly highlight the presence of high-grade gold associated with east west oriented quartz veins. However, gold in these veins is likely to be nuggetty, with a majority of the holes intersecting significant albite-sericite-carbonate-pyrite alteration within the felsic host rocks, associated with generally lower grade gold mineralisation.

104 air-core holes were completed at Comedy King, totalling 4,224m. This drilling was designed to extend the coverage over NE-trending faults, interpreted to be the controlling structures for the mineralisation.

Extremely high-grade gold was intersected at surface, most notably in drill-hole CK20AC193, which delivered an intercept of **4m @ 113g/t** from surface. As more drilling data from the prospect is generated, a clear NW-SE trend is becoming apparent in the alteration and gold mineralisation. Two zones at Comedy King follow this trend and are illustrated in Figure 1. The two NE-SW trending zones contain both the majority of the east west oriented high grade veins and the broader envelope of alteration intersected in the five lines of recent air-core

drilling. Each of these zones measures approximately 500m strike length by 100m width and form a significant exploration target in their own right.

The NW-SE orientation aligns with the multi-element geochemical data which suggests a strong sericite-pyrite alteration halo in this orientation. A more complex picture of the mineralisation is emerging, one in which the north-dipping high-grade veins are just one component in a larger mineralised system controlled by the NE-SW trending faults. Further interpretation is required to fully understand the geology of the prospect. This process, assisted by detailed geochemistry and geophysical data is underway.

Hole ID	From (m)	To (m)	Width (m)	Gold (g/t)	Comments
CK20RC130	0	2	2	0.86	
CK20RC131	7	9	2	1.98	
CK20RC131	49	50	1	0.65	
CK20RC132	20	21	1	1.08	
CK20RC132	27	28	1	1.37	
CK20RC132	45	49	4	0.89	
CK20RC133	50	51	1	0.77	
CK20RC134	33	37	4	0.72	
CK20RC134	72	73	1	0.92	
CK20RC137	12	13	1	2.30	
CK20RC137	23	25	2	0.92	
CK20RC137	30	31	1	0.61	
CK20RC137	33	34	1	1.25	
CK20RC137	42	43	1	0.92	
CK20RC139	33	36	3	0.68	
CK20RC139	39	40	1	0.63	
CK20RC140	12	14	2	1.36	
CK20RC141	78	79	1	0.81	
CK20RC142	37	39	2	8.10	
CK20RC142	40	41	1	0.54	
CK20RC142	67	68	1	0.75	
CK20RC145	42	43	1	0.80	
CK20RC146	21	23	2	1.03	
CK20RC146	70	73	3	1.50	
CK20RC147	1	3	2	1.14	
CK20RC147	10	11	1	0.74	
CK20RC147	21	22	1	2.82	
CK20RC147	67	68	1	0.57	

Table 1: Significant intercepts (>0.50g/t) for the Comedy King RC drilling program. True width is approximately 80% of downhole width

Hole ID	From (m)	To (m)	Width (m)	Gold (g/t)	Comments
CK20AC149	40	43	3	0.50	
CK20AC164	16	20	4	0.58	
CK20AC188	24	28	4	0.52	
CK20AC192	28	32	4	0.56	
CK20AC193	0	4	4	113	
CK20AC195	16	20	4	0.56	

Table 2: Significant intercepts (>0.5g/t) for 4m composite samples of the Comedy King Aircore drilling program. True width is approximately 80% of downhole width

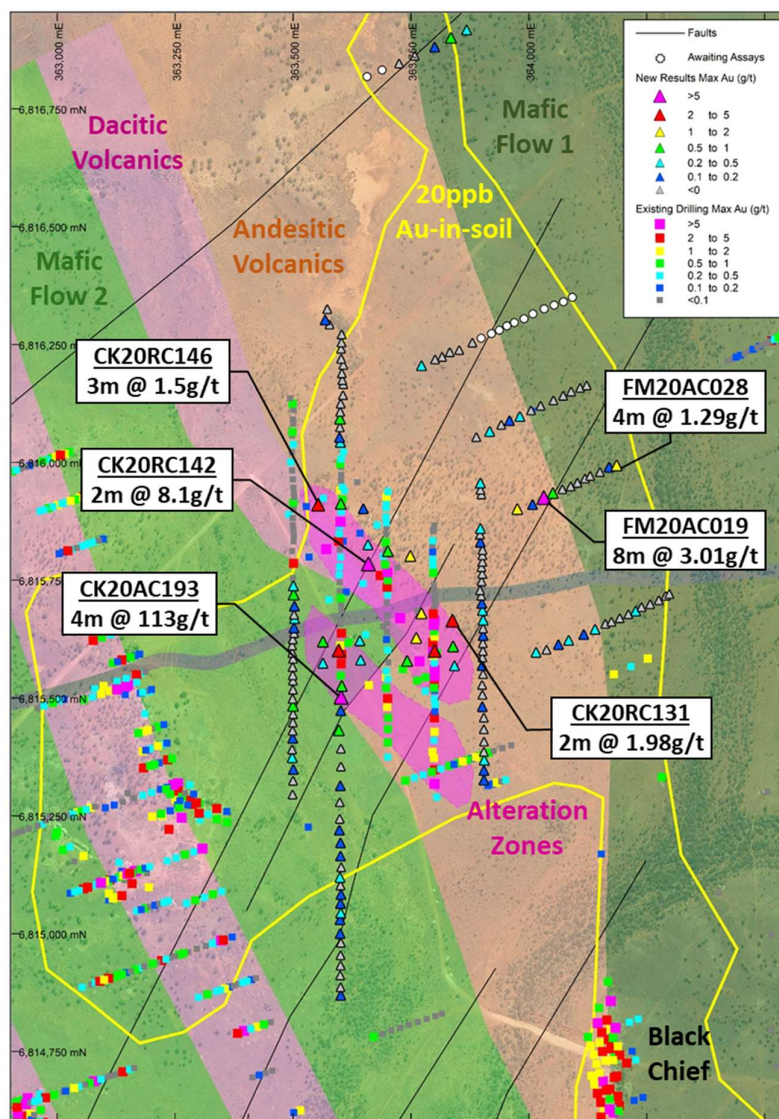


Figure 1: Collar locations and assay results from the Comedy King and Faye Marie RC and aircore drilling programs.

True width is approximately 80% of downhole width

Faye Marie

Assay results have also been received for 51 of the 64 air-core drill-holes completed at the Faye Marie prospect to the east of Comedy King and directly along strike from the Black Chief prospect. See Figure 1.

This drilling, totalling 2,410m, targeted a mafic-felsic contact associated with significant gold anomalism identified in auger drilling, gold-in-soil geochemical sampling and recent air-core drilling at Black Chief. Mineralisation appears to be higher grade where north-east-trending faults intersect the contact.

The results confirmed the presence of mineralisation, producing an intercept of **8m @ 3.01g/t from 36m** (FM20AC019, Figure 1). A re-interpretation of the area, based on a litho-geochemical analysis of the multi-element dataset, suggests this mineralisation may be the along-strike equivalent of the Black Chief deposit to the south (Figure 1). Assay results are pending for the remaining 13 air-core holes.

Hole ID	From (m)	To (m)	Width (m)	Gold (g/t)	Comments
FM20AC017	68	70	2	1.25	end of hole
FM20AC019	36	44	8	3.01	end of hole
FM20AC020	20	24	4	0.67	
FM20AC028	0	4	4	0.64	
FM20AC028	20	24	4	1.29	
FM20AC063	24	28	4	0.56	

Table 3: Significant intercepts (>0.5g/t) for 4m composite samples of the Faye Marie Aircore drilling program. *True width is approximately 80% of downhole width*

Project	Hole Id	Easting	Northing	RL	Hole Type	Azimuth	Dip	Depth
Comedy King	CK20RC129	363842	6815569	417	RC	180	-60	72
	CK20RC130	363839	6815609	417	RC	180	-60	102
	CK20RC131	363838	6815663	418	RC	180	-60	102
	CK20RC132	363761	6815627	418	RC	180	-60	114
	CK20RC133	363742	6815578	418	RC	180	-60	60
	CK20RC134	363772	6815679	418	RC	180	-60	78
	CK20RC135	363643	6815580	417	RC	180	-60	69
	CK20RC136	363642	6815621	417	RC	180	-60	108
	CK20RC137	363596	6815600	416	RC	180	-60	96
	CK20RC138	363563	6815574	416	RC	180	-60	72
	CK20RC139	363563	6815619	416	RC	180	-60	126
	CK20RC140	363749	6815801	420	RC	180	-60	90
	CK20RC141	363701	6815811	420	RC	180	-60	96
	CK20RC142	363659	6815783	419	RC	180	-60	72
	CK20RC143	363659	6815825	420	RC	180	-60	114
	CK20RC144	363649	6815902	419	RC	180	-60	114
	CK20RC145	363601	6815912	418	RC	180	-60	108
	CK20RC146	363553	6815909	418	RC	180	-60	96
CK20RC147	363800	6815599	418	RC	180	-60	114	
CK20AC148	363500	6815738	416	AC	180	-60	51	

Project	Hole Id	Easting	Northing	RL	Hole Type	Azimuth	Dip	Depth
	CK20AC149	363501	6815719	416	AC	180	-60	43
	CK20AC150	363503	6815695	416	AC	180	-60	50
	CK20AC151	363502	6815677	416	AC	180	-60	32
	CK20AC152	363503	6815669	416	AC	180	-60	30
	CK20AC153	363502	6815649	416	AC	180	-60	27
	CK20AC154	363502	6815638	416	AC	180	-60	22
	CK20AC155	363499	6815625	416	AC	180	-60	24
	CK20AC156	363498	6815612	416	AC	180	-60	32
	CK20AC157	363498	6815596	416	AC	180	-60	30
	CK20AC158	363500	6815584	416	AC	180	-60	31
	CK20AC159	363499	6815566	416	AC	180	-60	42
	CK20AC160	363499	6815549	415	AC	180	-60	30
	CK20AC161	363499	6815537	415	AC	180	-60	39
	CK20AC162	363499	6815518	415	AC	180	-60	45
	CK20AC163	363499	6815499	415	AC	180	-60	45
	CK20AC164	363500	6815483	415	AC	180	-60	40
	CK20AC165	363500	6815466	415	AC	180	-60	36
	CK20AC166	363499	6815448	415	AC	180	-60	42
	CK20AC167	363499	6815431	415	AC	180	-60	51
	CK20AC168	363499	6815414	415	AC	180	-60	54
	CK20AC169	363498	6815391	415	AC	180	-60	60
	CK20AC170	363498	6815374	415	AC	180	-60	61
	CK20AC171	363500	6815348	414	AC	180	-60	69
	CK20AC172	363500	6815325	414	AC	180	-60	66
	CK20AC173	363499	6815296	414	AC	180	-60	63
	CK20AC174	363572	6816325	420	AC	180	-60	46
	CK20AC175	363568	6816302	420	AC	180	-60	40
	CK20AC176	363577	6816293	420	AC	180	-60	46
	CK20AC177	363603	6816272	420	AC	180	-60	43
	CK20AC178	363602	6816255	420	AC	180	-60	39
	CK20AC179	363601	6816241	420	AC	180	-60	40
	CK20AC180	363602	6816220	420	AC	180	-60	45
	CK20AC181	363606	6816207	420	AC	180	-60	34
	CK20AC182	363603	6816189	420	AC	180	-60	33
	CK20AC183	363604	6816175	420	AC	180	-60	23
	CK20AC184	363606	6816166	420	AC	180	-60	30
	CK20AC185	363605	6816143	420	AC	180	-60	34
	CK20AC186	363601	6816125	420	AC	180	-60	33
	CK20AC187	363600	6816107	420	AC	180	-60	40
	CK20AC188	363600	6816092	420	AC	180	-60	38
	CK20AC189	363599	6816074	419	AC	180	-60	36
	CK20AC190	363598	6816053	419	AC	180	-60	27

Project	Hole Id	Easting	Northing	RL	Hole Type	Azimuth	Dip	Depth
	CK20AC191	363600	6816042	419	AC	180	-60	19
	CK20AC192	363603	6815525	416	AC	180	-60	57
	CK20AC193	363602	6815501	416	AC	180	-60	56
	CK20AC194	363601	6815473	415	AC	180	-60	83
	CK20AC195	363597	6815431	415	AC	180	-60	82
	CK20AC196	363601	6815393	414	AC	180	-60	100
	CK20AC197	363601	6815355	414	AC	180	-60	81
	CK20AC198	363600	6815314	414	AC	180	-60	68
	CK20AC199	363599	6815279	414	AC	180	-60	66
	CK20AC200	363599	6815244	414	AC	180	-60	43
	CK20AC201	363598	6815220	414	AC	180	-60	57
	CK20AC202	363601	6815193	414	AC	180	-60	47
	CK20AC203	363600	6815165	414	AC	180	-60	48
	CK20AC204	363602	6815141	414	AC	180	-60	43
	CK20AC205	363599	6815119	414	AC	180	-60	35
	CK20AC206	363601	6815102	414	AC	180	-60	36
	CK20AC207	363601	6815083	414	AC	180	-60	33
	CK20AC208	363600	6815064	414	AC	180	-60	33
	CK20AC209	363601	6815043	414	AC	180	-60	30
	CK20AC210	363599	6815030	414	AC	180	-60	41
	CK20AC211	363600	6815000	413	AC	180	-60	43
	CK20AC212	363601	6814981	413	AC	180	-60	42
	CK20AC213	363600	6814954	413	AC	180	-60	40
	CK20AC214	363601	6814933	413	AC	180	-60	41
	CK20AC215	363600	6814912	413	AC	180	-60	45
	CK20AC216	363601	6814887	413	AC	180	-60	44
	CK20AC217	363601	6814869	413	AC	180	-60	45
	CK20AC218	363897	6815956	424	AC	180	-60	21
	CK20AC219	363897	6815942	424	AC	180	-60	16
	CK20AC220	363899	6815932	424	AC	180	-60	30
	CK20AC221	363897	6815860	421	AC	180	-60	21
	CK20AC222	363896	6815847	421	AC	180	-60	18
	CK20AC223	363897	6815831	420	AC	180	-60	21
	CK20AC224	363901	6815814	420	AC	180	-60	19
	CK20AC225	363901	6815803	420	AC	180	-60	11
	CK20AC226	363901	6815789	419	AC	180	-60	13
	CK20AC227	363899	6815778	419	AC	180	-60	15
	CK20AC228	363901	6815764	419	AC	180	-60	21
	CK20AC229	363899	6815748	419	AC	180	-60	24
	CK20AC230	363896	6815729	418	AC	180	-60	24
	CK20AC231	363899	6815717	418	AC	180	-60	25
	CK20AC232	363900	6815701	418	AC	180	-60	37

Project	Hole Id	Easting	Northing	RL	Hole Type	Azimuth	Dip	Depth
	CK20AC233	363902	6815686	418	AC	180	-60	29
	CK20AC234	363903	6815665	418	AC	180	-60	26
	CK20AC235	363902	6815648	417	AC	180	-60	21
	CK20AC236	363903	6815633	417	AC	180	-60	31
	CK20AC237	363902	6815617	417	AC	180	-60	23
	CK20AC238	363902	6815600	417	AC	180	-60	30
	CK20AC239	363901	6815586	417	AC	180	-60	30
	CK20AC240	363901	6815569	417	AC	180	-60	43
	CK20AC241	363902	6815551	416	AC	180	-60	40
	CK20AC242	363901	6815528	416	AC	180	-60	42
	CK20AC243	363901	6815507	416	AC	180	-60	49
	CK20AC244	363901	6815481	416	AC	180	-60	54
	CK20AC245	363904	6815459	416	AC	180	-60	58
	CK20AC246	363904	6815434	415	AC	180	-60	55
	CK20AC247	363904	6815408	415	AC	180	-60	56
	CK20AC248	363904	6815386	415	AC	180	-60	54
	CK20AC249	363905	6815368	415	AC	180	-60	54
	CK20AC250	363905	6815346	415	AC	180	-60	55
	CK20AC251	363904	6815326	415	AC	180	-60	58
Faye Marie	FM20AC001	364015	6815597	417	AC	066	-60	43
	FM20AC002	364037	6815603	418	AC	066	-60	39
	FM20AC003	364062	6815613	418	AC	066	-60	51
	FM20AC004	364084	6815622	418	AC	066	-60	62
	FM20AC005	364116	6815635	418	AC	066	-60	48
	FM20AC006	364140	6815646	418	AC	066	-60	35
	FM20AC007	364162	6815658	418	AC	066	-60	22
	FM20AC008	364175	6815662	418	AC	066	-60	17
	FM20AC009	364193	6815670	418	AC	066	-60	18
	FM20AC010	364211	6815678	417	AC	066	-60	20
	FM20AC011	364226	6815684	417	AC	066	-60	13
	FM20AC012	364239	6815693	417	AC	066	-60	9
	FM20AC013	364257	6815699	417	AC	066	-60	16
	FM20AC014	364275	6815708	417	AC	066	-60	16
	FM20AC015	364290	6815717	417	AC	066	-60	5
	FM20AC016	364297	6815721	416	AC	066	-60	5
	FM20AC017	363975	6815901	423	AC	066	-60	70
	FM20AC018	364007	6815911	424	AC	066	-60	57
	FM20AC019	364031	6815924	424	AC	066	-60	44
	FM20AC020	364051	6815935	424	AC	066	-60	43
	FM20AC021	364071	6815943	424	AC	066	-60	34
	FM20AC022	364088	6815949	424	AC	066	-60	21
	FM20AC023	364103	6815957	423	AC	066	-60	15

Project	Hole Id	Easting	Northing	RL	Hole Type	Azimuth	Dip	Depth
	FM20AC024	364119	6815966	422	AC	066	-60	7
	FM20AC025	364130	6815971	422	AC	066	-60	7
	FM20AC026	364150	6815980	422	AC	066	-60	11
	FM20AC027	364170	6815990	421	AC	066	-60	24
	FM20AC028	364186	6815993	420	AC	066	-60	30
	FM20AC029	363888	6816054	424	AC	066	-60	66
	FM20AC030	363917	6816065	425	AC	066	-60	66
	FM20AC031	363941	6816080	425	AC	066	-60	41
	FM20AC032	363959	6816089	424	AC	066	-60	43
	FM20AC033	363981	6816097	424	AC	066	-60	47
	FM20AC034	364004	6816111	423	AC	066	-60	33
	FM20AC035	364025	6816120	422	AC	066	-60	43
	FM20AC036	364052	6816132	421	AC	066	-60	27
	FM20AC037	364073	6816142	420	AC	066	-60	21
	FM20AC038	364089	6816151	420	AC	066	-60	16
	FM20AC039	364108	6816158	419	AC	066	-60	7
	FM20AC040	364122	6816163	419	AC	066	-60	19
	FM20AC041	363772	6816205	422	AC	066	-60	62
	FM20AC042	363801	6816219	423	AC	066	-60	34
	FM20AC043	363816	6816224	423	AC	066	-60	38
	FM20AC044	363832	6816234	423	AC	066	-60	37
	FM20AC045	363852	6816239	423	AC	066	-60	60
	FM20AC046	363880	6816254	423	AC	066	-60	47
	FM20AC047	363899	6816263	423	AC	066	-60	50
	FM20AC048	363921	6816273	423	AC	066	-60	38
	FM20AC049	363937	6816280	423	AC	066	-60	33
	FM20AC050	363953	6816290	422	AC	066	-60	39
	FM20AC051	363969	6816297	422	AC	066	-60	45
	FM20AC052	363990	6816305	422	AC	066	-60	36
	FM20AC053	364008	6816315	421	AC	066	-60	40
	FM20AC054	364032	6816326	421	AC	066	-60	29
	FM20AC055	364053	6816333	420	AC	066	-60	24
	FM20AC056	364073	6816341	420	AC	066	-60	40
	FM20AC057	364092	6816350	420	AC	066	-60	28
	FM20AC058	363657	6816818	421	AC	066	-60	66
	FM20AC059	363688	6816833	421	AC	066	-60	69
	FM20AC060	363724	6816847	421	AC	066	-60	72
	FM20AC061	363758	6816863	421	AC	066	-60	93
	FM20AC062	363800	6816881	422	AC	066	-60	72
	FM20AC063	363835	6816901	422	AC	066	-60	69
	FM20AC064	363868	6816917	422	AC	066	-60	78

Table 4: Drill-hole details for the Comedy King and Faye Marie RC and air-core drilling programs.

-ENDS-

Authorised for Release by the Board of Directors

For further information, please contact:

Investor enquiries

Andrew Munckton
Managing Director, Kin Mining NL
+61 8 9242 2227

Media enquiries

Nicholas Read
Read Corporate
+61 419 929 046

About Kin Mining NL

Kin Mining NL (ASX: KIN) is a West Australian based gold development and exploration company. Kin’s key focus is its 100% owned Cardinia Gold Project (CGP) located in the highly prospective North-Eastern Goldfields region of Western Australia. The CGP has an 945koz¹ gold Mineral Resource defined in both oxide and deeper primary mineralisation with considerable potential to grow this resource with further drilling.

¹The company confirms that it is not aware of any new information or data that materially affects the information included in the ASX Announcement of 17th February 2020 “CGP Mineral Resource Estimate Upgrade to 945koz”, and that all material assumptions and technical parameters underpinning the estimates in that announcements continue to apply and have not materially changed.

Cardinia Gold Project: Mineral Resources: February 2020																
Project Area	Resource Gold Price (AUD)	Lower Cut off (g/t Au)	Measured Resources			Indicated Resources			Inferred Resources			Total Resources			Date Announced	
			Tonnes (Mt)	Au (g/t Au)	Au (k Oz)	Tonnes (Mt)	Au (g/t Au)	Au (k Oz)	Tonnes (Mt)	Au (g/t Au)	Au (k Oz)	Tonnes (Mt)	Au (g/t Au)	Au (k Oz)		
Mertondale																
Mertons Reward	\$2,000	0.5				0.8	2.30	60	0.4	1.01	15	1.2	1.86	74	17-Apr-19	
Mertondale 3-4	\$2,000	0.5				1.2	1.99	75	0.4	1.36	20	1.6	1.82	95	17-Apr-19	
Tonto	\$2,000	0.5				1.6	1.19	63	0.8	1.30	32	2.4	1.23	95	17-Feb-20	
Mertondale 5	\$2,000	0.5				0.4	1.84	24	0.4	1.36	18	0.8	1.60	42	17-Feb-20	
Eclipse	\$2,000	0.5							0.7	1.00	22	0.7	1.00	22	17-Feb-20	
Quicksilver	\$2,000	0.5							1.1	1.11	39	1.1	1.11	39	17-Feb-20	
Subtotal Mertondale						4.0	1.72	222	3.8	1.17	145	7.9	1.45	367		
Cardinia																
Bruno	\$2,000	0.5				0.9	1.02	28	1.9	1.28	78	2.8	1.20	106	09-Jul-19	
Lewis	\$2,000	0.5	0.4	1.04	12	3.6	0.93	108	1.0	1.06	33	4.9	0.97	153	09-Jul-19	
Kyte	\$2,000	0.5				0.3	1.57	16	0.0	1.30	2	0.4	1.54	18	17-Apr-19	
Helens	\$2,000	0.5				0.7	2.18	47	0.2	1.83	14	0.9	2.09	61	17-Apr-19	
Fiona	\$2,000	0.5				0.5	1.41	24	0.2	1.29	7	0.7	1.38	31	17-Feb-20	
Rangoon	\$2,000	0.5				0.5	1.26	20	0.3	1.07	11	0.8	1.19	31	17-Feb-20	
Hobby	\$2,000	0.5							0.1	2.10	8	0.1	2.10	8	17-Feb-20	
Subtotal Cardinia			0.4	1.04	12	6.5	1.17	244	3.8	1.27	153	10.6	1.20	409		
Raeside																
Michaelangelo	\$2,000	0.5				1.1	2.03	72	0.4	2.15	26	1.5	2.06	98	17-Feb-20	
Leonardo	\$2,000	0.5				0.4	2.38	30	0.1	1.92	9	0.5	2.26	39	17-Feb-20	
Forgotten Four	\$2,000	0.5				0.1	2.11	7	0.1	1.97	6	0.2	2.04	14	17-Feb-20	
Krang	\$2,000	0.5				0.3	1.85	16	0.0	1.71	2	0.3	1.84	17	17-Feb-20	
Subtotal Raeside						1.9	2.08	125	0.7	2.05	43	2.5	2.07	168		
TOTAL			0.4	1.04	12	12.4	1.49	591	8.3	1.28	341	21.0	1.40	945		

Table 1. Mineral Resource Estimate Table February 2020

Mineral Resources estimated by Jamie Logan of Kin Mining NL, and reported in accordance with JORC 2012 using a 0.5g/t Au cut-off within A\$2,000 optimisation shell.

COMPETENT PERSON'S STATEMENT

The information contained in this report relating to exploration results relates to information compiled or reviewed by Glenn Grayson. Mr. Grayson is a member of the Australasian Institute of Mining and Metallurgy and is a full-time employee of the company. Mr. Grayson has sufficient experience of relevance to the styles of mineralisation and the types of deposit under consideration, and to the activities undertaken to qualify as a Competent Person as defined in the 2012 edition of the JORC "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".

Mr. Grayson consents to the inclusion in this report of the matters based on information in the form and context in which it appears.

Appendix A

JORC 2012 TABLE 1 REPORT

Cardinia Gold Project - Section 1 & 2

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	• JORC Code explanation	Commentary
<i>Sampling techniques</i>	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30g charge for fire assay’). In other</i></p>	<p><u>Diamond</u></p> <p>Historic (pre-2014) diamond core (DD) sampling utilised half core or quarter core sample intervals; typically varying from 0.3m to 1.4m in length. 1m sample intervals were favoured and sample boundaries principally coincided with geological contacts.</p> <p>Recent (2014-2018) diamond core (DD) samples, either HQ3 or NQ2 in size diameter, were either cut in half longitudinally or further cut into quarters, using a powered diamond core drop saw centered over a cradle holding core in place. Core sample intervals varied from 0.2 to 1.25m in length but were predominantly aligned to 1m intervals or with sample boundaries which respected geological contacts.</p> <p>2019 diamond core samples, either HQ3 or NQ2 in size diameter, were either cut in half longitudinally or a third longitudinally, using an automated Corewise core saw Core was placed in boats, holding core in place. Core sample intervals varied from 0.3 to 1.3m in length but were predominantly aligned to 1m intervals or with sample boundaries which respected geological contacts.</p> <p><u>RC</u></p> <p>Historic reverse circulation (RC) drill samples were collected over 1m downhole intervals beneath a cyclone and typically riffle split to obtain a sub-sample (typically 3-4kg). 1m sub-samples were typically collected in pre-numbered calico bags and 1m sample rejects were commonly stored at the drill site. 3m or 4m composited interval samples were often collected by using a scoop (dry samples) or spear (wet samples). If composite samples returned anomalous results once assayed, the single metre sub-samples of the anomalous composite intervals were retrieved and submitted for individual gold analysis.</p> <p>Recent reverse circulation (RC) drill samples were collected by passing through a cyclone, a sample collection box, and riffle or cone splitter. All RC sub-samples were collected over one metre downhole intervals and averaged 3-4kg.</p> <p>2019 RC drilling samples were collected in 1m downhole intervals by passing through a cyclone, a collection box and then dropping through a cone splitter. All RC sub-samples were collected over one metre downhole intervals and averaged 3-4kg.</p> <p><u>AC/RAB</u></p> <p>Historic air core (AC) and rotary air blast (RAB) were typically collected at 1 metre intervals and placed on the ground with 3-4kg sub-samples collected using a scoop or spear. Three metre or four metre composited interval samples were often collected by</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>using a scoop (dry samples) or spear (wet samples). If composite samples returned anomalous results once assayed, the single metre sub-samples of the anomalous composite intervals were retrieved and submitted for individual gold analysis.</p> <p><u>Assay Methodology</u></p> <p>Historic sample analysis typically included a number of commercial laboratories with preparation as per the following method, oven drying (90-110°C), crushing (<-2mm to <-6mm), pulverizing (<-75µm to <-105µm), and riffle split to obtain a 30, 40, or 50gram catchweight for gold analysis. Fire Assay fusion, with AAS finish was the common method of analysis however, on occasion, initial assaying may have been carried out via Aqua Regia digest and AAS/ICP finish. Anomalous samples were subsequently re-assayed by Fire Assay fusion and AAS/ICP finish.</p> <p>Recent sample analysis typically included oven drying (105-110°C), crushing (<-6mm & <-2mm), pulverising (P90% <-75µm) and sample splitting to a representative 50gram catchweight sample for gold only analysis using Fire Assay fusion with AAS finish.</p> <p>Multi element analysis was also conducted on approximately 10% of samples, predominantly through ore zones. This was conducted via a 4-acid digest with ICP-MS/OES determination for a 48 element suite.</p> <p><u>Rock Chips</u></p> <p>All rock chip samples are taken using a pick. The samples are taken from outcrop where possible. Samples are also taken from in situ float material or waste rock around historic workings, where outcrop is not present. Care is taken to ensure all samples are representative of the medium being sampled. For example, if a 1m sediment unit is being sampled, a channel sample will be taken across the entire unit.</p> <p>All recent drilling, sample collection and sample handling procedures were conducted and/or supervised by KIN geology personnel to high level industry standards. QA/QC procedures were implemented during each drilling program to industry standards.</p>
<p>Drilling techniques</p>	<p><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p>Drilling carried out since 1986 and up to the most recent drill programs completed by KIN Mining was obtained from a combination of reverse circulation (RC), diamond core (DD), air core (AC), and rotary air blast (RAB) drilling.</p> <p>Data prior to 1986 is limited due to lack of exploration.</p> <p><u>Diamond</u></p> <p>Historic DD was carried out using industry standard ‘Q’ wireline techniques, with the core retrieved from the inner tubes and placed in core trays. Core sizes include NQ/NQ3 (Ø 45-48mm) and HQ/HQ3 (Ø 61-64mm). At the end of each core run, the driller placed core blocks in the tray, marked with hole number and depth. Core recovery was usually measured for each core run and recorded onto the geologist’s drill logs.</p> <p>2017 – 2018 DD was carried out by contractor Orbit Drilling Pty Ltd (“Orbit Drilling”) with a Mitsubishi truck-mounted Hydco 1200H 8x4 drill rig, using industry standard ‘Q’ wireline techniques. 2019 DD was carried out by Topdrill Pty Ltd. With a Sandvick DE840 mounted on a Mercedes Benz 4144 Actros 8x8 Carrier. The rig is fitted with Sandvik DA555 hands free diamond drilling rod handler and Austex hands free hydraulic breakout.</p> <p>Drill core is retrieved from the inner tubes and placed in plastic core trays and each core run depth recorded onto core marker blocks and placed at the end of each run in the tray. Core sizes include NQ2 (Ø 47mm) and HQ3 (Ø 64mm).</p> <p>Recent DD core recovery and orientation was obtained for each core run where possible, using electronic core orientation tools</p>

Criteria	• JORC Code explanation	Commentary
		<p>(e.g. Reflex EZ-ACT) and the ‘bottom of core’ marked accordingly.</p> <p>2017 -18 drilling was measured at regular downhole intervals, typically at 10-15m from surface and then every 30m to bottom of hole, using electronic multi-shot downhole survey tools (i.e. Reflex EZ-TRAC or Cameq Proshot). Independent programs of downhole deviation surveying were also carried out to validate previous surveys. These programs utilised either electronic continuous logging survey tool (AusLog A698 deviation tool) or gyroscopic survey equipment.</p> <p>2019 DD was surveyed at regular downhole intervals (every 30m with an additional end-of-hole survey) using electronic gyroscopic survey equipment.</p> <p><u>RC</u></p> <p>Historic RC drilling used conventional reverse circulation drilling techniques, utilising a cross-over sub, or face-sampling hammers with bit shrouds. Drill bit sizes typically ranged between 110-140mm.</p> <p>2017-18 RC drilling was carried out by Orbit Drilling’s truck-mounted Hydco 350RC 8x8 Actross drill rigs with 350psi/1250cfm air compressor, with auxiliary and booster air compressors (when required). Drilling utilised mostly downhole face-sampling hammer bits (Ø 140mm), with occasional use of blade bits for highly oxidized and soft formations. The majority of drilling retrieved dry samples, with the occasional use of the auxiliary and booster air compressors beneath the water table, to maintain dry sample return as much as possible. RC drillhole deviations were surveyed downhole, typically carried out inside a non-magnetic stainless steel (s/s) rod located above the hammer, using electronic multi-shot downhole tool (e.g. Reflex EZ-TRAC). In some instances, drillholes were surveyed later in open hole. Independent programs of downhole deviation surveying were also carried out to validate previous surveys. These programs utilised either electronic continuous logging survey tool (AusLog A698 deviation tool) or gyroscopic survey equipment.</p> <p>2019 RC drilling was carried out by Swick Mining Services truck-mounted Swick version Schramm 685 RC Drill Rig (Rod Handler & Rotary Cone Splitter) with support air truck and dust suppression equipment. Drilling utilised downhole face-sampling hammer bits (Ø 140mm). The majority of drilling retrieved dry samples, with the occasional use of the auxiliary and booster air compressors beneath the water table, to maintain dry sample return as much as possible.</p> <p>2019 RC was surveyed at regular downhole intervals (every 30m with an additional end-of-hole survey) using electronic gyroscopic survey equipment.</p> <p><u>AC/RAB</u></p> <p>Historic AC drilling was conducted utilising suitable rigs with appropriate compressors (eg 250psi/600cfm). AC holes were drilled using ‘blade’ or ‘wing’ bits, until the bit was unable to penetrate (‘blade refusal’), often near the fresh rock interface. Hammer bits were used only when it was deemed necessary to penetrate further into the fresh rock profile or through notable “hard boundaries” in the regolith profile. No downhole surveying is noted to have been undertaken on AC drillholes.</p> <p>Historic RAB drilling was carried out using small air compressors (eg 250psi/600cfm) and drill rods fitted with a percussion hammer or blade bit, with the sample return collected at the drillhole collar using a stuffing box and cyclone collection techniques. Drillhole sizes generally range between 75-110mm. No downhole surveying is noted to have been undertaken on RAB drillholes.</p>
<i>Drill sample recovery</i>	<i>Method of recording and assessing core and chip sample recoveries and results</i>	<p><u>Diamond</u></p> <p>Historic core recovery was recorded in drill logs for most of the diamond drilling programs since 1985. A review of historical</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p>reports indicates that core recovery was generally good (>80%) with lesser recoveries recorded in zones of broken ground and/or areas of mineralisation. Overall recoveries are considered acceptable for resource estimation.</p> <p>Recent core recovery data was recorded for each run by measuring total length of core retrieved against the downhole interval actually drilled and stored in the database. KIN representatives continuously monitor core recovery and core presentation quality as drilling is conducted and issues or discrepancies are rectified promptly to maintain industry best standards. Core recoveries averaged >95%, even when difficult ground conditions were being encountered. When poor ground conditions were anticipated, a triple tube drilling configuration was utilised to maximize core recovery</p> <p><u>RC/AC/RAB</u></p> <p>Historic sample recovery information for RC, AC, and RAB drilling is limited.</p> <p>Recent RC drilling samples are preserved as best as possible during the drilling process. At the end of each 1 metre downhole interval, the driller stops advancing, retracts from the bottom of hole, and waits for the sample to clear from the bottom of the hole through to the sample collector box fitted beneath the cyclone. The sample is then released from the sample collector box and passed through either a 3-tiered riffle splitter or cone splitter fitted beneath the sample box.</p> <p>Drilling prior to 2018 utilised riffle split collection whereas sample collection via a cone splitter was conducted for drilling undertaken since March 2018; cyclone cleaning processes remained the same.</p> <p>Sample reject is collected in plastic bags, and a 3-4kg sub-sample is collected in pre-marked calico bags for analysis. Once the samples have been collected, the cyclone, sample collector box and riffle splitter are flushed with compressed air, and the splitter cleaned by the off-sider using a compressed air hose at both the end of each 6 metre drill rod and then extensively cleaned at the completion of each hole. This process is maintained throughout the entire drilling program to maximise drill sample recovery and to maintain a high level of representivity of the material being drilled.</p> <p>RC drill sample recoveries are not recorded in the database however a review by Carras Mining Pty Ltd (CM) in 2017, of RC drill samples stored in the field, and ongoing observations of RC drill rigs in operation by KIN representatives, suggests that RC sample recoveries were mostly consistent and typically very good (>90%).</p> <p>Collected samples are deemed reliable and representative of drilled material and no material discrepancy, that would impede a mineral resource estimate, exists between collected RC primary and sub-samples.</p>
<p><i>Logging</i></p>	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p>	<p>Logging data coded in the database, prior to 2014, illustrates at least four different lithological code systems, a legacy of numerous past operators (Hunter, MPI, Metana, CIM, MEGM, Pacmin, SOG, and Navigator). Correlation between codes is difficult to establish however, based on historical reports, drill hole logging procedures appear consistent with normal industry practices of the time.</p> <p>KIN has attempted to validate historical logging data and to standardize the logging code system by incorporating the SOG and Navigator logging codes into one.</p> <p><u>Diamond</u></p> <p>Historical diamond core logging was recorded into drill logs for most of the diamond drilling programs since 1985. A review of historical reports indicates that logging noted core recovery, fractures per metre and RQD, lithology, alteration, texture, mineralisation, weathering, and other features. Core was then marked up for cutting and sampling.</p> <p>Navigator’s procedure for logging of diamond core included firstly marking of the bottom of the core (for successful core</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>orientations), then recording of core recovery, fractures per metre and RQD, lithology, alteration, texture, mineralisation, weathering, and other features. Core was then marked up for cutting and sampling. Navigator DD logging is predominantly to geological contacts.</p> <p>Navigator logging information was entered directly into hand held digital data loggers and transferred directly to the database, after validation, to minimize data entry errors.</p> <p>Drill core photographs, for drilling prior to 2014, are available only for diamond drillholes completed by Navigator.</p> <p>KIN DD logging is carried out on site once geology personnel retrieve core trays from the drill rig site. Core is collected from the rig daily. The entire length of every hole is logged. Recorded data includes lithology, alteration, structure, texture, mineralisation, sulphide content, weathering and other features. Drillhole collar coordinates, azimuth, dip, depth and sampling intervals are also recorded. KIN DD logging is to geological contacts.</p> <p>Qualitative logging includes classification and description of lithology, weathering, oxidation, colour, texture and grain size. Quantitative logging includes percentages of identified minerals, veining, and structural measurements (using a kenometer tool). In addition, logging of diamond drilling includes geotechnical data, RQD and core recoveries.</p> <p>Drill core is photographed at the Cardinia site, prior to any cutting and/or sampling, and then stored in this location. Photographs are available for every diamond drillhole completed by KIN and a selection of various RC chip trays. SG data is also collect</p> <p>All information collected is entered directly into laptop computers or tablets, validated in the field, and then transferred to the database.</p> <p>The level of logging detail is considered appropriate for exploration and to support appropriate mineral resource estimation, mining studies, and metallurgical studies.</p> <p>Diamond drillholes completed for geotechnical purposes were independently logged for structural data by geotechnical consultants.</p> <p><u>RC/AC/RAB</u></p> <p>Historical RC, AC, and RAB logging (including Navigator) was entered on a metre by metre basis. Logging consisted of lithology, alteration, texture, mineralisation, weathering, and other features</p> <p>For the majority of historical drilling (pre-2004) the entire length of each drillhole have been logged from surface to ‘end of hole’.</p> <p>KIN RC logging of was carried out in the field and logging has predominantly been undertaken on a metre by metre basis. KIN logging is inclusive of the entire length of each RC drillhole from surface to ‘end of hole’.</p> <p>Recorded data includes lithology, alteration, structure, texture, mineralisation, sulphide content, weathering and other features. Drillhole collar coordinates, azimuth, dip, depth and sampling intervals are also recorded.</p> <p>Qualitative logging includes classification and description of lithology, weathering, oxidation, colour, texture and grain size. Quantitative logging includes identification and percentages of mineralogy, sulphides, mineralisation, and veining.</p> <p>Photographs are available for a selection of recent KIN RC drillholes.</p>

Criteria	• JORC Code explanation	Commentary
		<p>All information collected is entered directly into laptop computers or tablets, validated in the field, and then transferred to the database.</p> <p>The level of logging detail is considered appropriate for exploration and to support appropriate mineral resource estimation, mining studies, and metallurgical studies.</p> <p><u>Rock Chips</u></p> <p>All rock chip samples are inspected by the sampling geologist and logged for lithology, alteration, mineralisation, veining, and structural fabric. This is a combination of qualitative and quantitative data.</p>
<p><i>Sub-sampling techniques and sample preparation</i></p>	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p><u>Diamond</u></p> <p>Historic diamond drill core (NQ/NQ3 or HQ/HQ3) samples collected for analysis were longitudinally cut in half, and occasionally in quarters for the larger (HQ/HQ3) diameter holes, using a powered diamond core drop saw centered over a cradle holding the core in place. Half core or quarter core sample intervals typically varied from 0.3m to 1.4m in length. 1m sample intervals were favoured and are the most common method of sampling, however sample boundaries do principally coincide with geological contacts. The remaining core was retained in core trays.</p> <p>2017-18 diamond drill core samples collected for analysis were longitudinally cut in half, with some samples cut into quarters, using a powered diamond core drop saw blade centered over a cradle holding the core in place. Core sample intervals varied from 0.2 to 1.25m in length but were predominantly aligned to 1m intervals or with sample boundaries which respected geological contacts. The remaining core was retained in their respective core trays and stored in KIN's yard for future reference. All KIN diamond drill core is securely stored at the KIN Leonora Yard.</p> <p>2019 diamond drill core samples collected for analysis were longitudinally cut in half, with some samples cut into thirds, using an automated Corewise powered diamond core saw with the blade centered over a boat holding the core in place. Core sample intervals varied from 0.2 to 1.25m in length but were predominantly aligned to 1m intervals or with sample boundaries which respected geological contacts. The remaining core was retained in their respective core trays and stored in KIN's yard for future reference. All KIN diamond drill core is securely stored at the Cardinia coreyard.</p> <p>All sub-sampling techniques and sample preparation procedures conducted and/or supervised by KIN geology personnel are to standard industry practice. Sub-sampling and sample preparation techniques used are considered to maximise representivity of drilled material. QA/QC procedures implemented during each drilling program are to industry standard practice.</p> <p>Samples sizes are considered appropriate for this style of gold mineralisation and as an industry accepted method for evaluation of gold deposits in the Eastern Goldfields of Western Australia.</p> <p><u>RC/AC/RAB</u></p> <p>Historic sampling was predominantly conducted by collecting 1m samples from beneath a cyclone and either retaining these primary samples or passing through a riffle splitter to obtain a 3-4kg sub-sample for analysis. First pass sampling often involved collecting composite samples by using a scoop (dry samples) or spear/tube (wet samples) to obtain 3m or 4m composited intervals, with the single metre split samples being retained at the drill site as spoil or in sample bags. If composite sample assays returned anomalous results, the single metre samples for this composite were retrieved and submitted for analysis. RC/AC/RAB sampling procedures are believed to be consistent with the normal industry practices at the time.</p> <p>Samples obtained from conventional RC drilling techniques with cross-over subs often suffered from down hole contamination,</p>

Criteria	• JORC Code explanation	Commentary
		<p>especially beneath the water table. Samples obtained from RC drilling techniques using the face sampling hammer suffered less from down hole contamination and were more likely to be kept dry beneath the water table, particularly if auxiliary and booster air compressors were used. These samples are considered to be representative.</p> <p>The vast majority of Reverse Circulation (RC) drill samples were collected at 1m downhole intervals from beneath a cyclone and then riffle split to obtain a sub-sample (typically 3-4kg). After splitting, 1m sub-samples were typically collected in pre-numbered calico bags, and the 1m sample rejects were commonly stored at the drill site in marked plastic bags, for future reference. First pass sampling often involved collecting composite samples by using a scoop (dry samples) or spear/tube (wet samples) to obtain 3m or 4m composited intervals, with the single metre split sub-samples being retained at the drill site. If the composite sample assays returned anomalous results, single metre sub-samples for the anomalous composite intervals were retrieved and submitted for analysis.</p> <p>Navigator included standards, fields duplicate splits (since 2009), and blanks within each drill sample batch, at a ratio of 1 for every 20 samples, with the number of standards being inserted at a ratio of 1 for every 50 samples.</p> <p>Recent RC sub-samples were collected over 1 metre downhole intervals and retained in pre-marked calico bags, after passing through a cyclone and either a riffle splitter, prior to March 2018, or cone splitter, after March 2018. The majority of RC sub-samples consistently averaged 3-4kg. Sample reject from the riffle splitter were retained and stored in plastic bags, and located near each drillhole site. When drilling beneath the water table, the majority of sample returns were kept dry by the use of the auxiliary and booster air compressors. Very few wet samples were collected through the splitter, and the small number of wet or damp samples is not considered material for resource estimation work.</p> <p>KIN RC drill programs utilise field duplicates, at regular intervals at a ratio of 1:25, and assay results indicate that there is reasonable analytical repeatability; considering the presence of nuggety gold.</p> <p>All sub-sampling techniques and sample preparation procedures conducted and/or supervised by KIN geology personnel are to standard industry practice. Sub-sampling and sample preparation techniques used are considered to maximise representivity of drilled material. QA/QC procedures implemented during each drilling program are to industry standard practice.</p> <p>Samples sizes are considered appropriate for this style of gold mineralisation and as an industry accepted method for evaluation of gold deposits in the Eastern Goldfields of Western Australia.</p> <p>No duplicates are taken for rock chip sampling. Sample sizes are approximately 3kg, this is considered appropriate for the material being sampled.</p>
<p><i>Quality of assay data and laboratory tests</i></p>	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and</i></p>	<p>Numerous assay laboratories and various sample preparation and assay techniques have been used since 1981. Historical reporting and descriptions of laboratory sample preparation, assaying procedures, and quality control protocols for the samples from the various drilling programs are variable in their descriptions and completeness.</p> <p>Assay data obtained prior to 2001 is incomplete and the nature of results could not be accurately quantified due to the combinations of various laboratories and analytical methodologies utilised.</p> <p>Since 1993, the majority of samples submitted to the various laboratories were typically prepared for analysis firstly by oven drying, crushing and pulverizing to a nominal 85% passing 75µm.</p> <p>In the initial exploration stages, Aqua Regia digest with AAS/ICP finish, was generally used as a first pass detection method, with follow up analysis by Fire Assay fusion and AAS/ICP finish. This was a common practice at the time. Mineralised intervals were</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></p>	<p>subsequently Fire Assayed (using 30, 40 or 50 gram catchweights) with AAS/ICP finish.</p> <p>Approximately 15-20% of the sampled AC holes may have been subject to Aqua Regia digest methods only, however AC samples were predominantly within the oxide profile, where aqua regia results would not be significantly different to results from fire assay methods.</p> <p>Limited information is available regarding check assays for drilling programs prior to 2004.</p> <p>During 2004-2014, Navigator utilised six different commercial laboratories during their drilling programs, however Kalgoorlie Assay Laboratories conducted the majority of assaying for diamond, RC, and AC samples using Fire Assay fusion on 40 gram catchweights with AAS/ICP finish.</p> <p>Since 2009 Navigator regularly included field duplicates and Certified Reference Material (CRM), standards and blanks, with their sample batch submissions to laboratories at average ratio of 1 in 20 samples. Sample assay repeatability and blank and CRM standard assay results were typically within acceptable limits.</p> <p>KIN sample analysis from 2014 to 2018 was conducted by SGS Australia Pty Ltd's ("SGS") Kalgoorlie and Perth laboratories. Sample preparation included oven drying (105°C), crushing (<6mm), pulverising (P90% passing 75µm) and riffle split to obtain a 50 gram catchweight. Analysis for gold only was carried out by Fire Assay fusion technique with AAS finish (SGS Lab Code FAA505).</p> <ul style="list-style-type: none"> • KIN regularly insert blanks and CRM standards in each sample batch at a ratio of 1:50. This allows for at least one blank and one CRM standard to be included in each of the laboratory's fire assay batch of 50 samples. Field duplicates are typically collected at a ratio of 1:50 samples and test sample assay repeatability. Blanks and CRM standards assay result performance is predominantly within acceptable limits for this style of gold mineralisation. • KIN requests laboratory pulp grind and crush checks at a ratio of 1:50 or less since May 2018 in order to better qualify sample preparation and evaluate laboratory performance. Samples have generally illustrated appropriate crush and grind size percentages since the addition of this component to the sample analysis procedure. • SGS include laboratory blanks and CRM standards as part of their internal QA/QC for sample preparation and analysis, as well as regular assay repeats. Sample pulp assay repeatability, and internal blank and CRM standards assay results are typically within acceptable limits. <p>From late 2018 samples have been analysed by Intertek Genalysis, with sample preparation either at their Kalgoorlie prep laboratory or the Perth Laboratory located in Maddington. . Sample preparation included oven drying (105°C), crushing (<6mm), pulverising (P90% passing 75µm) and split to obtain a 50 gram catchweight. Analysis for gold only was carried out by Fire Assay fusion technique with AAS finish.</p> <ul style="list-style-type: none"> • KIN regularly insert blanks and CRM standards in each sample batch at a ratio of 1:25. Kin accepts that this ratio of QAQC is industry standard. Field duplicates are typically collected at a ratio of 1:25 samples and test sample assay repeatability. Blanks and CRM standards assay result performance is predominantly within acceptable limits for this style of gold mineralisation. • KIN requests laboratory pulp grind and crush checks at a ratio of 1:50 or less since May 2018 in order to better qualify sample preparation and evaluate laboratory performance. Samples have generally illustrated appropriate crush and grind size percentages since the addition of this component to the sample analysis procedure. • Genalysis include laboratory blanks and CRM standards as part of their internal QA/QC for sample preparation and analysis,

Criteria	• JORC Code explanation	Commentary
		<p>as well as regular assay repeats. Sample pulp assay repeatability, and internal blank and CRM standards assay results are typically within acceptable limits.</p> <p>The nature and quality of the assaying and laboratory procedures used are considered to be satisfactory and appropriate for use in mineral resource estimations.</p> <p>Fire Assay fusion is considered to be a total extraction technique. The majority of assay data used for the mineral resource estimations were obtained by the Fire Assay technique with AAS or ICP finish. AAS and ICP methods of detection are both considered to be suitable and appropriate methods of detection for this style of mineralisation</p> <p>Aqua Regia is considered a partial extraction technique, where gold encapsulated in refractory sulphides or some silicate minerals may not be fully dissolved, resulting in partial reporting of gold content.</p> <p>No other analysis techniques have been used to determine gold assays.</p> <p>Ongoing QAQC monitoring program identified one particular CRM returning spurious results. Further analysis demonstrated that the standard was compromised and was subsequently removed and destroyed. A replacement CRM of similar grade was substituted into the QAQC program.</p> <p>KIN continues to both develop and reinforce best practice QAQC methods for all drilling operations and the treatment and analysis of samples. Regular laboratory site visits and audits have been introduced since April 2018 and will be conducted on a quarterly basis. This measure will ensure that all aspects of KIN QAQC practices are adhered to and align with industry best practice.</p> <p>All rock chip samples have been submitted to Intertek Genalysis (Perth) for analysis by 50g Fire assay, with multi-element analysis via a 4-acid digest for a 48-element suite. Sample preparation included oven drying (105°C), crushing (<6mm), pulverising (P90% passing 75µm). Blanks and standards are inserted by the lab at a minimum rate of 1 in 50. Lab repeats are performed for samples with particularly high gold values. Due to the nature and intended uses of this data, this QAQC procedure is intentionally less rigorous than that used for drilling samples.</p>
<p>Verification of sampling and assaying</p>	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	<p>Verification of sampling, assay techniques, and results prior to 2004 is limited due to the legacy of the involvement of various companies, personnel, drilling equipment, sampling protocols and analytical techniques at different laboratories.</p> <p>During 2009, a selection of significant intersections had been verified by Navigator’s company geologists and an independent consultant McDonald Speijers (“MS”). MS were able to validate 92% of the assay records in 50 randomly selected check holes, and only 6 assay discrepancies were detected (< 0.2%), only 2 of those were considered significant. MS concluded that the very small proportion of discrepancies indicated that the assay database was probably reliable at that time.</p> <p>In 2009, Runge Ltd (“Runge”) completed a mineral resource estimate report for the Cardinia Project area, including the Helens, Rangoon, Kyte and Bruno_Lewis deposits. Runge’s database verification included basic visual validation in Surpac and field verification of drillhole positions in February 2009. Runge did not report any significant issues with the database.</p> <p>Since 2014, significant drill intersections have been verified by KIN company geologists during the course of the drilling programs.</p> <p>During 2017, Carras Mining Pty Ltd (“CM”) carried out an independent data verification. 38,098 assay records for KIN 2014-2017 drilling programs were verified by comparing laboratory assay reports against the database. 6 errors were found, which are not considered material and which represented only 0.03% of all database records verified for KIN 2014-2017 drilling programs</p>

Criteria	• JORC Code explanation	Commentary
		<p>No adjustments, averaging or calibrations are made to any of the assay data recorded in the database. QA/QC protocol is considered industry standard with standard reference material submitted on a routine basis.</p> <p>Recent (2014-2018) RC and diamond drilling by KIN included twinning of some historical holes within the Helens and Rangoon resource areas. There is no significant material difference between historical drilling information and KIN drilling information.</p> <p>Areas without twinned holes illustrate a drill density that is considered sufficient to enable comparison with surrounding historic information. No material difference of a negative nature exists between historical drilling information and KIN drilling information.</p> <p>KIN diamond holes drilled for metallurgical and geotechnical test work illustrate assay results with adequate correlation to both nearby historical and recent drilling results.</p> <p>No adjustment or calibration has been made to assay data.</p>
<p><i>Location of data points</i></p>	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<p>Several local grids were established and used by previous project owners. During the 1990s, SOG transformed the surface survey data firstly to AMG and subsequently to MGA (GDA94 zone51).</p> <p>Navigator recognised errors in the collar co-ordinates resulting from transformations and as a result, a significant number of holes were resurveyed and a new MGA grid transformation generated. Historical collars have been validated against the original local grid co-ordinates and independently transformed to MGA co-ordinates and checked against the database. Navigator’s MGA co-ordinates were checked against the surveyor’s reports.</p> <p>Drilling was carried out using these various local grids. Since 2004, All Navigators drill hole collars were surveyed on completion of drilling in the Australian MGA94, Zone51 grid using RTK-DGPS equipment by licensed surveyors, with more than 80% of the pickups carried out by independent contractors.</p> <p>Almost all the diamond and at least 70% of Navigator RC holes were downhole surveyed. Pre-Navigator, single shot survey cameras were used, with typical survey intervals of 30-40 metres.</p> <p>Recent KIN drill hole collars are located and recorded in the field by a contract surveyor using RTK-DGPS (with a horizontal and vertical accuracy of ±50mm). Location data was collected in the GDA94 Zone51 grid coordinate system.</p> <p>Downhole surveying was predominantly carried out by the drilling contractor which, prior to late 2018, was Orbit Drilling Pty Ltd. This was conducted using a downhole electronic single shot magnetic tool. (Relfex EZ-shot), which is industry standard practice. This is considered sufficiently accurate except where significant magnetic interference is encountered. The magnetic field is recorded on every survey and flagged when likely to interfere with the reading. These surveys are downgraded in the database. In addition, if the downhole survey tool is located within 15 metres of the surface, there is risk of influence from the drill rig affecting the azimuth readings. This was observed for the survey readings, which include total magnetic intensity (TMI) measurements, where TMI is spurious for readings taken at downhole depths less than 20 metres. These spurious readings are included in the database, but are not used.</p> <p>Downhole surveying in 2019 has been conducted by the drilling contractors (Topdrill Pty Ltd and Swick Mining Services Pty Ltd) utilizing downhole electronic gyroscopic survey tools. These are considered very accurate and not susceptible to magnetic interference. No further surveying required to check drill hole deviation.</p> <p>A small selection of drillhole collars, which do not have DGPS collar surveys, were picked up with a handheld GPS and individually</p>

Criteria	• JORC Code explanation	Commentary
		<p>appraised in regards to their location prior to modelling; the position of these collars is deemed appropriate for the resource estimation work.</p> <p>Considering the history of grid transformations and surviving documentation, there might be some residual risk of error in the MGA co-ordinates for old drillholes, however this is not considered to be material for the resource estimation.</p> <p>Azimuth data was historically recorded relative to magnetic north. Much of the historical drilling data was recorded relative to magnetic north. Variation in magnetic declination for the Cardinia Project area is calculated at +0.823° East (1985) to +1.301° East (2017), with a maximum variation of +1.575° in 2005. The difference between true north and magnetic north, and the annual variation in magnetic declination since 1985 is not significant, therefore magnetic north measurements have been used, where true north data is unavailable, for all survey data used in resource estimation processes.</p> <p>The accuracy of drill hole collars and downhole data are located with sufficient accuracy for use in resource estimation work.</p> <p>For rock chip samples, locations are recorded at the time of sampling using a handheld GPS in the GDA94 Zone51 grid coordinate system.</p>
<i>Data spacing and distribution</i>	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<p>Drill hole spacing patterns vary considerably throughout the Cardinia Gold Project area and are deposit specific, depending on the nature and style of mineralisation being tested.</p> <p>Drill hole spacing within the resource areas is sufficient to establish an acceptable degree of geological and grade continuity and is appropriate for both the mineral resource estimation and the resource classifications applied.</p>
<i>Orientation of data in relation to geological structure</i>	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<p>The Cardinia greenstone sequence displays a NNW to NW trend. Drilling and sampling programs were carried out to obtain unbiased locations of drill sample data, generally orthogonal to the strike of mineralisation.</p> <p>At Helens mineralisation is structurally controlled in sub-vertical shear zones, with supergene components of varying lateral extensiveness present in the oxide profile.</p> <p>The vast majority of historical drilling, pre-Navigator (pre-2004), and KIN drilling is orientated at -60°/245° (WSW) and -60°/065° (ENE).</p> <p>At Bruno-Lewis and Kyte, mineralisation is either stratigraphy parallel (trending NNW, steep to moderately W-dipping) or cross-cutting and dipping shallowly to the NE (striking NW). The vast majority of the drilling is therefore predominantly orientated at -60°/225-250° or -60°/090°. Grade Control drillholes were drilled vertically. Since late 2018, Kin's drilling has been largely oriented to 070° to target contact lodes and 225-250° to target the NE-dipping potassic lodes.</p> <p>The chance of sample bias introduced by sample orientation is considered minimal. No orientation sampling bias has been identified in data thus far.</p>

Criteria	• JORC Code explanation	Commentary
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	<p>No sample security details are available for pre-Navigator (pre-2004) drill or field samples.</p> <p>Navigator drill samples (2004-2014) were collected in pre-numbered calico bags at the drill rig site. Samples were then collected by company personnel from the field and transported to the secure Navigator yard in Leonora. Samples were then batch processed (drillhole and sample numbers logged into the database) and then packed into 'bulkabag sacks'. The bulkabags were tied off and stored securely in the Navigator yard until being transported to the selected laboratory. There was no perceived opportunity for the samples to be compromised from collection of samples at the drill site to delivery to the laboratory.</p> <p>2017 -18 KIN RC drill samples were collected in pre-numbered calico bags at the drill rig site. The samples were then batch processed (drillhole and sample numbers encoded onto a hardcopy sample register) in the field, and then transported and stacked into 'bulkabag sacks' at the secure KIN yard location in Leonora. Bulkabags were tied off and stored securely in the yard until being transported to the laboratory.</p> <p>2019 RC drill samples were collected in pre-numbered calico bags at the drill rig site. The samples were then batch processed (drillhole and sample numbers encoded onto a hardcopy sample register) in the field, and then transported and stacked into 'bulkabag sacks' at the Cardinia office.</p> <p>2017-18 KIN DD samples were obtained by KIN personnel in pre-numbered calico bags at the KIN yard location in Leonora. Samples were then stacked into 'bulkabag sacks' at the yard location and stored securely until being transported to the laboratory.</p> <p>2019 samples were obtained by KIN personnel in pre-numbered calico bags at the core yard located at the Cardinia office. Samples were then stacked into 'bulkabag sacks' at the yard location and stored securely until being transported to the laboratory.</p> <p>Transport contractors are utilised to transport samples to the laboratory. No perceived opportunity for samples to be compromised from collection of samples at the drill site, to delivery to the laboratory, where they were stored in their secure compound, and made ready for processing is deemed likely to have occurred.</p> <p>On receipt of the samples, the laboratory independently checked the sample submission form to verify samples received and readied the samples for sample preparation. SGS and Genalysis sample security protocols are of industry standard and deemed acceptable for resource estimation work.</p>
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	<p>Historic drilling and sampling methods and QA/QC are regarded as not being as thoroughly documented compared to current standards. Inhouse reviews of various available historical company reports of drilling and sampling techniques indicates that these were most likely conducted to industry best practice and standards of the day.</p> <p>Independent geological consultants Runge Ltd completed a review of the Cardinia Project database, drilling and sampling protocols, and so forth in 2009. The Runge report highlighted issues with bulk density and QA/QC analysis within the supplied database. Identified issues were subsequently addressed by Navigator and KIN.</p> <p>Carras Mining Pty Ltd (CM), an independent geological consultant, reviewed and carried out an audit on the field operations and database in 2017. Drilling and sampling methodologies observed during the site visits were to industry standard. No issues were identified for the supplied databases which could be considered material to a mineral resource estimation. During the review, Carras Mining logged the oxidation profiles (base of complete oxidation and top of fresh rock) for each of the deposit areas, based on visual inspection of selected RC drill chips from KIN's recent drilling programs, and a combination of historical and KIN drillhole logging. Final adjustments were made with input from KIN geologists. The oxidation profiles were used to assign bulk densities</p>

Criteria	JORC Code explanation	Commentary
		<p>and metallurgical recoveries to the 2017 resource models.</p> <p>Past bulk density test work has been inconsistent with incorrect methods employed, to derive specific gravity or in-situ bulk density, rather than dry bulk density. Navigator (2009) and recent KIN (2017) bulk density test work was carried out using the water immersion method on oven dried, coated samples to derive dry bulk densities for different rock types and oxidation profiles. This information has been incorporated into the database for resource estimation work. CM conducted site visits during 2017 to the laboratory to validate the methodology.</p> <p>Drilling, sampling methodologies, and assay techniques used in these drilling programs are considered to be appropriate and to mineral exploration industry standards of the day.</p> <p>Laboratory site visits and audits were introduced in April 2018 and are conducted on a quarterly basis. This measure ensures that all aspects of KIN QAQC practices are adhered to and align with industry best practice.</p>

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<p>The Cardinia Project, 35-40km NE of Leonora is managed, explored and maintained by KIN, and constitute a portion of KIN's Leonora Gold Project (LGP), which is located within the Shire of Leonora in the Mt Margaret Mineral Field of the North Eastern Goldfields.</p> <p>The Helens and Rangoon area includes granted mining tenements M37/316 and M37/317, The tenements are held in the name of Navigator Mining Pty Ltd, a wholly owned subsidiary of KIN.</p> <p>The Bruno-Lewis and Kyte areas includes granted mining tenements M37/86, M37/227, M37/277, M37/300, M37/428 and M37/646. The tenements are held in the name of Navigator Mining Pty Ltd, a wholly owned subsidiary of KIN. The following royalty payment may be applicable to the areas within the Cardinia Project's Bruno and Lewis areas that comprise the deposits being reported on:</p> <ol style="list-style-type: none"> 1. Gloucester Coal Ltd (formerly CIM Resources Ltd and Centenary International Mining Ltd) in respect of M37/86 - 1% of the quarterly gross value of sales for gold ounces produced, in excess of 10,000 ounces. <p>There are no known native title interests, historical sites, wilderness areas, national park or environmental impediments over the outlined current resource areas, and there are no current impediments to obtaining a licence to operate in the area.</p>
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<p>At Cardinia, from 1980-1985, Townson Holdings Pty Ltd ("Townson") mined a small open pit over selected historical workings at the Rangoon prospect. Localised instances of drilling relating to this mining event are not recorded and are considered insubstantial and immaterial for resource modelling.. Companies involved in the collection of the majority of the gold exploration data since 1985 and prior to 2014 include:</p>

Criteria	• JORC Code explanation	Commentary
		<p>Thames Mining NL (“Thames”) 1985; Mt Eden Gold Mines (Aust) NL (also Tarmoola Aust Pty Ltd “MEGM”) 1986-2003; Centenary International Mining Ltd (“CIM”) 1986-1988, 1991-1992; Metana Minerals NL (“Metana”) 1986-1989; Sons of Gwalia Ltd (“SOG”) 1989, 1992-2004; Pacmin Mining Corporation (“Pacmin”) 1998-2001, and Navigator Resources Ltd (“Navigator”) 2004-2014.</p> <p>In 2009 Navigator commissioned Runge Limited (“Runge”) to complete a Mineral Resource estimate for the Bruno, Lewis, Kyte, Helens and Rangoon deposits. Runge reported a JORC 2004 compliant Mineral Resource estimate, at a cut-off grade of 0.7g/t Au, totaling 1.45Mt @ 1.3 g/t au (61,700 oz Au) for Helens and Rangoon, and totaling 4.34Mt @ 1.2 g/t au (169,700 oz Au) for Bruno, Lewis and Kyte.</p> <p>A trial pit (Bruno) was mined by Navigator in 2010, and a ‘test parcel’ of ore was extracted and transported firstly to Sons of Gwalia’s processing plant in Leonora, and finally to Navigator’s processing plant located at Bronzewing, where approximately 100,000 tonnes were processed at an average head grade of 2.33 g/t au (7,493 oz Au).</p>
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	<p>The Cardinia Project area is located in the central part of the Norseman-Wiluna Greenstone Belt, which extends for some 600km on a NNW trend across the Archean Yilgarn Craton of Western Australia.</p> <p>The regional geology comprises a suite of NNE-North trending greenstones positioned within the Mertondale Shear Zone (MSZ) a splay limb of the Kilkenny Lineament. The MSZ denotes the contact between Archaean felsic volcanoclastics and sediment sequences in the west and Archaean mafic volcanics in the east. Proterozoic dolerite dykes and Archaean felsic porphyries have intruded the sheared mafic/felsic volcanoclastic/sedimentary sequence.</p> <p>Locally within the Cardinia Project area, the stratigraphy consists of intermediate, mafic and felsic volcanic and intrusive lithologies and locally derived epiclastic sediments, which strike NNW, dipping steep-to-moderately to the west. Structural foliation of the areas stratigraphy predominantly dips steeply to the east but localised inflections are common and structural orientation can vary between moderately (50-75°) easterly to moderately westerly dipping.</p> <p>Mineralisation at Helens is controlled by a cross-cutting fault, hosted predominantly in mafic rock units, adjacent to the felsic volcanic/sediment contacts. The ore zones are associated with increased shearing, intense alteration and disseminated sulphides. Minor supergene enrichment occurs locally within mineralised shears throughout the regolith profile.</p> <p>Mineralisation at Bruno-Lewis is largely controlled by the stratigraphic contact between basalt and felsic volcanics. Gold is associated with significant sulphide mineralisation in the sediments and volcanoclastics between the 2 volcanic units. Gold is also hosted within shallowly NE-dipping lodes, associated with increased potassic-sericite alteration and quartz stockwork veining. These lodes also host the mineralisation at Kyte. Substantial supergene mineralisation sits above both styles of mineralisation.</p>
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i>	Material drilling information for exploration results has previously been publicly reported in numerous announcements to the ASX by Navigator (2004-2014) and KIN since 2014.

Criteria	• JORC Code explanation	Commentary
	<ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. <p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	
Data aggregation methods	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	<p>When exploration results have been reported for the resource areas, the intercepts are reported as weighted average grades over intercept lengths defined by geology or lower cut-off grades, without high grade cuts applied. Where aggregate intercepts incorporated short lengths of high grade results, these results were included in the reports.</p> <p>Since 2014, KIN have reported RC drilling intersections with low cut off grades of ≥ 0.5 g/t Au and a maximum of 2m of internal dilution at a grade of <0.5g/t Au.</p> <p>There is no reporting of metal equivalent values.</p>
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg ‘down hole length, true width not known’).</i></p>	<p>The orientation, true width, and geometry of mineralised zones have been primarily determined by interpretation of historical drilling and continued investigation and verification of KIN drilling.</p> <p>Drill intercepts are reported as downhole widths not true widths.</p> <p>Accompanying dialogue to reported intersections normally describes the attitude of mineralisation.</p>
Diagrams	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional</i></p>	<p>Appropriate maps and sections are included in the main body of this report.</p>

Criteria	• JORC Code explanation	Commentary
	<i>views.</i>	
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	Public reporting of exploration results by KIN and past tenement holders and explorers for the resource areas are considered balanced. Representative widths typically included a combination of both low and high grade assay results. All meaningful and material information relating to this mineral resource estimate is or has been previously reported.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Since 2018, a campaign of determining Bulk Densities has been undertaken. The water displacement method is used on drill samples selected by the logging geologist. These measurements are entered into the logging software interface and loaded to the Datashed database.
Further work	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	KIN intend to continue exploration and drilling activities at in the described area, with the intention to increase the project's resources.