

**SOUTH AMERICA' S
EMERGING PRECIOUS
AND
BASE METALS EXPLORER**

Promesa Limited

Office Address

**Suite 7 | 55 Hampden Rd,
Nedlands, WA 6009
Australia**

P: +61 8 9389 8884

F: +61 8 6389 0576



Contact

Ananda Kathiravelu

Executive Director

E: ananda@promesa.com.au

M: +61 412 036 789

Michael Sebbag

Executive Technical Director

E: michael@promesa.com.au

M: +61 407 703 899

ASX ANNOUNCEMENT

08 January 2014

DRILLING RESULTS FROM THE ALUMBRE PROJECT

HIGHLIGHTS

Promesa Ltd ("Promesa" , the Company") is pleased to announce the current results of the Stage 2 of the drilling program at the Alumbre Project in Northern Peru.

Key points are as follows:

- **74m at 0.2g/t Gold from 97m.**
- **Anomalous Copper and Molybdenum results throughout drillhole ALDD14009.**
- **Trace element geochemistry shows significant enrichment in a suite of elements common to the zones above the core of copper porphyry systems and that ALDD14009 is high in the hydrothermal system.**

Promesa Limited recently completed a 2,395m Diamond Core drill program at the Alumbre Project. The Company has received the results of drillhole ALDD14009 from the Stage 2 drill program (refer Figure 1 and Table 1).

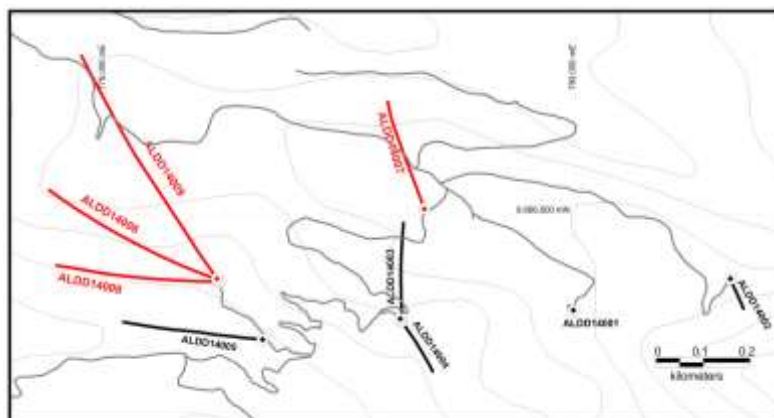


Figure 1 – Alumbre drillhole locations and downhole traces (stage 2 red)

Drillhole ALDD14009 is a shallow angle hole aimed to determine the geochemistry below a prominent topographic high with significant stockworking in the volcanic rocks outcropping at surface (Refer Figure 2 and Table 1). The surface area above the drillhole has anomalous copper, gold and molybdenum geochemistry.

The drillhole intersected intensely altered and variably brecciated rock over the entire length of the hole encountering fractured and veined andesitic volcanic rock to 457.4m then porphyritic diorite to 567.4m.

Table 1 – Alumbre Drillhole locations of the Stage 2 Program

Hole ID	wgs84mE	wgs84mN	Azimuth	Dip	RL (masl)	Depth (m)
ALDD14006	779239	9065861	290	-50	930	629.25
ALDD14007	779679	9066010	340	-70	1075	659.5
ALDD14008	779244	9065856	270	-50	930	539.25
ALDD14009	779238	9065862	325	-15	930	567.4

Vein concentrations of up to 70% by rock volume are indicative of the vein concentrations expected in a porphyry system. Copper, molybdenum and gold mineralisation are present throughout the drill hole. Comparing surface geochemistry to drillhole assays indicates that values of copper increase with depth. In the drillhole, copper assays returned 184m at 0.026% Cu from 217m which included 28m at 0.04% Cu from 217m and 1m interval results of 0.1% Cu from 226m, 0.11% Cu from 242m and 0.14% Cu from 244m. Gold assays returned 1m at 7.2 g/t Au from 142m and 1m at 1.3g/t Au from 165m within 74m at 0.2g/t gold from 97m. Several significant Molybdenum results were returned including 2m at 557ppm Mo from 7m within a broad 525m averaging 37ppm Molybdenum.

Trace element geochemistry indicates significant enrichment in a suite of elements common to the zones above the core of copper porphyry systems. Arsenic, Bismuth, Selenium, Rhenium and Tellurium often display enrichment above the region of the porphyry core hosting the highest copper grades. Tellurium is often associated with the higher level of porphyry system alteration or the near surface epithermal environment. Rock textures at Alumbre do not reflect the epithermal environment and therefore the trace elements indicate the drillhole transected rock associated with the upper levels of a porphyry system.

Drillhole ALDD14009 was oriented -15 degrees (Refer Figure 2). The sub-horizontal orientation means that the drillhole depths indicated relate more to horizontal extension of mineralisation and allow the identification of fluid pathways across the high level part of the hydrothermal system.

Table 2– Maximum, minimum and average gold copper and molybdenum values from ALDD14009

ALDD14009	Au (ppm)	Cu (ppm)	Mo (ppm)
Average hole abundance	0.06	179	36
Hole maximum	7.190	1446	677
Hole minimum	0.001	1.6	6

Detailed core logging, core cutting and sampling continues at the Alumbre project with further assay results pending from the completed Stage 2 drill program. The preparation of the semi-detailed Environmental Impact Assessment over the expanded and larger drill area at Alumbre is advancing rapidly. Environmental scientists, archaeologists and community relations specialists have completed their initial field activities.

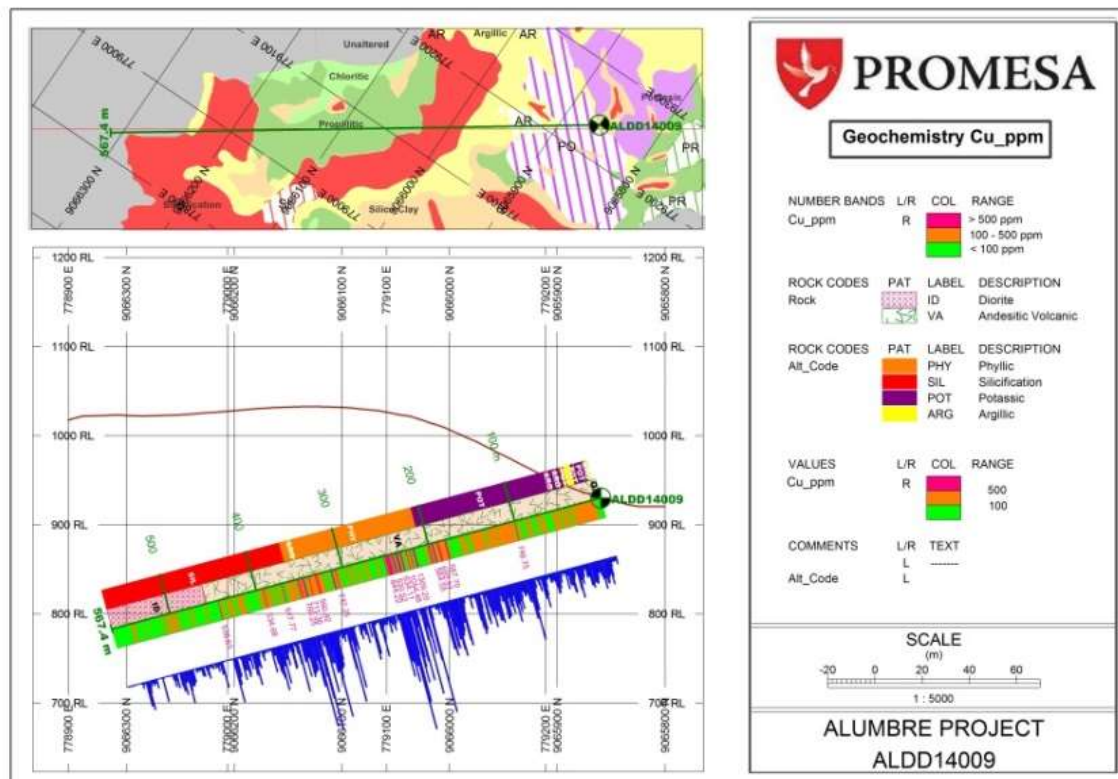


Figure 2 – Drillhole ALDD14009 geology alteration and Cu geochemistry

Each stage of work at Alumbre continues to improve our understanding of this large porphyry system. We continue to base our decisions on sound scientific principles and geological understanding. We look forward to the results of subsequent drillholes to further refine our geological model. The Company is excited about the exploration and discovery potential of the Alumbre project.

On behalf of the Board,



Ananda Kathiravelu

Executive Director

Promesa Ltd

Competent Persons Statement

The information in this report that relates to Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Mr Dean de Largie, a Fellow of the Australian Institute of Geoscientists. Mr de Largie is a full-time employee of Promesa Limited. Mr de Largie has sufficient experience which is relevant to the styles of mineralisation and types of deposits under consideration and to the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr de Largie consents to the inclusion in this report of the matters based on his information in the form and context in which it appears above.

Appendix A: Drillhole ALDD14009 Downhole Geochemistry

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
0	1	117.2	95.22	90.54	31.7	2.92	14	3.7	0.73
1	2	59.1	48.5	78.45	17.2	1.6	13	1.7	0.87
2	3	131	44.12	44.42	28.1	1.92	3	1.7	0.63
3	4	94.6	53.33	49.77	21.2	1.72	6	1.8	0.64
4	5	62.1	52.63	49.48	14.7	1.77	11	1.8	0.43
5	6	57.7	48.67	59.26	44.7	4.01	17	4.7	1.7
6	7	31.3	51.42	29.38	23.3	1.86	14	1.9	0.39
7	8	138.2	108.42	676.97	41.5	3.1	29	2.1	0.79
8	9	127.4	224.1	436.04	43.5	12.15	18	2	3.71
9	10	70.1	316.35	37.41	32.1	1.4	6	1	0.25
10	11	69.9	160.35	59.42	31.1	2.02	8	1.9	0.34
11	12	58.4	188.44	37.11	27.5	2.24	13	1	0.37
12	13	51.7	207.41	41.38	26.8	1.97	7	0.4	0.15
13	14	49.7	229.96	22.71	19.9	1.37	8	0.5	0.15
14	15	89.9	290.53	45.9	8.2	0.47	2	0.2	0.06

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
15	16	143.1	281.72	33.11	32.7	1.35	6	0.8	0.3
16	17	112.2	225.35	23.53	22.2	0.9	10	0.8	0.09
17	18	98.7	225.37	33.24	15.1	0.76	39	0.7	0.14
18	19	75.9	347.17	55.72	21.8	1.38	6	0.6	0.15
19	20	68.5	226.81	56.35	23	1.39	17	0.9	0.09
20	21	111.4	182.54	40.83	66.3	2.31	5	1.5	0.23
21	22	75.6	123.34	25.37	45.7	1.69	5	1	0.49
22	23	148.2	134.45	87.82	56.5	2.95	6	1.3	0.47
23	24	25.4	125.55	36.78	20.2	1.51	5	0.4	0.17
24	25	54	151.38	39.87	35.6	1.88	12	1.2	0.32
25	26	55.8	211.92	60.62	31.1	3.13	3	2.4	0.77
26	27	109.4	255.47	25.66	21	1.31	5	0.8	0.11
27	28	56.2	260.11	26.47	17.5	1.3	7	0.7	0.06
28	29	34	216.25	26.34	17.2	1.01	7	0.5	0.05
29	30	43.3	238.57	59.68	27.8	1.78	14	2	0.42
30	31	72.4	72.68	41.89	54.3	6.84	4	3.6	4.67
31	32	78.6	298.75	86.16	29.8	2.59	9	2.2	0.84
32	33	48.6	225.47	49.58	28.9	1.41	7	0.9	0.34
33	34	89.6	265.02	57.97	67.3	2.1	15	2.2	1.16
34	35	66.9	150.5	34.15	60.7	1.81	14	2.3	1.43
35	36	23.3	132.81	35.82	23.7	0.81	8	0.6	0.26
36	37	18.9	156.69	33.33	11.6	0.44	16	0.4	0.11
37	38	12.6	48.79	24.74	12.1	0.72	7	1	0.2
38	39	5.8	46.87	33.66	6	0.43	3	0.3	0.06
39	40	15	67.63	27.84	7.3	0.62	26	0.5	0.1
40	41	13.3	129.52	24.63	5	0.72	18	1.5	0.05
41	42	24.3	151.8	27.04	18.6	1.13	8	2.3	0.1
42	43	27.6	221.17	27.94	14.5	1.09	50	6.4	0.49
43	44	19.2	170.53	28.78	5.4	0.38	36	2.3	0.08
44	45	27.6	152.2	29.93	6.4	0.49	68	2	0.08
45	46	39.6	381.73	69.45	17.5	0.43	380	1.1	0.07
46	47	56.3	280.63	72.38	13.8	0.45	444	2.3	0.1
47	48	43	78.22	30.79	25.5	0.71	71	2.2	0.18
48	49	24.2	26.6	21.41	21.3	1.15	20	2.4	0.37
49	50	32.3	33.37	30.15	15.9	0.41	38	0.4	0.19
50	51	51.7	102.37	78.28	33.8	2.16	47	3.3	1.36
51	52	51	133	56.62	15.9	2.25	12	3.4	0.99
52	53	101.2	300.05	27.84	26.1	2.14	6	3.4	0.88
53	54	50.2	283.52	31.16	19.5	1.32	19	2.6	0.7
54	55	62.4	205.64	49.6	11.4	0.39	150	1	0.21
55	56	41.3	200.99	35.09	13.2	0.71	46	1.3	0.13
56	57	41.1	192.97	35.12	22.9	0.55	57	1.4	0.06
57	58	23.3	56.84	31.83	12.7	0.78	67	1.3	0.21
58	59	10	70.86	51.26	5	0.16	77	0.3	0.02
59	60	21.5	235.18	32.78	9.8	0.57	39	1.6	0.1
60	61	10.9	34.48	20.76	14.3	0.49	49	1.1	0.15
61	62	14.4	20.03	25.63	18.4	1.11	78	2.9	0.28
62	63	26.7	51.54	135.99	15.3	1.1	816	2.4	0.3
63	64	10.7	24.42	48.15	6.4	0.89	137	1.6	0.14
64	65	20.5	30.74	21.22	17.9	1.27	60	2.2	0.22
65	66	23	77.99	20.69	8.4	0.91	27	1.2	0.04
66	67	17.6	134.12	13.82	6	0.93	20	2.2	0.03
67	68	35.3	73.36	8.12	2.5	0.73	41	2.4	0.03
68	69	32.4	200.99	30.76	4.1	1.36	329	2.8	0.12
69	70	60.1	163.78	18.35	9.5	1.37	62	3	0.11
70	71	103.7	252.01	36.62	22.6	4.27	156	4.7	0.27
71	72	58.2	257.19	32.77	8.1	3.45	119	5	0.6
72	73	45.6	161.29	23.62	18.1	6.14	53	6.8	2.88
73	74	106.5	95.49	71.63	19.1	8.63	287	7.3	4.64
74	75	37	75.01	28.3	12.6	2.11	122	6.7	0.44
75	76	22.8	80.84	25.45	4.4	1.31	161	1.9	0.12
76	77	25.8	104.74	28.77	4.9	0.76	123	1.1	0.14
77	78	29.1	102.49	37.74	9.4	0.96	124	1.7	0.17
78	79	20.3	17.7	24.85	12.7	1.45	81	2.3	0.38
79	80	35.9	41.34	30.16	34.6	2.36	98	3.2	0.75

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
80	81	25.1	16.17	33.35	20.9	2.43	140	3.1	0.7
81	82	43.2	59.91	81.96	2.7	0.67	330	1	0.17
82	83	39.7	23.57	61.65	9.9	12.51	242	3.9	6.07
83	84	37.4	139.75	72.19	3.4	0.61	201	1	0.14
84	85	22.7	238.41	92.93	4.3	0.43	361	0.8	-0.02
85	86	39.6	384.99	93.14	19.1	1.42	353	2	0.19
86	87	37.6	240.83	28.25	3.6	0.38	79	0.8	0.04
87	88	54	271.81	27.42	11.7	1	130	4.3	0.18
88	89	11.1	32.16	40.18	3.7	1.18	164	4	0.27
89	90	14.4	13.35	45.02	19.6	1.7	272	2.4	0.52
90	91	12.4	173.34	41.89	3.9	0.5	113	0.6	0.1
91	92	15.5	88.1	29.26	3.9	0.37	62	-0.1	0.2
92	93	36.7	38.54	58.12	45.5	2.16	198	2.5	0.87
93	94	9.3	15.61	60.14	2.6	0.46	148	0.4	0.18
94	95	17.3	18.33	69.58	9.2	1.84	358	2.5	0.9
95	96	18.3	118.88	55.32	4.1	1.35	236	1.2	0.86
96	97	37.3	85.95	103.53	18.5	6.04	956	5.2	3.36
97	98	95.5	197.51	93.49	72.2	8.6	822	10.3	3.93
98	99	75.3	380.4	67.54	24.7	3.7	296	4.7	1.25
99	100	20	81.25	53.77	2.1	0.82	222	1.5	0.12
100	101	39.9	746.75	18.09	7.5	2.95	49	4.2	0.95
101	102	89	344.46	79.98	39.3	5.15	384	9.2	2.02
102	103	42.6	476.83	53.59	4.7	4.08	160	5.6	1.75
103	104	38.3	55.21	33.01	19.8	5.55	132	5.3	1.89
104	105	93.4	271.58	77	42.3	5.59	444	5.6	1.95
105	106	37.8	245.12	63.73	3.5	0.68	226	2.2	0.22
106	107	26.9	141.99	43.97	1.6	0.18	105	0.6	0.06
107	108	55.6	151.02	103.01	16.6	7.34	571	7.4	4.72
108	109	51.6	170.59	44.8	9.9	2.93	202	5.5	2.33
109	110	100	181.13	52.76	8.6	10.33	218	9.2	7.44
110	111	101.6	128.49	36.85	18.7	7.83	98	12.4	7.54
111	112	50.5	115.77	39.11	4	2.09	136	3	1.76
112	113	25.9	116.42	80.66	1.8	0.2	707	0.3	0.04
113	114	48.3	194.9	40.79	9.1	0.91	185	0.8	0.32
114	115	77.1	323.12	35.73	31.6	1.28	106	2.8	0.16
115	116	44.7	107.71	57.92	4.9	0.95	129	1.8	0.26
116	117	88.1	231.02	24.41	33	5.93	70	7.2	1.63
117	118	37.9	357	29.23	5.8	1.25	166	1.6	0.24
118	119	64.5	210.16	37.99	1.7	0.25	138	0.4	0.02
119	120	70.2	252.16	25.28	52.5	3.75	72	5.2	0.64
120	121	167.8	467.14	214.72	5.8	0.87	1000	1	0.07
121	122	55.7	284.71	92.79	11.6	2.18	365	1.6	0.57
122	123	214.2	55.08	43.76	34.6	21.13	143	5.7	7.9
123	124	53.9	138.49	29.05	14.2	2.85	77	5	0.96
124	125	117.8	203.81	79.24	88.7	10.33	234	15.9	3.83
125	126	32	344.23	44.3	30.6	1.42	103	3.3	0.3
126	127	48.7	142.84	50.75	29.7	4.84	441	6	1.37
127	128	51	257.7	37.4	30.2	1.69	105	4	0.35
128	129	36	112.1	30.05	14.6	0.57	64	1.8	0.12
129	130	41	150.88	38.46	7.8	0.43	92	0.9	0.07
130	131	102.4	366.86	68.06	8.2	1.13	301	2	0.15
131	132	47.1	43.89	66.26	32.7	3.08	332	3.9	1.37
132	133	57.8	378.04	51.08	30.8	4.08	309	9.5	1.47
133	134	107.6	397.35	78.26	26.7	3.84	250	13.6	1.84
134	135	112.7	128.98	75.85	24.5	3.06	314	5.6	1.54
135	136	46.1	174.72	77.9	22.8	1.97	475	2.2	0.47
136	137	121.2	99.88	59.74	67.9	5.33	310	7.2	1.89
137	138	79.5	22.37	44.98	73.2	4.3	149	5.6	2.07
138	139	83.1	162.53	33.44	47.4	3.32	99	7.1	1.04
139	140	73.3	422.51	43.66	13.6	0.81	151	1.8	0.2
140	141	126.7	336.06	36.89	24.8	1.73	126	3.8	0.24
141	142	139.5	390.26	41.71	11.2	1.06	138	2.1	0.17
142	143	7189.8	387.37	50.75	19	4.47	174	3.6	1.96
143	144	244.6	281.12	86.62	72.6	3.41	215	5.5	1.43
144	145	102.5	221.93	55.15	53.2	4.36	131	7.3	1.61

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
145	146	85.6	311.63	33.75	86.2	1.64	138	2.6	1.04
146	147	86.1	247.51	61.63	48.4	1.52	175	2.7	0.93
147	148	73.6	258.6	94.99	29.4	2.08	525	2.6	0.61
148	149	229.4	450.69	71.65	13.9	0.63	500	1.2	0.1
149	150	117.8	320.28	31.04	28.7	1.47	73	3.7	0.76
150	151	165.6	258.87	63.95	82	2.17	263	1.8	0.65
151	152	113.6	190.75	57.83	29.4	2.52	336	3.9	0.95
152	153	137.9	60.59	59.91	59.4	5.41	233	11.4	2.78
153	154	45.2	9.42	34.76	3.5	0.57	72	2.8	0.67
154	155	140.7	395.68	76.23	28.7	2.81	200	16.1	2.06
155	156	71.1	345.86	56.98	13.1	3.97	141	10.5	1.66
156	157	81.9	26.71	80.09	15.8	2.95	214	9.4	0.78
157	158	18.5	6.25	46.3	0.7	0.09	102	0.2	0.06
158	159	79.7	26.06	51.68	19	3.52	101	12.9	2.02
159	160	86	187.61	79.86	9.9	2.99	179	8.8	1.16
160	161	131.2	453.48	40.28	12	2.41	94	3.6	1.21
161	162	143.4	434.03	35	18.8	2.02	71	2.7	0.99
162	163	124	498.22	18.65	17.4	2.64	53	6.8	1.52
163	164	106	416.88	29.58	39.2	5.66	93	19.5	3.04
164	165	59.9	321.77	40.81	15.4	2.53	85	11.3	1.21
165	166	1260.6	52.82	26.42	15.1	8.55	55	15.8	7.52
166	167	12.5	8.96	26.85	3.8	0.44	78	1.4	0.32
167	168	42.2	30.55	18.22	13.4	2	39	5.3	0.68
168	169	53.6	40.39	17.59	15.6	3.76	104	7.9	0.97
169	170	116.4	37.98	18.93	11.4	2.32	43	7.2	0.86
170	171	99.8	157.27	18.04	17.6	1.87	54	7.9	0.95
171	172	32.5	21.48	21.53	5.6	1.93	48	2.6	1.2
172	173	15.2	8.94	12	3.4	0.55	23	1.1	0.12
173	174	18.1	12.55	21.87	2.5	0.47	47	1.9	0.3
174	175	40.3	11.1	40.64	18.4	1.53	78	8.4	1.35
175	176	26.6	15.78	40.95	16.8	0.8	143	2	0.23
176	177	10.2	8.02	21.48	3.5	0.25	37	0.4	0.09
177	178	62.6	73.96	58.65	23	5.36	686	9.8	2.54
178	179	35.2	33.51	31.06	18.7	4.08	89	10	2.05
179	180	50.8	134.59	14.74	59	6.02	42	11.6	1.83
180	181	136.5	587.7	34.39	30.7	3.84	169	11.8	1.45
181	182	71	516.13	18.36	7.8	2.16	78	4.6	0.78
182	183	104	279.32	40.29	24.6	7.64	236	13.7	3.67
183	184	45.6	298.69	23.69	12.7	2.11	153	3.3	0.58
184	185	42.8	226.85	30.32	18.7	1.78	76	3.3	0.76
185	186	47.7	383.48	14.6	40.4	2.68	31	5.6	0.79
186	187	44.1	410.45	29.84	15.9	1.48	71	4.4	0.45
187	188	62.9	448.99	43.73	30.8	2.14	141	4.8	0.92
188	189	56.2	270.16	35.44	15.4	4.74	148	10	2.36
189	190	80	692.57	14.77	24.5	2.21	75	10	0.69
190	191	45.9	610.03	22.69	11.9	0.97	67	2.9	0.17
191	192	90	368.39	33.84	17.8	3.21	201	3.7	0.66
192	193	95.3	481.81	20.51	15.2	2.98	84	9.5	1.71
193	194	61.9	79.29	30.18	19.2	4.14	82	11.5	1.82
194	195	37.3	321.66	16.22	11.5	2.63	65	8	0.84
195	196	61.1	581.23	26.53	21.4	3.62	153	8	0.74
196	197	106.3	564.55	33.2	56.3	7.53	125	9.8	2.69
197	198	39.1	122.05	25.8	11.2	3.83	107	10.1	1.33
198	199	67.4	17.01	34.1	57	2.98	220	9.5	1.06
199	200	52	662.77	35.85	16.3	13.19	163	15.7	7.48
200	201	38	392.09	64.91	22.1	3.72	211	11.5	1.43
201	202	31.2	577.62	76.65	29.5	2.95	467	7.4	1.03
202	203	65.8	125.92	59.36	23.8	2.95	332	6.7	1.13
203	204	68.2	189.89	14.38	14.5	2.75	50	4.5	1.06
204	205	76.2	90.67	14.85	24.1	2.89	36	5.8	0.92
205	206	56.7	15.19	28.42	30.2	1.97	66	6.2	0.64
206	207	55.9	41.36	90.06	24.5	1.53	238	4.6	0.7
207	208	70.3	125.82	40.47	33	2.35	140	6.1	0.66
208	209	70	70.3	96.9	43.4	1.37	779	7.2	0.43
209	210	100.1	35.05	45.41	35.1	1.79	407	8.6	0.65

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
210	211	60.8	53.07	30.72	18.4	3.72	140	12	1.01
211	212	17.6	21.1	40.6	6.6	1.42	156	3.9	0.5
212	213	12.2	9.87	25.31	7.8	1	92	4.8	0.49
213	214	22.9	26.04	34.96	6.8	1.14	170	5.5	0.69
214	215	27.6	13.81	34.44	13.9	1.46	147	9.9	0.96
215	216	54.2	24.35	21.52	37.2	2.21	100	14.5	1.27
216	217	53.7	175.94	39.94	16.9	1.02	182	8.7	0.8
217	218	109.9	1309.2	18.77	12	2.51	65	16.9	3.42
218	219	13.3	660.73	36.7	5.3	0.7	185	2.4	0.93
219	220	5.6	3.8	56.6	6.3	0.17	380	1.4	0.06
220	221	8.5	9.7	41.82	7.1	0.48	222	1.5	0.22
221	222	11.4	43.18	23.61	4.5	1.1	93	4.5	0.55
222	223	30.4	566.72	38.82	5.5	1.71	139	9.2	0.69
223	224	26.8	356.55	8.18	8.8	1.61	21	9.5	0.64
224	225	10.7	116.01	9.9	1.9	1.09	34	6.9	0.58
225	226	32.3	240.12	24.18	21.6	1.38	179	12.7	1.8
226	227	42.4	1054.48	31.61	35	2.02	231	17.5	1.35
227	228	47.8	395.43	69.35	12.5	1.5	606	14.3	2.04
228	229	18.1	67.17	111.21	1.9	0.26	998	1.1	0.26
229	230	23.9	16.08	68.07	2.5	0.24	431	1.3	0.24
230	231	11.8	7.61	29.85	2.7	0.16	114	0.1	0.11
231	232	6	10.38	20.45	2.2	0.1	99	-0.1	0.04
232	233	183.5	872.26	22.06	6.5	0.75	82	8	0.4
233	234	74.6	634.11	25.02	28.2	1.03	123	18.1	0.7
234	235	23	201.68	38.13	3.3	1.61	288	4	0.64
235	236	14.5	14.89	18.19	1.5	0.24	58	-0.1	0.03
236	237	70.3	576.33	10.67	3.5	3.23	28	5.1	1.56
237	238	39.6	688.54	25.29	1.2	1.52	115	2.7	0.69
238	239	42.7	882.01	11.53	0.6	1.92	40	4.9	0.96
239	240	10.2	9.27	28.67	1	0.11	100	-0.1	0.09
240	241	25.4	68.9	129.65	4.4	0.58	1000	2.6	0.66
241	242	186.9	530.52	42.54	14.4	2.35	133	9.1	2.4
242	243	77.6	1111.29	18.21	1.9	1.76	71	10.4	1.54
243	244	52.3	281.8	22.06	3.2	2.12	70	2.2	1.03
244	245	46.8	1446.39	15.12	2.8	2.9	64	3.8	1.12
245	246	31.2	55.14	16.45	2.1	0.55	73	1.4	0.34
246	247	88	654.84	7.27	3.5	1.31	16	2.1	0.49
247	248	38.4	574.7	9.39	5.3	0.5	21	1.9	0.09
248	249	33.5	844.22	28.73	5	0.67	161	4.7	0.06
249	250	25.7	600.81	7.72	3.9	0.31	29	2	0.03
250	251	22.4	579.33	12.16	6.3	0.51	53	2.2	0.07
251	252	29.8	477.76	12.73	2.8	0.38	43	1.6	0.11
252	253	41.3	767.93	31.93	5.5	0.55	111	2.8	0.17
253	254	47.2	78.7	25.05	6.8	0.29	88	1.6	0.17
254	255	30.4	60.31	29.57	6.1	0.44	80	2.1	0.17
255	256	6.9	3.41	36.29	0.5	0.13	144	0.7	0.07
256	257	2.9	5	18.06	0.5	0.05	129	-0.1	-0.02
257	258	30.5	94.07	21.29	5.3	1.02	73	6.1	1.66
258	259	16.4	41.48	25.86	1.1	0.33	64	1	0.4
259	260	16.1	174.6	23.77	4.5	0.55	89	2	0.43
260	261	16	30.22	20.72	7.2	1.03	76	3.3	0.43
261	262	17	109.88	12.89	18.1	0.88	32	7.6	0.25
262	263	36.7	55.97	159.92	20.2	2.1	212	5.9	0.8
263	264	31.3	76.9	21.19	26.5	0.97	72	8.9	0.59
264	265	17.3	191.07	17.91	2.8	0.56	74	1.8	0.29
265	266	65.3	29	21.41	11.4	1.46	91	9.4	1.2
266	267	68.7	41.84	39.32	26	1.88	155	11.7	1.38
267	268	28	80.28	12.15	23.5	1.35	28	3.4	0.5
268	269	21	31.93	19.29	22.4	1.04	67	1.8	0.23
269	270	44.7	79.75	13.15	31.2	1	24	3.4	0.22
270	271	23.3	14.09	16.53	14.4	1.26	56	3.5	0.52
271	272	15.1	70.68	13.72	19.3	0.9	49	4.5	0.26
272	273	31	102.83	20.48	37.1	0.7	42	12.9	0.37
273	274	29.1	249.42	13.55	13.6	0.72	45	4.7	0.26
274	275	39	455.16	11.8	10.2	1.94	42	5.6	0.63

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
275	276	58.8	154.86	17.98	17.1	4.48	62	9.8	1.68
276	277	9.3	11.81	100.26	11.2	5.03	115	7.6	1.15
277	278	4.7	25.15	69.76	1.1	2.48	131	1.3	0.32
278	279	7.8	11.17	19.59	4.9	0.58	48	2	0.36
279	280	12.4	34.83	21.63	12.2	0.89	118	4.1	0.48
280	281	22.8	48.23	21.59	18.3	1.44	76	7.3	0.79
281	282	27.2	27.77	52.35	68.2	4.48	215	16	1.86
282	283	41.9	397.54	17.45	8.9	2.8	64	5.8	1.14
283	284	46.1	383.47	11.1	11.5	0.71	51	1.2	0.26
284	285	159.2	466	14.91	4.6	0.75	81	4.7	0.92
285	286	7	9.01	64.25	0.2	0.05	239	-0.1	-0.02
286	287	4.4	9.36	19.52	0.2	0.05	235	-0.1	0.11
287	288	32.9	176.86	17.72	6.5	0.62	110	7.5	5.47
288	289	4.1	4.18	13.01	-0.1	0.03	47	-0.1	0.06
289	290	2.7	3.6	25.58	0.2	0.04	134	0.1	0.06
290	291	1.3	2.28	34.98	-0.1	-0.02	133	0.4	-0.02
291	292	24.7	239.58	17.24	10.2	0.58	96	4.5	0.62
292	293	30.4	118.02	20.53	7.5	3.91	56	8.9	1.37
293	294	12.5	132.14	78.12	5.5	1.63	253	2.5	0.34
294	295	115.7	75.42	40.81	8.5	2.88	111	8.3	1.03
295	296	4.5	19.8	32.99	3.3	0.89	144	1.5	0.37
296	297	23.9	64.48	30.65	10.6	4.08	120	4.6	1.12
297	298	25.4	179.87	17.54	4.5	2.18	84	6.3	1.15
298	299	54.5	118.01	13.63	7.1	2.44	46	5.8	1.28
299	300	2	2.71	26.1	0.5	0.2	43	0.2	0.1
300	301	1.6	3.11	22.02	0.5	0.05	62	-0.1	0.02
301	302	3.9	2.57	20.97	1.4	0.11	68	0.2	0.05
302	303	4.1	6.5	19.3	0.6	0.1	98	-0.1	0.08
303	304	5.1	10.39	15.69	2.6	0.3	27	0.6	0.25
304	305	12	25.93	32.92	5.2	0.4	60	0.5	2.67
305	306	10.5	291.12	19.97	1.2	4.35	43	3.3	2.12
306	307	15	154.32	20.57	4.9	3.02	77	3.3	0.85
307	308	25.5	226.56	24.37	3.7	4.54	122	3.8	2.27
308	309	44.2	742.25	16.55	13.4	5.12	36	7.1	1.52
309	310	41.2	305.89	19.63	7.9	3.94	79	5	1.57
310	311	46.5	51.31	21.81	13.9	3.35	146	3.4	0.93
311	312	28.8	161.13	13.31	1.6	2.15	104	1.7	0.52
312	313	67	908.14	31.83	9.8	3.43	202	4.6	0.59
313	314	55.5	504.94	23.83	15.1	3.73	155	5.4	0.95
314	315	83.9	52.9	39.23	5.1	8.38	250	5.6	3.82
315	316	45.4	61.36	28.68	10.3	6.04	101	7.2	2.37
316	317	26.6	77.53	55.28	19.6	5.25	356	12.5	2.04
317	318	23.6	149.61	7.69	14.5	1.33	30	2.9	0.39
318	319	33.1	63.73	28.1	10.6	1.4	150	3.7	0.67
319	320	47.7	101.38	35.69	24.4	3.43	186	7.5	1.49
320	321	16.1	21.41	30.71	1.6	0.79	90	1.8	0.41
321	322	16.8	54.43	17.63	7	1.59	101	5.4	0.8
322	323	27.3	68.28	38.85	5.5	1.94	144	5	0.81
323	324	60.4	89.79	26.47	10.7	4	60	5.9	2.19
324	325	23.2	141.18	18.74	22.8	1.89	30	2.8	0.81
325	326	16.6	348.03	21.44	11.7	0.8	29	1.1	0.3
326	327	25.8	431.61	28.12	21.3	1.43	54	2.5	0.63
327	328	34.9	399.94	32.71	24	1.51	56	2.4	0.68
328	329	25	458.32	11.67	7.6	0.88	27	1.1	0.2
329	330	28.5	420.59	21.5	15.9	1.14	51	1.5	0.48
330	331	55	560.92	30.32	23.8	2.15	117	2.9	1.14
331	332	56	1041.77	32.06	28.9	2.58	74	3.7	1.37
332	333	40.2	478.02	28.26	27.3	2.98	69	3.7	1.51
333	334	17.6	146.52	36.02	17.1	2.05	133	1.6	0.79
334	335	38.5	486.57	27.37	24.9	2.33	77	2.3	1.31
335	336	13.4	210.67	21.32	5.6	1.01	42	0.8	0.6
336	337	33.9	358.95	51.8	4	3.21	87	6.3	2.2
337	338	43	115.87	62.27	7.5	4.38	98	5.5	2.78
338	339	36.8	361.69	40.21	15.8	2.21	214	3.6	1.6
339	340	42.8	711.36	71.42	14.5	3.25	241	8.8	2.43

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
340	341	48.4	262.68	43.56	27.6	8.16	210	11.3	4.07
341	342	49.4	139.51	42.58	11	6.67	107	4.5	3.38
342	343	33.3	129.84	28.49	16.5	6.82	70	3	3.42
343	344	12.6	38.27	16.78	16.8	3.88	64	2.2	2.04
344	345	17.9	58.79	18.47	17.4	4.12	71	3.9	1.49
345	346	116.7	1169.18	55.22	23.1	2.14	110	2	0.65
346	347	147.4	769.25	110.96	26.4	2.25	156	1.8	0.43
347	348	49.3	498.09	69.86	21.7	1.18	162	1.8	0.36
348	349	10.8	112.85	11.44	18.2	0.89	29	1.3	0.28
349	350	25.1	251.04	46.77	37.3	9.73	89	5.2	4.02
350	351	63.3	1103.49	24.49	35.7	8.98	44	8.6	3.03
351	352	23.6	266.66	15.02	7.8	6.96	54	4.7	2.87
352	353	35.2	609.19	12.67	15.6	6.47	37	6.7	3.17
353	354	96.4	280	12.61	19.5	2.58	52	1.9	0.82
354	355	12.7	56.58	11.75	15.4	2.63	72	2.4	0.76
355	356	14.2	400.34	23.16	8.9	1.09	55	2.1	0.11
356	357	17.1	395.85	21.54	7.9	3.41	38	1.9	1.07
357	358	23.2	88.68	83.79	19.4	10.25	429	7	3.27
358	359	23.3	425.73	17.13	14.3	2.25	49	2.1	0.83
359	360	28.8	413.89	21.6	7.1	2.15	87	1.6	0.92
360	361	18.5	464.43	20.47	13.4	2.55	55	2.3	1.05
361	362	17.5	234.5	19.91	17.3	1.34	50	1.9	0.37
362	363	8.9	166.62	24.97	13.9	2.19	109	1.3	0.64
363	364	13.4	216	20.58	10.1	2.5	29	1.3	0.97
364	365	10.7	447.38	24.72	14.2	2.42	28	1.8	0.86
365	366	8.8	31.97	21.25	3.2	3.42	28	1.7	1.97
366	367	19.2	261.89	10.92	5	4.1	15	3.4	1.65
367	368	10.1	20.82	23.21	1.9	2.58	76	2.1	1.34
368	369	8.1	9.8	82.17	2.1	0.2	230	-0.1	0.09
369	370	18.9	30.84	364.83	1.8	2.58	1000	0.7	1.58
370	371	29.7	617.77	34.34	6	4.99	70	4.4	1.52
371	372	15.1	276.42	19.66	6.2	3.73	72	3	1.22
372	373	14.1	146.19	13.58	11	3.66	26	2.8	0.85
373	374	5.4	47.89	19.01	0.9	1.42	58	0.3	0.59
374	375	8.7	27.95	60.01	5.9	1.83	267	1	0.73
375	376	7.6	19.66	73.93	10.6	3.12	153	2	1.31
376	377	10	109.77	44.85	14.4	3.08	86	2	0.94
377	378	10.8	299.1	23.07	38.5	3.17	143	1.7	1.09
378	379	10.7	309.14	19.96	22.2	3.28	425	3.8	1.16
379	380	7.6	91.26	34.67	11.2	2.43	253	1.4	0.87
380	381	4.1	62.12	133.89	2.7	1.57	1000	0.7	0.64
381	382	4.8	9.75	76.45	0.4	0.15	503	-0.1	0.05
382	383	8.2	103.56	57.69	5.9	0.6	389	-0.1	0.27
383	384	9.4	25.64	30.6	1.6	1.49	208	0.1	0.76
384	385	10.5	251.69	82.18	3.8	1.2	1000	0.8	0.63
385	386	14.4	178.16	19.03	8.4	0.86	127	1.2	0.28
386	387	19.6	48.84	17.38	19	1.67	82	1.2	0.71
387	388	20.8	171.84	21.99	13.1	4.67	81	0.4	0.42
388	389	32.7	462.6	18.84	23.1	1.7	87	0.9	0.46
389	390	8.9	27.14	18.96	3.7	1.84	77	0.4	0.82
390	391	17.9	248.37	19.29	21	1.87	133	0.6	0.37
391	392	16.6	226.71	21.78	8.3	1.99	93	0.5	0.75
392	393	24.1	534.68	17.71	12.3	1.7	50	0.6	0.42
393	394	24.8	379.38	18.99	11.2	2.11	55	2.3	0.95
394	395	18.1	339.35	12.99	12.4	1.83	53	1.1	0.4
395	396	13.7	295.87	8.65	6.2	1.64	134	1.8	0.67
396	397	24.3	198.82	16.21	8.4	4.02	215	4.8	2.69
397	398	16.1	25.61	22.1	9.4	4.2	130	2.5	1.72
398	399	20.8	94.98	10.16	11.1	6.81	66	5.2	3.49
399	400	15.9	20.7	17.24	12.2	2.3	143	3.2	1.38
400	401	16.1	293.94	13.31	7.1	2.04	157	3	1.22
401	402	4.6	10.8	10.39	1.3	0.25	55	0.4	0.21
402	403	9.9	17.96	23.51	2.3	0.57	431	1.1	0.5
403	404	4	10.66	21.47	1.4	0.26	195	0.2	0.2

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
404	405	20.5	33.06	28.08	18.5	2.49	311	1.9	0.76
405	406	3.3	5.55	35.2	0.7	0.14	243	-0.1	0.04
406	407	4.3	5.03	20.78	1.7	0.32	156	-0.1	0.11
407	408	15.4	38.6	21.36	11.1	2.23	99	1.1	0.7
408	409	18.7	34.22	13.86	5.9	2.44	61	1.5	1.11
409	410	8.6	17.47	12.15	5.2	0.82	41	2.1	0.66
410	411	14.2	122.08	10.53	11.2	2.35	49	2.1	1.59
411	412	15.4	70.16	17.88	5.1	1.06	77	2.1	0.75
412	413	4.8	6.63	42.48	1.1	0.24	188	0.2	0.14
413	414	8	8.47	31.56	2	0.3	265	0.5	0.15
414	415	24.2	22.56	15.02	10.4	0.85	59	0.9	0.23
415	416	15	59.75	8.75	4.6	0.77	31	0.5	0.16
416	417	21.3	196.75	15.86	6	0.74	23	0.5	0.04
417	418	32.9	111.2	14.83	4.6	0.87	46	0.6	0.12
418	419	34.3	169.27	15.6	14.9	1.65	41	1.5	0.39
419	420	65.4	139.4	47.45	23.4	2.16	181	1.1	0.23
420	421	25.7	390.83	12.55	33.9	2.54	42	1.7	0.65
421	422	13.8	179.28	11.44	5.2	0.42	32	0.3	0.04
422	423	20.7	267.74	23.97	33.3	1.92	81	2.3	0.72
423	424	17.9	21.14	12.56	26.1	8.49	48	4	4.46
424	425	10.7	16.16	33.82	7	1.24	98	1.1	0.5
425	426	13.3	178.29	25.36	38.6	12.35	123	3.2	0.82
426	427	20.5	76.59	8.75	21	2.93	23	1.8	0.59
427	428	18.8	67.65	12.69	6.1	1.26	35	0.6	0.4
428	429	29.6	14.56	18.13	41.8	3.8	79	4.3	0.93
429	430	20.3	231.01	28.11	11.5	0.99	82	0.6	0.12
430	431	37.6	263.07	21.34	14.1	1.35	61	1	0.26
431	432	18.2	15.24	14.47	11.7	1.24	42	1.1	0.34
432	433	13.1	176.94	11.08	4.6	1.02	32	1	0.4
433	434	14.4	166.97	11.57	4.4	0.53	61	0.4	0.16
434	435	20.8	166.92	11.05	13.4	0.65	41	1	0.18
435	436	94.6	284.43	10.49	15.6	2.15	20	2.7	1.01
436	437	84.3	30.89	10.37	13	2.34	48	5.3	1.48
437	438	21.3	8.33	8.85	4.5	0.64	21	3	0.45
438	439	46.9	10.09	13.33	39	1.45	49	4.1	0.77
439	440	15.3	4.72	11.47	8.2	0.29	49	0.9	0.11
440	441	67.7	230.31	13.76	34	3.66	81	7	1.45
441	442	95.5	232.93	13.97	17.2	3.34	42	4.4	1.21
442	443	25.9	326.29	7.26	7.9	1.05	18	2.6	0.3
443	444	8.6	73.89	6.86	3.6	1.13	22	1.6	0.47
444	445	60.2	538.63	7.25	22	5.22	18	8.4	1.91
445	446	6.5	5.78	7.4	1.5	0.18	29	0.7	0.1
446	447	9.2	5.98	9.57	1.8	0.21	23	0.5	0.09
447	448	27.1	5.63	8.36	7.6	0.4	19	1.7	0.25
448	449	54.4	9	29.04	11.5	1.19	23	1.6	0.39
449	450	11	3.72	8.2	5.7	0.51	12	0.5	0.15
450	451	7.7	5.19	9.61	5.6	0.5	23	1.1	0.31
451	452	7.9	3.15	6.94	2.3	0.14	18	0.1	0.08
452	453	3.5	2.59	9.24	1.1	0.12	35	-0.1	0.05
453	454	8.8	6.77	16.74	10.2	2.43	32	2.5	1.18
454	455	2.8	3.93	16.89	1.5	0.24	143	0.1	0.11
455	456	3.8	6.86	8.54	3.3	0.23	15	-0.1	0.11
456	457	3.2	7.74	15.24	2.9	0.14	36	0.3	0.08
457	458	39.7	317.23	11.65	30.8	4.84	40	4.7	1.93
458	459	28.7	67.81	12.42	45.7	2.78	272	2.9	1.2
459	460	29.8	150.77	10.6	20.3	2.02	107	2.1	0.86
460	461	5.3	6.67	10.67	3.1	0.22	47	0.3	0.04
461	462	6.3	37.51	10.77	7.4	0.8	93	0.6	0.27
462	463	27.8	105.8	14.21	22	3.33	84	1.4	1.3
463	464	23.2	5.94	13.61	10.6	0.84	23	0.1	0.81
464	465	12.1	53.85	13.16	9.2	1.63	34	0.5	1.16
465	466	42.4	51.27	13.93	44.8	4.52	26	2.8	1.92
466	467	4.8	3.28	10.05	0.6	0.12	18	-0.1	0.06
467	468	7.9	4.3	10.25	1.2	0.35	33	-0.1	0.15

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
468	469	10.7	58.41	17.82	13.2	4.19	27	0.9	2.78
469	470	12.6	7.62	15.1	1.9	11.86	47	0.7	6.5
470	471	4.5	37.11	24.37	1	0.41	106	0.4	0.22
471	472	3.4	17.7	5.78	0.3	0.18	44	-0.1	0.1
472	473	4	17.83	19.72	0.7	0.39	231	0.4	0.13
473	474	8.2	42.32	26.83	12	2.23	99	1.8	1.37
474	475	25.5	159.33	15.29	11.8	2.86	32	2.1	1.08
475	476	88	111.84	29.93	23.5	2.07	51	2.6	0.82
476	477	23.1	47.71	37.05	23.1	2.75	45	2.7	1.13
477	478	7.7	4.77	25.4	0.3	0.51	87	0.4	0.2
478	479	13	7.25	87.69	7.5	1.1	843	1	0.67
479	480	25.6	118.52	93.85	19.4	2.75	969	2.9	1.22
480	481	36.7	49.72	19.9	32	2.21	69	3.2	1.08
481	482	13.1	109.19	11.18	6.8	0.64	50	0.5	0.16
482	483	13	29.45	16.48	11	0.77	60	0.5	0.23
483	484	10.1	9.32	12.21	3.2	1.46	54	0.3	0.39
484	485	16.8	39.35	27.98	8.9	1.51	46	0.6	0.45
485	486	8.3	3.91	70.24	3.6	0.3	409	0.3	0.09
486	487	21.6	32.08	140.23	7.1	1.1	522	1.3	0.71
487	488	65.3	49.35	39.46	15.7	1.91	123	3.1	1.43
488	489	18.6	6.55	92.02	5.6	0.41	99	0.6	0.41
489	490	17.1	5.99	134.49	4.3	0.23	228	0.4	0.34
490	491	5.7	3	37.79	1.1	0.59	108	-0.1	0.39
491	492	35.4	155.51	16.42	8.1	3.27	31	0.9	2.39
492	493	25	43.07	19.76	20.4	2.67	67	2.2	0.8
493	494	12.2	191.64	12.79	4.6	0.54	39	0.5	0.1
494	495	19.7	174.55	20.32	3.2	2.99	131	0.4	0.14
495	496	22.9	195.07	34.57	5.9	0.72	161	0.7	0.3
496	497	44.9	49.9	30.6	27.8	2.28	53	1	1.37
497	498	42.9	247.67	16.21	12	1.73	20	1.8	0.86
498	499	71.6	395.82	16.06	12	2.02	36	3.2	1.13
499	500	74.9	135.01	22.21	27	3.08	25	4.1	1.7
500	501	54.1	14.87	17.44	13.8	4.57	19	2	2.68
501	502	54	119.84	13.78	24.1	3.85	24	2.5	1.63
502	503	45.6	136.19	120.92	9.2	1.84	224	1	0.82
503	504	27.4	278	46.66	6.3	1.72	181	1.7	0.43
504	505	46.3	92.42	18.48	8.1	1.6	77	1.3	0.24
505	506	50.1	228.79	12.99	35.8	5.66	46	3.7	2.36
506	507	39.4	163.35	18.68	32.5	11.49	61	4.2	4.68
507	508	8.3	6.19	38.98	6.7	0.84	305	0.7	0.33
508	509	4.3	4.83	45.77	1.1	0.67	330	0.4	0.36
509	510	3.8	6.61	15.48	6.6	0.43	33	0.1	0.17
510	511	18.5	173.17	11.83	20.5	2.4	43	2.3	0.75
511	512	26.7	78.79	11.93	13.1	1.61	31	2.6	0.32
512	513	14.7	84.33	14	12.4	2.59	26	2	0.4
513	514	10.2	148.12	5.88	9.1	3.57	8	2.5	0.38
514	515	9.5	60.86	12.56	7	1.13	26	1	0.07
515	516	12	11.83	13.56	12.7	1.2	48	1.3	0.26
516	517	15.8	5.33	13.58	13.9	1.43	33	1.8	0.19
517	518	6.8	5.66	26.83	5.2	1.47	29	1.2	0.57
518	519	5	3.16	15.89	1.2	0.24	31	-0.1	0.05
519	520	22.5	7.52	12.79	15.3	1.48	16	2	0.69
520	521	4.8	2.65	10.55	0.1	0.12	16	-0.1	0.11
521	522	11.6	3.05	8.31	7.3	0.4	20	0.6	0.11
522	523	3.2	3.24	27.01	2	0.65	48	0.4	0.16
523	524	10.5	4.01	17.34	7.2	1.23	46	2.7	0.28
524	525	15.8	7.68	15.22	4.4	1.39	33	2.2	0.37
525	526	19.1	7.63	16.31	7.1	1.94	40	3.5	0.38
526	527	28.1	297.44	17.54	11.3	7.55	46	2.5	0.43
527	528	32.8	9.32	10.72	8.7	4.31	20	3.2	0.81
528	529	30.3	2.52	14.26	2	0.67	37	1.7	0.09
529	530	8.3	3.66	17.15	1.8	0.46	32	0.2	0.15
530	531	16.2	2.86	12.32	15.5	0.86	14	1.1	0.47
531	532	9.2	3.82	160.36	3.2	3.04	104	2.9	1.6

ALDD14009 Drillhole Assay Result for Significant Elements									
From(m)	To (m)	Au (ppb)	Cu (ppm)	Mo (ppm)	As (ppm)	Bi (ppm)	Re (ppb)	Se (ppm)	Te (ppm)
532	533	9.6	3.35	16.03	4.5	1.37	40	1.6	0.27
533	534	19.2	110.52	14.23	24.9	10.7	28	3.3	0.86
534	535	31.1	52.39	17.7	19.8	7.75	24	4.5	1.26
535	536	16.7	44.4	18.28	8.5	2.79	29	19.9	0.73
536	537	50.5	32.01	16.69	23.6	9.49	51	7.6	2.74
537	538	15.1	69.02	19.69	7.3	2.93	36	2.1	0.21
538	539	23.8	19.91	15.47	10.1	36.76	34	3.1	0.54
539	540	24.1	35.98	22.7	30.2	4.18	97	1.3	0.38
540	541	26.4	57.01	19.68	29.2	7.56	46	2.2	0.52
541	542	23.4	92.26	20.2	26.9	7.2	52	5.1	0.75
542	543	37	146.97	14.86	29.5	8.56	24	4.9	0.58
543	544	56	350.81	22.34	20.2	10.26	64	6.1	0.53
544	545	29.4	298.81	13.49	14.5	11.51	40	6.1	0.64
545	546	22.6	301.44	10.77	15	11.6	15	3.9	0.6
546	547	6.8	5.04	14.7	7.2	1.55	43	2.4	0.65
547	548	41.7	22.64	12.92	21.2	43.79	32	5.8	1.25
548	549	30.9	21.91	70.48	19.6	37.82	333	5.6	0.94
549	550	85.3	69.08	17.45	29.9	15.9	31	6.6	1.98
550	551	84.2	13.44	16.25	15.9	8.68	51	10.7	1.64
551	552	7.3	1.87	16	2.2	0.43	29	0.1	0.08
552	553	6.1	4.16	20.65	1.5	0.21	48	-0.1	0.11
553	554	3.5	2.98	21.18	4	0.15	34	-0.1	0.04
554	555	4.4	1.99	29.74	3.4	0.13	71	-0.1	0.08
555	556	3	1.58	26.49	4.2	0.11	52	-0.1	0.03
556	557	18.9	4.74	15.85	17.9	1.5	46	4.3	0.5
557	558	95.3	5.77	16.28	13.7	1.65	48	2.5	0.45
558	559	10.1	2.89	11.17	1	0.16	25	-0.1	0.02
559	560	5.5	5.81	22.62	1.4	0.17	61	0.2	0.05
560	561	5.4	13.4	33.37	4.9	0.48	114	1.1	0.12
561	562	17.9	5.05	30.47	6.3	0.64	91	1.3	0.18
562	563	17.1	4.75	33.61	5.3	0.72	88	0.6	0.17
563	564	19	5.18	31.58	6	1.09	68	1.5	0.28
564	565	20.6	11.66	21.51	13.5	2.95	35	2.2	0.94
565	566	7.6	4.01	14.6	3.7	0.62	24	0.5	0.14
566	567.4	6.1	2.81	16.09	3.6	0.78	35	0.8	0.44

Appendix B - JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data – Alumbre Project

Criteria	JORC Code explanation	Commentary
----------	-----------------------	------------

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	1m length half-core samples. Core cut with diamond saw.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	Full 1m sample half core sample is assayed ensuring representivity.
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	NQ or HQ diamond drilling was performed to return drill core which was half-cut by diamond saw. 1m samples of the half core were bagged and sent to Acme Laboratories. Sample preparation included Drying, Crushing each sample to 10 mesh, split off 250g and pulverise until 85% passes through 200 mesh.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Standard single tube HQ and NQ drill core
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	No bias exists. In general core recovery was close to 100%

Criteria	JORC Code explanation	Commentary
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	All core is logged in detail, geologically and geotechnically as well as recording drill core recovery.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	Logging is qualitative, all core is photography prior to cutting and after cutting.
	The total length and percentage of the relevant intersections logged.	All core is logged in detail.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	Half core is cut and half core is sampled
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	Is Core therefore this question is N/A
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Sample preparation is high quality, appropriate and industry standard.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	Duplicate samples taken and industry standard blanks and standard reference samples inserted each 10m.
	Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.	Duplicate samples taken every 30m.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	Sampling is half drill core and of appropriate size for the grain size.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Assay methods over extremely low levels of detection and are appropriate, Aqua regia digestion is considered partial.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	No geophysics reported in this press release.

Criteria	JORC Code explanation	Commentary
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	Duplicate samples taken and industry standard blanks and standard reference samples inserted each 10m. Sufficient precision and accuracy has been established.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Umpire assays will be done at the end of the Alumbre program.
	<i>The use of twinned holes.</i>	No twinned holes.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Database is stored at several locations and updated periodically. Data is validated using MapInfo.
	<i>Discuss any adjustment to assay data.</i>	No adjustments to assay data
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Collar survey by Garmin GPS. Downhole survey by downhole SFP drillers downhole probe, a Reflex EZ shot.
	<i>Specification of the grid system used.</i>	UTM grid, Datum WGS84 zone 17 is used.
	<i>Quality and adequacy of topographic control.</i>	Multiple GPS topographic determinations determine adequate accuracy of vertical control.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	No ore reserve reporting at this stage. No sample compositing.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	No bias determined
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be</i>	No Bias

Criteria	JORC Code explanation	Commentary
	<i>assessed and reported if material.</i>	
Sample security	<i>The measures taken to ensure sample security.</i>	Constant chain of command established from drill site to core yard to lab then to final storage.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Sampling, results and assaying techniques reviewed periodically and determine that appropriate methods are used.

Section 2 Reporting of Exploration Results – Alumbre Project

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Alumbre project area is located at low attitude, in the Department of La Libertad in northern Peru. There are no historical sites, wilderness or national parks or environmental issues. The current project area consist of group of concessions with one concessions which is 100% owned by Promesa Limited, plus one other adjoining concession which are subject to option agreement, these include three concessions owned by Oban S.A.C which allows 70% farm-in and includes an NSR royalty.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	Concessions and agreements are in good standing and the company has social and government approvals in place to explore.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The region was explored by Santa Cristina de Chorobal from 1993 to 1994. Newmont, from 1994 to 1996, undertook regional exploration work. Savage Resources, between 1996 and 1999 undertook sampling, mapping, geophysics and drilling within some of the current project area at Alumbre. Savage conducted a nine-hole RC and RC/Diamond drill program and collected 573 rock sampling program along channels of various lengths from 1 to 27m in length within part of the Alumbre area and the ad. Historical Savage RC drill samples were composited up to 4m and diamond drill holes were composited up to 2m. This drilling produced anomalous results which were considered worthy of follow up drilling by Savage.

Criteria	JORC Code explanation	Commentary
		Location of these drill holes have be verified as the collars are visible. Samples were assayed by SGS laboratory; however this cannot be verified as the original laboratory certificates are not available and were pre-JORC. Promesa have undertaken confirmation field sampling of Savage surface sampling which supports the results obtained by Savage. Savage Resources was taken over by Pasminco in 1999 who subsequently went into receivership 2001 and suspended work on the project area. From 2001 to 2010 the area was not held by any party. Alikante Mining Company 2010 acquired the Gaya 104 concession and released it to Kirio Mining S.A.C in 2011 who then optioned it to Promesa in 2012. Promesa acquired 100% of the concession in August 2013.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	Mineralisation styles on the properties are epithermal gold and porphyry copper with molybdenum or gold credits.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <i>easting and northing of the drill hole collar.</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar.</i> <i>dip and azimuth of the hole.</i> <i>down hole length and interception depth.</i> <i>hole length.</i>	This information is in the text.
	<i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	Not applicable. No drilling information in this release.
Data aggregation	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of</i>	Actual results are reported.

Criteria	JORC Code explanation	Commentary
methods	<i>high grades) and cut-off grades are usually Material and should be stated.</i>	
	Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	No short lengths of samples.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalent determinations
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	The drill hole ALDD14009 is sub-horizontal at -15 degrees. A cross section is provided.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Maps and diagrams are within the press release
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Minimum , maximum and average values have been reported.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater,	No other information reported. Specific gravity determinations are ongoing.

Criteria	JORC Code explanation	Commentary
	<i>geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further work to be determined after all results and reporting has been completed