



Hot Chili Limited ACN 130 955 725
First Floor, 768 Canning Highway, Applecross, Western Australia 6153
PO Box 1725, Applecross, 6953, Western Australia
P: +61 8 9315 9009 F: +61 8 9315 5004

ASX ANNOUNCEMENT

Thursday 22nd January 2015

Impressive Drill Results at Alice Set to Grow Productora Resource

Latest results confirm Alice is a porphyry-style deposit, highlighting potential for further similar discoveries

New Drill Results from Alice

204m grading 0.6% copper and 0.1g/t gold
(and 48ppm Molybdenum)

From 33m down-hole

Including 26m grading 1.0% copper & 0.2g/t gold

Within a broader intersection of

237m grading 0.5% copper and 0.1g/t gold

From surface

179m grading 0.4% copper
(and 38ppm Molybdenum)

From 61m down-hole

Including 81m grading 0.5% copper

Hot Chili (ASX: HCH) is pleased to announce that fresh drilling results confirm that the recent Alice discovery at its Productora Copper Project in Chile is a porphyry-style deposit.

The addition of Alice and any further bulk porphyry-style discoveries will underpin substantial increases to Productora's Mineral Resources and Ore Reserves.

The latest drilling at Alice, which is 400m west of the planned central pit at Productora, intersected very wide zones of copper extending from surface and outlined the potential for significant extensions of higher grade copper.

ASX Code

HCH

Contact

Mr Christian Easterday
Managing Director

E: admin@hotchili.net.au

www.hotchili.net.au





Results included 204m grading 0.6% copper and 0.1g/t gold from within a broader intersection of 237m grading 0.5% copper and 0.1g/t gold from surface.

Importantly, these wide zones of higher grade copper at Alice remain open toward the west and at depth. Further drilling is planned to expand the extent of Alice mineralisation in advance of a maiden resource estimate.

Alice will form part of an increased Mineral Resource and Ore Reserve estimate for the overall Productora Pre-feasibility study (PFS).

Alice Adds Porphyry Copper Resource Upside to Productora

Productora's entire Mineral Resource of more than 1Mt of copper and 675,000 ounces of gold is a breccia style deposit hosted within a structural corridor known as the main zone.

Confirmation that Alice is a porphyry-style copper deposit adjacent to the main zone (breccia hosted) is an exciting development in the growth of Productora into a multi-deposit copper project.

To confirm the style of deposit at Alice, Hot Chili completed a detailed review of all Reverse Circulation (RC) and Diamond (DD) drilling undertaken.

Porphyry-style copper mineralisation at Alice is associated with finely disseminated chalcopyrite and pyrite which is evenly disseminated throughout a non-brecciated dacite porphyry host rock. Alteration associated with the dacite porphyry which hosts Alice has been identified over a large area and at this stage significant potential exists to discover more near-surface porphyry copper.

Drilling at Alice has defined significant copper grades which extend from surface in a NNE - SSW orientation over a strike length of approximately 400m. The true width of porphyry-style copper mineralisation requires further verification although presently it varies between 90m and 150m. Higher grade copper is currently open towards the west and at depth.

Hot Chili is now reviewing its exploration and drilling results over other potential porphyry footprints identified at Productora. The Company believes there is strong evidence to suggest that Productora may host a cluster of deposits, as is the case at other known copper porphyry systems globally and within Chile.

Generative exploration efforts at Productora during 2014 identified three large-scale, multi-element surface geochemical footprints typical of zoned copper porphyry deposits. First pass drilling over two of these footprints in the western extent of the project have confirmed extensive distal alteration zones associated with large porphyry deposits.

Hot Chili plans to review its future exploration strategy to target any near-surface, large-scale porphyry copper potential at Productora.



The Alice discovery has underpinned further resource additions into the PFS and highlighted the potential for Productora to elevate into a new class of much larger emerging copper developments.

For more information please contact:

Christian Easterday

Managing Director

+61 8 9315 9009

Email: christian@hotchili.net.au

or visit Hot Chili's website at www.hotchili.net.

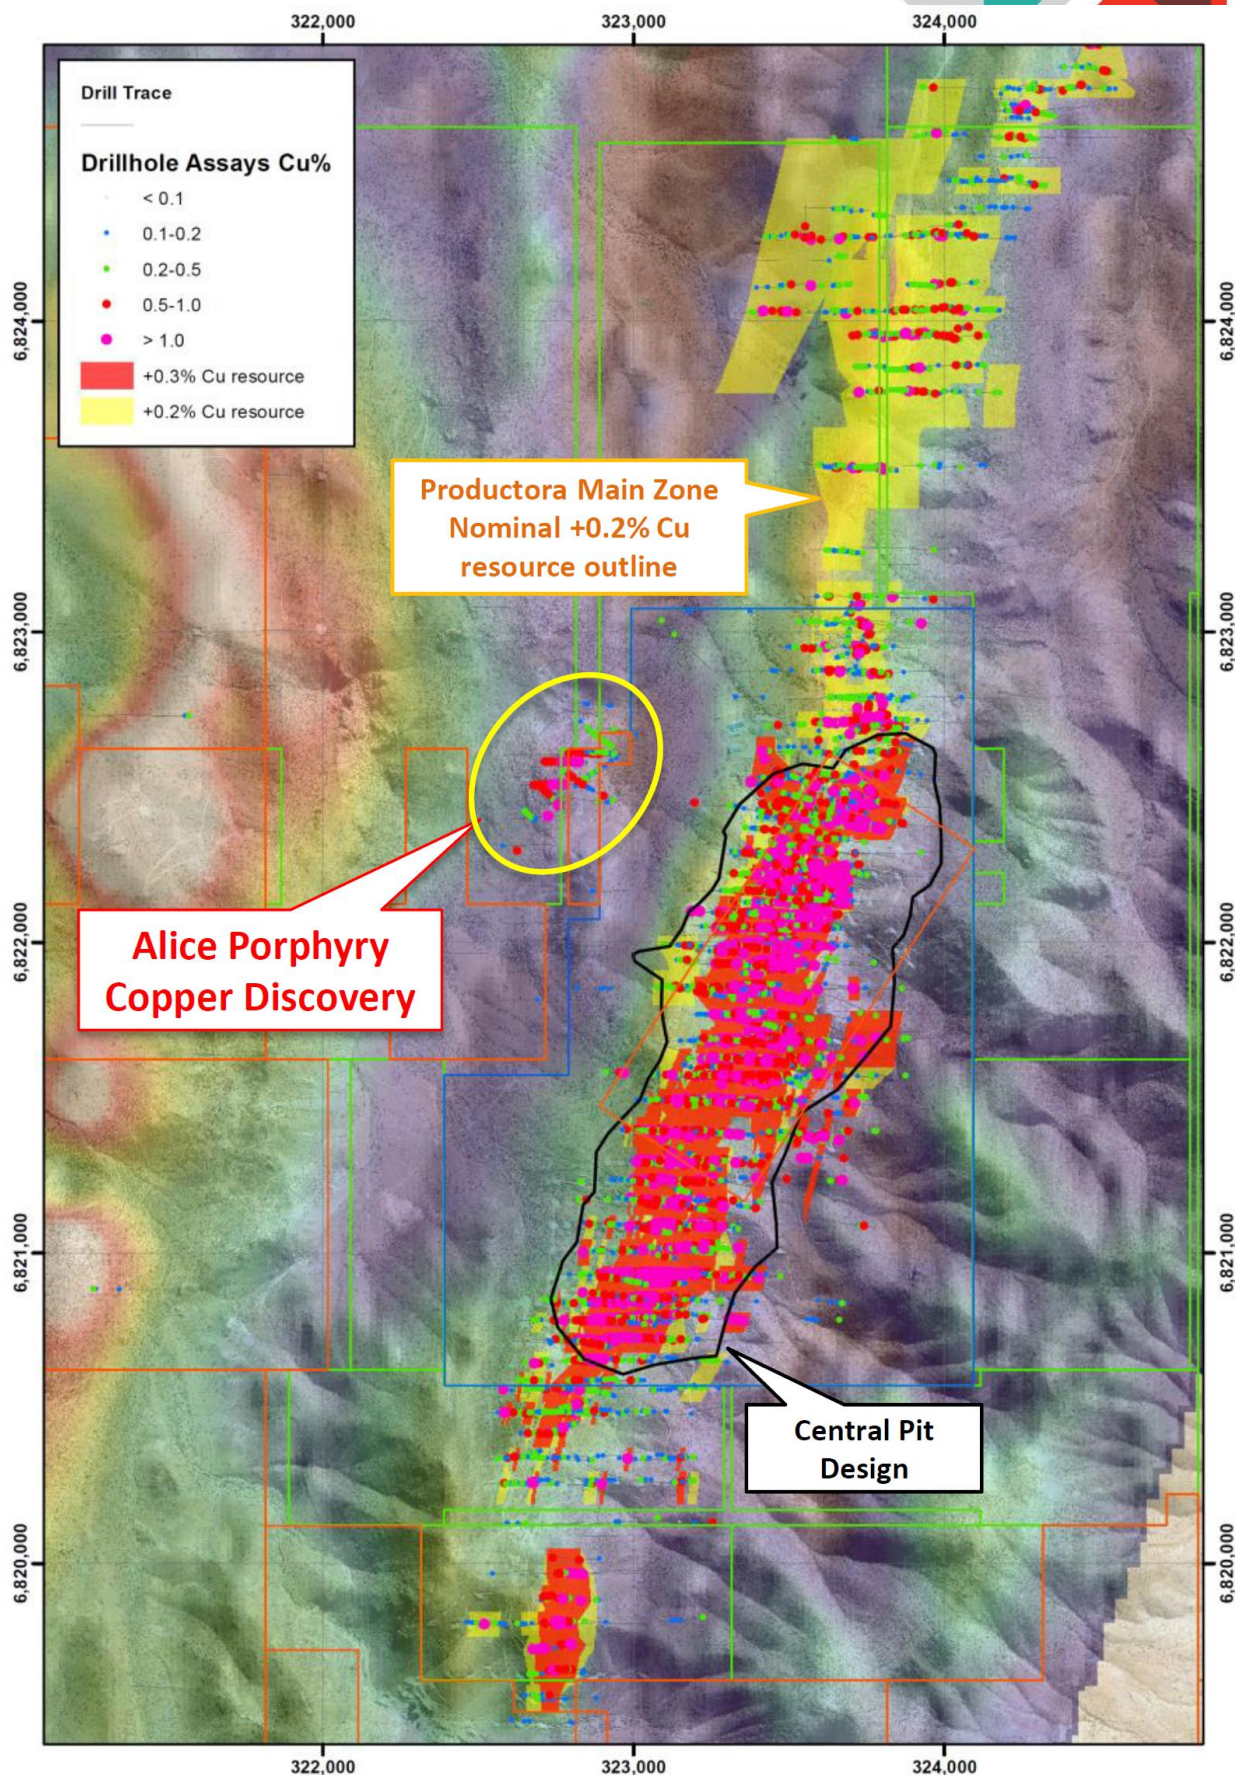


Figure 1. Plan displaying the location of the Alice porphyry copper discovery in relation to the planned Productora central pit design, Mineral Resource outlines and TMI.

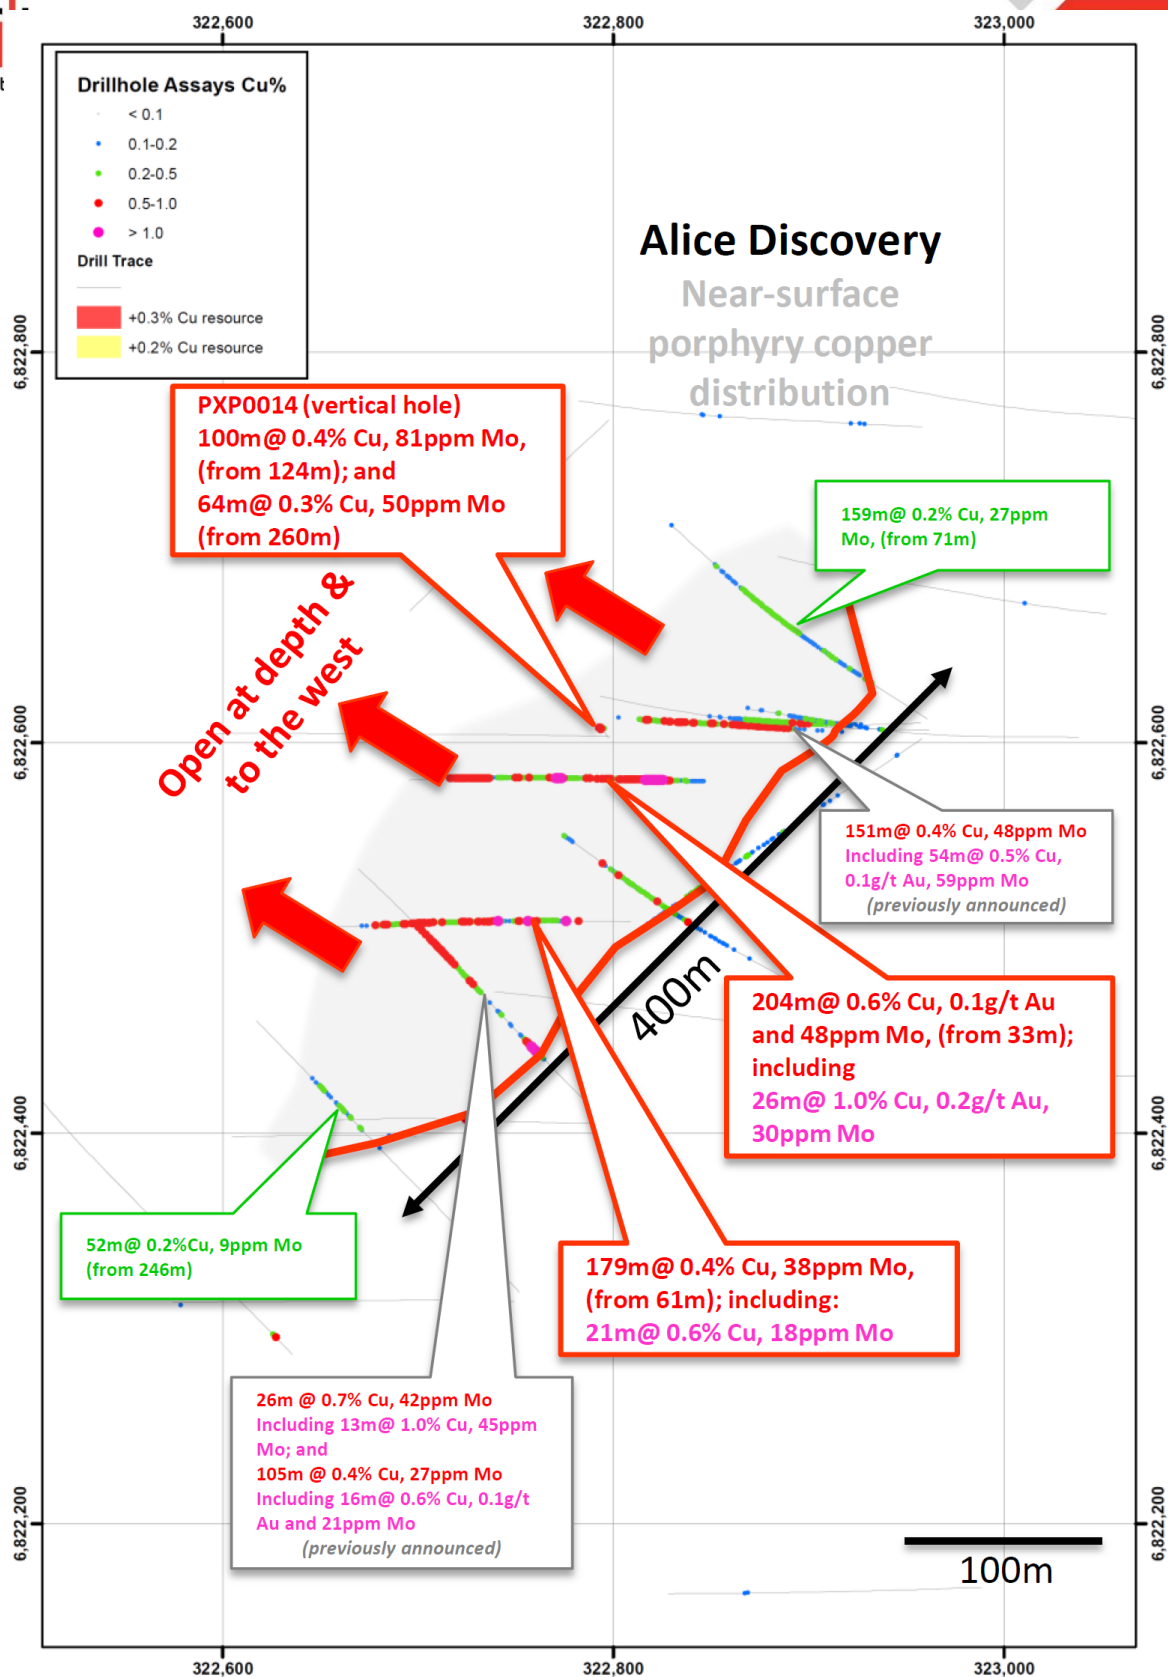


Figure 2. Plan displaying the location of near-surface significant porphyry copper drilling intersections at the Alice discovery.



Productora Copper Project- New Significant Drilling Intersections

Hole_ID	Coordinates			Azim.	Dip	Hole Depth	Intersection		Interval (m)	Copper	Gold	Molybdenum
	North	East	RL				From	To		(% Cu)	(g/t Au)	(ppm Mo)
PRP0870	6822612	322960	749	304	-55	306	71	230	159	0.2	0.0	27
PRP0871	6822602	322958	749	236	-55	333	198	203	5	0.3	0.0	11
							228	307	79	0.1	0.0	79
PRP0922	6822580	322846	787	272	-60	270	0	237	237	0.5	0.1	45
						including	33	237	204	0.6	0.1	48
						including	39	65	26	1.0	0.2	30
PRP0923	6822508	322809	812	273	-60	280	61	240	179	0.4	0.0	38
						including	127	208	81	0.5	0.0	16
PRP0926	6822603	323038	753	271	-60	374	248	320	72	0.1	0.0	50
PXP0012	6822405	322797	806	272	-56	258	125	132	7	0.5	0.0	15
PXP0014	6822606	322793	814	328	-90	328	124	224	100	0.4	0.0	81
							260	324	64	0.3	0.0	50
PXP0015	6822449	322944	768	275	-54	348	93	95	2	0.5	2.2	5
PRP0884	6822319	322752	810	317	-55	396	246	298	52	0.2	0.0	9

Notes to Significant Drilling Intersections

- All drill holes with pre-fix "PRP and PXP" are reverse circulation (RC) and all drill holes with suffix "D" are diamond holes.
- Results comprise ICP analysis (ME-ICP61) of all 1m whole core samples (D); 1m selective cone split samples (RC) and 4m composite samples (RC).
- Priority AAS analysis (CU-AA62 ore grade analysis) results were utilised where analysis was undertaken for copper results greater than 1.0%.
- Priority MS analysis (ME-MS61) results were utilised where analysis was undertaken for uranium results greater than 50ppm.
- Gold analysis only undertaken over copper results greater than 0.1%. All gold results comprise ICP analysis (Au-ICP21). Gold significant intersections may in some instances represent the average of gold results within the zone of intersection. In these instances generally gold analysis has been undertaken over 90 percent of the samples taken within the length of the intersection.
- All results were analysed by ALS Chemex (La Serena and Lima) laboratories
- * denotes RC extension of previously drilled RC hole.



Qualifying Statements

JORC Compliant Ore Reserve Statement

Productora Open Pit Probable Ore Reserve Statement – Reported 31st March 2014

Ore Type	Category	Tonnage (Mt)	Grade			Contained Metal			Payable Metal		
			Copper (%)	Gold (g/t)	Molybdenum (ppm)	Copper (tonnes)	Gold (ounces)	Molybdenum (tonnes)	Copper (tonnes)	Gold (ounces)	Molybdenum (tonnes)
Transitional	Probable	10.2	0.54	0.10	128	55,000	34,000	1,300	27,000	13,000	1,000
Fresh	Probable	80.3	0.47	0.11	177	378,000	274,000	14,200	323,000	139,000	8,000
Total	Probable	90.5	0.48	0.11	172	433,000	308,000	15,500	350,000	152,000	9,000

Note 1: Figures in the above table are rounded, reported to two significant figures, and classified in accordance with the Australian JORC Code 2012 for Mineral Resource and Ore Reserve reporting.

Note 2: Average recoveries applied to Probable Ore Reserve estimate are: Fresh Cu- 88.8%; Fresh Au - 65%; Fresh Mo - 60%, Transitional Cu- 50%, Transitional Au- 50% and Transitional Molybdenum- 50%. Payability factors applied for Cu- 96.5%, Au- 78% and Mo- 98%. The Probable Ore Reserve was estimated using price assumptions of US\$3.00/lb copper, US\$1,250/oz gold and US\$10/lb molybdenum and an exchange rate (AUD:USD) of 0.88.

JORC Compliant Mineral Resource Statement

Productora Mineral Resource Statement – Reported 31st March 2014

Classification (+0.25% Cu)	Tonnage (Mt)	Grade			Contained Metal		
		Copper (%)	Gold (g/t)	Molybdenum (ppm)	Copper (tonnes)	Gold (ounces)	Molybdenum (tonnes)
Indicated	158.6	0.50	0.11	152	799,000	540,000	24,000
Inferred	55.6	0.41	0.08	97	229,000	133,000	5,000
Total	214.3	0.48	0.10	138	1,029,000	675,000	29,000

Note 1: Figures in the above table are rounded, reported to two significant figures, and classified in accordance with the Australian JORC Code 2012 for Mineral Resource and Ore Reserve reporting.

Mineral Resource and Ore Reserve Confirmation

The information in this report that relates to Mineral Resources and Ore Reserve estimates on the Productora copper project was previously reported in the ASX announcement “Maiden Ore Reserve at Productora Set for Strong Growth in 2014”, dated 31st March 2014, a copy of which is available on the ASX website at www.asx.com.au and the Company’s website at www.hotchili.net.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and that all material assumptions and technical parameters underpinning the estimates in that announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person’s findings are presented have not been materially modified from the original market announcement.



Competent Person's Statement- *Exploration Results*

Exploration information in this announcement is based upon work undertaken by Mr Christian Easterday, the Managing Director and a full-time employee of Hot Chili Limited whom is a Member of the Australasian Institute of Geoscientists (AIG). Mr Easterday has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a 'Competent Person' as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (JORC Code). Mr Easterday consents to the inclusion in the report of the matters based on their information in the form and context in which it appears.

Forward Looking Statements

This announcement contains "forward-looking statements". All statements other than those of historical facts included in this announcement are forward-looking statements including estimates of Mineral Resources and Ore Reserves. However, forward-looking statements are subject to risks, uncertainties and other factors, which could cause actual results to differ materially from future results expressed, projected or implied by such forward-looking statements. Such risks include, but are not limited to, copper and other metals price volatility, currency fluctuations, increased production costs and variances in ore grade ore recovery rates from those assumed in mining plans, as well as political and operational risks and governmental regulation and judicial outcomes. The Company does not undertake any obligation to release publicly any revisions to any "forward-looking statement" to reflect events or circumstances after the date of this announcement, or to reflect the occurrence of unanticipated events, except as may be required under applicable securities laws. All persons should consider seeking appropriate professional advice in reviewing this announcement and all other information with respect to the Company and evaluating the business, financial performance and operations of the Company. Neither the provision of this announcement nor any information contained in this announcement or subsequently communicated to any person in connection with this announcement is, or should be taken as, constituting the giving of investment advice to any person.



Appendix- JORC Code, 2012 Edition Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> Reverse circulation drilling (RC) was used to produce a 1m bulk sample and representative 1m split samples (12.5%, or nominally 3kg) were collected using a cone splitter. Diamond drilling was used to produce drill core with a diameter of 63.5mm (HQ). Diamond holes were logged and sampled in their entirety. Diamond core was whole sampled in one metre intervals, regardless of geological interpretation. RC sample representivity was ensured by a combination of Company Procedures regarding quality controls (QC) and quality assurance / testing (QA). <ul style="list-style-type: none"> Examples of QC include (but are not limited to), daily workplace and equipment inspections, as well as drilling and sampling procedures. Examples of QA include (but are not limited to), collection of drilling duplicates ("field duplicates"), the use of certified standards and certified blank samples, as well as umpire-laboratory checks. Industry standard practices for sampling techniques were employed at the Productora project. Geological logging was completed and mineralised intervals were determined by the geologists to be submitted as 1m split samples. In zones logged as unmineralised geologists directed field assistants to collect a 4m composite sample and this was submitted to the laboratory for analysis. If these 4m composite samples came back with Cu grade > 0.2% the corresponding original 1m split samples were collected and submitted to the laboratory for analysis. The drill samples (RC and diamond) were submitted to ALS La Serena. Laboratory analysis involved: sample crushed to 70% > 2mm, riffle/ rotary split off 1kg, pulverize split to > 85% passing 75 microns, then 100g analysis by ME-ICP61 technique. Samples were submitted to ALS Global, La Serena which is ISO accredited.
Drilling techniques	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-</i> 	<ul style="list-style-type: none"> The Reverse Circulation drilling method was predominantly down-the-hole hammer drilling with 140 to 130mm diameter drill bits used. Diamond drilling used HQ drill bits (96mm external and 63.5mm



Criteria	JORC Code explanation	Commentary
	<i>sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	internal diameter). Diamond drilling was double tube. Diamond core was oriented by the Reflex ACT III core orientation tool.
Drill sample recovery	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • Drilling techniques to ensure adequate RC sample recovery included the use of “booster” air pressure as well as limits on angle of drilling. Air pressure used for RC drilling was 700-800psi. • Logging of all samples followed established company procedures which included recording of qualitative fields to allow discernment of sample reliability. This included (but was not limited to) recording: <ul style="list-style-type: none"> ○ sample condition, sample recovery, sample collection method (ie. split or composite), and comments ▪ Overall logging of RC sample recovery at Productora recorded 96% of samples as “Good”, 3% “Moderate” and 1% “Poor”. ▪ Recovery in diamond core at Productora recorded, 93% “Good”, 2% “Moderate”, 2% “Poor”, and 4% “No Recovery/ No Record”. ▪ RC sample intervals recorded ~80% 1m split samples, and ~20% 4m composite samples (generally composite samples are located in unmineralised zones) • 1m split sample weights submitted for analysis averaged 3.5kg. There does not appear to be any bias in sample weight with respect to sample depth, in fact sample weight slightly increases with depth from ~3.8kg at surface to 4kg at 500m depth down-hole. • The sample condition was reviewed with average weight for dry sample being 3.4 kg, moist samples 3.0kg, and wet samples 4.0kg, showing fairly consistent weights across all sample conditions. • Sample weights and corresponding assay grades were reviewed and no discernible bias was detected.
Logging	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or</i> 	<ul style="list-style-type: none"> • Geological logging of samples followed established company and industry common procedures. Qualitative logging of samples included (but was not limited to); lithology, mineralogy, alteration, veining and weathering. Diamond core logging included additional fields such as structure and geotechnical parameters. • Photography of diamond core was routinely completed and is



Criteria	JORC Code explanation	Commentary
	<p><i>quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <ul style="list-style-type: none"> <i>The total length and percentage of the relevant intersections logged.</i> 	<p>stored on the company's data server.</p> <ul style="list-style-type: none"> Every metre (100%) of RC and DD drilling was geologically logged and sampled. Quantitative alteration geochemistry characterization was also completed using ME-ICP61 assay data. This characterization has identified seven main alteration types at Productora- albite, kaolinite, potassic (k-feldspar), magnetite-amphibole, sericite, sericite-albite and sodic-calcic. At Productora a clear correlation between silicate mineralogy (alteration) and sulphide mineralogy (copper mineralisation) is evident from the geochemical alteration classification work completed, and this has been used to guide exploration drilling and resource modelling.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> Entire whole HQ diamond core was sampled to ensure maximum sample representivity. Splitting of RC samples occurred via a rotary cone splitter by the RC drill rig operators. Cone Splitting of RC drill samples occurred regardless of whether the sample was wet or dry. Company procedures were followed to ensure sub-sampling adequacy and consistency. These included (but were not limited to), daily work place inspections of sampling equipment and practices, as well as drilling/ sub-sample duplicates ("field duplicates"). <ul style="list-style-type: none"> RC Sample condition was routinely recorded Field duplicates were taken at a rate of 1 in every 50th meter of drilling. Results of field duplicate assays give confidence that acceptable relative levels of accuracy and precision of assay data returned from Productora. Sample sizes (width and length) were based on industry best practice and mineralisation style. Previous comparison between diamond and RC samples at Productora shows an acceptable correlation and supports the use of RC samples as representative of the in-situ material.
Quality of assay data and laboratory	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered</i> 	<ul style="list-style-type: none"> All samples (RC chips and diamond core) were assayed by industry standard methods. All samples were submitted to ALS, La Serena for analysis. Sample preparation involved:



Criteria	JORC Code explanation	Commentary
tests	<p><i>partial or total.</i></p> <ul style="list-style-type: none"> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> sample crushed to 70% > 2mm, riffle split off 1kg, pulverize split to > 85% passing 75 microns Analytical Technique involved: <ul style="list-style-type: none"> ALS Method ME-ICP61 (31 element analysis), with additional assaying triggered as follows; samples which returned copper >1,000ppm were analysed for gold by ALS Method Au-ICP21 (30g Fire Assay). Samples with Cu >10,000ppm were analysed by ALS "ore grade" method Cu-AA62 (represents ~ 2% of samples) Reported gold significant intersections may in some instances represent the average of gold results within the zone of intersection. In these instances generally gold analysis has been undertaken over >90 percent of the samples taken within the length of the intersection. Routine "mineralized" Certified Reference Material (CRM) were inserted by Hot Chili Ltd at a rate of 1 in 50 samples. Routine Blank Certified Reference Material ("Blanks") were inserted by Hot Chili Ltd at a rate of 1 in 100 samples. Results from CRM (standards, blanks), and results from umpire laboratory testwork (ACME), gives confidence in the accuracy and precision of assay data returned from ALS. The analytical laboratory (ALS) also provided their own routine quality controls within their own practices. The results from their own validations were provided to Hot Chili Ltd.
Verification of sampling and assaying	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> Routine Umpire laboratory checks are performed by an alternative and independent laboratory (ACME). 5% of coarse rejects are submitted for Umpire checks and validation against the primary laboratory. To date Umpire laboratory results correlate well with primary laboratory (ALS) results, with no discernible bias detected. At Productora there are quite a few RC intervals twinned with diamond holes. A previous direct verification comparison between nominally equivalent intervals showed these is some short-scale structural and mineralisation noise in all elements. Population comparison plots for matched twins has previously been attempted but were not informative. This makes quantitative correlation troublesome, but visual validation of mineralisation domains suggest that there is acceptable correlation, and no apparent bias in the twinned mineralisation intervals and assay ranges. Hot Chili has strict procedures for data capture, flow and data storage, a full description of these procedures is included in the



Criteria	JORC Code explanation	Commentary
		<p>resource report.</p> <ul style="list-style-type: none"> Limited adjustments were made to returned assay data; values returned lower than detection level were set to the methodology's detection level, and this was flagged by code in the database. Additionally, copper values are converted from ppm to %. Various analytical techniques have been used for analysis of ore grade elements (including Au and Cu), therefore a ranking has been applied to these elements ensuring the highest priority assay value is used for resource estimation. All assay values (from all analytical techniques) are stored in the database for completeness.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Collar surveys were completed by topographical surveying company (Geotopo's Exploraciones). Down-hole directional surveys using a gyroscopic instrument were completed by reputable down-hole surveying company's Wellfield (pre June 2013) and North Tracer (post June 2013). Down-hole surveys were completed using a north-seeking gyroscope, eliminating the risk of magnetic interference. The WGS 84 UTM Zone 19S coordinate system was used for all Hot Chili undertakings. Magnetic north has been used for directional surveys. Accuracy and adequacy of topographic control was validated visually in 3D software by comparison of drill collar locations and high resolution satellite (1m contours) derived DEM.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Drillhole spacing at Productora within the preliminary central pit design is on a nominal 80m by 40m grid, with some infill control sections drilled on 40 x 40m spacing. This drillhole spacing has provided a high level of support for robust geological and mineralisation modeling. Geological and grade continuity is sufficient for mineral resource estimation, with both indicated and inferred resources being classified at Productora. In unmineralised areas four metre composite samples were taken. These 4m composite samples represent ~25% of the assay sample data, while the 1m split samples comprise ~75% of the samples. The majority of the 4m composite samples lie outside the mineralised geological wireframes.



Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> The majority of drilling was oriented perpendicular to the overall NE structural trend of the Productora project area, with drillholes angled at 60 degrees towards 090 degrees to optimize drill intersections of the west dipping orebody. Where the mineralisation has been interpreted to dip moderately to the east, drilling has been oriented at 60 degrees towards 270 degrees. In some areas of the project, where drill rig access was limited by lack of drill platforms some variable drilling orientations were used for targeting the mineralisation. Drilling orientation and subsequent sampling is unbiased in its representation of reported material.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Hot Chili has strict chain of custody procedures that are adhered to for drill samples. All samples for each batch have the sample submission number/ticket inserted into each bulk polyweave sample bag with the id number clearly visible. The sample bag is stapled together such that no sample material can spill out and no one can tamper with the sample once it leaves Hot Chili's custody.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> Coffey Mining Limited has completed an audit on the sampling techniques and data used for the Productora resource estimate. This audit has involved a site visit, review of drilling and sampling techniques, and independent grab sampling and analysis by an umpire laboratory.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a 	<ul style="list-style-type: none"> Hot Chili (through its subsidiary company SMEAL) controls an area measuring approximately 12.5km N-S by 5km E-W at the project through various agreements with private land holders; CMP (Chile's largest iron ore producer) and government organisations. Three types of lease agreements have been executed at the project: <ul style="list-style-type: none"> joint venture earn-in agreements with CMP (HCH to earn 65% over five years) 100% purchase-option agreements (Central Lease Productora 1/16 Purchase Option agreement was executed in February 2013)



Criteria	JORC Code explanation	Commentary
	license to operate in the area.	<ul style="list-style-type: none"> ○ 30 year lease agreement for Uranio 1/70 (CCHEN-Comisión Chilena de Energía Nuclear) ○ Hot Chili (through its subsidiary company SMEAL) has also secured large tenement holdings in its own right across available extensions at the project. • The URANIO 1/70 lease is subject to a royalty payment, and the royalty agreement is with CCHEN. Details are as follows: <ul style="list-style-type: none"> 1. After the first 5 years of the lease agreement or upon beginning of the exploitation phase if this situation happens before, the following minimum Net Smelter Royalty (NSR) shall be charged: <ul style="list-style-type: none"> a. 2% over all metals different from gold (ie. copper). b. 4% over gold. c. 5% over non-metallic. 2. All of the above are calculated over effective mineral sold. • The majority of Hot Chili's landholding at Productora is held in Exploitation Concessions (Mining Lease would be the Australian equivalent term), with Mining Claims and Mining Petitions being the other main landholding types at the project (outside the main mineralised corridor and the preliminary central pit design).
Exploration done by other parties	<ul style="list-style-type: none"> • Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> • Exploration at the Productora Project has been completed by: <ul style="list-style-type: none"> ○ CCHEN (Chilean Nuclear Commission) in the late 1980's: <ul style="list-style-type: none"> ▪ Mapping, geochemical sampling, ground spectrometry, magnetometry, trenching, drilling (28 shallow percussion holes). Focus was on near surface, secondary uranium potential). ○ GMC-Teck in the 1990's <ul style="list-style-type: none"> ▪ Compilation of mapping, surface geochemical sampling, ground geophysics (IP), percussion drilling. ○ Thesis (Colorado School of Mines), 1990's <ul style="list-style-type: none"> ▪ Thesis completed which involved field mapping, laboratory studies (petrology, whole rock geochemistry, geochronology, x-ray diffraction, sulphur isotope analysis).
Geology	<ul style="list-style-type: none"> • Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> • The majority of copper-gold-molybdenum mineralisation at Productora is hosted in a structurally focused breccia and fracture network developed within a larger body of K-feldspar-tourmaline-magnetite breccia. Structurally-focused mineralised breccia zones are evident trending broadly sub-parallel to the



Criteria	JORC Code explanation	Commentary
		<p>Productora fault zone (NNE).</p> <ul style="list-style-type: none"> The association between mineralisation, breccia zones and manto horizons shows that an interplay between units with significant primary permeability (mantos) and fault-related secondary permeability (breccias) exert a critical control on the distribution of mineralisation. Mineralised breccias are clearly visible in both RC drilling and in diamond core. The intensity of brecciation, alteration and sulphide mineralisation is generally greater within higher-grade domains. Sulfides comprise pyrite, chalcopyrite, bornite and molybdenite developed as breccia, vein and cavity fill, as well as disseminations within the brecciated host rocks. This sulphide distribution creates centimetre to metre-scale higher-grade patches enclosed by moderate-grade disseminated sulphide minerals.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> A complete list of all holes reported as significant exploration results are provided in Productora Project- New Significant Drilling Intersections table This listing includes: <ul style="list-style-type: none"> collar coordinates WGS84_19S), elevation, hole orientation (dip and azimuth- magnetic), downhole intersection depth and length total hole depth length weighted average grade for Cu%, Au g/t, Mo ppm Length weighted average grade is rounded to one decimal place No material drillhole information has been excluded
Data	<ul style="list-style-type: none"> In reporting Exploration Results, 	<ul style="list-style-type: none"> In reported exploration results, length weighted averages are



Criteria	JORC Code explanation	Commentary																				
aggregation methods	<p>weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <ul style="list-style-type: none">Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.The assumptions used for any reporting of metal equivalent values should be clearly stated.	<p>used for any non-uniform intersection sample lengths. Length weighted average is (sum product of interval x corresponding interval grade Cu%), divided by sum of interval lengths and rounded to one decimal place</p> <ul style="list-style-type: none">For example an aggregation of results could look like the below: <table><thead><tr><th>From</th><th>To</th><th>Interval</th><th>Grade Cu%</th></tr></thead><tbody><tr><td>236</td><td>240</td><td>4</td><td>0.623</td></tr><tr><td>240</td><td>241</td><td>1</td><td>0.25</td></tr><tr><td>241</td><td>242</td><td>1</td><td>0.451</td></tr><tr><td>242</td><td>243</td><td>1</td><td>0.861</td></tr></tbody></table> <p>Weighted average = ((4 x 0.623) + (1 x 0.25) + (1 x 0.451) + (1 x 0.861)) / (4+1+1+1) = 7m @ 0.58% Cu</p> <ul style="list-style-type: none">Exploration results are nominally reported where copper results are greater than 0.3% Cu, significant intersections have a minimum down-hole width of 4m, internal dilution of up to 4 metres has been incorporated in some instances to allow continuity of significant intersections.No top-cutting of high grade assay results has been applied, nor was it deemed necessary for the reporting of significant intersections.No metal equivalent values have been reported	From	To	Interval	Grade Cu%	236	240	4	0.623	240	241	1	0.25	241	242	1	0.451	242	243	1	0.861
From	To	Interval	Grade Cu%																			
236	240	4	0.623																			
240	241	1	0.25																			
241	242	1	0.451																			
242	243	1	0.861																			
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none">These relationships are particularly important in the reporting of Exploration Results.If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	<ul style="list-style-type: none">Mineralisation at Productora can be located within steeply west dipping breccia hosted envelopes, or within moderately east dipping steeply plunging shoots, and to a lesser extent shallow dipping permeable volcanoclastic bedding horizons.Due to the variable nature of mineralisation geometry, the drilling orientation is chosen according to the mineralisation geometry type being targeted.Where practical the drilling orientation has been designed to intersect mineralisation perpendicular to the lode orientation, however this is not always possible.																				
Diagrams	<ul style="list-style-type: none">Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant	<ul style="list-style-type: none">Refer to figures in announcement. A plan view of reported significant intersection drillhole collar locations is included.																				



Criteria	JORC Code explanation	Commentary
	discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> It is not practical to report all exploration results. Low grade intersections grading 0.2-0.5% Cu have been reported as well as high grade intersections grading > 0.5% Cu. Unmineralised intervals <0.2% Cu have not been reported.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Other exploration data available: <ul style="list-style-type: none"> Surface mapping- geological observations (lithological and structural) Geophysical and radiometric surveys (airborne) Bulk density analysis is completed on every 5th metre of diamond core and pycnometer analysis is performed on every 25th RC metre Preliminary metallurgical test work has been completed at Productora as part of the scoping study. These results have indicated that conventional processing will be suitable, with metallurgical recoveries of >90% for copper, ~80% for gold, ~75% for molybdenum (recoveries achieved from coarse 180µm grind size)
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Resource definition drilling (copper-gold-molybdenum) and resource extensional drilling continue at Productora within the preliminary central pit design (which covers ~3km of the Productora mineralised corridor strike extent). Outside of the preliminary central pit design further exploratory testing for copper-gold-molybdenum and iron mineralization will be completed over the entire project holding. A systematic geochemical soil sampling programme has been designed as a first pass technique for discovering potential mineralisation, this will be followed up by prioritization and subsequent drill testing of favourable targets. Drill targeting of conceptual high grade shoots at depth, along strike and down plunge will also be a focus for future exploration.

