

26 March 2015

ASX : BGS

The emerging West African
Gold Exploration Company

Targeting multi-million
ounce gold deposits in Mali
and Liberia.

Expanding gold inventory
at existing assets and via
new project generation.

Winton Willesee

Chairman

Kevin Joyce

Managing Director

Hugh Bresser

Non-Executive Director

Investor Relations

Rupert Dearden / Richard Glass

MAGNUS Communication

T: +61 8 6160 4903

E: rdearden@magnus.net.au

Suite 9, 5 Centro Ave,

Subiaco WA 6008

PO Box 457

West Perth WA 6872

P: +61 8 9286 3045

F: +61 8 9226 2027

E: info@birimiangold.com

ABN 11 113 931 105

HIGH GRADE GOLD AT KOTING PROSPECT

HIGHLIGHTS

- Detailed resampling of recently drilled Aircore intervals at Koting Prospect defines new high grade gold zones. Significant results include;
 - 9m @ 7.53 g/t Au - ending in mineralisation
 - 23m @ 1.27 g/t Au, incl.
 - 9m @ 1.83 g/t Au
 - 5m @ 4.88 g/t Au
 - 3m @ 4.67 g/t Au
 - 7m @ 1.58 g/t Au
- Wide uncut mineralised intervals of 42m @ 1.22 g/t Au and 27m @ 1.55 g/t Au confirm continuity of an extensive new gold trend. Open along strike.
- Discrete high grade lenses significantly enhance potential economics for bulk open-pit mining of the >50m wide mineralised zone at Koting
- Planning for follow up drilling underway

Birimian Gold Limited (ASX:BGS) ("Birimian Gold" or the "Company") is pleased to advise that it has received final analytical results from samples submitted to the laboratory as part of a detailed resampling program of recent Aircore (AC) drill intervals at the Massigui Gold Project in southern Mali.

These new results significantly upgrade the previously reported drill results (See ASX Release: 9 February 2015) and confirm the grade potential of the new gold discovery at Koting Prospect (Figure 1).

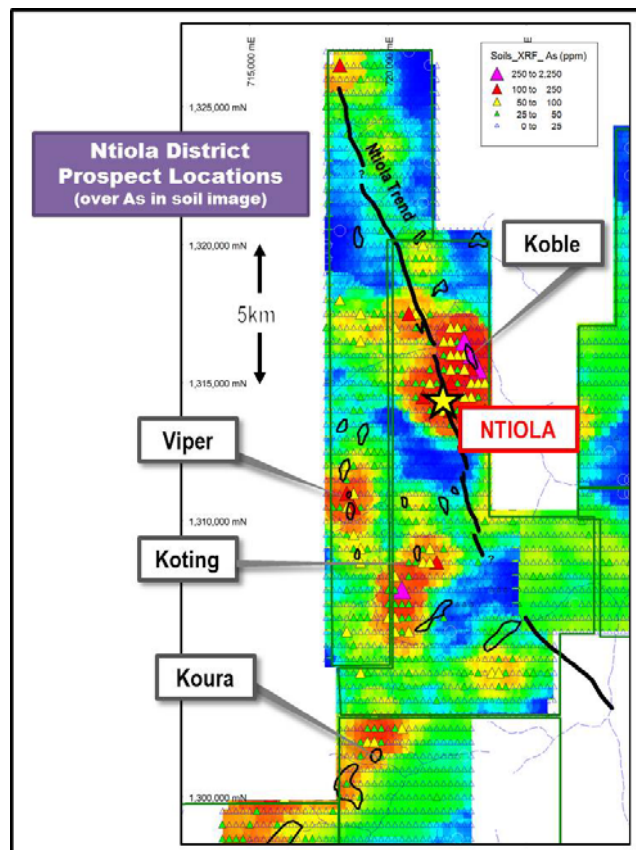


Figure 1. Ntiola District. Prospect locations are shown over the arsenic in soil image.

Two previous shallow reverse circulation (RC) drill holes completed by the Company at Koting Prospect intersected a strongly mineralised shallow gold zone over substantial downhole widths comprising an uncut drill intersection of **51m @ 1.17 g/t Au from 33m**, and included a higher grade interval of **20m @ 1.64g/t Au** (Figure 1). During January a follow up AC drilling program targeted mineralised extensions adjacent to these RC holes in areas not previously investigated with systematic deeper drilling. This program successfully delineated a north-south striking gold trend hosting shallow high grade gold mineralisation over broad downhole widths. Highlights from the AC drilling included;

- **4m @ 14.05g/t from 4m**
- **12m @ 5.79g/t from 48m (ended in mineralisation)**
- **16m @ 1.38g/t from 36m**
- **50m @ 0.9g/t from 12m, incl. 16m @ 1.40g/t**
- **4m @ 4.17g/t from 36m**

The AC drilling conducted by the Company in January was initially sampled in 4m composited intervals. Detailed sampling of these intervals was recently undertaken to refine the spatial distribution of mineralisation and improve the geological interpretation of the target zones. This program involved collecting representative samples from each of the original one metre drill intervals that formed the initial gold bearing four metre composite samples.

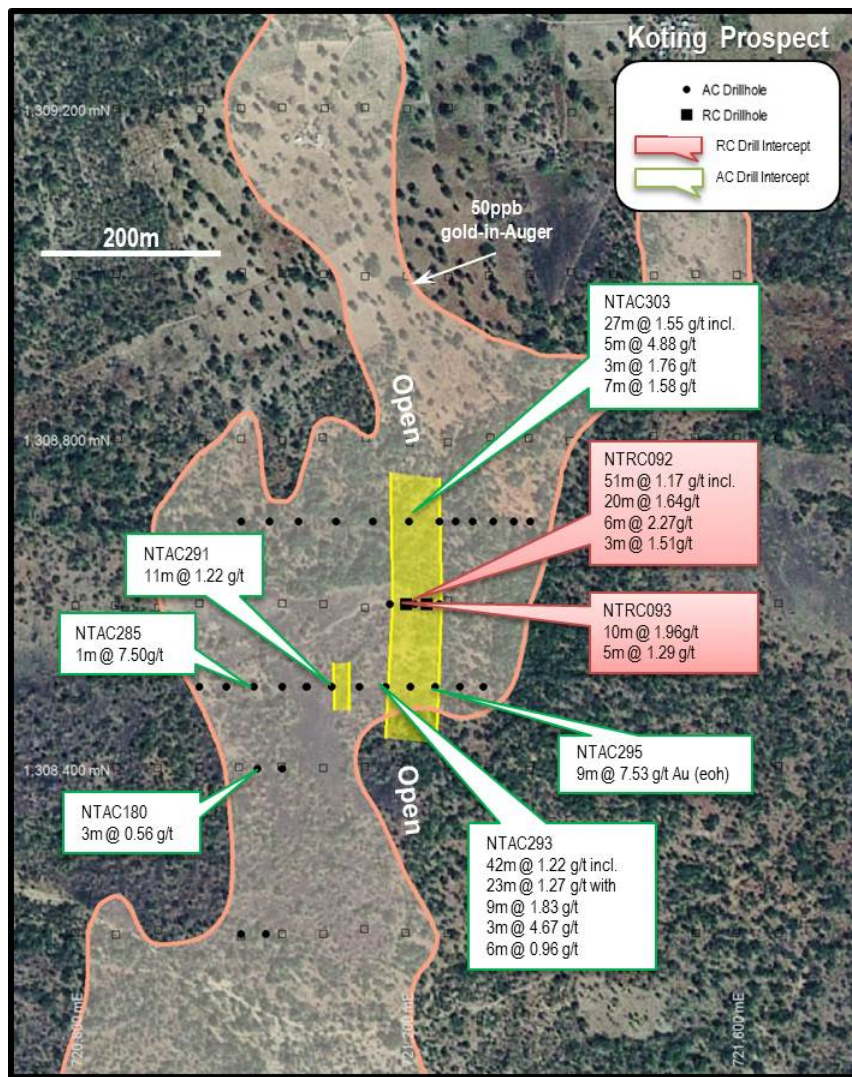


Figure 2. Koting Prospect. Updated significant drill intersections.

Analytical results from the one metre sample intervals have defined multiple high grade zones occurring within the broad (>50m wide) mineralised zone at Koting. Results are presented in Table 1.

Wide uncut mineralised intervals of **42m @ 1.22 g/t Au** and **27m @ 1.55 g/t Au** to the north and south of the earlier RC intercepts confirm continuity of an extensive gold bearing trend (See Figure 2). The occurrence of discrete high grade lenses within these broader zones substantially upgrades the bulk mining potential at Koting. Results are summarised as follows;

- **9m @ 7.53 g/t Au from 51m - ending in mineralisation**
- **42m @ 1.22 g/t Au (uncut) from 18m, including**
 - **23m @ 1.27 g/t Au from 18m (with 9m @ 1.83 g/t Au)**
 - **3m @ 4.67 g/t Au from 46m**
- **27m @ 1.55 g/t Au (uncut) from 3m, including**
 - **5m @ 4.88 g/t Au from 3m**
- **7m @ 1.58 g/t Au from 39m**

The scale and tenor of the mineralisation identified in the recent drilling suggests there is excellent scope to define significant new gold resources which will be amenable to an open-pit mine operation at Koting. The gold trend is open along strike and at depth, and the Company believes there is excellent scope to define further gold mineralisation through additional drilling in these areas. The latest reported resampling results will be utilised to plan additional step out and infill AC and RC drilling programs to further define the extents of mineralisation.

About Birimian Gold Limited

Birimian Gold holds substantial interests in several highly prospective gold projects situated within the Birimian Gold Belt of West Africa; a gold rich region which has produced in excess of 250 million ounces of gold from large, low cost mines. The Company's primary assets include the advanced Massigui Gold Project and Dankassa Gold Project in Southern Mali, and the Basawa Gold Project in Liberia.

Following the discovery of the Ntiola Deposit at the Massigui Project, Birimian Gold continues to pursue a targeted exploration campaign over the greater Project area with the aim of identifying additional shallow gold resources amenable to open pit mining. The Company's recent drilling successes at Viper and Koting Prospects are exciting new developments which confirm the strong potential to add to the mineralisation already identified at Ntiola. The prospect areas are located within 25km of the world class Morila Gold Mine, operated by Randgold Resources.

For further information please contact :

Mr Kevin Joyce

Managing Director

(08) 9286 3045

info@birimiangold.com

Competent Persons Declaration

The information in this announcement that relates to exploration results is based on information compiled by or under the supervision of Kevin Anthony Joyce. Mr Joyce is Managing Director of Birimian Gold Limited and a Member of the Australian Institute of Geoscientists. Mr Joyce has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results. Mr Joyce consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Previous Reported Results

There is information in this announcement relating to previous Exploration Results at the Massigui Project. The Company confirms that it is not aware of any other new information or data that materially affects the information included in the original market announcement, and that all material assumptions and technical parameters have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

Table 1. Significant analytical results from detailed sampling of aircore drilling at Koting Prospect, Massigui Project, Mali. Holes with intersections >0.5 g/t Au reported. Collar details and original composite sample results for all drilling are reported in previous announcements.

Hole_ID	North	East	Dip	Azm	Hole Depth	From	To	Width	Au g/t
NTAC285	1308500	720950	-60	90.5	65	36	38	1	7.5
NTAC291	1308500	721110	-60	90.5	67	14	25	11	1.22
NTAC293	1308500	721175	-60	90.5	62	18	41	23	1.27
					including	32	41	9	1.83
and						46	49	3	4.67
and						54	60	6	0.96
NTAC295	1308500	721235	-60	90.5	60	51	60**	9	7.53
NTAC303	1308700	721203	-60	90.5	77	3	8	5	4.88
and						15	18	3	1.76
and						39	46	7	1.58

** Hole NTAC295 ended in mineralisation

- 1) Intercepts are calculated using a 0.5 g/t Au cut-off, allowing for 2m maximum internal waste.
- 2) Intercepts are reported from 1m samples submitted to ALS Bamako for 30g Fire Assay.
- 3) QAQC standards and blanks were routinely inserted/collected at every 20th sample.

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> Samples were collected at the drill rig and scoop sampled from 1m drill spoils to collect a nominal 2 - 3 kg sub sample. Aircore (AC) holes were routinely sampled as 4m composited intervals down the hole. Additional 1m samples were also collected and stored on site during drilling operations. Routine standard reference material and sample blanks were inserted/collected at every 20th sample in the sample sequence. All samples were submitted to ALS Bamako for preparation and analysis by 30g Fire Assay (DL 0.01ppm).
<i>Drilling techniques</i>	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> Aircore is a reverse circulation drilling technique. All AC holes were drilled using a purpose built light aircore drill rig supplied and operated by Laynes Drilling. Hole diameter was nominally 80mm.
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> A qualitative estimate of sample recovery was done for each sample metre collected from the drill rig. Appropriate drill techniques were employed to maximize recovery and sample quality. Holes were terminated when water was encountered in the hole. Drill sample recovery and quality is considered to be adequate for the drilling technique employed.
<i>Logging</i>	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> All drill sample intervals were geologically logged by qualified company geologists Where appropriate, geological logging recorded the abundance of specific minerals, rock types and weathering using a standardized logging system. All sample material was logged and sampled.
<i>Sub-sampling techniques and sample preparation</i>	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and</i> 	<ul style="list-style-type: none"> All composite and 1m samples were scoop sampled at the drill rig. Additional sample preparation was undertaken by ALS Bamako laboratory. At the laboratory, samples were weighed, dried

Criteria	JORC Code explanation	Commentary
	<p><i>appropriateness of the sample preparation technique.</i></p> <ul style="list-style-type: none"> Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p>and crushed to -2mm in a jaw crusher. A 1.5kg split of the crushed sample was subsequently pulverised in a ring mill to achieve a nominal particle size of 85% passing 75µm.</p> <ul style="list-style-type: none"> Sample sizes and laboratory preparation techniques are considered to be appropriate for this early stage exploration and the commodity being targeted.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Analysis for gold is undertaken at ALS Bamako by 30g Fire Assay with AAS finish to a lower detection limit of 0.01ppm. Fire assay is considered a "total" assay technique. Review of routine standard reference material and sample blanks suggest there are no significant analytical bias or preparation errors in the reported analyses. Results of analyses for lab duplicates are consistent with the style of mineralisation being evaluated and considered to be representative of the geological zones which were sampled. Internal laboratory QAQC checks are reported by the laboratory. Review of the internal laboratory QAQC suggests the laboratory is performing within acceptable limits.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Drill hole data is compiled and digitally captured by company geologists at the drill rig. The compiled digital data is verified and validated by the Company's database consultant before loading into the drill hole database. Twin holes were not utilized to verify results. Reported results are compiled by the Company's database consultant and the Managing Director. There were no adjustments to assay data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill hole collars were set out in UTM grid WGS84_Zone29N Drill hole collars were positioned using hand held GPS. All holes were inclined at 60 degrees to the west. Given the shallow reconnaissance nature of the drilling, no downhole surveying was undertaken. Locational accuracy at collar and down the drill hole is considered appropriate for this early stage of exploration.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	<ul style="list-style-type: none"> Holes were nominally drilled on 100m spaced east-west orientated drill sections. Hole spacing on section was nominally 25m Data spacing and distribution is not sufficient for resource estimation. Sample compositing has not been used for the

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Whether sample compositing has been applied. 	results reported here.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Exploration is at an early stage and the true orientation of mineralisation has not been confirmed at this stage.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples are stored on site prior to road transport by Company personnel to the laboratory in Bamako, Mali.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> There have been no external audit or review of the Company's sampling techniques or data.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The reported results are from an area within the Finkola Permis de Research, which is held 100% by Birimian Gold Mali SARL, a subsidiary of Birimian Gold Limited Tenure is in good standing.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The area which is presently covered by the Finkola Permit was explored intermittently by Randgold Resources in the period 2000 to 2009. Exploration consisted of soil sampling, reconnaissance drilling and pitting, and sporadic follow up RC and diamond drilling.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The deposit style targeted for exploration is lode gold. This style of mineralisation typically forms as veins or disseminations in altered host rock. Deposits of this type often form in proximity to linear geological structures. Surficial geology within the project area typically consists of indurated gravels forming plateau, and broad depositional plains consisting of colluvium and alluvial to approximately 5m vertical depth. Lateritic weathering is common within the project area. The depth to fresh rock is typically 50m vertical.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar 	<ul style="list-style-type: none"> Significant results are summarised in Table 1 within the attached announcement. Only holes with intersections >0.5g/t Au are reported. Collar location details for all drillholes are shown in earlier relevant announcements The drill holes reported in this announcement have the following parameters applied - Grid co-ordinates are UTM WGS84_29N

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> o <i>dip and azimuth of the hole</i> o <i>down hole length and interception depth</i> o <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • Collar elevation is defined as height above sea level in metres (RL) • Dip is the inclination of the hole from the horizontal. Azimuth is reported in WGS 84_29N degrees as the direction toward which the hole is drilled. • Down hole length of the hole is the distance from the surface to the end of the hole, as measured along the drill trace • Intersection depth is the distance down the hole as measured along the drill trace. • Intersection width is the down hole distance of an intersection as measured along the drill trace • Hole length is the distance from the surface to the end of the hole, as measured along the drill trace. • No results from previous exploration are the subject of this Announcement.
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> • Drill hole intercepts are reported from 1m down hole samples. • A minimum cut-off grade of 0.5 g/t Au is applied to the reported intervals. • Maximum internal dilution is 2m within a reported interval. • No grade top cut off has been applied. • No metal equivalent reporting is used or applied
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • The reported results are from early stage exploration drilling; as such the orientation of geological structure is uncertain. • Results are reported as down hole length, true width is unknown.
<i>Diagrams</i>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • A drill hole location plan for the Koting Prospect is shown in Figure 2.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • Results have not been comprehensively reported in this announcement. • Comprehensive drill hole locations are reported in previous announcements.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater,</i> 	<ul style="list-style-type: none"> • The AC drilling reported in this announcement was targeted on geochemical results from recent auger and RC drilling which was undertaken by BGS and reported in previous announcements. • There is no other exploration data which is considered material to the results reported in this

Criteria	JORC Code explanation	Commentary
	<i>geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	announcement.
<i>Further work</i>	<ul style="list-style-type: none"><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	<ul style="list-style-type: none">AC and RC drilling will be planned to follow up the reported results.