



HORSESHOE METALS
LIMITED

HIGH GRADE COPPER IN FIRST DRILLHOLES AT HORSESHOE LIGHTS

SUMMARY

- RC drilling programme at Horseshoe Lights well underway with 6 holes (947m) completed to date.
- Assay results from first two holes received with multiple broad zones of copper mineralisation intersected.
- Significant copper intersections include:
 - **24 metres (34-58m) @ 1.2% Cu**, including **1 metre (43-44m) @ 3.2% Cu**,
 - **15 metres (86-101m) @ 1.6% Cu**, including **2 metres (89-91m) @ 8.2% Cu**,
 - **12 metres (121-133m) @ 2.4% Cu**, including **3 metres (127-130m) @ 6.7% Cu and 0.3 g/t Au** in RC1104, and
 - **32 metres (90-122m) @ 1.0% Cu** including **6 metres (96-102m) @ 2.1% Cu** in RC1103.
- Next assay results expected to be released next week.

Horseshoe Metals Limited (ASX:HOR) ("Horseshoe" or "the Company") is pleased to provide details of the first results from resource drilling recently commenced at its 100% owned Horseshoe Lights Copper/Gold Project ("Horseshoe Lights Project"), located 75km west-northwest of Sandfire Resources NL's (ASX: SFR) DeGrussa Copper/Gold mine in Western Australia (see Figure 2).

RC Drilling

To date 947 metres of Reverse Circulation ("RC") drilling in six holes has been completed. Assay results from the first two holes (RC1103-1104) have now been received and have returned wide zones of copper intersections in both holes.

Page 1 of 16

ABN 20 123 133 166

24 Mumford Place Balcatta WA 6021 PO Box 695 Balcatta WA 6914

Ph (08) 6241 1844 Fax: (08) 6241 1811

www.horseshoemetals.com.au

ASX/MEDIA ANNOUNCEMENT

27 MAY 2015

ASX Code: HOR

Management

Mr Neil Marston

Managing Director/Company
Secretary

Mr Michael Fotios

Non-Executive Director

Mr Alan Still

Non-Executive Director

Issued Capital

Shares: 169.7 Million

Performance Rights: 2.8 M

Share Price: \$0.03

Market Capitalisation:

\$5.1 Million

Cash at Bank

(31 March 2015)

\$0.26 Million

ASX ANNOUNCEMENT 27 MAY 2015

The drilling programme aims to add copper tonnes and grade to the existing mineral resource block model with a particular focus on those areas within the optimised pit shell from the 2014 Scoping Study (*refer to ASX announcement dated 19 December 2014*) where drill hole density is low or largely based upon historical drill holes, many of which have not been surveyed down hole.

Results

RC1104 recorded several zones of copper mineralisation including the following intervals:

- **24 metres (34-58m) @ 1.2% Cu** including **1m (43-44m) @ 3.2% Cu;**
- **15 metres (86-101m) @ 1.6% Cu**, including **2m (89-91m) @ 8.2% Cu** and
- **12 metres (121-133m) @ 2.4% Cu**, including **3m (127-130m) @ 6.7% Cu and 0.3 g/t Au**

The best zone of copper mineralisation recorded in RC1103 was:

- **32 metres (90-122m) @ 1.0% Cu** including **6m (96-102m) @ 2.1% Cu**

A drill section with the above intervals for RC1103 and RC1104 is shown in Figure 1 and the location of the drill holes is shown in Figure 3. Details of laboratory assay results received are set out in Table 1.

Discussion

RC1103 & RC1104 were drilled to the north west of the existing open pit to infill a gap in the previous drilling completed by the Company. RC1104 was also drilled to twin an unsurveyed historical hole (RC555) and was collared within 5 metres of its reported location.

A comparison of mineralised intervals below shows that RC1104 has wider zones of copper mineralisation with higher grades than in RC555, which will clearly upgrade the copper mineral resource blocks in this part of the deposit.

RC1104 (drilled 2015)		RC555 (drilled 1988)	
Depth	Interval / Grade	Depth	Interval / Grade
34-58m	24m @ 1.2% Cu	32-60m	28m @ 1.1% Cu
86-101m	15m @ 1.6% Cu	84-92m	8m @ 0.8% Cu
105-114m	9m @ 0.8% Cu	110-126m	16m @ 0.6% Cu
121-133m	12m @ 2.4% Cu	130-142m (EOH)	12m @ 0.6% Cu
134-138m	4m @ 0.5% Cu		
140-146m	6m @ 1.2% Cu		

N.B. RC555 results are based on 2m composite assays and RC1104 results are based on 1m assays. RC1104 has not yet been surveyed; however it will be surveyed shortly.

Copper mineralisation observed in these drill holes consists predominantly of chalcopyrite and some chalcocite.



ASX ANNOUNCEMENT 27 MAY 2015

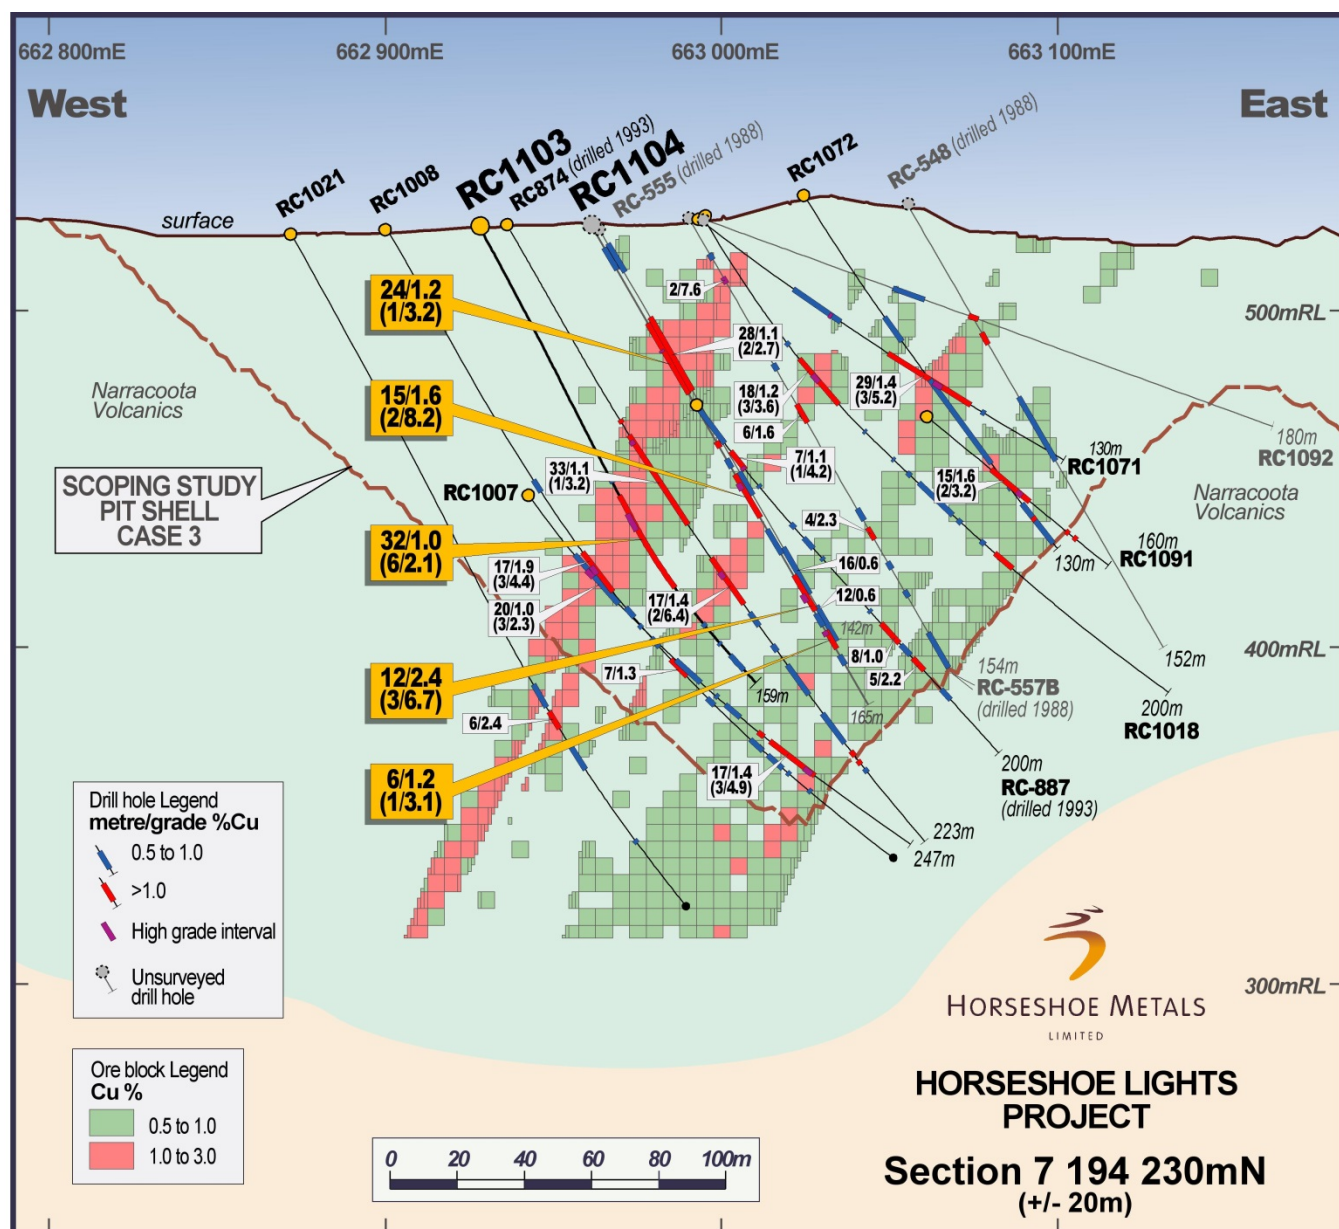


Figure 1 – Drill Section through RC1103 & RC1104

Future Activities

A total of 390 samples for RC1105 –RC1108 have been submitted to the laboratory for analysis and should be available for release late next week.

The drilling crew have returned to site after a short break to continue the programme. The drilling programme is expected to run to at least 30 June 2015.



ASX ANNOUNCEMENT 27 MAY 2015

TABLE 1
Horseshoe Lights Project
RC Drilling Programme
Significant Copper Intersections
(0.25% Cu cut-off)

Hole	Northing (m)	Easting (m)	Planned Azimuth (degrees)	Planned Dip (degrees)	Hole Depth (m)	From (m)	To (m)	Interval (m)	Cu % (average)	Au g/t (average)
RC1103	7194228	662928	90°	-60°	159	83	86	3	0.5	
						90	122	32⁺	1.0	
	<i>including</i>					96	102	6	2.1	
						136	137	1	0.8	
						143	144	1	0.5	
						148	154	6	0.5	
RC1104	7194234	662961	90°	-60°	165	8	16	8*	0.8	
						34	58	24⁺	1.2	
	<i>including</i>					43	44	1	3.2	
						75	77	2	1.2	
						81	84	3	0.9	
						86	101	15⁺	1.6	
	<i>including</i>					89	91	2	8.2	
						105	114	9	0.8	
						121	133	12	2.4	
	<i>including</i>					127	130	3	6.7	0.3
						134	138	4	0.5	
						140	146	6	1.2	
	<i>including</i>					140	141	1	3.1	
						148	151	3	0.4	

Notes: + includes 1 x 1m interval grading <0.25% Cu

* includes 1 x 1m interval missing

Insufficient information available to determine true width.

ENDS**For further information please contact:**

Neil Marston
Managing Director
Horseshoe Metals Limited
T: +61 8 6241 1844
M: +61 427 188 768
E: nam@horseshoemetals.com.au

James Moses
Media and Investor Relations
Mandate Corporate
M: +61 420 991 574
T: +61 2 8211 0612
E: james@mandatecorporate.com.au

ASX ANNOUNCEMENT 27 MAY 2015

About Horseshoe Metals Limited

Horseshoe Metals Limited is a copper and gold focused company with a package of tenements covering approximately 500km² in the highly prospective Peak Hill Mineral Field, located north of Meekatharra in Western Australia. The Company's projects are the Kumarina Project and the Horseshoe Lights Project (see Figure 2).

About the Horseshoe Lights Project

The Horseshoe Lights Project includes the old open pit of the Horseshoe Lights copper-gold mine which operated up until 1994, producing over 300,000 ounces of gold and 54,000 tonnes of contained copper including over 110,000 tonnes of Direct Shipping Ore (DSO) which graded between 20-30% copper.

The Horseshoe Lights ore body is interpreted as a deformed Volcanogenic Hosted Massive Sulphide (VMS) deposit that has undergone supergene alteration to generate the gold-enriched and copper-depleted cap that was the target of initial mining. The deposit is hosted by quartz-sericite and quartz-chlorite schists of the Lower Proterozoic Narracoota Formation, which also host Sandfire Resources' DeGrussa copper/gold mine.

Past mining was focused on the Main Zone, a series of lensoid ore zones which passed with depth from a gold-rich oxide zone through zones of high-grade chalcocite mineralisation into massive pyrite-chalcopyrite. To the west and east of the Main Zone, copper mineralisation in the Northwest Stringer Zone and Motters Zone consists of veins and disseminations of chalcopyrite and pyrite and their upper oxide copper extensions.

The table below summarises the total Mineral Resources for the Horseshoe Lights Project as at 31 December 2014.

HORSESHOE LIGHTS PROJECT SUMMARY OF MINERAL RESOURCES AS AT 31 DECEMBER 2014								
Location	Category	Tonnes (Mt)	Cu (%)	Au (g/t)	Ag (g/t)	Cu metal (tonnes)	Au metal (oz)	Ag metal (k oz)
In-situ Deposit (0.5% Cu cut-off grade)	<i>Measured</i>	1.73	1.04	0.0	0.5	18,000	1,900	28.8
	<i>Indicated</i>	2.43	0.95	0.0	0.7	23,200	3,400	52.2
	<i>Inferred</i>	8.69	1.01	0.1	2.6	87,400	30,700	712.4
	Total	12.85	1.00	0.1	1.9	128,600	36,000	793.4
Flotation Tailings	Inferred	1.421	0.48	0.34	6.5	6,800	15,300	294.8
M15 Stockpiles	Inferred	0.243	1.10	0.17	4.7	2,650	1,300	36.7
Note: At 0% Cu cut-off grade unless otherwise stated						TOTAL	138,050	52,600
							1,124.9	



ASX ANNOUNCEMENT 27 MAY 2015

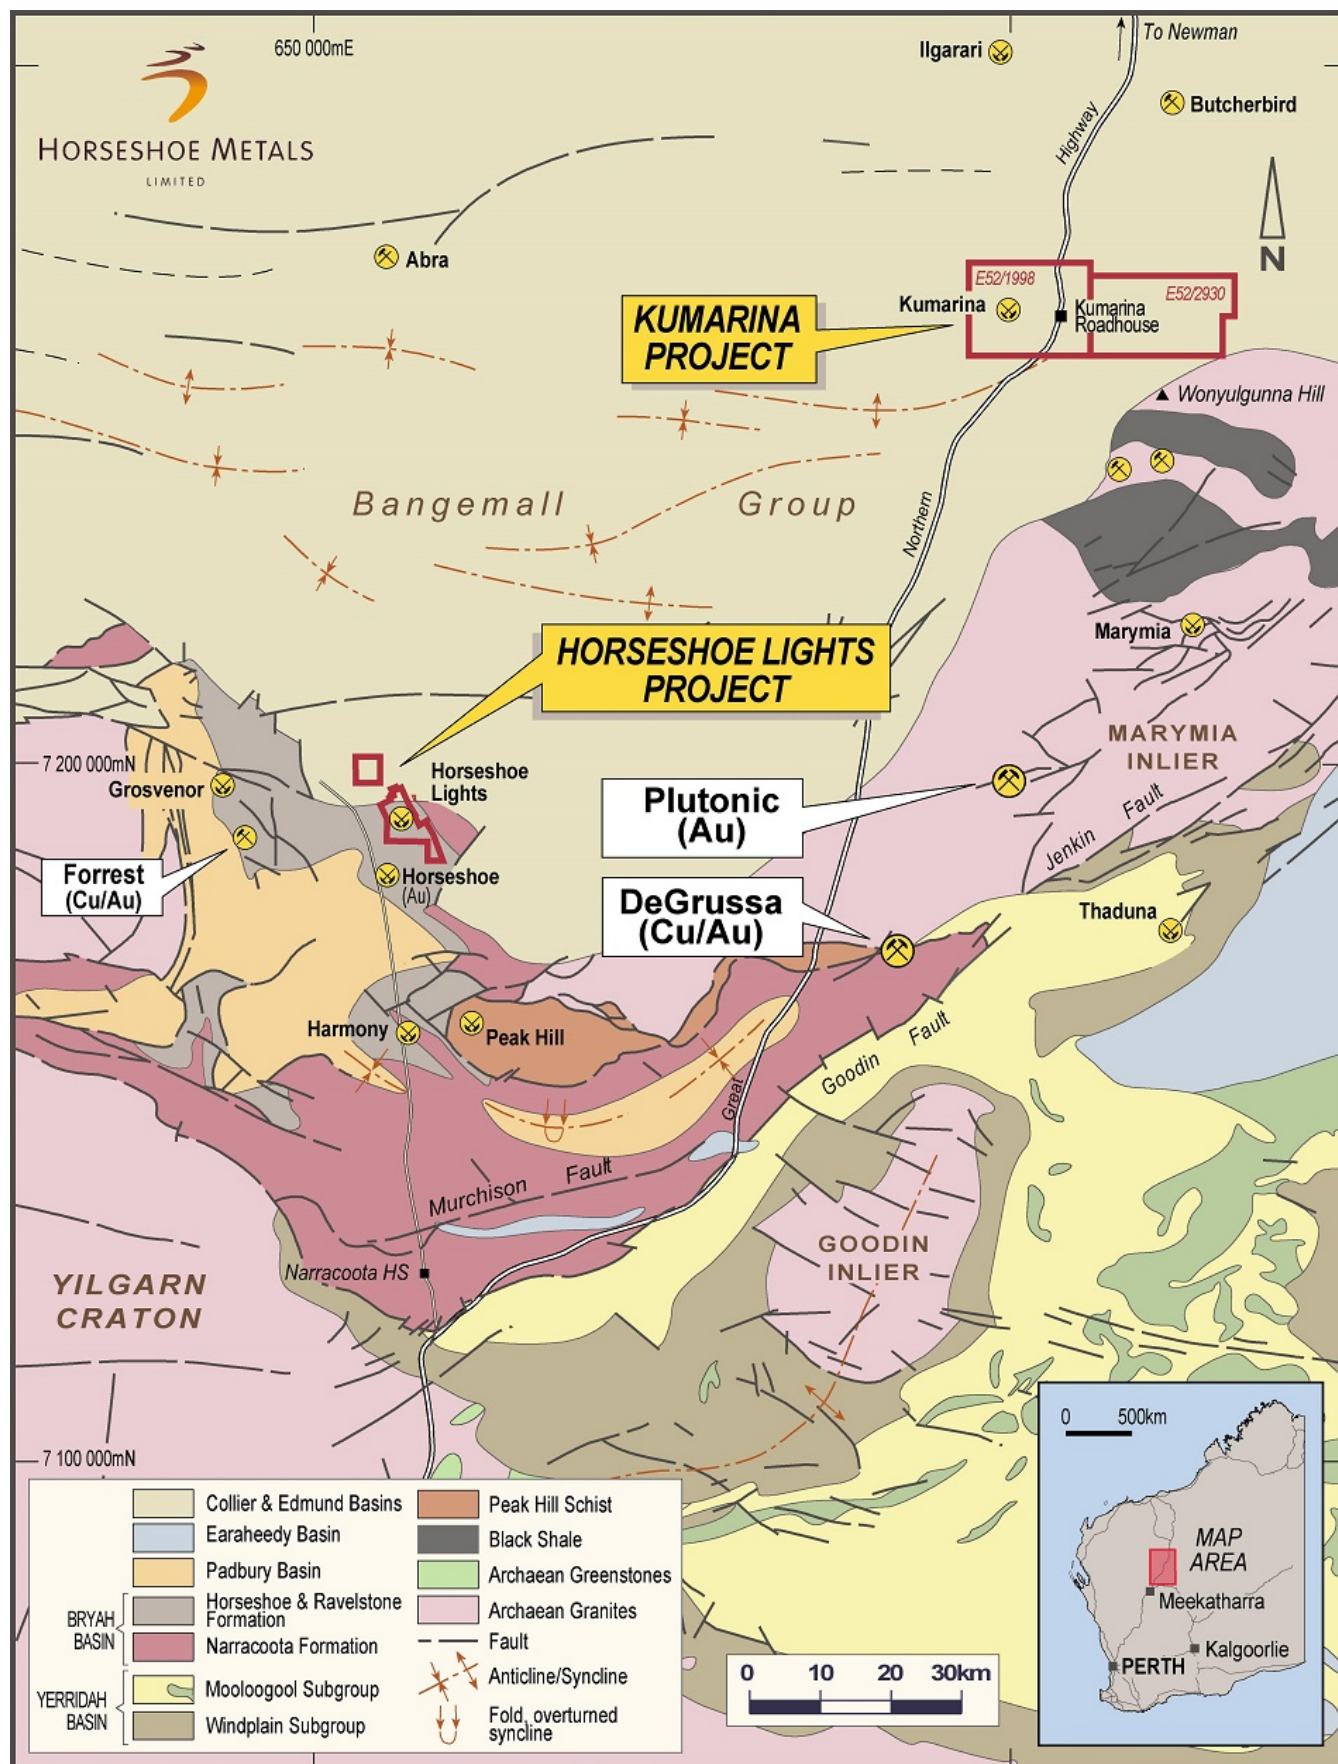


Figure 2 - Projects Location Plan



ASX ANNOUNCEMENT 27 MAY 2015

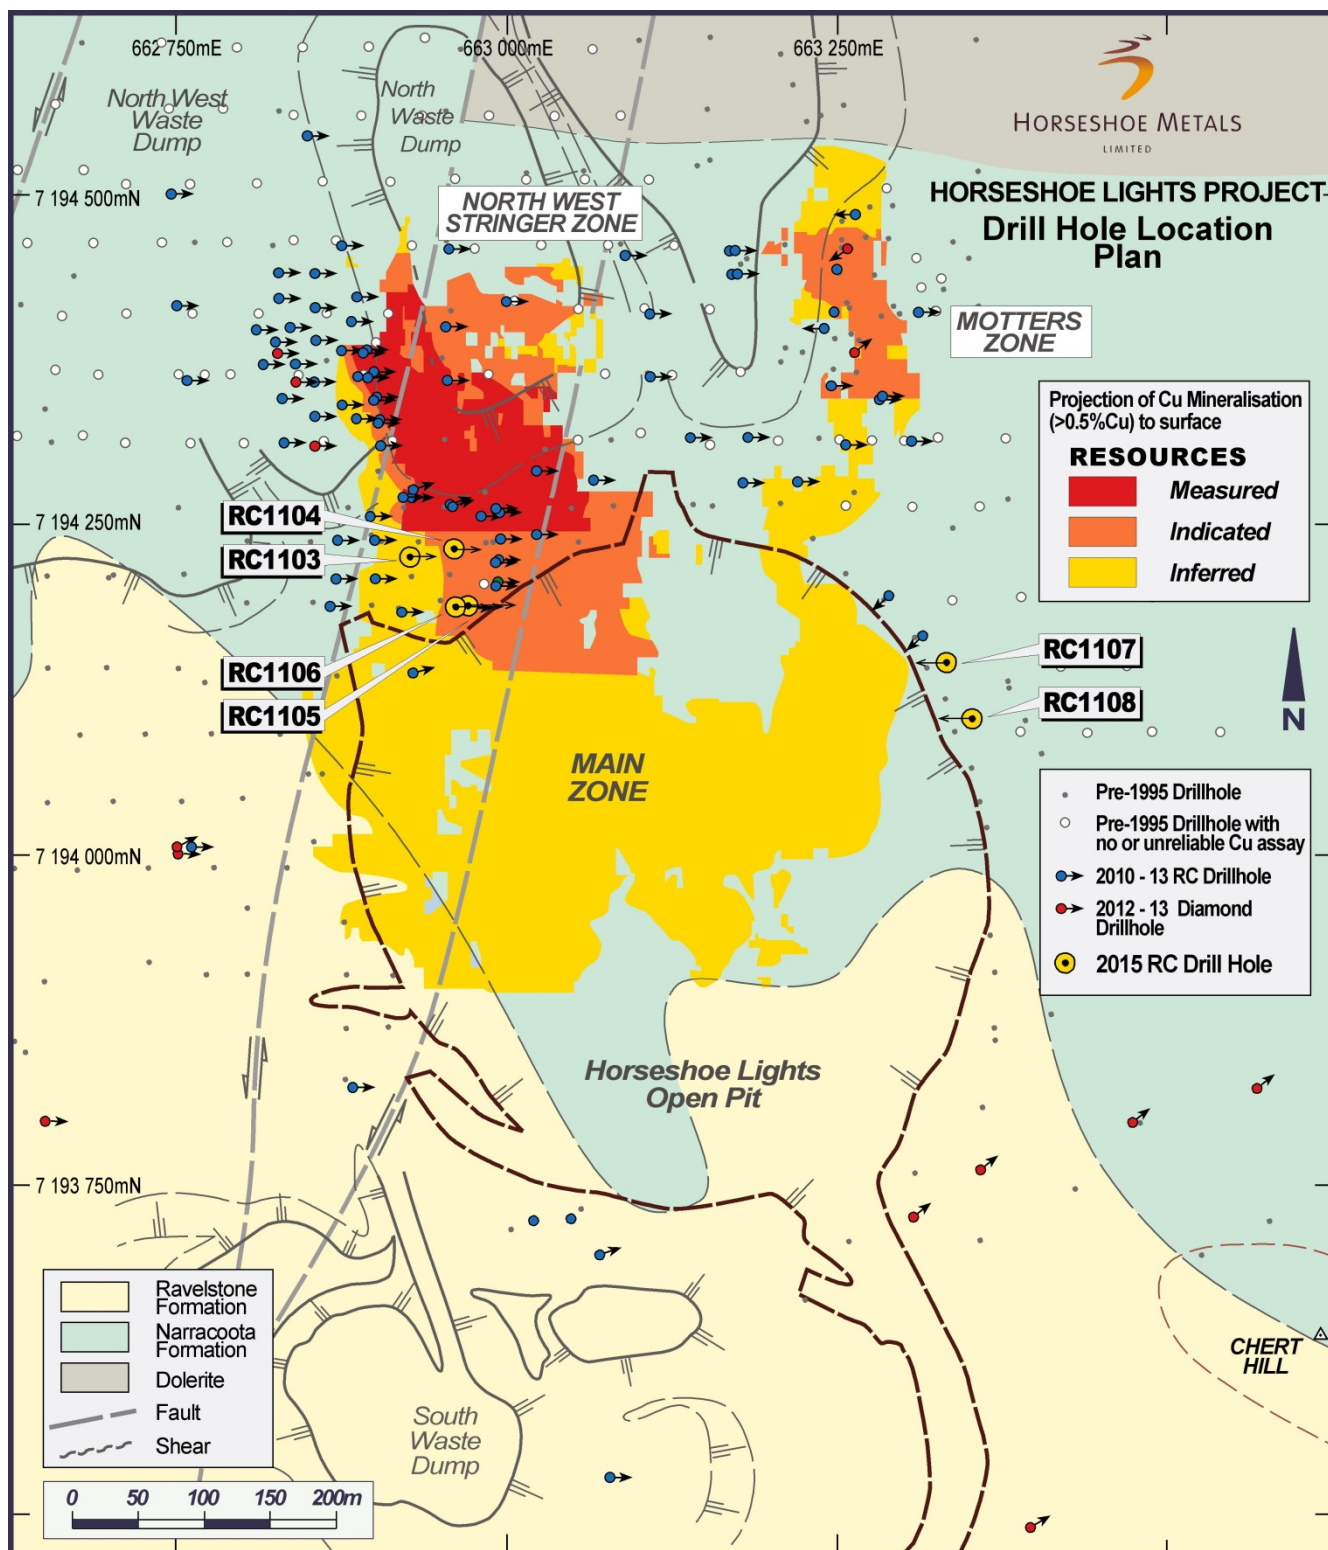


Figure 3 – Drill Hole Location Plan



ASX ANNOUNCEMENT 27 MAY 2015

APPENDIX 1 - JORC Code Reporting Criteria

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC-Code Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	Exploration results are collected using standard industry practices for sampling, assay methods and QAQC. Reverse circulation (RC) samples weighing approx. 3kg are collected as individual 1m samples through a cyclone which are riffle split for analysis. Each sample is analysed with a handheld Delta Premium XRF in the field.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	RC samples within zones of visual oxide or sulphide mineralisation or producing elevated readings of copper as determined by handheld XRF are sent for laboratory assaying as 1m riffle split samples. The remaining intervals of the drill hole are submitted as 3m speared composite samples. Any anomalous composite samples are to be re-submitted as original 1m split samples. The handheld XRF was regularly calibrated as per manufacturer's specifications. In addition QAQC measures included the use of duplicates and certified reference materials on a 1:25 ratio for all XRF readings.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	Industry standard practice was used for copper analysis whereby a 3kg RC drill sample representing a 1m sample interval was used to obtain a 150g pulp for analysis. Similarly for gold analysis the same sample was used to obtain a 10g charge for aqua regia analysis.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i>	The drill holes were completed using the Reverse Circulation (RC) technique with a 5½" face sampling bits.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	Visual inspection of the sample volume indicates sample recovery is excellent. Any poor sample recovery or condition is noted in the drill hole database.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	RC samples are visually checked for recovery, moisture and contamination. A cyclone and splitter are used to provide a uniform sample and these are routinely cleaned. The drill



ASX ANNOUNCEMENT 27 MAY 2015

Criteria	JORC-Code Explanation	Commentary
		contractor blew out the hole at the beginning of each drill rod to remove excess water and maintain dry samples.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	Ground conditions for RC drilling are good and drilling returned consistent size samples. RC recoveries are high enough to preclude the potential for sample bias.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Logging of RC drilling identifies all aspects of lithology, colour, weathering texture, alteration and mineralisation including percentage estimates of oxide/sulphide content. All primary recorded on site data was directly imported into a drill hole database and checked against the original data. During logging part of the RC sample was sieved, logged and placed in RC chip trays. The logging also includes references to wet samples in the comments.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i>	The lithology data is qualitative but magnetic susceptibility was also recorded. All reverse circulation samples have been photographed in wet form and the chip trays are retained for physical inspection on-site and in the Perth office.
	<i>The total length and percentage of the relevant intersections logged.</i>	All RC holes are logged from start to end of hole.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	No diamond core drilled during this program.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i>	All RC samples are initially riffle split on a 1:7 ratio and only dry samples are assayed.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	RC sample procedure follows industry best practice whereby samples are sorted, reconciled, placed onto trolleys and dried in a gas oven at 110°C for minimum of 8 hours or until dry. Samples ranging from 300g - ≤3kg are crushed to nominal ~10mm using a jaw crusher and then pulverised using LM2, LM5 or Mixer Mill pulverisers. Samples >3kg are Boyd crushed to a nominal ~3mm and split in half using Boyd rotary split divider, one half is then pulverised the other retain, bagged and stored. After pulverising a 150g craft geochemical (pulp) packet is taken directly from the pulveriser bowl and submitted to the laboratory for analysis.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Laboratory QAQC methods include insertion of blanks and undertaking check samples for significant assay results.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Field duplicates are collected and submitted on a 1:50 ratio. The assay result is then compared to the original samples and is expected to fall within 2 standard deviations.



ASX ANNOUNCEMENT 27 MAY 2015

Criteria	JORC-Code Explanation	Commentary
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The sample size is considered industry standard for base metal mineralisation.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	<p>All samples are submitted to Genalysis Laboratories (Intertek). The Copper assay is derived using a mixed acid digest of nitric, hydrofluoric, perchloric and hydrochloric acids on 0.2g of sample and analysed using ICP Optical Emission Spectrophotometry.</p> <p>The gold assay was derived using an aqua regia technique where 10g of prepared sample is digested using nitric and hydrochloric acid. The sample is then solvent extracted using Methyl isobutyl ketone and read on a Graphite Furnace Atomic Absorption Spectrometer.</p> <p>These methods are considered adequate and effective for this style of mineralisation.</p>
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	The Handheld XRF used to determine sample type i.e. 1m split or composite sample is a Delta Premium. All data is collected using 30 second reading time for all 3 beams on soil mode. The instrument is calibrated according to manufacturer's specification and tested regularly using duplicates and certified reference materials every 25 th sample.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	In addition to internal laboratory checks the company submits field duplicates and standards on a 1:25 ratio. External laboratory checks are planned for significant assay results but have yet to be completed.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	None undertaken in this programme
	<i>The use of twinned holes.</i>	RC1104 is a twinned hole of RC-555. The purpose of the broader drill program is to infill and verify mineralised intervals and grades determined from existing drilling.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	All drilling and sample data is captured in the field electronically using established templates and verified in Perth office before upload into database.
	<i>Discuss any adjustment to assay data.</i>	No adjustments undertaken.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	<p>Initial collar locations are determined by handheld Garmin GPS but will be surveyed using DGPS by licensed surveyors before resource estimates are undertaken.</p> <p>Downhole surveys consisted of single shot digital camera readings obtained at 18m and every 50m interval thereafter.</p>
	<i>Specification of the grid system used.</i>	Grid system coordinates are GDA94 MGA Zone 50.



ASX ANNOUNCEMENT 27 MAY 2015

Criteria	JORC-Code Explanation	Commentary
	<i>Quality and adequacy of topographic control.</i>	Topographic control was created from known survey stations and air photography in strict accordance with Mines Regulation Act 1946 by the authorised mine surveyor.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i>	Resource drilling in this program to date used approx. 20m spacing.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	The resource drilling spacing and results employed in this program are consistent with previous drill spacing and results that are part of a JORC compliant mineral resource.
	<i>Whether sample compositing has been applied.</i>	Composite sampling over 4m has been employed for non- mineralised samples producing a XRF reading below 1000ppm.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drilling in this program is orientated east-west to maintain consistency and spacing with previous drilling.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	As stated above.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	Prior to submission all samples are stored on-site under supervision of the project geologist. Samples are transported to Meekatharra by Horseshoe Metals personnel and then onto the assay laboratory by licensed couriers.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews have been performed to date.



ASX ANNOUNCEMENT 27 MAY 2015

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC-Code Explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	<p>The Horseshoe Lights Project comprises one Mining Lease (M52/743), one Exploration Licence (E52/2042), nine Prospecting Licences (P52/1203-1211) and five Miscellaneous Licences (L52/42 -45 and L52/66) covering an area of approximately 60 km² (6,000 hectares). Current registered holder of the tenements is Murchison Copper Mines Pty Ltd which is a wholly owned subsidiary of Horseshoe Metals Limited.</p> <p>Murchison Copper Mines Pty Ltd has 100% interest in the tenements. Unrelated party Horseshoe Gold Mine Pty Ltd (a subsidiary of Granges Resources Limited) retains a 3% net smelter return royalty in respect to all production derived from some of the Horseshoe Lights Project tenements, namely M52/743, P52/1203 – 1206, E52/2042 (portion only) L52/42 – 45 and L52/66.</p> <p>Native title interests have been extinguished in regards to Mining Lease 52/743.</p> <p>There are no historical or environmentally significant sites on Mining Lease 52/743.</p>
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	Mining Lease 52/743 is in good standing and the Company is unaware of any impediments to it obtaining a licence to operate in the area.



ASX ANNOUNCEMENT 27 MAY 2015

Criteria	JORC-Code Explanation	Commentary
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<p>The Horseshoe Lights deposit surface gossan was discovered in 1946 and worked at a prospect level until 1949. Open pit and underground workings were operated by Anglo-Westralian Pty Ltd, a subsidiary of Asarco Incorporated from 1949 to 1954. Asarco explored the deposit by sampling surface trenches, drilling one surface diamond drill hole, underground drilling and cross-cutting underground on two levels.</p> <p>In 1964, Electrolytic Zinc Company of Australia Pty Ltd conducted widespread exploration including eight diamond drill holes in a search for copper. Seven of the holes intersected oxidised material above 200 m depth. Drill hole EZ7 intersected sulphide copper mineralisation between the intervals 177-204m and 290-335m. Due to the low copper grade of the drill intercepts EZ relinquished the tenements.</p> <p>During 1969 and 1970 Planet Metals Ltd drilled seven holes and achieved several intercepts grading between 0.5% and 1.0% copper. Several of the holes were abandoned short of the target depth because of difficult drilling conditions.</p> <p>In the period 1975 to 1977, Amax Iron Ore Corporation and its partner Samantha Mines NL ("Samantha") investigated the Horseshoe Lights area for base metals. This investigation included drilling a further three diamond drill holes including one beneath the southern end of the main ore zone. Placer Austex Pty Ltd, Samantha and Homestake Mining Company Ltd also investigated the property.</p> <p>Previous exploration activities during the main phase of open pit mining were completed by Horseshoe Gold Mine Pty Ltd which was a wholly owned subsidiary of Barrack Mines Ltd between 1983-89 and Sabminco NL (now Grange Resources Limited) between 1990-1993. Barrack Mines Ltd drilled 43 diamond holes for 15,353m, 638 Reverse Circulation holes for 55,343m and 19 channel samples for 520m between 1983 and 1989.</p> <p>Sabminco NL drilled 14 HQ & NQ diamond holes for 2672.25m and 108 Reverse Circulation holes for 9,244m between 1990 and 1993. Initial drill hole spacing was on a nominal spacing of 50 x 50m with infill as required in the pit area.</p>



ASX ANNOUNCEMENT 27 MAY 2015

Criteria	JORC-Code Explanation	Commentary
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	Primary VMS mineralisation at Horseshoe Lights occurs in the core of a NNW trending and SE plunging parasitic anticline, that is overturned to produce intermediate SW dips on western limbs and steep SW dips on eastern limbs. The massive and disseminated sulphide envelope of the deposit itself is also SW dipping and plunging to the SSE (150°), and was likely folded. It sits within altered basalt and mafic volcanoclastic units along the contact with overlying felsic volcanic schist. The VMS mineralisation in the mine area is constrained by the tightly folded and sheared stratigraphy, and appears to be affected by offsets along N-S and NE trending brittle cross faults.
Drill hole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <ul style="list-style-type: none"> • <i>easting and northing of the drill hole collar</i> • <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> • <i>dip and azimuth of the hole</i> • <i>down hole length and interception depth</i> • <i>hole length.</i> <p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	<p>Refer to the body of text of this report and Table 1 for all information material to the understanding of the exploration results.</p> <p>No exclusions of information have occurred.</p>
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	Only 1m split samples are reported and simply averaged over the mineralised interval. A 0.25% cut-off grade has been used unless otherwise noted in Table 1
	<i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	Intercepts that consist of high grade results within a longer lower grade zone are detailed separately to avoid confusion (refer to Table 1)
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Not applicable.



ASX ANNOUNCEMENT 27 MAY 2015

Criteria	JORC-Code Explanation	Commentary
<i>Relationship between mineralisation widths and intercept lengths</i>	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	Exploration drilling in this program is either vertical or orientated perpendicular to interpreted mineralisation trend.
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to diagrams in body of text.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	See Table 1 for all exploration results
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	In the company's opinion this material has been adequately reported in previous announcements and the detail is not relevant for reporting of these exploration results.
<i>Further work</i>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	Drilling is planned to upgrade the resources and check the extent of the mineralised zones to the east of the existing pit as stated.
	<i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Refer to diagrams in body of text.



ASX ANNOUNCEMENT 27 MAY 2015

Competent Persons Statement

The information in the report to which this statement is attached that relates to Exploration Results is based on information compiled by Mr Geoff Willetts, BSc. (Hons) MSc. who is a Member of the Australian Institute of Geoscientists. Geoff Willetts is an employee of Horseshoe Metals Limited. Geoff Willetts has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Geoff Willetts consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this report that relates to the Horseshoe Lights Project Mineral Resources is based on information compiled by Mr. Dmitry Pertel, who is a member of the Australian Institute of Geoscientists. Mr. Pertel is an employee of CSA Global Pty Ltd. The information was previously issued with the written consent of Mr Dmitry Pertel in the Company's 30 June 2013 Quarterly Report released to the ASX on 31 July 2013. The Company confirms that:

- (a) the form and context in which Mr. Dmitry Pertel's findings are presented have not been materially modified.*
- (b) it is not aware of any new information or data that materially affects the information included in the 31 July 2013 ASX announcement and that all the material assumptions and technical parameters underpinning the estimate in the 31 July 2013 ASX announcement continue to apply and have not materially changed.*
- (c) it is uncertain that following evaluation and/or further exploration work that the historical estimates will be able to be reported as mineral resources in accordance with the JORC Code.*

The information in this report that relates to the Horseshoe Lights Project flotation tailings and surface stockpiles Mineral Resources is based on information compiled by Mr Geoff Willetts, BSc. (Hons) MSc. who is a Member of the Australian Institute of Geoscientists. Geoff Willetts is an employee of Horseshoe Metals Limited. The information was previously issued with the written consent of Mr Geoff Willetts in announcements released to the ASX on 26 February 2015 and 9 March 2015. The Company confirms that:

- (a) the form and context in which Mr Geoff Willetts' findings are presented have not been materially modified.*
- (b) it is not aware of any new information or data that materially affects the information included in the 26 February 2015 and 9 March 2015 ASX announcements and that all the material assumptions and technical parameters underpinning the estimates in the 26 February 2015 and 9 March 2015 ASX announcements continue to apply and have not materially changed.*
- (c) it is uncertain that following evaluation and/or further exploration work that the historical estimates will be able to be reported as mineral resources in accordance with the JORC Code.*