



## EXCHANGE RELEASE

---

### Baobab Project Update

---

22 September 2015

- **Baobab Project positioned for an expected decision to proceed with mining in the coming months**
- **Environmental Impact Study at final stage of approval**
- **Water drilling MOU signed with Bauer**
- **Expert product assessment by CRU Consulting confirms attractive specifications and premium market pricing**
- **Infill drilling confirms the presence of a significant mineralised body within the Small Mine Permit**

Minemakers Managing Director and CEO Cliff Lawrenson said, *"We continue to make rapid progress towards a decision to commence mining at the Baobab Project. We are particularly pleased by the expert's validation of our ability to deliver a potential premium product and the outstanding infill drilling results that have been achieved over the past several months. We look forward to further progress toward commencement of mining."*

Minemakers Limited ("Minemakers") is pleased to announce a number of key achievements as the Company progresses the Baobab Rock Phosphate Project (the "Baobab Project") towards a decision to commence mining over the next few months. The decision will ultimately be made by the board of Minemakers with reference to technical and economic information, permits and other factors at the time of such decision.

### ***Small Mine Permit***

The application for a Small Mine Permit (SMP) was submitted in March 2015 and was subsequently granted in May 2015, subject to the completion of an Environmental Impact Study ("EIS") and Community Support and Relocation Plan ("CSR"). Both the EIS and CSR are in the final stages of approval, and are expected to be formally approved by the Senegal Government in the next few weeks.

### ***Water Drilling***

Preparation for water drilling is currently underway in accordance with an MOU previously signed with Bauer, the preferred drilling contractor for this task. The drill rig is now in Dakar and final review of the drilling contract is due to be completed before the end of September, with a view to commencing drilling shortly thereafter.

### ***Product Assessment and Offtake***

Minemakers commissioned a value in use analysis by CRU Consulting, a division of CRU International Limited, in relation to two product specifications derived from representative material gathered in technical drilling within the area of the SMP. This analysis estimates market values, FOB Dakar, for each product to various export markets and indicates premiums for both products over the Moroccan benchmark specification for producers of wet process phosphoric acid and related fertilisers. The analysis further indicates that the Brazilian and SE Asian markets offer the highest netback prices to FOB Dakar. While CRU Consulting identifies possible marketability issues and considerations with both products, Minemakers believes that these considerations are not material.

Offtake discussions with potential local and export customers are progressing with samples having been provided to these parties for further assessment.

### ***Drilling Results***

The results of an infill drilling program conducted over the past few months has confirmed the presence of a significant body of phosphate mineralisation within the SMP. Infill drilling is to resume after a planned four week break and it is expected that by the end of 2015, Minemakers will have sufficient supporting data to enable estimation of an Indicated Resource within the SMP. The current Inferred Resource estimate stands at 25 million tonnes @ 23% P<sub>2</sub>O<sub>5</sub>, as announced on 11 May 2015.

The infill program focused on the SMP area to improve the understanding of the resource and to gather samples for metallurgical testing. This program has included 53 air core holes for 2,340 metres and 61 diamond holes for 2,522 metres of drilling.

While there is further drilling to complete, initial assay results have confirmed that there is a significant body of mineralisation in the north-east sector of the Project area, Area C, and that the mineralisation extends to the south and east. There is also a significant thickness of mineralisation to the east of the SMP with further drilling required to determine whether it is contiguous with the Area C mineralisation. Thick mineralisation in the north-west and south sectors of the SMP have been defined by 250 x 250 metre grid spacing and will be infilled to 125 x 125 metre grid spacing over the next 12 months. Selected mineralised intercepts are presented in Table 1 below. Details of all drilling are included in a table of material drill intercepts, included in Appendix 1. Other material information is included in the mandatory JORC 2012 Table 1, include as Appendix 2.

Hole ID	Easting	Northing	RL	Dip	Total depth	Mineralised intercept data (average grade over width)						
						From	To	Width	P <sub>2</sub> O <sub>5</sub> %	Fe <sub>2</sub> O <sub>3</sub> %	Al <sub>2</sub> O <sub>3</sub> %	MgO%
RGDD0047	340756	1645496	33	-90°	45.4	31.6	42.6	11.0	22.8	2.32	1.27	0.02
						36.6	40.6	4.0	30.5	3.19	0.82	0.01
RGDD0045	340874	1645498	33	-90°	44.1	30.7	41.3	10.6	24.5	1.79	1.66	0.07
						30.7	36.3	5.6	32.7	1.91	2.22	0.12
						30.7	33.3	2.6	38.1	1.70	0.56	0.01
RGRC0413	340628	1645380	34	-90°	48	36	46	10	20.6	2.60	1.71	0.10
						37	40	3	31.4	2.40	0.74	<0.05
RGDD0041	340995	1645249	32	-90°	45.3	34	43	9.0	27.2	3.79	1.27	0.03
						35	39	4.0	31.8	2.95	0.87	0.02
						38	39	1.0	36.4	1.89	0.59	0.01
RGRC0408	340503	1645625	31	-90°	48	37	46	9	24.9	1.56	2.11	0.22
						38	42	4	35.8	1.19	1.10	<0.05
RGDD0092	341254	1645377	44	-90°	45	35.4	43.4	8.0	23.7	5.32	2.27	0.24
						36.4	40.4	4.0	31.2	3.57	1.18	0.02
						37.4	39.4	2.0	35.5	3.49	0.76	0.02
RGRC0426	341124	1645499	31	-90°	45	35	42	7	28.5	1.46	2.00	0.09
						36	40	4	35.1	0.39	0.84	<0.05
						37	38	1	39.4	0.19	0.48	<0.05
RGDD0089A	341369	1645379	39	-90°	44.5	35.4	42.4	7.0	26.3	1.97	1.88	0.03
						37.4	41.4	4.0	30.7	1.58	1.61	0.02
						38.4	39.4	1.0	38.1	1.51	0.95	<0.01
RGRC0380	341275	1644717	34	-90°	38	30	37	7	24.2	2.74	3.30	0.81
						30	35	5	30.5	2.22	1.59	<0.05
						31	34	3	34.4	1.12	0.89	<0.05
RGDD0088	341125	1644501	40	-90°	38	31.1	37.1	6.0	25.8	3.21	3.41	0.41
						32.1	34.1	2.0	35.6	1.53	1.18	0.02
Maximum of 2 metres of internal waste excluded												

**Table 1. Selected drill intercepts. (Note: all drilling is vertical therefore no azimuth shown)**

**Cliff Lawrenson**  
Managing Director

### **Competent Persons' and Qualified Person's Statement**

*The scientific and technical information in this document is based on, and fairly represents, information and supporting documentation prepared by Russell Fulton, who is the Geological Manager of the Company and a Member of the Australian Institute of Geoscientists, and who has reviewed and approved the scientific and technical information in this document. Mr Fulton has sufficient experience deemed relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' and a 'Qualified Person' as defined in National Instrument 43-101 – Standards of Disclosure for Mineral Projects. Mr Fulton consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.*

*For further information on the Senegal Phosphate Project please refer to Minemakers' market announcements dated 27 April 2015 and 11 May 2015 ("Prior Announcements") and the NI43-101 technical report entitled "Technical Report Mineral Resource Estimation for the Gadde Bissik Phosphate Deposit, Republic of Senegal" dated 9 June, 2015 and available on SEDAR at [www.sedar.com](http://www.sedar.com). . Minemakers is not aware of any new information or data that materially affects the information included in those Prior Announcements.*

### **Cautionary Statement Regarding Forward-Looking Information**

*All statements, trend analysis and other information contained in this document relative to markets for Minemakers' trends in resources, recoveries, production and anticipated expense levels, as well as other statements about anticipated future events or results constitute forward-looking statements. Forward-looking statements are often, but not always, identified by the use of words such as "seek", "anticipate", "believe", "plan", "estimate", "expect" and "intend" and statements that an event or result "may", "will", "should", "could" or "might" occur or be achieved and other similar expressions. Forward-looking statements are subject to business and economic risks and uncertainties and other factors that could cause actual results of operations to differ materially from those contained in the forward-looking statements. Forward-looking statements are based on estimates and opinions of management at the date the statements are made. Minemakers does not undertake any obligation to update forward-looking statements even if circumstances or management's estimates or opinions should change. Investors should not place undue reliance on forward-looking statements.*

## APPENDIX 1 – Exploration Details

Drilling at the Baobab Project has been continuous since recommencing in early March this year with a total of 53 air core holes (2,340 metres) and 57 diamond holes (2,385 metres) drilled. An air core drilling program on a 250 x 250 metre spaced grid was completed in late April. A small portion of thicker, higher grade mineralisation was drilled out at 125 x 125 metres grid spacing with air core drilling before switching to PQ (90mm) diameter diamond drilling.

The first phase of the diamond drilling program was designed to recover core for metallurgical test work in South Africa and also to provide six additional duplicate holes to existing air core drill holes for quality assurance purposes. The second phase of the diamond program was resource definition drilling on a 125 x 125 metres grid pattern. Diamond drilling was selected as the preferred method for closer-scale infill drilling in order to provide more detailed geological information and to allow for samples for ongoing density determination as well as providing samples for marketing and more metallurgical test work if required. Drill hole locations are shown in Figure 1 and coordinates and intercept data are shown in Table 1. An additional 32 diamond holes (1,284 metres) have been completed and are analytical results are awaited.

Although sample recovery in mineralisation has been more consistent in the diamond drilling than the air core drilling, a comparison of twinned air core /diamond holes indicates that there are similar average mineralisation thicknesses and phosphate grades in both types of drilling. There is no evidence of a systematic bias due to preferential sample loss or gain. Material drill hole data is included in Table 1 below.

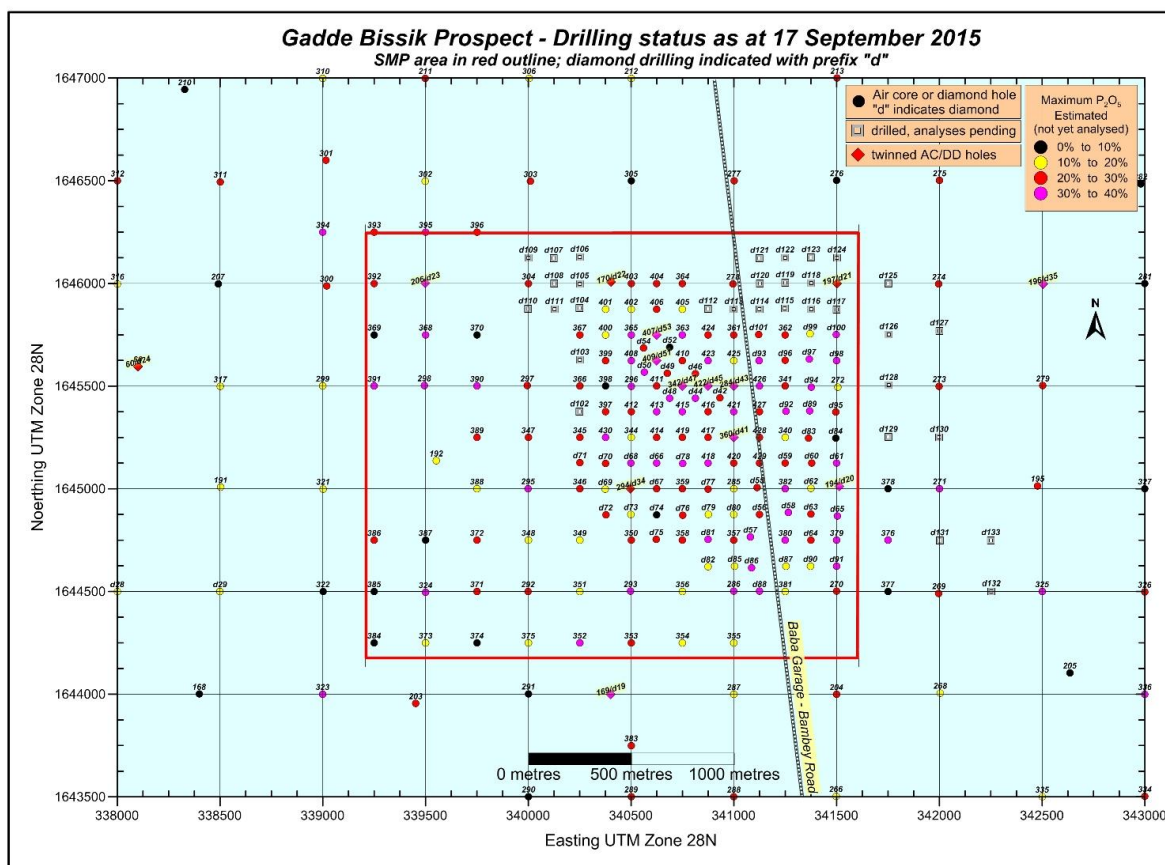


Figure 1 – Drill hole location

Following the completion of the 250 x 250 metre program, drilling concentrated on infilling and extending one of the better mineralised areas defined by the 250 x 250 metre drilling, in the north-east sector of the SMP. A small amount of sterilisation drilling has also taken place to aid in planning of potential future mine infrastructure.

Figure 2 shows the thickness of mineralisation at a cut-off grade of 5%  $P_2O_5$  modelled with ordinary kriging. The data source is from drill results and from geological logging for holes that have not been

analysed. Phosphate mineralisation is relatively coarse-grained and easily visible in both air core and diamond drill core. Figure 3 depicts modelling of grade x metre (5%  $P_2O_5$  cut-off), used as a proxy for contained phosphate. There is generally good correlation between contained phosphate and thickness of mineralisation.

The infill drilling to date has confirmed that there is a significant body of mineralisation in the north-east sector, Area C, and that the mineralisation extends to the south and east. There is also a significant thickness of mineralisation to the east of the SMP with further drilling required to determine whether it is a separate body to the SMP. Thick mineralisation in the north-west and south sectors of the SMP have been defined by 250 x 250 metre grid spacing and will be infilled to 125 x 125 metre grid spacing over the next 12 months. Mineralisation to the south of Area C has been shown to be less continuous than defined by the wider-spaced drilling.


The infill drilling has continued to demonstrate the consistent and relatively simple stratigraphic succession in the Gadde Bissik area. Basal units of the Senegal Sedimentary Basin comprise a sequence limestone or dolostones which have been rarely intersected by drilling. These units are overlain by marls and local zones of nummulitic limestones and they underlie the phosphatic sediments. The contact between basement units and phosphatic sediments is commonly marked by a variably developed but distinctive ferruginous marly clay layer, uncomfortably overlaying the basement. Where present this layer generally ranges from around 1 to 3 metres in thickness. This layer typically carries low to medium grade phosphate mineralisation.

The main phosphate zone comprises poorly consolidated clayey sandstone generally ranging from around two to twelve metres thick and averaging around three metres thick. Within this layer phosphate mineralisation is variably developed and occurs as soft to hard pebbles of phosphate of lime, gravels of phosphate of alumina and ferruginous gravels. In higher grade zones the phosphate generally occurs as pebbles varying from brown to beige to white. Phosphate grades range from 5% up to 38%  $P_2O_5$ .


The main phosphate layer is typically overlain by a gravelly layer containing aluminium phosphates with  $P_2O_5$  grades generally less than 5%. Where present, this layer is generally around one to rarely five metres thick. The aluminium phosphate zone is overlain by clayey sands.

A schematic section through the mineralisation is depicted in Figure 4 below.




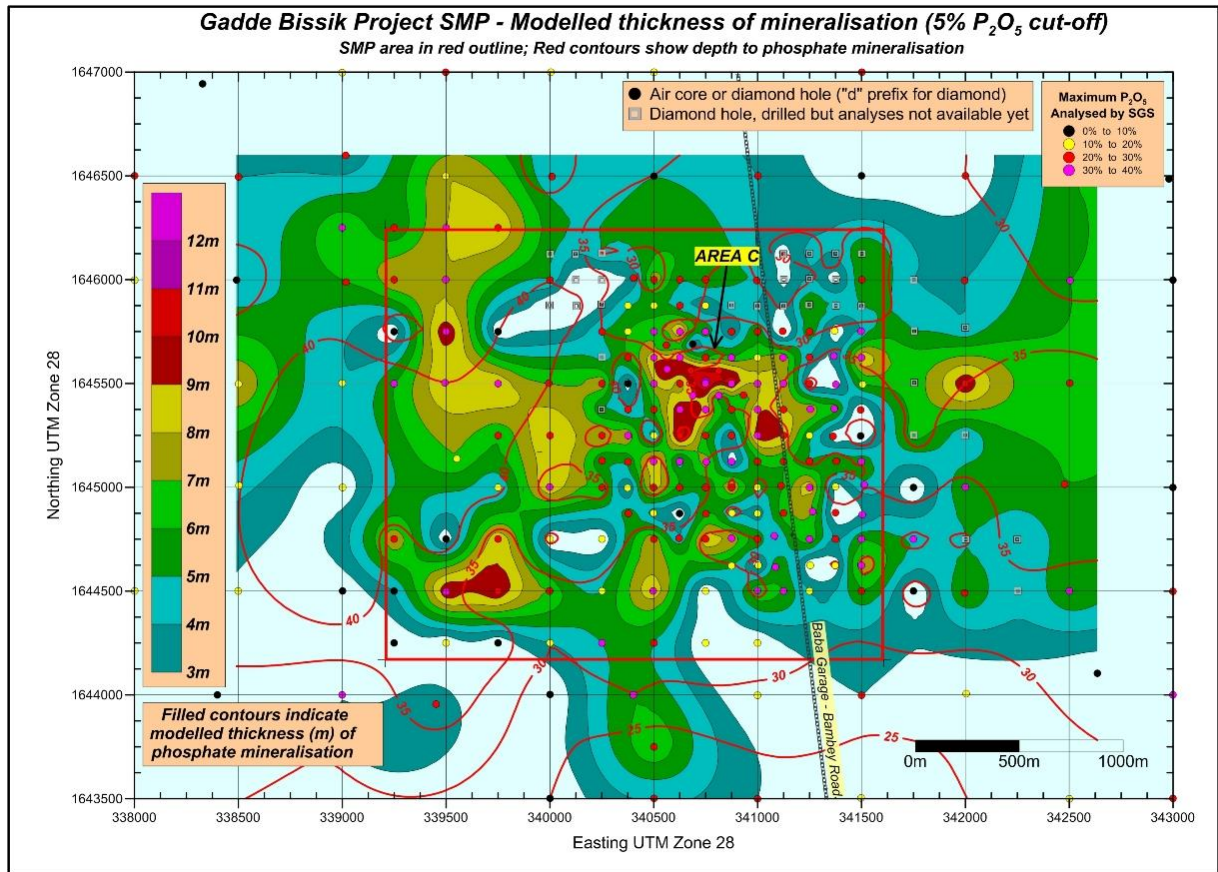

**Figure 2 – Modelled phosphate mineralisation thickness (5%  $P_2O_5$  cut-off)**

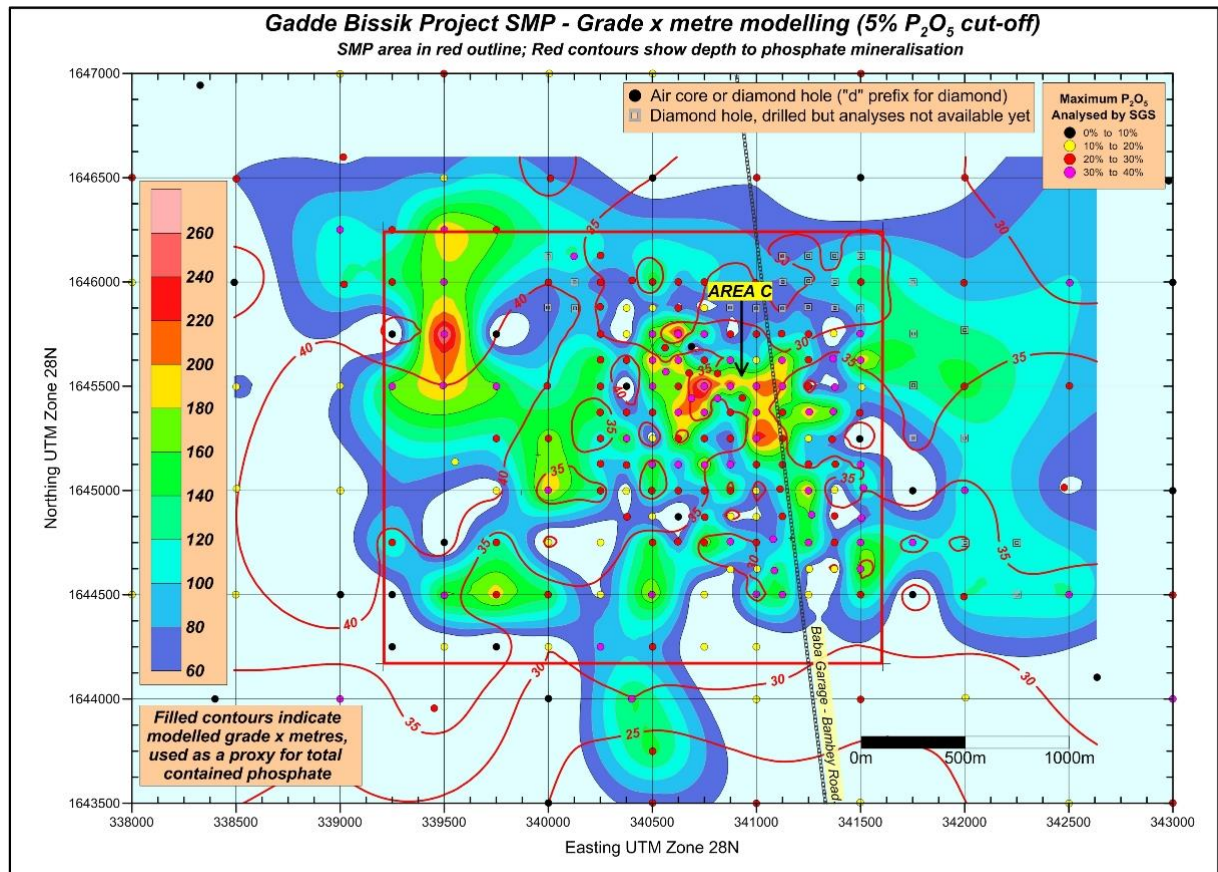

**Figure 3 – Modelled grade x metre (5%  $P_2O_5$  cut-off)**

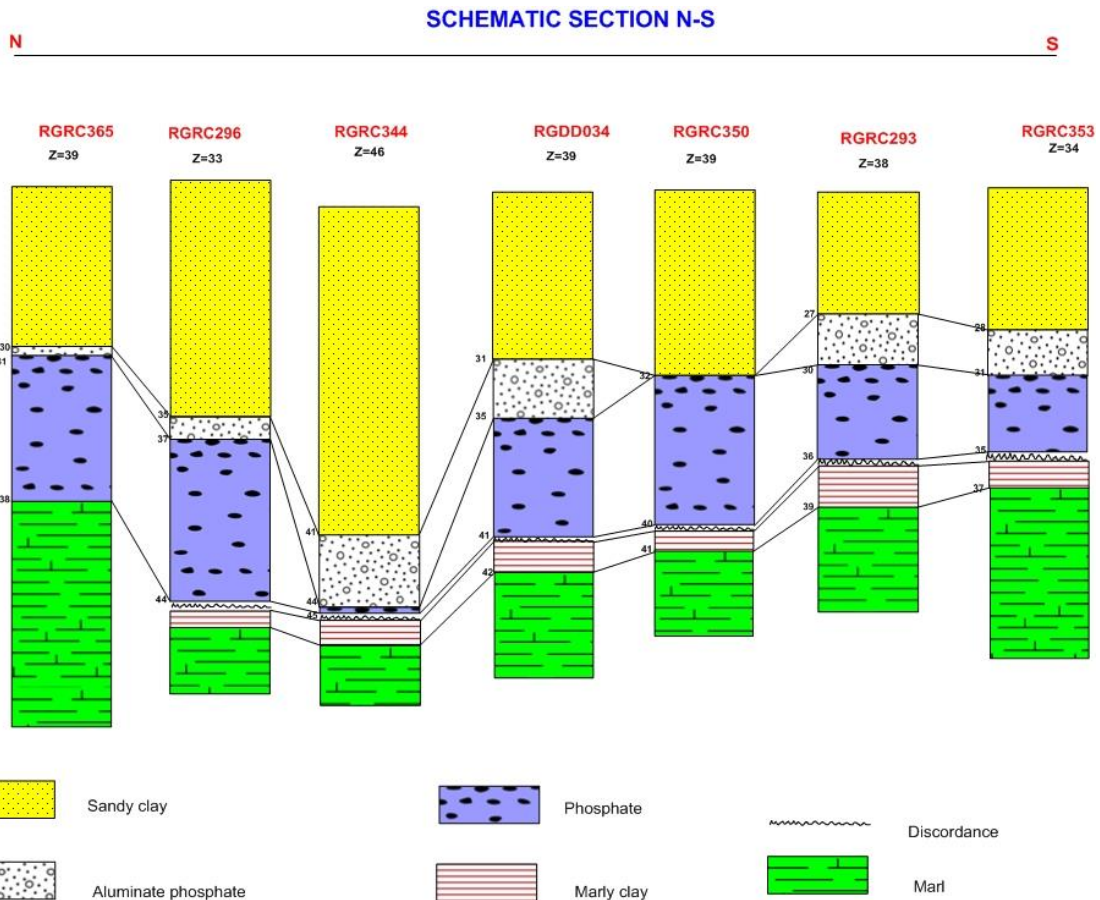

**Figure 4. Schematic geological cross-section oriented north-south at approximately 345000mE. Refer to Figure 1 for collar locations. Not all drilling is shown.**

**Table 1. Table of material drill intercepts for exploration drilling within the Small Mine Permit. Drill holes RGDC0378-0430 and RGDD0041-0101 (Note: all drilling is vertical therefore no azimuth shown)**

Hole ID	Easting	Northing	RL	Dip	Total depth	Mineralised intercept data (average grade over width)						
						From	To	Width	P <sub>2</sub> O <sub>5</sub> %	Fe <sub>2</sub> O <sub>3</sub> %	Al <sub>2</sub> O <sub>3</sub> %	MgO%
RGDD0047	340756	1645496	33.43	-90°	45.35	31.63	42.63	11.0	22.8	2.32	1.27	0.02
						36.63	40.63	4.0	30.5	3.19	0.82	0.01
RGRC0422	340875	1645498	32.61	-90°	44	31	42	11	20.0	1.70	2.17	0.09
						32	37	3	31.5	1.11	1.62	<0.05
RGDD0045	340874	1645498	32.51	-90°	44.1	30.7	41.3	10.6	24.5	1.79	1.66	0.07
						30.7	36.3	5.6	32.7	1.91	2.22	0.12
						30.7	33.3	2.6	38.1	1.70	0.56	0.01
RGRC0413	340628	1645380	33.98	-90°	48	36	46	10	20.6	2.60	1.71	0.10
						37	40	3	31.4	2.40	0.74	<0.05
RGDD0050A	340564	1645568	42	-90°	49.0	35.5	46.38	9.9	15.7	1.89	0.99	0.02
						36.38	38.38	2.0	27.4	1.25	1.37	0.02
						37.38	38.38	1.0	31.9	0.98	0.69	<0.01
RGDD0098	341499	1645624	44	-90°	45.6	34.0	43.2	9.2	22.4	4.11	2.06	0.04
						34.0	34.2	0.2	30.1	2.99	1.48	0.02
						40.2	41.2	1.0	32.5	1.05	0.94	<0.01
RGRC0407	340625	1645754	30.73	-90°	40	28	37	9	29.8	2.56	1.04	<0.05
						30	33	3	33.1	3.21	0.83	<0.05
RGDD0041	340995	1645249	32.29	-90°	45.25	33.95	42.95	9.0	27.2	3.79	1.27	0.03
						34.95	38.95	4.0	31.8	2.95	0.87	0.02
						37.95	38.95	1.0	36.4	1.89	0.59	0.01



Hole ID	Easting	Northing	RL	Dip	Total depth	Mineralised intercept data (average grade over width)						
						From	To	Width	P <sub>2</sub> O <sub>5</sub> %	Fe <sub>2</sub> O <sub>3</sub> %	Al <sub>2</sub> O <sub>3</sub> %	MgO%
RGR0408	340503	1645625	31.23	-90°	48	37	46	9	24.9	1.56	2.11	0.22
						38	42	4	35.8	1.19	1.10	<0.05
RGR0382	341249	1644998	33.8	-90°	42	30	39	9	23.5	1.97	3.75	0.16
						30	37	7	25.6	1.96	1.30	<0.05
						34	35	1	30.5	2.30	1.43	<0.05
RGDD0077	340875	1644999	50	-90°	42.1	31.62	40.2	8.6	19.1	2.01	2.65	0.14
						31.62	33.2	1.6	25.3	1.07	1.36	0.01
RGDD0048A	340690	1645440	46	-90°	45.9	34.9	43.4	8.5	24.8	2.59	1.07	0.02
						38.4	39.4	1.0	36.1	1.33	0.61	<0.01
RGDD0068	340499	1645125	50	-90°	44.5	33.47	41.85	8.4	19.9	2.83	1.29	0.02
						33.47	36.85	3.4	28.6	1.89	1.23	0.01
						33.85	34.85	1	37.2	1.11	1.13	<0.01
RGDD0049A	340677	1645563	35	-90°	47.5	35.23	45.63	8.4	19.7	1.15	1.83	0.02
						37.63	42.63	3.0	23.1	1.08	1.26	<0.01
						40.63	41.63	1.0	28.8	1.15	0.66	<0.01
RGR0409	340627	1645626	32.1	-90°	48	37	45	8	26.2	1.38	1.41	0.05
						40	42	2	31.3	1.64	1.12	<0.05
RGDD0093	341123	1645625	40	-90°	41.1	30.7	38.7	8.0	25.3	1.12	1.44	0.02
						31.7	33.7	2.0	33.1	1.16	0.95	<0.01
RGR0395	339499	1646246	35.06	-90°	46	36	44	8	24.9	3.88	2.39	0.16
						40	43	3	34.9	1.11	0.93	<0.05
RGR0421	341000	1645374	31.84	-90°	46	35	43	8	24.0	3.00	3.11	0.40
						36	38	2	30.4	0.63	1.43	<0.05
RGR0428	341128	1645251	32.55	-90°	46	35	43	8	23.4	4.35	1.86	0.10
						35	39	3	27.7	1.37	0.99	<0.05
RGDD0092	341254	1645377	44	-90°	45	35.4	43.4	8.0	23.7	5.32	2.27	0.24
						36.4	40.4	4.0	31.2	3.57	1.18	0.02
						37.4	39.4	2.0	35.5	3.49	0.76	0.02
RGR0415	340749	1645376	30.91	-90°	45	34	42	8	23.0	3.65	2.54	0.15
						36	41	5	28.0	1.97	1.02	<0.05
						40	41	1	32.6	1.88	1.19	<0.05
RGR0414	340625	1645248	31.92	-90°	46	35	44	8	22.1	2.72	2.11	0.10
						37	39	2	27.2	2.10	1.22	<0.05
RGR0403	340500	1646000	31.03	-90°	39	27	36	8	21.4	2.30	2.36	0.30
						29	32	3	26.1	1.57	1.71	<0.05
RGDD0091	341500	1644623	41	-90°	39.5	29.65	37.65	8.0	20.5	4.32	2.56	0.25
						29.65	32.65	3.0	27.2	1.35	1.12	<0.01
						30.65	31.65	1.0	35.5	1.50	0.52	<0.01
RGR0390	339751	1645499	37.53	-90°	54	43	51	8	19.5	4.69	1.11	<0.05
						49	51	2	28.4	7.59	0.69	<0.05
RGR0396	339751	1646250	36.17	-90°	45	37	45	8	19.3	2.11	1.81	<0.05
						38	39	1	25.2	2.67	1.46	<0.05
RGDD0046	340811	1645560	32.87	-90°	45.6	35.28	43.28	8.0	18.0	2.04	1.60	0.05
						42.28	43.28	1.0	22.8	2.21	1.70	0.03
RGDD0043A	340995	1645499	31.74	-90°	42.5	32.3	40	7.7	22.1	4.01	1.86	0.04
						35	36	1.0	31.7	3.59	0.87	<0.01
RGDD0051	340625	1645628	44	-90°	47.0	37.9	45.2	7.3	26.1	1.47	1.61	0.02
						40.2	42.2	2.0	31.9	1.96	1.03	<0.01
RGR0426	341124	1645499	31.2	-90°	45	35	42	7	28.5	1.46	2.00	0.09
						36	40	4	35.1	0.39	0.84	<0.05
						37	38	1	39.4	0.19	0.48	<0.05
RGDD0089A	341369	1645379	39	-90°	44.5	35.36	42.36	7.0	26.3	1.97	1.88	0.03
						37.36	41.36	4.0	30.7	1.58	1.61	0.02
						38.36	39.36	1.0	38.1	1.51	0.95	<0.01
RGR0380	341275	1644717	33.71	-90°	38	30	37	7	24.2	2.74	3.30	0.81
						30	35	5	30.5	2.22	1.59	<0.05

Hole ID	Easting	Northing	RL	Dip	Total depth	Mineralised intercept data (average grade over width)						
						From	To	Width	P <sub>2</sub> O <sub>5</sub> %	Fe <sub>2</sub> O <sub>3</sub> %	Al <sub>2</sub> O <sub>3</sub> %	MgO%
						31	34	3	34.4	1.12	0.89	<0.05
RGRC0430	340375	1645248	31.98	-90°	47	38	45	7	23.0	4.01	2.02	0.40
						38	41	3	30.2	4.38	1.43	<0.05
RGRC0411	340626	1645496	33.32	-90°	47	37	44	7	22.3	2.34	1.88	0.06
						40	44	3	26.9	2.38	1.80	0.06
RGRC0383	340501	1643751	36.18	-90°	31	22	29	7	21.4	4.42	4.20	0.26
						22	27	5	23.3	1.81	1.38	<0.05
RGRC0392	339251	1645998	36.62	-90°	49	39	46	7	17.6	1.69	1.01	<0.05
						45	46	1	21.7	2.34	1.00	<0.05
RGDD0078	340752	1645123	48	-90°	44.5	35.2	42.1	6.9	28.5	2.32	1.18	0.01
						36.1	38.1	2.0	30.6	0.59	0.92	<0.01
RGDD0053	340628	1645752	36	-90°	38.34	28.76	35.6	6.8	30.6	2.23	1.09	0.01
						29.6	30.6	1.0	38.8	1.02	0.51	<0.01
RGDD0060	341378	1645126	42	-90°	41	32.2	38.78	6.6	16.9	2.57	1.70	0.02
RGDD0076	340751	1644872	38	-90°	40.73	33.15	39.4	6.3	18.8	6.20	3.79	0.28
						34.4	35.4	1.0	22.7	6.00	1.92	<0.01
RGRC0391A	339250	1645499	38.14	-90°	50	44	50	6	28.1	2.69	1.42	<0.05
						47	50	3	32.0	3.17	1.05	<0.05
RGDD0088	341125	1644501	40	-90°	38	31.14	37.14	6.0	25.8	3.21	3.41	0.41
						32.14	34.14	2.0	35.6	1.53	1.18	0.02
RGRC0423	340873	1645622	32.34	-90°	43	35	41	6	23.9	2.70	1.85	0.35
						36	39	3	31.8	2.42	0.66	<0.05
RGDD0086	341086	1644616	40	-90°	39.51	32.35	38.36	6.0	23.0	2.94	4.17	0.24
						33.35	36.35	3.0	29.3	0.95	1.71	0.03
						33.35	34.35	1.0	31.9	0.93	0.91	0.03
RGRC0429	341139	1645129	32.8	-90°	43	34	40	6	21.3	2.97	2.56	0.20
						35	36	1	26.6	0.71	1.08	<0.05
RGRC0427	341125	1645374	32.13	-90°	46	37	43	6	21.3	4.44	2.57	0.07
						40	41	1	24.7	2.28	1.64	<0.05
RGRC0420	341002	1645123	33.06	-90°	43	35	41	6	20.1	6.07	4.51	0.50
						36	40	4	25.0	6.89	2.49	0.05
RGRC0389	339752	1645248	34.46	-90°	50	41	47	6	18.9	3.55	2.33	0.06
						42	45	2	23.0	3.18	1.35	<0.05
RGRC0386	339249	1644747	38.29	-90°	49	39	47	6	18.8	2.32	3.43	<0.4
						44	45	1	28.0	2.63	2.29	<0.05
RGDD0096	341250	1645626	36	-90°	43.1	33.15	41.15	6.0	18.6	0.94	1.84	0.06
						38.15	39.15	1.0	27.6	1.01	1.52	0.02
RGRC0416	340873	1645376	31.64	-90°	43	35	41	6	18.6	2.85	2.96	0.30
						35	39	3	21.0	2.47	2.36	<0.05
RGDD0081	340874	1644754	43	-90°	36.9	27.16	33.16	6.0	18.5	8.59	2.18	0.03
						27.16	29.16	2.0	28.1	1.11	2.08	0.03
RGDD0067	340624	1645000	41	-90°	44	36.27	42.3	6.0	15.6	4.02	3.81	0.25
						40.3	41.3	1.0	19.3	5.30	1.66	0.02
RGRC0410	340749	1645629	32.31	-90°	46	37	43	6	14.6	2.44	2.25	0.10
						38	39	1	21.7	1.48	1.58	<0.05
RGRC0425	340999	1645623	31.29	-90°	42	33	39	6	13.9	2.61	3.24	<0.05
						34	35	1	19.3	2.56	2.50	<0.05
RGDD0058	341265	1644884	41	-90°	41	32.35	38.15	5.8	25.6	1.24	3.11	0.01
						35.15	38.15	3	31.4	1.13	1.42	0.01
RGRC0379	341501	1644747	33.84	-90°	39	31	36	5	29.9	3.40	2.34	<0.07
						31	34	3	31.8	2.39	1.49	<0.05
						31	32	1	35.0	2.90	1.43	<0.05
RGDD0042	340934	1645442	31.43	-90°	42.55	33.6	39.6	5.0	22.3	3.34	2.35	0.03
						37.6	38.6	1.0	27.7	3.55	1.77	0.02
RGDD0061	341500	1645125	40	-90°	42.7	35.6	40.6	5.0	20.4	5.65	1.17	0.03
						35.6	36.6	1.0	35.6	0.60	0.70	<0.01

Hole ID	Easting	Northing	RL	Dip	Total depth	Mineralised intercept data (average grade over width)						
						From	To	Width	P <sub>2</sub> O <sub>5</sub> %	Fe <sub>2</sub> O <sub>3</sub> %	Al <sub>2</sub> O <sub>3</sub> %	MgO%
RGR0412	340500	1645374	32.61	-90°	46	38	43	5	19.7	1.22	1.44	<0.05
						38	40	2	27.2	0.58	1.43	<0.05
RGR0394	339001	1646248	34.14	-90°	46	39	44	5	18.9	1.74	2.10	0.43
						40	41	1	34.6	1.08	0.85	<0.05
RGR0393	339250	1646251	33.32	-90°	45	38	43	5	18.4	5.19	3.96	0.39
						39	42	3	21.0	3.70	2.79	<0.05
RGR0399	340377	1645619	32.69	-90°	50	42	48	5	17.5	1.94	1.96	0.18
						42	44	2	23.9	1.27	1.27	<0.05
RGDD0070	340375	1645123	37	-90°	44.4	38.21	43.24	5.0	17.2	5.20	3.84	0.54
						38.21	40.24	2.0	25.4	0.91	1.71	0.01
RGDD00101	341120	1645752	35	-90°	35	28.1	33.1	5.0	16.6	2.46	2.76	0.08
						29.1	30.1	1.0	21.2	2.38	2.29	0.06
RGDD0095	341496	1645373	35	-90°	46.7	38.2	43.2	5.0	13.5	0.96	2.93	0.05
						38.2	39.2	1.0	20.3	0.74	3.05	0.02
RGDD0085	341004	1644624	51	-90°	37	31.29	36.29	5.0	13.4	3.32	3.40	0.49
RGDD0071	340251	1645128	49	-90°	44.3	37.63	42.51	4.9	19.7	4.69	4.15	0.24
						37.63	39.51	1.9	25.0	3.25	1.88	0.01
RGDD0044A	340812	1645437	32.28	-90°	43.8	36.15	40.94	4.8	22.6	4.76	2.24	0.04
						38.94	40.94	2.0	36.1	1.47	0.64	0.02
RGDD0055	341113	1645007	40	-90°	40	33.27	38	4.7	23.0	1.87	1.82	0.01
						34	35	1.0	29.6	0.46	0.24	0.02
RGDD0056	341124	1644876	43	-90°	38.37	30.5	37.2	4.7	15.1	14.45	4.33	0.75
RGDD0075	340623	1644754	37	-90°	39	32.88	37	4.1	15.1	3.11	3.61	0.78
						35	36	1.0	29.1	2.80	1.38	0.02
RGDD0059	341249	1645126	42	-90°	42.3	35.9	39.9	4.0	22.2	7.65	1.70	0.02
						36.9	37.9	1.0	26.3	2.71	1.43	<0.01
RGDD0100	341498	1645751	42	-90°	38.5	32.55	36.55	4.0	22.0	5.81	1.59	0.06
						32.55	33.55	1	33.9	1.40	1.05	0.04
RGR0419	340753	1645258	31.29	-90°	45	39	43	4	18.3	2.57	2.29	0.10
						40	41	1	26.9	0.93	1.06	<0.05
RGDD0054	340561	1645685	38	-90°	37.95	31.45	35.45	4.0	17.9	2.63	1.64	0.05
						32.45	35.45	2.0	22.4	3.01	1.56	0.05
RGR0397	340374	1645376	31.32	-90°	47	40	44	4	17.7	2.04	2.00	<0.05
						43	44	1	21.2	3.14	2.38	<0.05
RGDD0083	341364	1645246	44	-90°	45.7	40	44	4.0	16.9	58.63	5.60	0.33
						40	43	2.0	23.7	3.86	2.59	0.04
RGR0402	340499	1645875	33.26	-90°	42	34	38	4	14.5	2.56	2.55	0.08
RGDD0087A	341253	1644623	45	-90°	38.6	32.75	36.75	4.0	13.8	5.36	1.82	0.04
RGR0385	339250	1644501	34.59	-90°	44	38	42	4	9.76	2.31	2.81	0.28
						41	42	1	14.8	7.51	1.12	1.12
RGDD0064	341374	1644750	44	-90°	37	31.9	35.65	3.8	18.5	3.74	4.58	0.70
						31.9	33.65	1.8	26.0	0.58	1.48	0.03
RGDD0057	341081	1644766	44	-90°	38.35	32.55	36.15	3.6	19.6	1.66	2.11	0.03
						35.15	36.15	1.0	31.5	2.90	1.20	0.02
RGDD0073	340499	1644876	42	-90°	43	37.91	41.17	3.3	16.6	8.32	2.00	0.04
RGDD0097	341367	1645632	42	-90°	43	36.82	39.82	3.0	21.8	0.79	1.95	0.03
						37.82	38.82	1.0	30.7	0.53	1.12	0.01
RGR0404	340625	1646004	32.41	-90°	41	36	39	3	20.9	4.39	2.67	0.20
RGDD0066	340624	1645125	39	-90°	43.9	38.55	41.55	3.0	18.7	4.18	5.15	0.65
						39.55	40.55	1.0	32.3	1.77	1.17	0.06
RGR0417	340875	1645247	32.98	-90°	46	40	43	3	17.2	4.57	3.61	0.10
						41	42	1	22.7	2.96	2.16	<0.05
RGDD0080	340999	1644875	43	-90°	40	34.7	37.7	3.0	15.9	5.55	6.39	0.71
RGR0406	340624	1645875	32.58	-90°	41	35	38	3	15.5	4.71	4.37	0.18
RGR0424	340872	1645747	31.45	-90°	39	32	36	3	15.3	3.23	2.42	<0.05
						34	35	1	22.0	2.92	1.56	<0.05

[illegible]

## Appendix 2

### JORC Code, 2012 Edition – Table 1

#### Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration and resource drilling undertaken in 2015 by BMCC, in association with Minemakers planning and program management, includes air core (AC) and diamond core (DD) drilling.</li> <li>The database compiled for the current study comprises 53 AC holes for 2,340 metres and 61 DD holes for 2,552 metres of drilling, all within the Small Mine Permit at the Gadde Bissik Project. Another 32 recently completed DD holes have results pending.</li> <li>AC drilling was undertaken by local contractor IDC using a track-mounted Schramm T450G reverse circulation drill rig. Diamond drilling was undertaken by local contractor Senelabo using three track-mounted drill rigs; two GEOTEC 350TB geotechnical drill rigs and a FORDIA OPTIMA geotechnical drill rig</li> </ul>
	<ul style="list-style-type: none"> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> </ul>	<ul style="list-style-type: none"> <li>All drilling and sampling was supervised by field geologists.</li> <li>AC holes were sampled over 1 m down-hole intervals with sub-sampling generally by riffle splitting.</li> <li>Diamond core was halved or quartered for assaying using a diamond saw.</li> </ul>
	<ul style="list-style-type: none"> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> </ul>	<ul style="list-style-type: none"> <li>Phosphate mineralisation is typically associated with elevated uranium grades. Hand-held radiation detection measurements were used to aid selection of intervals for assaying in AC drilling.</li> </ul>
	<ul style="list-style-type: none"> <li>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>All assaying was undertaken by SGS, with sample preparation in Dakar, Senegal and analysis at either Lakefield in Canada or Booyens in South Africa. DD samples from the resource area were analysed at Lakefield and AC samples were analysed at Booyens.</li> <li>SGS’s sample preparation comprised oven drying and crushing of the entire sample to 75% passing -2mm. A 1.5kg sub-sample collected by riffle splitting was pulverised to 85% passing -75 microns in a ring and puck pulveriser (SGS Method PRP89, PRP94).</li> </ul>

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>20g samples of pulverised material were air freighted to the analytical laboratory. A 0.2-0.5 gram sub-sample of the pulverised material was fused with lithium metaborate and analysed by XRF for P<sub>2</sub>O<sub>5</sub>, Al<sub>2</sub>O<sub>3</sub>, CaO, Fe<sub>2</sub>O<sub>3</sub>, K<sub>2</sub>O, MgO, MnO, Na<sub>2</sub>O, SiO<sub>2</sub> and TiO<sub>2</sub> (± Cr<sub>2</sub>O<sub>5</sub> and V<sub>2</sub>O<sub>5</sub>). (SGS Method XRF76C,V). LOI was determined gravimetrically at 1000°C.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>The AC drilling utilised bit diameters of 134 to 136mm.</li> <li>All diamond drilling was triple tube, at 90mm diameter with rotary mud tri-cone pre-collars through un-mineralised overburden. Diamond core was not oriented.</li> <li>All Gadde Bissik drilling was vertical.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>AC sample recovery was assessed by weighing total recovered sample material. The sample recovery of around 70% is slightly less than expectations for high quality AC sampling. Reasons for this trend are unclear. Additional investigations, including further bulk density measurements are on-going.</li> <li>AC samples showed with no notable association between recovery and phosphate grade.</li> <li>Additional confirmation of the general reliability of AC sampling is provided by 6 twinned diamond holes which show similar average mineralisation thicknesses and phosphate grades to the paired AC holes.</li> <li>Diamond core recovery measurements based on recovered lengths for core runs are available for all holes and show an average recovery of 94% for mineralised intervals, which is consistent with good quality diamond drilling.</li> <li>Available information suggests that sampling is reasonably representative and does not include a systematic bias due to preferential sample loss or gain.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>AC and diamond holes were routinely geologically logged by industry standard methods with logs available for around 100% of this round of exploration drilling.</li> <li>Sub-samples of AC chips were retained in chip trays. Diamond core and AC chip trays were routinely photographed.</li> <li>The geological logging is qualitative in nature, and of sufficient detail to support the current interpretation.</li> </ul>



Criteria	JORC Code explanation	Commentary
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> <li><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>AC samples were collected over 1 m down-hole intervals and generally sub-sampled with a three tier riffle splitter.</li> <li>The majority of AC samples were dry, with very few samples logged as wet.</li> <li>Diamond core was halved or quartered for assaying using a diamond saw.</li> <li>Measures taken to ensure the representivity of AC and diamond sub-sampling include close supervision by field geologists, use of appropriate sub-sampling methods, routine cleaning of splitter and cyclones, and rigs with sufficient capacity to provide generally dry AC samples.</li> <li>Information available to demonstrate the representivity of AC sub-sampling includes field duplicates and paired diamond holes.</li> <li>The available information demonstrates that the sub-sampling methods and sub-sample sizes are appropriate for the grain size of the material being sampled, and provide sufficiently representative sub-samples for resource estimation.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></li> <li><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></li> </ul>	<ul style="list-style-type: none"> <li>Hand-held radiation detection measurements were used to aid selection of intervals for assaying for AC samples.</li> <li>Assay quality control procedures include certified reference standards and coarse blanks. These results have established acceptable levels of precision and accuracy for the attributes included in the current Inferred resource estimates.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li><i>The verification of significant intersections by either independent or alternative company personnel.</i></li> </ul>	<ul style="list-style-type: none"> <li>Minemakers' Geological Manager verifies significant intersections by checking against logging and reference to adjacent drill holes and during field visits by inspection of core and drill chips and the use of a portable XRF.</li> </ul>
	<ul style="list-style-type: none"> <li><i>The use of twinned holes.</i></li> </ul>	<ul style="list-style-type: none"> <li>Diamond drilling includes 6 holes drilled within 10 m of AC holes. The twinned diamond and AC holes show similar mineralisation grades and thicknesses providing some confidence in the general reliability of the AC sampling.</li> </ul>
	<ul style="list-style-type: none"> <li><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> </ul>	<ul style="list-style-type: none"> <li>Sample intervals and geological logs were recorded on logging sheets and subsequently entered into desk-top or lap-top computers. These logs and laboratory assay files were merged directly into a central Micromine database.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li><i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>Database and geological staff routinely validate database entries with reference to original data.</li> <li>The Competent Person's independent checks of database validity included: Comparison of assay values with geological logging, comparison of assay values between nearby holes, checking for internal consistency between, and within database tables, comparisons between assay results from different sampling phases.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> </ul>	<ul style="list-style-type: none"> <li>No assay results were modified.</li> <li>Around 53% holes have high accuracy differential GPS (DGPS) collar surveys. The remainder are from holes with collar locations measured by hand-held GPS.</li> <li>For holes with only hand-held GPS surveys, collar elevations were assigned from a DTM generated from DGPS surveys.</li> <li>Drill holes were not routinely down-hole surveyed.</li> <li>For the comparatively widely spaced and shallow vertical holes the lack of comprehensive differential GPS collar surveys is not considered to be an issue.</li> </ul>
	<ul style="list-style-type: none"> <li><i>Specification of the grid system used.</i></li> </ul>	<ul style="list-style-type: none"> <li>All surveying was undertaken in World Geodetic System (WGS84 ) Zone 28 coordinates.</li> </ul>
	<ul style="list-style-type: none"> <li><i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>A triangulation representing topography was generated from DGPS collar surveys.</li> <li>Topographic control is adequate for the current reporting</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li><i>Data spacing for reporting of Exploration Results.</i></li> </ul>	<ul style="list-style-type: none"> <li>Drill hole spacing within the SMP is 250 metres x 250 metres or 125 metres x 125 metres..</li> </ul>
	<ul style="list-style-type: none"> <li><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>The data spacing has established geological and grade continuity sufficiently for the current Exploration Results.</li> </ul>
	<ul style="list-style-type: none"> <li><i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>Drill hole samples were composited to 1 m down-hole intervals for modeling.</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>The mineralisation is flat lying to gently undulating, and perpendicular to the generally vertical drill holes.</li> <li>The drilling orientation achieves un-biased sampling of the mineralisation.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Sample collection for BMCC drilling was supervised by BMCC geologists using protocols established by Minemakers.</li> <li>The project is in a largely rural area with easy access to the general public. AC samples selected for assaying were collected in heavy-duty polyweave plastic bags that were immediately sealed and placed inside a BMCC vehicle. The bagged samples were then taken by BMCC employees directly to the BMCC site office in the regional town of Tivaouane where they were kept under lock and key. Samples were transferred to the BMCC office in Dakar weekly where paperwork was prepared and samples then delivered directly to SGS in Dakar by BMCC personnel. No contractors or third parties were permitted unsupervised access to samples before delivery to SGS.</li> <li>Core samples were taken to the BMCC site office at the end of each day. Sampling was undertaken with a core saw at the site office, samples bagged and despatched to Dakar using the same protocols as described above for AC sampling.</li> <li>Results of field duplicates twinned holes, and the general consistency of results between sampling phases and drilling methods provide confidence in the general reliability of the resource data.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>Data reviews have included comparisons between various sampling phases and methods which provide some confidence in the general reliability of the data.</li> <li>An independent Competent Person has reviewed the quality and reliability of previous exploration data (not the data reported here). These reviews included observation of drilling and sampling, review of database consistency, spot check comparisons between original sampling sheets and database entries and comparison of laboratory source files with database entries, and review of QAQC information.</li> <li>The Competent Person considers that the sample preparation, security</li> </ul>

Criteria	JORC Code explanation	Commentary
		and analytical procedures adopted for the BMCC drilling provide an adequate basis for the future Mineral Resource estimates.

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The Gadde Bissik project lies within BMCC's 1553km<sup>2</sup> Research Permit "Cherif-Lo Ngakham" in the region of Thies. The licence was renewed on 28 July 2014 for three years.</li> <li>A 5km<sup>2</sup> higher grade, more closely drilled portion, is the subject of a granted small Mine Permit (SMP) to BMCC. Minemakers has entered into an agreement with BMCC to acquire the tenement and certain fees and royalties apply, the nature of which are subject to confidentiality. The obligations in regard to fees and future royalties are not considered by the company to be commercially onerous. There are no known impediments to obtaining a licence to operate in the area.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Data from an earlier phase of exploration by BMCC is not considered material to this Public Reporting.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>Gadde Bissik phosphate mineralisation is part of the widespread marine phosphate phase within the in the Middle Eocene (48.6 to 40.4 million years) Senegalese sedimentary basin. Phosphate mineralisation in the Gadde Bissik area is predominantly a product of dismantling and reworking of primary high grade "residual" phosphate deposits and subsequent deposition under palaeo-morphological control. The "reworked" deposits at Gadde Bissik are thicker and higher grade than typically recorded in the broader area and may indicate a more proximal source resulting in a lower degree of dilution through mixing with non-phosphatic material.</li> <li>The Gadde Bissik stratigraphic succession comprises a footwall of marl and marly clays, with locally overlying nummulitic limestone, discordantly overlain by the phosphatic sequences. The contact is typically marked by elevated iron levels within the marly clay. The main phosphatic unit comprises phosphate sands with hard and soft phosphate pebbles, phosphatic conglomerates and varying degrees of ferruginous gravels. The unit varies from 1 to 12 m thick with the thicker areas interpreted as lenticular or pod-like bodies. Grades vary from around 5 to 37% P<sub>2</sub>O<sub>5</sub>. Above the main phosphate unit a discontinuous layer of white gravelly aluminum phosphate is locally developed with</li> </ul>

Criteria	JORC Code explanation	Commentary
		grades typically in the range of 1-5% P <sub>2</sub> O <sub>5</sub> locally ranging up to 10%. Where present the layer varies from 1 to 5 m thick. The lower part of this unit grades into the main phosphatic unit in some places. The phosphatic units are overlain by clayey sands ranging from around 10 to 50 m thick.
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>This information is presented in Appendix 1 of this Public Reporting.</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> </ul>	<ul style="list-style-type: none"> <li>Drill results are reported as weighted averages using a cut-off grade of 10% P<sub>2</sub>O<sub>5</sub> except for drill holes with no intervals above or equal to 10% P<sub>2</sub>O<sub>5</sub>.</li> </ul>
	<ul style="list-style-type: none"> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>No metal equivalents are reported here.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>The mineralisation is flat lying to gently undulating, and perpendicular to the generally vertical drill holes, with down-hole lengths representing true thicknesses.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being</li> </ul>	<ul style="list-style-type: none"> <li>Included in text of announcement.</li> </ul>



Criteria	JORC Code explanation	Commentary
	<i>reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>All drill holes are reported.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>Immersion density measurements are available for 64 diamond core samples, including 45 mineralised samples. The measurements, did not include oven-drying or wax coating and suggest an average value of around 1.8 t/m<sup>3</sup> for mineralisation. For the current estimates, this value was discounted by around 10% reflecting the lack of wax coating and air drying giving a value of 1.6 t/bcm.</li> <li>Density data is routinely collected by weighing core runs. The data has not been rigorously analysed yet but the densities are similar to those obtained by the immersion method.</li> <li>Additional bulk density measurements, including and oven-drying and wax coating are planned.</li> <li>Initial analyses of deleterious elements of commercial significance were conducted on samples from selected drill holes within Area C of the SMP and indicate the following: <ul style="list-style-type: none"> <li>Cadmium levels lie between 20-50ppm</li> <li>Uranium levels lie between 50-150ppm</li> <li>Chlorine levels are between 50-150ppm</li> <li>Mercury levels are below 0.04ppm</li> <li>Lead levels are below 10ppm</li> <li>Arsenic levels are below 10ppm</li> <li>Organic carbon levels are below 0.2%</li> </ul> </li> <li>Analyses were carried out at ALS Vancouver on pulps supplied by BMCC retained and returned from major element analysis by SGS. The following analytical methods were used: <ul style="list-style-type: none"> <li>Organic carbon by method C-IR06a - dissolution of carbonate with HCL (25%), Leco furnace and infrared spectroscopy.</li> <li>Chlorine by method CI-ELE81a – Chlorine by KOH fusion and specific ion electrode</li> <li>Mercury by method Hg-MS42 – trace mercury analysis</li> </ul> </li> </ul>

Criteria	JORC Code explanation	Commentary
		<p>by aqua regia digest and ICPMS finish</p> <ul style="list-style-type: none"> <li>○ Fluorine by method F-ELE82 – F by ion selective electrode after sodium peroxide fusion and citric acid leach</li> <li>○ Cadmium, uranium, lead and arsenic by method ME-ICP61 – HF, HHO3-HClO4 acid digestion, HCl leach and ICP-AES finish</li> </ul> <ul style="list-style-type: none"> <li>• Further analyses of exploration samples are planned.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>• <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li> <li>• <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Further infill drilling is being carried out within and around the SMP area, as well as drilling to recover samples for metallurgical and geotechnical test work prior to any proposed mining.</li> <li>• Future exploration work is planned at a regional scale, starting at 4 kilometres by 4 kilometres grid spacing.</li> </ul>

### Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section.)

Criteria	JORC Code explanation	Commentary
<b>Database integrity</b>	<ul style="list-style-type: none"> <li>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</li> <li>Data validation procedures used.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Site visits</b>	<ul style="list-style-type: none"> <li>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</li> <li>If no site visits have been undertaken indicate why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Geological interpretation</b>	<ul style="list-style-type: none"> <li>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</li> <li>Nature of the data used and of any assumptions made.</li> <li>The effect, if any, of alternative interpretations on Mineral Resource estimation.</li> <li>The use of geology in guiding and controlling Mineral Resource estimation.</li> <li>The factors affecting continuity both of grade and geology.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Estimation and modelling techniques</b>	<ul style="list-style-type: none"> <li>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>The assumptions made regarding recovery of by-products.</li> <li>Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>Any assumptions behind modelling of selective mining units.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>Any assumptions about correlation between variables.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>Description of how the geological interpretation was used to control the resource estimates.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>Discussion of basis for using or not using grade cutting or capping.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Moisture</b>	<ul style="list-style-type: none"> <li>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Cut-off parameters</b>	<ul style="list-style-type: none"> <li>The basis of the adopted cut-off grade(s) or quality parameters applied.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Mining factors or assumptions</b>	<ul style="list-style-type: none"> <li>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Metallurgical factors or assumptions</b>	<ul style="list-style-type: none"> <li>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Environmental factors or assumptions</b>	<ul style="list-style-type: none"> <li>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>

Criteria	JORC Code explanation	Commentary
	consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	
<b>Bulk density</b>	<ul style="list-style-type: none"> <li>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</li> <li>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</li> <li>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>The basis for the classification of the Mineral Resources into varying confidence categories.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
	<ul style="list-style-type: none"> <li>Whether the result appropriately reflects the Competent Person's view of the deposit.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>The results of any audits or reviews of Mineral Resource estimates.</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>
<b>Discussion of relative accuracy/confidence</b>	<ul style="list-style-type: none"> <li>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</li> <li>The statement should specify whether it relates to global or local</li> </ul>	<ul style="list-style-type: none"> <li>No Mineral Resources are reported here.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i></p> <ul style="list-style-type: none"> <li>• <i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i></li> </ul>	