

West African hits 19m at 1.8g/t Au from 9m extending shallow oxide gold at M3 Eastern Zone

Gold developer West African Resources Limited (ASX, TSXV: WAF) is pleased to report further RC results from the M3 prospect, at its 100%-owned Tanlouka Gold Project, Burkina Faso.

Highlights

- **RC drilling at M3 extends shallow oxide mineralisation in M3 eastern zone**
- **Potential to add ounces to existing heap leach Probable Ore Reserve of 440,000oz gold¹**
- **Resource definition drilling at M1 and M3 in progress**

Managing Director Richard Hyde commented:

“Drill hole TAC 1204 returned a solid result of 19m at 1.75g/t Au from 9m at the northern end of the M3 eastern mineralised zone.

“Gold mineralisation at M3 eastern zone can be traced over 300m, is open along strike and located less than 2km from the proposed heap leach starter pit at M5.

“Follow-up shallow RC drilling is in progress at M3 and M1 prospects. Further results are imminent.”

Extension of shallow oxide gold at M3 Eastern Zone

Drilling has extended shallow oxide gold mineralisation at the M3 eastern zone. Follow-up drilling has confirmed continuity of gold mineralisation in this area (**Figure 1 and 2**) with TAC1204 returning a result of 19m at 1.75g/t Au from 9m at the northern end of the M3 eastern mineralised zone. Mineralisation at the eastern zone can now be traced over 300m and remains open to the north. Further new results include:

- TAC1204: 19m at 1.75g/t Au from 9m
- TAC1215: 10m at 1.45g/t Au from 28m, ending in mineralisation
- TAC1216: 2m at 0.66g/t Au from surface and;
 - 3m at 2.05g/t Au from 6m;
 - 10m at 1.15g/t Au from 14m; and
 - 10m at 1.18g/t Au from 27m ending in mineralisation
- TAC1217: 11m at 1.64g/t Au from 22m ending in mineralisation

Recent RC drilling from the current program at M3 has returned significant results including:

- TAC0995: 5m at 2.17g/t Au from 40m ending in mineralisation
- TAC0996: 32m at 5.02g/t Au including 13m at 7.14g/t Au from 2m
- TAC1047: 25m at 2.45g/t Au from 12m, including 17m at 3.35g/t Au, ending in mineralisation

- TAC1102: 20m at 2.80g/t Au from 24m, including 8m at 3.98g/t Au
- TAC1127: 15m at 1.2g/t Au from 4m, including 5m at 2.2g/t Au
- TAC1150: 9m at 1.21g/t Au from 16m, ending in mineralisation
- TAC1156: 22m at 1.3g/t Au from 8m, including 8m at 2.71g/t Au, ending in mineralisation
- TAC1166: 16m at 2.3g/t Au including 8m at 4.0 g/t Au, from surface
- TAC1164: 9m at 2.1g/t Au from 28m ending in mineralisation
- TAC1198: 12m at 2.1g/t Au from surface

Significant Potential to Increase Project Resources

The recently discovered gold mineralisation at the M3 prospect is yet to be included in the project resource inventory. M3 mineralisation will be modelled and incorporated in a resource update by Q2 CY2016. Any additional higher grade oxide tonnes will have a positive impact on the project economics (see page 4).

It is expected that oxide mineralisation from M1 and M3 will continue to exhibit similar metallurgical characteristics to M5 oxides (ASX/TSXV: 22/12/2015) and will be amenable to heap leach processing. Follow-up RC and diamond drilling is in progress and will continue during 2016. Results from recent drilling are shown below in Figures 1 and 2 with results presented in Table 1.

Figure 1: Mankarga Regional Exploration Summary Plan


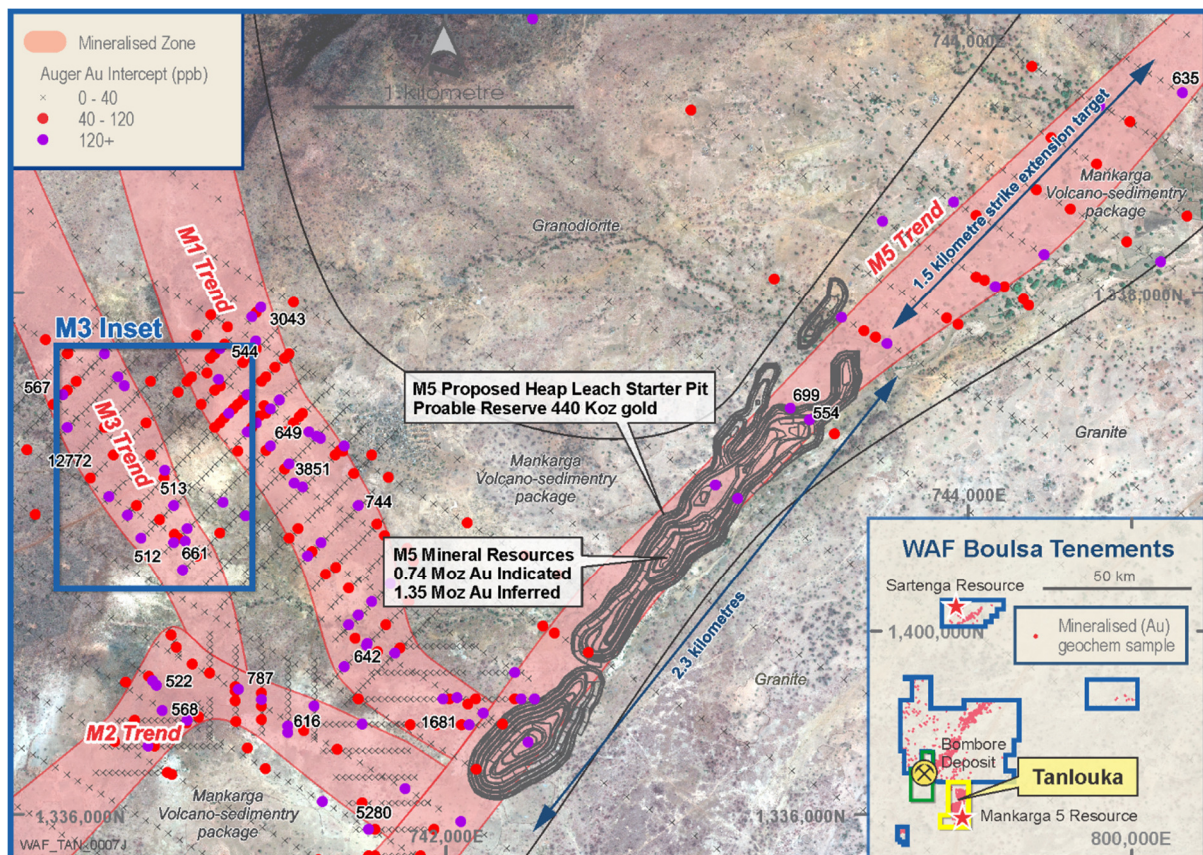


Figure 2: M3 Summary Plan

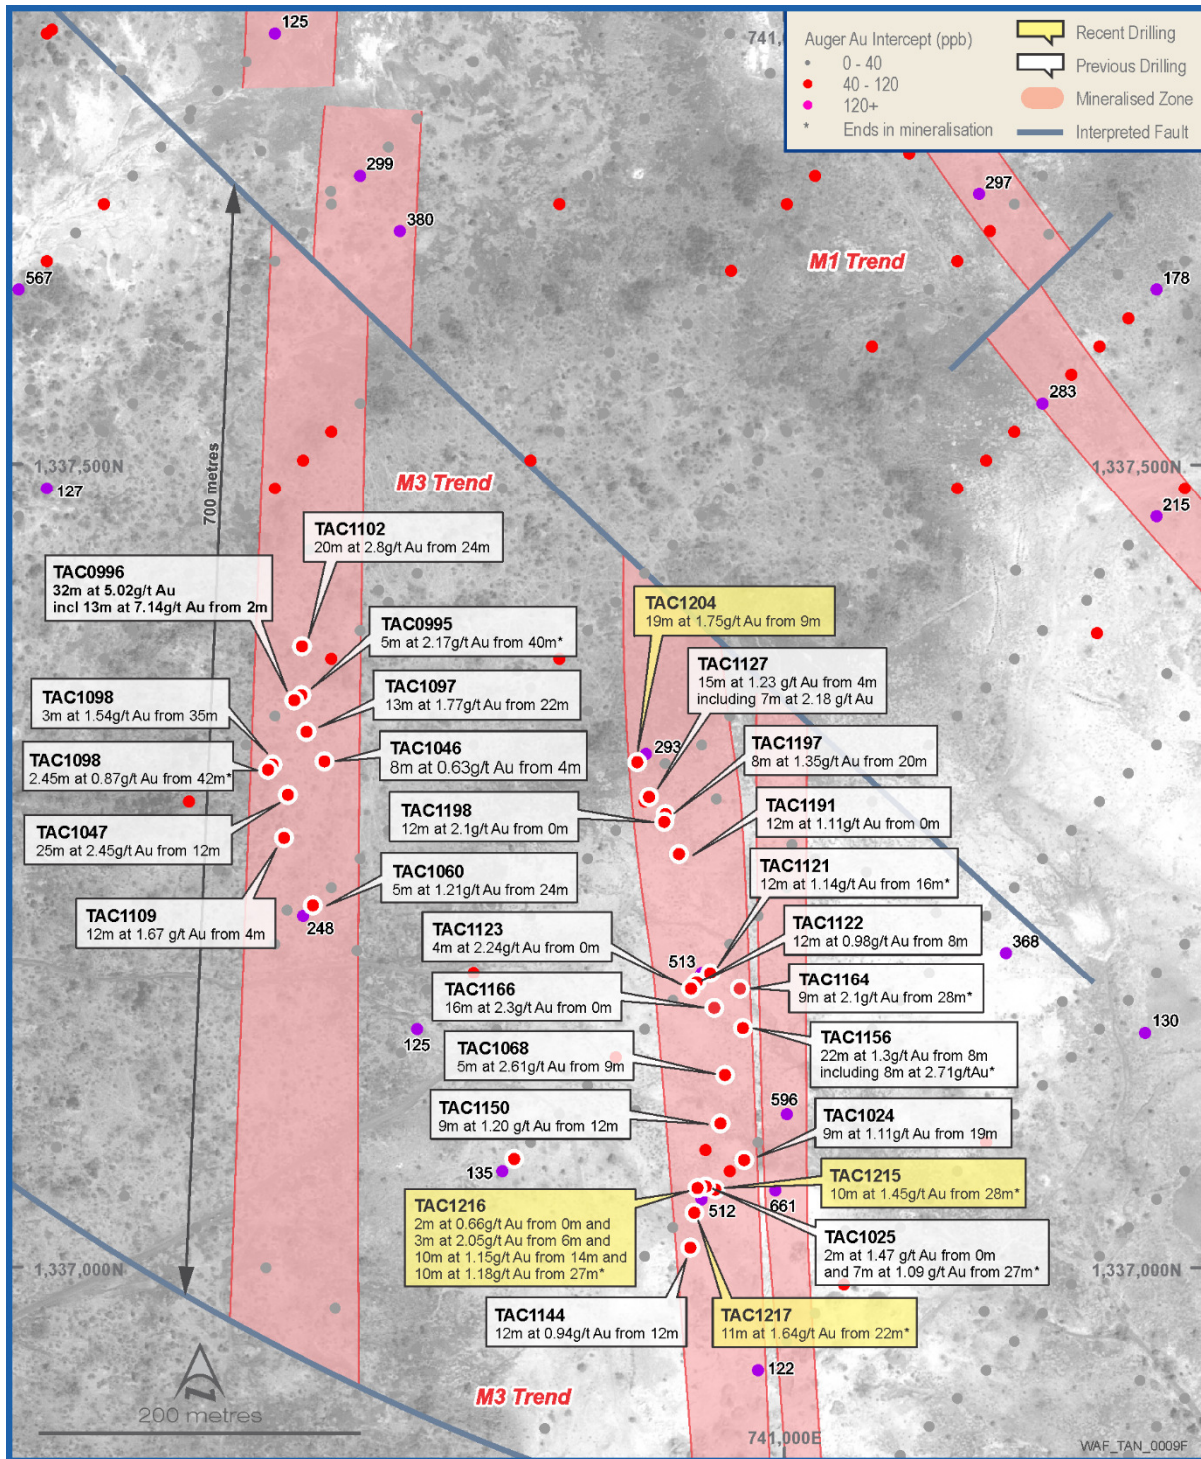

2015 PFS Highlights

West African Resources Limited completed an updated Pre-Feasibility Study report for an oxide heap leach starter project on its Mankarga 5 Gold Project, Burkina Faso in May 2015 (ASX, TSXV: 15/5/15, 29/5/2015). It was prepared in accordance with the requirements of both the Australian 2012 JORC Code and Canadian NI 43-101. The report is filed on SEDAR and on the Company's website. A summary of the base case is stated below assuming a 100% project at a gold price of \$1,300/oz. All amounts are in US dollars.

- Production of 69,000oz pa for first 3 years, 49,000oz pa for life of mine, 7 year life of mine
- Cash costs \$428/oz for 3 years, \$635/oz life of mine
- All-in cash costs of \$538/oz for 3 years, \$749/oz life of mine
- Pre-tax IRR of 63% with 14-month payback, post-tax IRR of 50% with 16-month payback
- Pre-tax cash flow of \$146m, post-tax cash flow of \$118m after initial and sustaining capital costs
- Pre-tax NPV5% of \$117m, Post-tax NPV5% of \$86m
- Probable Ore reserve of 440,000oz, life of mine strip ratio 2:1
- Potential to upgrade in-pit Inferred Resources currently treated as waste in mining schedule
- Nearby drill ready oxide targets with potential to add to the base case

Mankarga5 April 2015 Resource							
	Cut-off (Au g/t)	Indicated Resource			Inferred Resource		
		Tonnes	Grade (Au g/t)	Au Oz	Tonnes	Grade (Au g/t)	Au Oz
Oxide	0.5	7,200,000	1.2	273,000	800,000	0.8	20,000
	1	3,100,000	1.8	180,000	200,000	1.2	7,000
Transitional	0.5	2,300,000	1.2	89,000	500,000	0.9	13,000
	1	1,000,000	1.9	60,000	200,000	1.3	6,000
Fresh	0.5	9,500,000	1.2	377,000	39,100,000	1.0	1,320,000
	1	4,200,000	1.9	256,000	14,800,000	1.6	778,000
Total	0.5	19,000,000	1.2	736,000	40,400,000	1.0	1,350,000
	1	8,400,000	1.8	495,000	15,200,000	1.6	791,000

Mankarga5 May 2015 Ore Reserve															
Category	Strongly Oxidised			Moderately Oxidised			Transition			Fresh			Total		
	Mt	Au g/t	Au koz	Mt	Au g/t	Au koz	Mt	Au g/t	Au koz	Mt	Au g/t	Au koz	Mt	Au g/t	Au koz
Probable	3.0	1.10	96	5.4	1.04	183	1.3	1.46	63	1.5	2.11	98	11.2	1.22	440

Cautionary Note:

Mineral Resources that are not mineral reserves do not have demonstrated economic viability. Mineral resource estimates do not account for mineability, selectivity, mining loss and dilution. These mineral resource estimates include inferred mineral resources that are normally considered too speculative geologically to have economic considerations applied to them that would enable them to be categorized as mineral reserves. There is also no certainty that these inferred mineral resources will be converted to

measured and indicated categories through further drilling, or into mineral reserves, once economic considerations are applied.

Production targets for the proposed heap leach starter project referred to in this announcement were first released to the ASX and TSXV on 23 February 2015. They are preliminary and there is no certainty that the production targets, or the forecast financial information derived from the production targets, will be realised. All material assumptions underpinning production targets or forecast financial information derived from production targets continue to apply and have not materially changed.

Hole ID	From	To	Interval	Au g/t	Dip	Azi	EOH	Easting	Northing	RL	Prospect
TAC0996	2	34	32	5.02	-50	225	43	740704	1337362	313	M3
TAC1024	19	28	9	1.11	-50	225	37	740985	1337078	305	M3
TAC1025	0	2	2	1.47	-50	225	34	740971	1337062	305	M3
TAC1025	27	33.7	6.7	1.09	-50	225	34	740971	1337062	305	M3
TAC1046	4	12	8	0.63	-50	225	43	740718	1337319	313	M3
TAC1047	12	37	25	2.45	-50	225	37	740703	1337305	313	M3
TAC1060	24	29	5	1.21	-50	225	45	740717	1337235	311	M3
TAC1068	9	14	5	2.61	-50	225	20	740967	1337123	305	M3
TAC1079	0	4	4	0.54	-50	225	28	741002	1337034	305	M3
TAC1097	22	35	13	1.77	-50	225	42	740716	1337347	312	M3
TAC1098	28	30	2	0.58	-50	225	44	740699	1337330	313	M3
TAC1098	35	38	3	1.54	-50	225	44	740699	1337330	313	M3
TAC1098*	42	44.45	2.45	0.87	-50	225	44	740699	1337330	313	M3
TAC1102	24	44	20	2.8	-50	225	47	740716	1337402	312	M3
TAC1109	4	16	12	1.67	-50	225	34	740694	1337273	312	M3
TAC1121	8	12	4	0.71	-50	225	28	740964	1337194	306	M3
TAC1121*	16	28	12	1.14	-50	225	28	740964	1337194	306	M3
TAC1122	8	20	12	0.98	-50	225	25	740952	1337185	306	M3
TAC1123	0	4	4	2.24	-50	225	30	740943	1337175	306	M3
TAC1123	8	12	4	0.83	-50	225	30	740943	1337175	306	M3
TAC1127	4	19	15	1.23	-50	225	25	740922	1337299	306	M3
TAC1133	32	36	4	0.80	-50	225	40	740726	1337213	311	M3
TAC1142	12	16	4	0.55	-50	225	28	740973	1337034	305	M3
TAC1144	12	24	12	0.94	-50	225	30	740950	1337021	306	M3
TAC1148	20	24	4	2.28	-50	225	27	740973	1337096	305	M3
TAC1149	0	4	4	0.62	-50	225	22	740958	1337086	306	M3
TAC1150	16	25	9	1.21	-50	45	25	740951	1337081	306	M3
TAC1156*	8	30	22	1.3	-50	45	30	740968	1337143	304	M3
TAC1164*	28	37	9	2.1	-50	225	37	740987	1337189	305	M3
TAC1165	0	12	12	0.72	-50	225	28	740972	1337172	305	M3
TAC1165*	16	28	12	0.78	-50	225	28	740972	1337172	305	M3
TAC1166	0	16	16	2.3	-50	225	25	740960	1337166	305	M3
TAC1167	0	4	4	0.6	-50	225	23	740951	1337157	306	M3
TAC1167	16	20	4	1.15	-50	225	23	740951	1337157	306	M3
TAC1169	0	4	4	1.21	-50	225	23	740941	1337146	306	M3
TAC1178	12	16	4	1.27	-50	225	27	740943	1337206	306	M3
TAC1179	8	12	4	1.01	-50	225	34	740934	1337194	306	M3
TAC1182*	24	27	3	0.81	-50	225	27	740962	1337253	306	M3
TAC1190	16	20	4	1.84	-50	225	27	740943	1337272	306	M3
TAC1191	0	12	12	1.11	-50	225	22	740937	1337261	306	M3
TAC1197	20	28	8	1.35	-50	225	29	740937	1337294	306	M3
TAC1198	0	12	12	2.1	-50	225	21	740928	1337281	306	M3
TAC1203	22	29	7	0.5	-50	225	32	740929	1337336	304	M3
TAC1204	9	28	19	1.75	-50	225	33	740917	1337323	304	M3
TAC1213	0	4	4	0.49	-50	225	24	741012	1337137	305	M3
TAC1215	0	4	4	0.29	-50	45	38	740936	1337037	301	M3
TAC1215	28	38	10	1.45	-50	45	38	740936	1337037	301	M3
TAC1216	0	2	2	0.66	-50	45	37	740940	1337044	301	M3
TAC1216	6	9	3	2.05	-50	45	37	740940	1337044	301	M3
TAC1216	14	24	10	1.15	-50	45	37	740940	1337044	301	M3
TAC1216	27	37	10	1.18	-50	45	37	740940	1337044	301	M3
TAC1217	22	33	11	1.64	-50	45	33	740931	1337023	300	M3
TAC1231	28	37	9	1.17	-50	225	37	740848	1337082	300	M3

- * denotes ending in mineralisation
- All holes are RC holes.

- All reported intersections from the current 2015 program are assayed at either 1m or 4m composited intervals.
- Sample preparation and Fire Assay conducted by BIGS Ouagadougou. Assayed by 50g fire assay with AAS finish.
- Mineralised intervals reported with a maximum of 2 metre of internal dilution of less than 0.20g/t gold (Table 1). No top cut applied.
- Sample preparation and Fire Assay conducted by BIGS Ouagadougou. Assayed by 50g fire assay with AAS finish.
- QA/QC protocol: For RC samples we insert one blank, one standard and one duplicate for every 17 samples (3 QA/QC within every 20 samples).

Table 1 Mankarga Significant Intercepts 0.2 g/t Cut Off											
Hole ID	From	To	Interval	Au g/t	Dip	Azi	EOH	Easting	Northing	RL	Prospect
TAN15-DD028	36	50	14	4.42	-50	225	71.5	741375	1337610	304	M1
TAN15-DD029	48	54	6	2.52	-50	225	73	741455	1337550	304	M1

- * denotes ending in mineralisation
- All holes are diamond holes.
- All reported intersections from the current 2015 program are assayed at either 1m or 4m composited intervals.
- Sample preparation and Fire Assay conducted by BIGS Ouagadougou. Assayed by 50g fire assay with AAS finish.
- Mineralised intervals reported with a maximum of 2 metre of internal dilution of less than 0.20g/t gold (Table 1). No top cut applied.
- Sample preparation and Fire Assay conducted by BIGS Ouagadougou. Assayed by 50g fire assay with AAS finish.
- QA/QC protocol: For RC samples we insert one blank, one standard and one duplicate for every 17 samples (3 QA/QC within every 20 samples).

Competent Person's Statement

Information in this announcement that relates to exploration results, exploration targets or mineral resources is based on information compiled by Mr Richard Hyde, a Director, who is a Member of The Australian Institute of Mining and Metallurgy and Australian Institute of Geoscientists. Mr Hyde has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (the JORC Code) and a Qualified Person under National Instrument 43-101. Mr Hyde consents to the inclusion in this announcement of the statements based on his information in the form and context in which they appear.

Forward Looking Information

This news release contains "forward-looking information" within the meaning of applicable Canadian and Australian securities legislation, including information relating to West African's future financial or operating performance may be deemed "forward looking". All statements in this news release, other than statements of historical fact, that address events or developments that West African expects to occur, are "forward-looking statements". Forward-looking statements are statements that are not historical facts and are generally, but not always, identified by the words "expects", "does not expect", "plans", "anticipates", "does not anticipate", "believes", "intends", "estimates", "projects", "potential", "scheduled", "forecast", "budget" and similar expressions, or that events or conditions "will", "would", "may", "could", "should" or "might" occur. All such forward-looking statements are based on the opinions and estimates of the relevant management as of the date such statements are made and are subject to important risk factors and uncertainties, many of which are beyond West African's ability to control or predict. Forward-looking statements are necessarily based on estimates and assumptions that are inherently subject to known and unknown risks, uncertainties and other factors that may cause actual results, level of activity, performance or achievements to be materially different from those expressed or implied by such forward-looking statements. In the case of West African, these facts include their anticipated operations in future periods, planned exploration and development of its properties, and plans related to its business and other matters that may occur in the future. This information relates to analyses and other information that is based on expectations of future performance and planned work programs. Statements concerning mineral resource estimates may also be deemed to constitute forward-looking information to the extent that they involve estimates of the mineralization that will be encountered if a mineral property is developed.

Forward-looking information is subject to a variety of known and unknown risks, uncertainties and other factors which could cause actual events or results to differ from those expressed or implied by the forward-looking information, including, without limitation: exploration hazards and risks; risks related to exploration and development of natural resource properties; uncertainty in West African's ability to obtain funding; gold price fluctuations; recent market events and conditions; risks related to the uncertainty of mineral resource calculations and the inclusion of inferred mineral resources in economic estimation; risks related to governmental regulations; risks related to obtaining necessary licenses and permits; risks related to their business being subject to environmental laws and regulations; risks related to their mineral properties being subject to prior unregistered agreements, transfers, or claims and other defects in title; risks relating to competition from larger companies with greater financial and technical resources; risks relating to the inability to meet financial obligations under agreements to which they are a party; ability to recruit and retain qualified personnel; and risks related to their directors and officers becoming associated with other natural resource companies which may give rise to conflicts of interests. This list is not exhaustive of the factors that may affect West African's forward-looking information. Should one or more of these risks and uncertainties materialize, or should

underlying assumptions prove incorrect, actual results may vary materially from those described in the forward-looking information.

West African's forward-looking information is based on the reasonable beliefs, expectations and opinions of their respective management on the date the statements are made and West African does not assume any obligation to update forward looking information if circumstances or management's beliefs, expectations or opinions change, except as required by law. For the reasons set forth above, investors should not place undue reliance on forward-looking information. For a complete discussion with respect to West African, please refer to West African's financial statements and related MD&A, all of which are filed on SEDAR at www.sedar.com.

Neither TSX Venture Exchange nor its Regulation Services Provider (as that term is defined in the policies of the TSX Venture Exchange) accepts responsibility for the adequacy or accuracy of this release.

Section 1: Sampling Techniques and Data		
Criteria	JORC Code Explanation	Commentary
Sampling Technique	Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	The Mankarga area is being drilled using Diamond Core Drilling (DD) and Reverse Circulation (RC) drilling. The drill spacing is being in-filled to a nominal 100m x 20m grid spacing. A total program of 8000m is proposed. Holes are angled towards 045° or 225° magnetic at M3 and 120° where possible at M5 at declinations of -50°, to optimally intersect mineralised zones. All RC samples were weighed to determine recoveries. All potentially mineralised zones were then split and sampled at 1m intervals using three-tier riffle splitters. QA/QC procedures were completed as per industry best practice standards (certified blanks and standards and duplicate sampling). Samples were despatched to BIGS in Ouagadougou for sample preparation, where they were crushed, dried and pulverised to produce a sub sample for analysis. BIGS has a fire assay facility in Ouagadougou where 50g fire assays, AAS finishes and screen fire assays have been conducted. Historic sampling preparation and assaying was completed at Abilabs and SGS laboratories located in Ouagadougou. Historic samples we analysed by Fire Assay method with AAS finish.
Drilling	Drill type (e.g. core, reverse circulation, open- hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc.).	Reverse Circulation "RC" drilling within the resource area comprises 4.5 inch diameter face sampling hammer and aircore blade drilling and hole depths range from 13m to 60m. Diamond drilling in progress comprises both NQ and HQ diameter core, at holes between 75m and 350m depth.
Drill Sample Recovery	Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	RC recoveries are logged and recorded in the database. Overall recoveries are >75% for the RC; there are no significant sample recovery problems. A technician is always present at the rig to monitor and record recovery. RC samples were visually checked for recovery, moisture and contamination. The bulk of the Resource is defined by DD and RC drilling, which have high sample recoveries. The style of mineralisation, with common higher-grades, require large diameter core and good recoveries to evaluate the deposit adequately. The consistency of the mineralised intervals and density of drilling is considered to prevent any sample bias issues due to material loss or gain.
Logging	Whether core and chip samples have been geologically and geotechnical logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean/Trench, channel, etc.) photography. The total length and percentage of the relevant intersections logged.	Geotechnical logging was carried out on all diamond drill holes for recovery, RQD and number of defects (per interval). Information on structure type, dip, dip direction, alpha angle, beta angle, texture, shape, roughness and fill material is stored in the structure/Geotech table of the database. Logging of diamond core and RC samples recorded lithology, mineralogy, mineralisation, structural (DDH only), weathering, alteration, colour and other features of the samples. Core was photographed in both dry and wet form. All drilling has been logged to standard that is appropriate for the category of Resource which is being reported.
Sub-Sampling Technique and Sample Preparation	If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled.	RC samples were collected on the rig using a three tier riffle splitter. All samples were dry. The sample preparation for all samples follows industry best practice. BIGS in Ouagadougou for sample preparation, where they were crushed, dried and pulverised to produce a sub sample for analysis. Sample preparation involving oven drying, coarse crushing, followed by total pulverisation LM2 grinding mills to a grind size of 90% passing 75 microns. Field QC procedures involve the use of certified reference material as assay standards, blanks, and duplicates for the RC samples only. The insertion rate of these averaged 3:20 for RC. Field duplicates were taken on for both 1m RC splits using a riffle splitter. The sample sizes are considered to be appropriate to correctly represent the style of mineralisation, the thickness and consistency of the intersections.

Quality of Assay Data and Laboratory Tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	The laboratory used an aqua regia digest followed by fire assay for with an AAS finish for gold analysis. No geophysical tools were used to determine any element concentrations used in this Resource Estimate. Sample preparation checks for fineness were carried out by the laboratory as part of their internal procedures to ensure the grind size of 90% passing 75 micron was being attained. Laboratory QA/QC involves the use of internal lab standards using certified reference material, blanks, splits and duplicates as part of the in house procedures. Certified reference materials, having a good range of values, were inserted blindly and randomly. Results highlight that sample assay values are accurate and that contamination has been contained. Repeat or duplicate analysis for samples shows that the precision of samples is within acceptable limits. Sample preparation conducted and fire assay performed by BIGS SARL -Assayed by 50g fire assay with AAS finish. QA/QC protocol: For diamond core one blank and one standard inserted for every 18 core samples (2 QA/QC samples within every 20 samples dispatched, or 1 QA/QC sample per 10 samples despatched) and no duplicates. QA/QC protocol: For RC samples we insert one blank, one standard and one duplicate for every 17 samples (3 QA/QC within every 20 samples or 1 every 8.5 samples).
Verification of Sampling and Assaying	The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes The verification of significant intersections by either independent or alternative company personnel. Discuss any adjustment to assay data	WAF's QP R. Hyde has verified significant intersections in diamond core and RC drilling. Primary data was collected using a set of company standard Excel™ templates on Toughbook™ laptop computers using lookup codes. The information was validated on-site by the Company's database technicians and then merged and validated into a final Access™ database by the company's database manager.
Location of Data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used Quality and adequacy of topographic control	All drill holes have been located by DGPS in UTM grid WGS84 Z30N. Down-hole surveys were completed at the end of every hole where possible using a Reflex down-hole survey tool, taking measurements every. DGPS was used for topographic control.
Data Spacing and Distribution	Data spacing for reporting of Exploration Results Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied	The nominal drill hole spacing is 20m (northwest) by 100m (northeast). The mineralised domains have demonstrated sufficient continuity in both geological and grade to support the definition of Mineral Resource and Reserves, and the classifications applied under the 2012 JORC Code. Historic samples have been composited to three metre lengths, and adjusted where necessary to ensure that no residual sample lengths have been excluded (best fit). WAF intends to update the Mankarga 5 Resource following the current work programs, in the first quarter of 2014.
Orientation of Data in Relation to Geological Structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	The majority of the data is drilled to either magnetic 120° or 300° orientations, which is orthogonal/perpendicular to the orientation of the mineralised trend. The bulk of the drilling is almost perpendicular to the mineralised domains. Structural logging based on oriented core indicates that the main mineralisation controls are largely perpendicular to drill direction. No orientation based sampling bias has been identified in the data at this point.
Sample Security	The measures taken to ensure sample security	Chain of custody is managed by WAF. Samples are stored on site and delivered by WAF personnel to BIGS Ouagadougou for sample preparation. Whilst in storage, they are kept under guard in a locked yard. Tracking sheets are used track the progress of batches of samples
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	WAF personnel and consultants have completed numerous site visits and data reviews since acquiring the project in 2014. No material issues were noted. A technical report located on WAF's website.

Section 2 Reporting of Exploration Results		
Criteria	JORC Code Explanation	Commentary
Mineral Tenement and Land Tenure Status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Boulsa Project tenements covers over 3,700km ² , granting the holders the right to explore for gold. The tenements have been acquired by either direct grant to WAF or its subsidiaries or by contractual agreements with tenement holders. Apart from the Tanlouka Agreement where Tanlouka SARL holds a 90% interest, all other vendor agreements provide WAF with the right to obtain an ultimate interest of 100%. All licences, permits and claims are granted for gold. All fees have been paid, and the permits are valid and up to date with the Burkinabe authorities. The payment of gross production royalties are provided for by the Mining Code and the amount of royalty to be paid for ranges from 3% (<US\$1000), 4% (\$1000-1300) and 5% (>\$1300).
Exploration Done by Other Parties	Acknowledgment and appraisal of exploration by other parties.	Very little exploration has been carried out over greater project the tenement prior to WAF's involvement which commenced in 2008, with the exception of the Tanlouka Permit. The area comprising the Tanlouka Permit has been held by Channel Resources Ltd since the early 1990's. Work recommenced in earnest on the Tanlouka Permit in 2010. WAF acquired Channel Resources Ltd on January 17th 2014. Available historic records and data were reviewed by both WAF during Due Diligence prior to the acquisition.
Geology	Deposit type, geological setting and style of mineralisation.	The Boulsa Project straddles some 70km strike length of the Manga-Sebba greenstone belt, which bifurcates and trends northeast and east-northeast respectively from southern-central Burkina Faso into Niger over some 450km. The south-eastern portion of the project area covers the southern extension of the Fada N'Gourma Belt. Lithologies comprise volcano-plutonic bodies including amphibolised basalts with amphibolites, andesites and basalts, rhyolites and rhyodacites, brecciated tuffs, and gabbroic bodies including pyroxenite and serpentinite. Gold mineralisation in the project area is mesothermal orogenic in origin and structurally controlled. The project also contains shear hosted porphyry related copper-gold-molybdenum mineralisation on the Sartenga Permit which is believed to be unique in West Africa."
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Intercepts that form the basis of this announcement are tabulated in Table 1 in the body of the announcement and incorporate Hole ID, Easting, Northing, Dip, Azimuth, Depth and Assay data for mineralised intervals. Appropriate maps and plans also accompany this announcement.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	All intersections are assayed on one meter intervals No top cuts have been applied to exploration results. Mineralised intervals are reported with a maximum of 2m of internal dilution of less than 0.2g/t Au. Higher grade zones are reported with a maximum of internal dilution of less than 2g/t Au of internal dilution. Mineralised intervals are reported on a weighted average basis.

Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	The orientation of the mineralised zone has been established and the majority of the drilling was planned in such a way as to intersect mineralisation in a perpendicular manner. However, due to topographic limitations some holes were drilled from less than ideal orientations.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	The appropriate plans and sections have been included in the body of this document.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All grades, high and low, are reported accurately with "from" and "to" depths and "hole identification" shown.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	Preliminary metallurgical test work has been completed, with excellent results. Gold recoveries exceed 95% from oxide bottle roll tests, exceed 92% for sulphide bottle roll tests and a significant proportion of the gold is recoverable by gravity concentration. Additional metallurgical test work is planned.
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Further infill drilling is planned and is ongoing, aimed at increasing the amount of resource categorized as Indicated, as well as upgrading some of the Indicated Resource to Measured status. Drilling aimed at increasing the Resource below the current depth extent is also planned. A figure showing proposed work programs is included in the body of this report.