



## ASX Announcement

23 February 2016

ASX Code: ARM

### Aurora Minerals Group of Companies

Diversified Minerals Exploration via direct and indirect interests

#### Predictive Discovery Limited (ASX: PDI) – 43.1%

- Gold Exploration / Development in Burkina Faso

#### Peninsula Mines Limited (ASX: PSM) – 35.8%

- Graphite, Lithium- Gold, Silver and Base Metals
- Molybdenum and Tungsten Exploration in South Korea

#### Golden Rim Resources (ASX: GMR) - 13.4%

- Gold Exploration/ Development in Burkina Faso

#### Aurora Western Australian Exploration – 100%

- Manganese, Base metals and gold

### Contact Details

#### Principal & Registered Office

Suite 2, Level 2  
20 Kings Park Road  
West Perth WA 6006

Martin Pyle – Managing Director  
Tel: +61 8 6143 1840

Karen Oswald – Media and Investor Relations  
Tel: +61 423 602 353

Ken Banks – Investor Relations  
Tel: +61 402 079 999

### Website

[www.auroraminerals.com](http://www.auroraminerals.com)



## PREDICTIVE DISCOVERY- Cote D'Ivoire Soil Anomaly Strengthened by New Gold Results

Predictive Discovery Limited, a company in which Aurora Minerals Limited holds a 43.1% shareholding, today announced results of infill soil sampling obtained by Joint Venture partner, Toro Gold Limited, on the Boundiali permit in Cote D'Ivoire.

A copy of the announcement is attached.

For further information please contact:

**Martin Pyle**  
Managing Director  
Telephone: +61 8 6143 1840

**Media**  
**Karen Oswald**  
Marko Communications  
Mob: +61 423 602 353



23<sup>rd</sup> February 2016

## ASX Announcement

**Predictive Discovery Limited** is a gold exploration company with strong technical capabilities focused on its advanced gold exploration projects in West Africa.

ASX: PDI

**Issued Capital:** 1.3B shares

**Share Price:** 0.2 cents

**Market Capitalisation:** \$2.6M

### Directors

Phillip Jackson  
Non-Exec Chairman

Paul Roberts  
Managing Director


David Kelly  
Non-Executive Director

## Cote D'Ivoire Soil Anomaly Strengthened by New Gold Results

Predictive Discovery Limited (ASX: PDI) is pleased to announce the results of infill soil sampling obtained by Joint Venture partner, Toro Gold Limited, on the Boundiali permit in Cote D'Ivoire:

- Confirmation and extension of the 5.6km long gold-in-soil anomaly first announced on 20 October 2015 with values including **2.1g/t Au**, **1.3 g/t Au** and **1.0g/t Au**.
- A **strong and coherent 2km long soil anomaly** at the southern end of the above zone, now defined on a 200 x 50m sample density (Figure 1).
- Toro plans to commence RC drilling in April 2016.


Mr Paul Roberts, Predictive's Managing Director said: *"These new results confirm the importance and prospectivity of the Boundiali soil anomaly. The consistency of gold-in-soil results at the southern end of the zone is particularly encouraging. We anticipate the results of Toro's drilling program with great interest."*

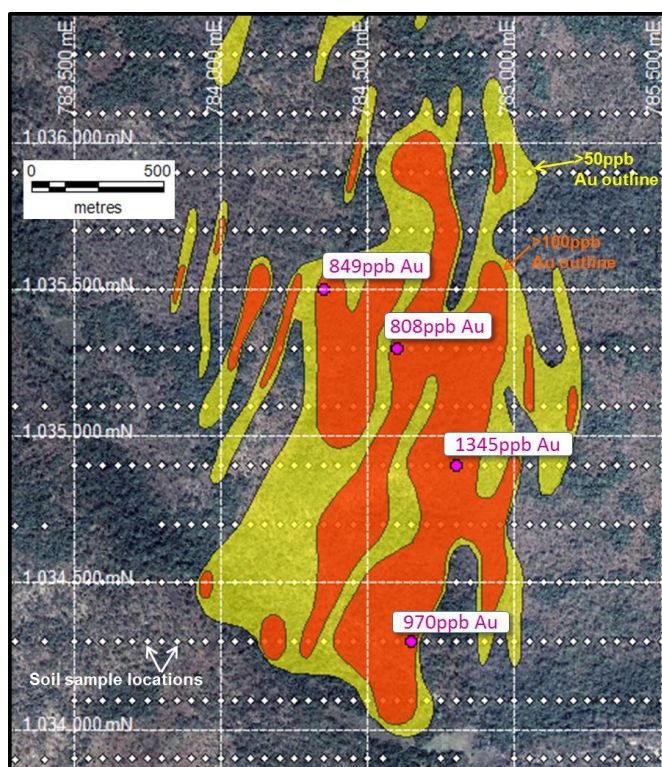

**Figure 1:** Gold-in-soil geochemical contour image of the southern 2km of the Boundiali permit's 6km long anomaly on satellite imagery, highlighting the consistency of >100ppb gold anomaly (in orange).

## INTRODUCTION

Predictive is in Joint Venture with Toro Gold Limited (**Toro**), a UK-based company, on four permits in Cote D'Ivoire (Figure 2). Under the terms of the Joint Venture agreement, Toro can earn a 51% interest in Predictive Discovery Cote D'Ivoire SARL (Predictive CI), which holds Predictive's interest in the four permits, by spending US\$1 million on exploration and option payments. Once Toro has achieved its 51% interest, PDI may contribute 49% of expenditure from then on or dilute. If PDI decides to dilute, Toro can earn a further 14% in Predictive CI by spending an additional US\$2.5 million on exploration of the ground, leaving PDI with a 35% holding.

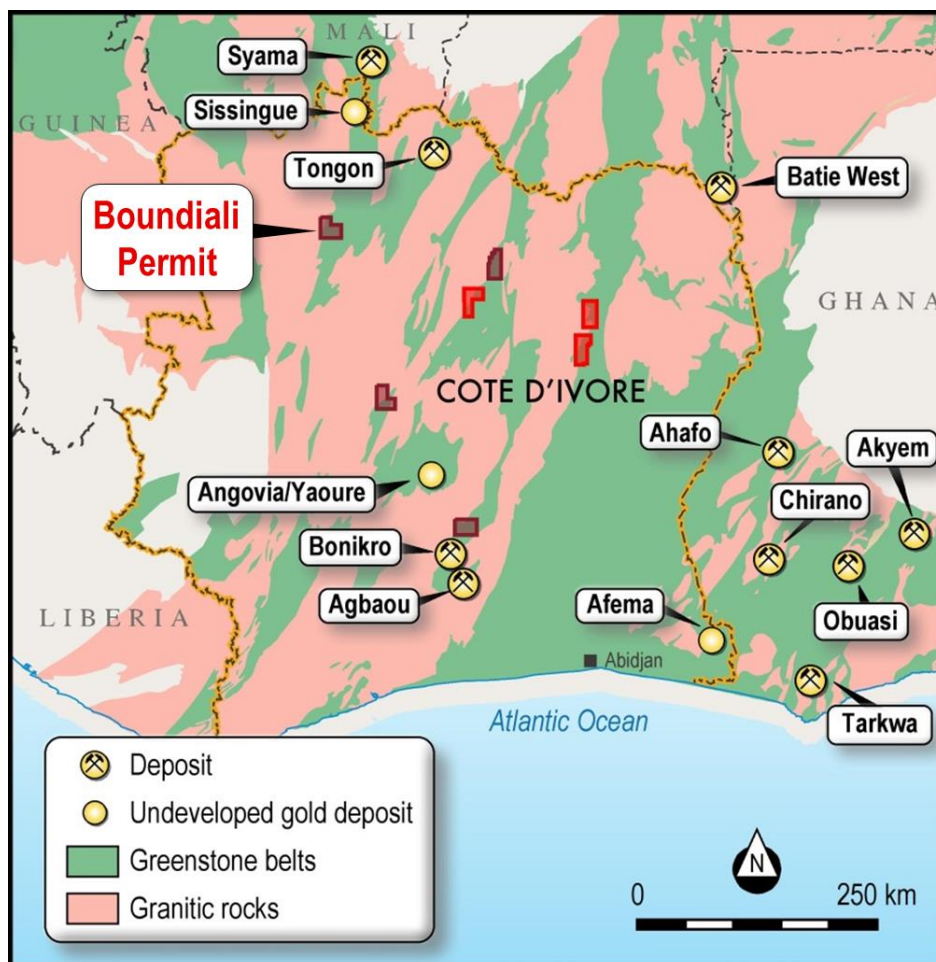

**Figure 2:** Locality map showing location of Boundiali permit and PDI's other exploration ground interests in Cote D'Ivoire. The Toro Gold joint venture permits are shown in brown and the ground covered by PDI's agreement on the Bobosso Project with the Ivoirian company, XMI SARL, is shown in red.


## Boundiali Background

The Boundiali permit is located within a very well mineralised greenstone belt which contains the large operating Tongon and Syama gold mines in Cote D'Ivoire and Mali respectively. The southern part of this belt has had little exploration to date and represents a first class opportunity to make new large gold discoveries.



## Toro Soil Survey - Boundiali

Toro previously carried out a soil sampling program covering the entire Boundiali permit on 800m spaced lines. Samples were collected 100m apart on each line and, initially, only every second sample was submitted for analysis (ASX release dated 20 October 2015). Subsequently, 100m spaced infill samples were assayed selectively in areas of soil gold anomalies (ASX release dated 23<sup>rd</sup> November 2015).

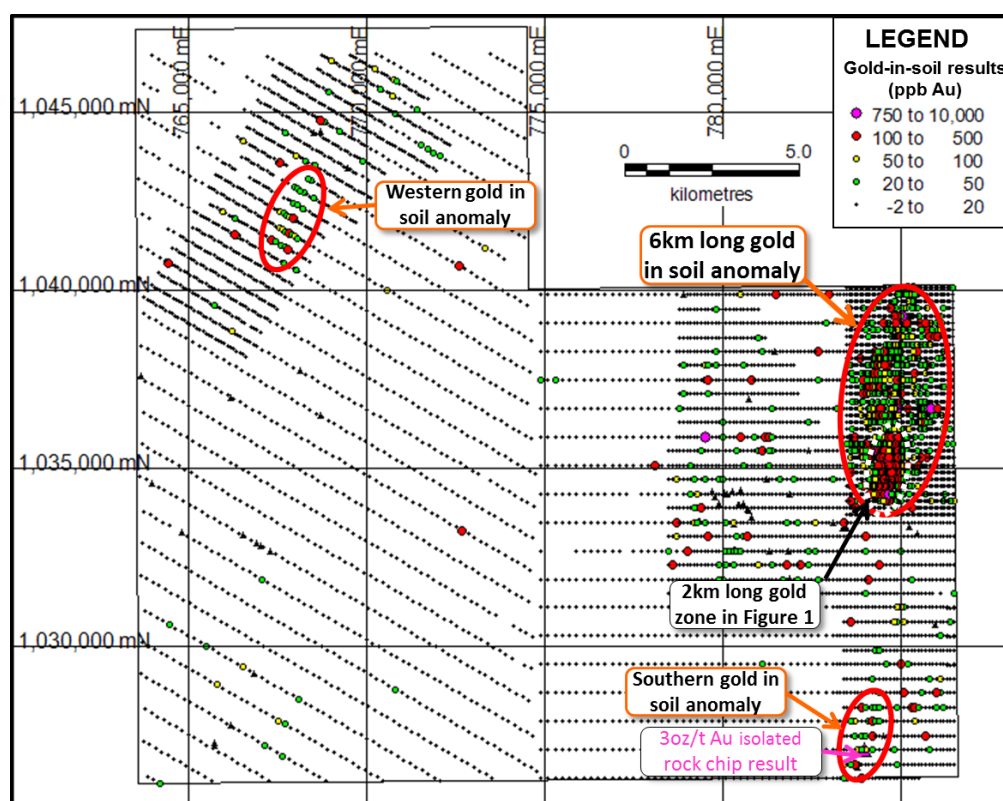

**Figure 3:** Toro Gold soil sampling grid covering the entire Boundiali exploration permit. Results in grade intervals are shown for all of Toro soil results to date. The large NE Boundiali gold anomaly and two other coherent gold anomalies are highlighted on this map. Rock chip samples are shown as small black triangles.

2,854 infill soil samples were collected on either 400 x 100m or 200 x 50m sample spacings in areas of encouraging gold results obtained from the initial 800 x 100m sample grid. These samples were analysed for gold by fire assay at the ALS laboratory at Loughrea in Ireland. The new infill results reinforced the earlier reported assays, highlighting three areas of coherent soil anomalies (see Figure 3). Peak values of **2.1g/t Au**, **1.3g/t Au** and **1.0g/t Au** were obtained in the infill sampling program.

This work has shown that the southern 2km of the largest (6km long) anomaly is of particular interest with very clear line-to-line continuity (Figure 1). Elsewhere, two other coherent anomalies have been highlighted, both of which lie upstream of BLEG stream sediment anomalies recorded by PDI in its initial exploration of the permit (ASX release dated 4<sup>th</sup> August 2014). Of these, the south-eastern anomaly coincides with an isolated, high grade rock chip sample containing **90g/t Au** or **3 oz/t Au** (ASX release dated 10<sup>th</sup> November 2015).

## Follow-up Work

Toro is currently planning to commence a RC drilling program focused especially on the southern 2km portion of the 6km long anomaly.

**TABLE 1 – SOIL SAMPLING RESULTS**

Sample numbers	Northing (WGS84-30N)	Easting (WGS84 – 30N)	RL	Hole dips	Azimuth	Hole Depth	From	Interval	Au (ppb)
Toro sample numbers in the range 25092 to 29950.	Refer to Figures 1 and 3 for map locations of all samples	Refer to Figures 1 and 3 for map locations of all samples	See notes	Not relevant to the samples described in this report	Not relevant to the samples described in this report	Soil samples were collected from 10-50cm depth	Not relevant to the samples described in this report	Not relevant to the samples described in this report	See notes and Figures 1 and 3.
Notes: Soil sampling is a reconnaissance exploration technique. In the sampling and sample preparation method used by Toro, soil samples were collected from shallow holes and dried and sieved to -80 mesh at a local field camp. The prepared samples were then sent to the ALS laboratory in Loughrea in Ireland for fire assay analysis. RL ranges for the Boundiali permit are 360 to 442m. Individual RLs are not reported in this announcement because they are not relevant to interpreting geochemical data of this type.									

Section 1: Sampling Techniques and Data		
Criteria	JORC Code Explanation	Commentary
Sampling Technique	<p>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report.</p> <p>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</p>	<p>The sampling described in this report refers samples obtained from the Boundiali exploration permit in Cote D'Ivoire.</p> <p>The soil and lag samples were collected from shallow holes with depths between 10 and 50cm.</p>
Drilling	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard	This is not relevant to a soil sampling program.

	tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	
<b>Drill Sample Recovery</b>	<p>Method of recording and assessing core and chip sample recoveries and results assessed.</p> <p>Measures taken to maximise sample recovery and ensure representative nature of the samples.</p> <p>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</p>	This is not relevant to a soil sampling program.
<b>Logging</b>	<p>Whether core and chip samples have been geologically and geotechnical logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</p> <p>Whether logging is qualitative or quantitative in nature. Core (or costean/Trench, channel, etc) photography.</p> <p>The total length and percentage of the relevant intersections logged.</p>	Soil samples are described in terms of soil type, regolith and landscape classification and colour. Descriptions are largely qualitative.
<b>Sub-Sampling Technique and Sample Preparation</b>	<p>If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</p> <p>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</p> <p>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</p> <p>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled.</p>	The sample preparation method is appropriate and standard for soil samples of this type.
<b>Quality of Assay Data and Laboratory Tests</b>	<p>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</p> <p>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</p> <p>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</p>	The analytical method used has a very low (1ppb Au) detection limit which is appropriate for samples of this type.

<b>Verification of Sampling and Assaying</b>	The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes The verification of significant intersections by either independent or alternative company personnel. Discuss any adjustment to assay data	This is not relevant to a soil sampling program.
<b>Location of Data points</b>	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.  Specification of the grid system used Quality and adequacy of topographic control	Coordinates shown on the locality maps (Figures 1 and 3) are for Universal Transverse Mercator (UTM), Datum WGS 84, Zone 29 - Northern Hemisphere.
<b>Data Spacing and Distribution</b>	Data spacing for reporting of Exploration Results  Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.  Whether sample compositing has been applied	The soil sampling grids of 400 x 100m and 200 x 50m are considered appropriate for a reconnaissance exploration grid of this type. No Mineral Resource can be estimated from these data.
<b>Orientation of Data in Relation to Geological Structure</b>	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	The samples were collected along lines which were designed to cross cut the interpreted bedding and foliation strike orientations in permit.
<b>Sample Security</b>	The measures taken to ensure sample security	Samples are stored securely at Toro Gold's field office in Yamoussoukro.
<b>Audits or Reviews</b>	The results of any audits or reviews of sampling techniques and data	No audits or reviews of sampling techniques and data have been carried out given the reconnaissance nature of this soil sampling program.
<b>Section 2 Reporting of Exploration Results</b>		
<b>Mineral Tenement and Land Tenure Status</b>	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.  The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Boundiali exploration permit was granted to PDI Cote D'Ivoire SARL in January 2014. Toro Gold Limited may earn a 51% interest in PDI Cote D'Ivoire SARL by spending US\$1 million.
<b>Exploration Done by Other Parties</b>	Acknowledgment and appraisal of exploration by other parties.	PDI is not aware of any effective gold exploration over the Boundiali permit however historic records are incomplete at the Cote D'Ivoire government geological agency.
<b>Geology</b>	Deposit type, geological setting and style of mineralisation.	The geology of the Boundiali permit consists of granite, metasediments, mafic volcanics and intrusives, and conglomerates.

<b>Drill Hole Information</b>	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> <li>• easting and northing of the drill hole collar</li> <li>• elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>• dip and azimuth of the hole</li> <li>• down hole length and interception depth</li> <li>• hole length</li> <li>• If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<p>This is not relevant to a soil sampling program. Sample coordinate information is provided in Table 1 and on the maps included in this release.</p>
<b>Data Aggregation Methods</b>	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<p>This is not relevant to a soil sampling program..</p>
<b>Relationship Between Mineralisation Widths and Intercept Lengths</b>	<p>These relationships are particularly important in the reporting of Exploration Results</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</p>	<p>This is not relevant to a soil sampling program.</p>
<b>Diagrams</b>	<p>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>	<p>Appropriate plans showing the locations of the soil samples, classified by results, are shown in this release.</p>
<b>Balanced Reporting</b>	<p>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</p>	<p>Results from all assayed soil samples have been reported.</p>
<b>Other Substantive Exploration Data</b>	<p>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential</p>	<p>All relevant, new exploration data is reported in this release.</p>



	deleterious or contaminating substances.	
<b>Further Work</b>	<p>The nature and scale of planned further work (eg tests for lateral extensions or large scale step out drilling.</p> <p>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</p>	Follow- up RC drilling is planned on the permit as outlined in this release.

*Predictive Discovery Limited (PDI) was established in late 2007 and listed on the ASX in December 2010. The Company is focused on exploration for gold in West Africa. The Company's major focus is in Burkina Faso, West Africa where it has assembled a substantial regional ground position totalling 1,500km<sup>2</sup> and is exploring for large, open-pit table gold deposits. Exploration in eastern Burkina Faso has yielded a large portfolio of exciting gold prospects, including the high grade Bongou gold deposit on which a resource estimate was calculated in September 2014. PDI also has interests in a strategic portfolio of tenements in Côte D'Ivoire covering a total area of 2,700 km<sup>2</sup>.*

#### Competent Persons Statement

*The exploration results and the Exploration Target reported herein, insofar as they relate to mineralisation are based on information compiled by Mr Paul Roberts (Fellow of the Australian Institute of Geoscientists). Mr Roberts is a full time employee of the company and has sufficient experience relevant to the style of mineralisation and type of deposits being considered to qualify as a Competent Person as defined by the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Roberts consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.*

For further details please contact:

Paul Roberts  
Managing Director  
Tel: +61 402 857 249  
Email:

[paul.roberts@predictivediscovery.com](mailto:paul.roberts@predictivediscovery.com)

Ric Moore  
Company Secretary  
Tel: +61 8 6143 1840  
Email:

[rmoore@auroraminerals.com](mailto:rmoore@auroraminerals.com)