

Exploration Office Unit 2 81 Harrison Road Dudley Park SA 5008

Tel: +61 8 8245 4900 Fax: +61 8 8245 4999 www.monaxmining.com.au

For Immediate Release Tuesday 8 July, 2014

ASX RELEASE

Micro-gravity enhances target at Parndana Project

HIGHLIGHTS

- Micro-gravity survey completed at Monax's Parndana Project in South Australia.
- Modelling of detailed data confirms shallower target.
- Drill sites selected to test coincident dense chargeable anomaly.
- Regulatory approval received for drilling program.

Monax Mining Limited ("Monax") (ASX: MOX) today announced the completion of the microgravity survey and target modelling at its 100% owned Parndana Project on Kangaroo Island in South Australia.

This survey was designed to provide more detailed data and further improve constraints on the size and depth of the gravity target.

50m spaced gravity data was collected along the three NE trending induced polarisation (IP) traverses (Figure 1). Figure 2 shows the updated second order residual gravity image within the 3D inversion model which supports a coherent dense body with core density contrast of 0.225q/cc*.

The new data and subsequent modelling further confirm the existence of a coincident dense chargeable body, constrained within the dilation of the Cygnet-Snelling Shear Zone. This modelling indicates that the body is between 100-200m depth, significantly shallower than the initial reported depth (~300m). The data also shows a smaller anomaly located approximately 400m to the NE of the main gravity/chargeable anomaly, providing a further target (see Figure 1).

Monax is planning to drill three holes commencing in early August 2014, focussed on testing the main gravity/chargeable anomaly.

Monax has received the necessary regulatory approval for drilling.



Gary Ferris Managing Director, Monax Mining Ph: (08) 8245 4900

Email: info@monaxmining.com.au

The information in this report that relates to Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Mr G M Ferris, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Ferris is employed full time by the Company as Managing Director and, has a minimum of five years relevant experience in the style of mineralisation and type of deposit under consideration and qualifies as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" Mr Ferris consents to the inclusion of the information in this report in the form and context in which it appears.

This announcement contains information previously announced within the following Monax Mining Limited ASX announcements:

- 24 July 2006 Zone of zinc and lead mineralisation extended at Bonaventura.
- 27 March 2014 Gravity survey identifies significant anomaly on Monax's Parndana Project.
- 30 April 2014 Quarterly Report for the period ending 31 March 2014.
- 20 June 2014 Monax to raise equity for drilling of Parndana IP anomaly.
- 1 July 2014 Prominent chargeable anomaly identified at Monax's Parndana Project.

^{*} g/cc = grams per cubic centimetre



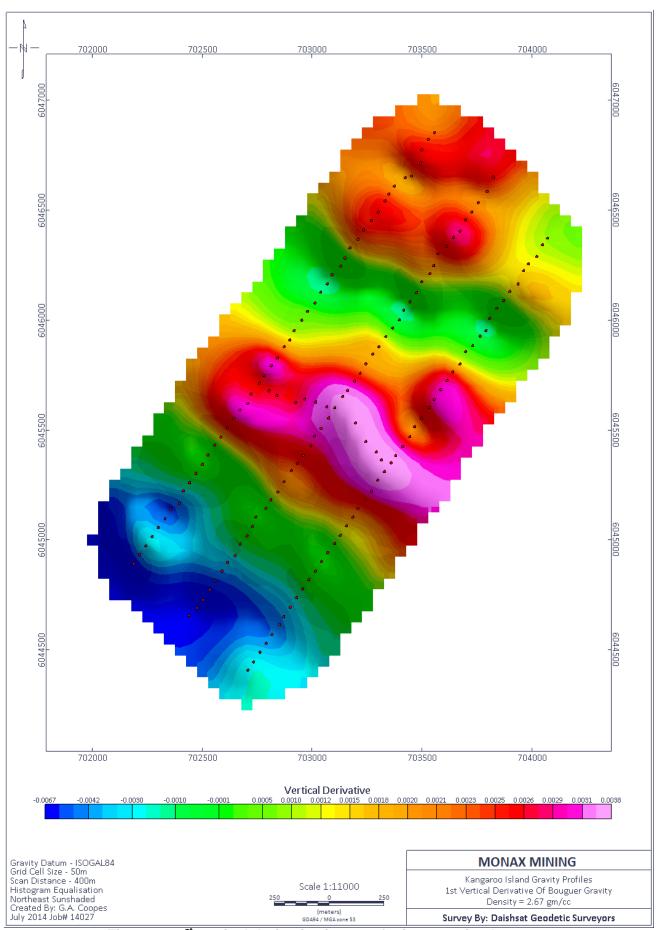


Figure 1. 1st vertical derivative image of micro-gravity data.



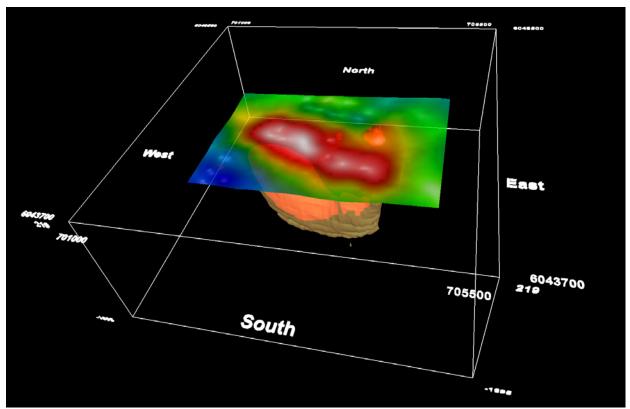


Figure 2. Snapshot of the updated 3D inversion model showing the second order residual gravity image along with the gravity inversion shells which support a core density contrast of 0.225g/cc.



JORC Code, 2012 Edition - Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	Not Applicable for gravity survey.
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	Not Applicable for gravity survey.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	Not Applicable for gravity survey
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. 	Not Applicable for gravity survey.



Criteria	JORC Code explanation	Commentary
	The total length and percentage of the relevant intersections logged.	
Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	Not Applicable for gravity survey.
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	Not Applicable for gravity survey.
Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	Not Applicable for gravity survey.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 Not Applicable for gravity survey. Gravity data was collected using GDA94 (Zone 53). Location data was collected using a differential GPS.
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	 Newly acquired gravity data was collected at 50m station intervals. Not applicable – data not used for resource estimation.



Criteria	JORC Code explanation	Commentary
	Whether sample compositing has been applied.	Not Applicable for gravity survey.
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	Not Applicable for gravity survey.
Sample security	The measures taken to ensure sample security.	Not Applicable for gravity survey.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Not Applicable for gravity survey.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental actions.	The gravity survey was undertaken on Exploration Licence 4581 which is owned 100% by Monax Mining Limited. The tenement is located on Freehold Land. The tenement is free of any known impediments.
	 settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	The tenement is free of any known impediments.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 Initial drilling in the area was undertaken by the South Australian Department of Mines and Energy in 1991. Havilah Resources undertook regional soil and stream geochemical surveys, followed by a drilling program in 2003. Several companies prior to 1990 undertook soil sampling programs in the region.
Geology	Deposit type, geological setting and style of mineralisation.	Sediment hosted silver-lead-zinc style mineralisation.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. 	Not Applicable for gravity survey



Criteria	JORC Code explanation	Commentary
	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	Not Applicable for gravity survey.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	Not Applicable for gravity survey
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	 Registered 3D inversion model presented with processed gravity data.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Not Applicable for gravity survey.
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	Data from earlier exploration has been previously released.
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 Monax will utilise newly acquired gravity data and modelling to assist in outlining possible drilling targets. Monax is planning to drill the target generated from this survey.