

AGUIA PROVIDES DRILL PROGRAM UPDATE FOR TRES ESTRADAS PROJECT, BRAZIL

- First phase Diamond and Reverse Circulation drilling programs at Três Estradas South have intersected excellent widths of phosphate mineralization.
- To date 1,595 meters of Diamond Drilling has been completed and results returned from six holes include:
 - 53.94 meters grading 5.27% P_2O_5 , from 17.50 meters
 - 62.65 meters grading 4.32% P_2O_5 , from 9.15 meters
 - 74.00 meters grading 4.11% P_2O_5 , from 12.00 meters
- In addition 1,010 meters of Reverse Circulation drilling was also completed and results from six holes returned the following intercepts:
 - 22.00 meters grading 14.07% P_2O_5 , from 13.00 meters
 - 33.00 meters grading 13.85% P_2O_5 , from 5.00 meters
 - 38.00 meters grading 10.74% P_2O_5 , from 1.00 meters
 - 44.00 meters grading 10.07% P_2O_5 , from surface

Aguia Resources Limited (ASX: **AGR**) ("Aguia" or "Company") is pleased to announce that the Company has received excellent results from the first batch of assays from the ongoing reverse circulation and diamond drilling programs testing the southern extension to the Três Estradas project located in the state of Rio Grande do Sul in southern Brazil. This is a part of the current extensive drill program at the flagship phosphate assets of the Company that comprises Três Estradas South and the adjoining Joca Tavares project.

Três Estradas South forms the southwest strike extension of the previously announced Três Estradas in-pit resource of 30.5 million tons grading 4.3% P_2O_5 , which includes indicated resources of 9.9 million tons grading 5.03% P_2O_5 and inferred resources of 20.6 million tons grading 3.94% P_2O_5 . Previously announced auger drilling at Três Estradas South has returned several encouraging results, including 10 meters grading 10.6% P_2O_5 , 12 meters grading 9.8% P_2O_5 , 7.9 meters grading 12.0% P_2O_5 , all ending in mineralization indicating that the high grade oxide zone extends further to the south-west from the current resource.

In December 2014 the Company initiated a drilling program to systematically test the mineralization at Três Estradas South. The planned program consists of a combination of at least 1,000 meters of reverse circulation drilling to outline the oxide mineralization and 3,000 meters of diamond drilling designed to test the extension of the mineralization at depth. The program is ongoing and to date 1,595 meters of diamond drilling and 1,010 meters of reverse circulation have been completed.

"The initial assay results from this program are extremely encouraging as they confirm the extension of the Três Estradas mineralization to the southwest at surface and also at depth. Both oxide mineralization and fresh carbonatite are identical in texture and grade to the current pit-constrained resource that was delineated in the previous programs.

These initial results are consistent with those from the previous shallow auger drilling and demonstrate that mineralization continuously extends to the southwest. The initial results for the oxide mineralization have returned thicker intercepts, up to 44 meters from surface. At depth the carbonatite-hosted mineralization is consistent and predictable along strike indicating that this program has the potential to substantially increase the resource at Três Estradas”, commented Technical Director Fernando Tallarico.

“These results validate the potential for a high quality, world class phosphate asset in South Brazil to service the growing demand for phosphate nutrients in the farm belts in Brazil. We will continue to explore the region to finish the drill program that commenced in December 2014 to cover Três Estradas South and also include the adjoining properties in Joca Tavares”, added Managing Director Prakash Hariharan.

– ENDS –

For further information, please contact:

Prakash Hariharan

Managing Director

Em: phariharan@aguiaresources.com.au

About Aguia

Aguia is an emerging fertiliser development company focusing on phosphate and potash projects in Brazil. Brazil is Latin America's biggest economy and is heavily reliant on imports of up to 50 per cent of its phosphate and 90 per cent of its potash needs. Aguia is well positioned to capitalise on the growing demand for phosphorus and potash based fertilisers in the expanding agriculture sector in Brazil and controls four large projects, located close to existing infrastructure. The Company is committed to its existing projects whilst continuing to pursue other opportunities within the fertiliser sector.

JORC Code Competent Person Statements

The information in this report relates to new Exploration Results that are released under the JORC 2012 requirements. It is based on information compiled by Dr Fernando Tallarico who is a member of the Association of Professional Geoscientists Ontario. Dr Tallarico is a full-time employee of Aguia Resources Limited. Dr Tallarico has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' ("JORC Code"). Dr Tallarico consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Previously released information included in this release is extracted from the following reports, which are available for viewing on the Company's website:

- *Três Estradas South Delivers High Grade Phosphate Results, released on 14 October 2013*
- *Mining Study – Três Estradas Phosphate Deposit, released on 16 September 2014*

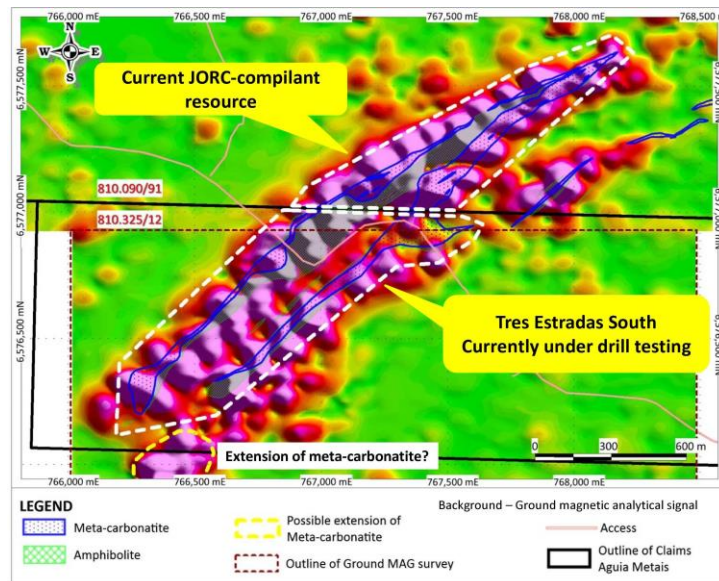


Figure 1: Três Estradas Ground Magnetics Image highlighting the 30.5 million tonne pit constrained resource in claim 810.090/91 and the southwest extension in claim 810.325/12 that is currently being drilled.

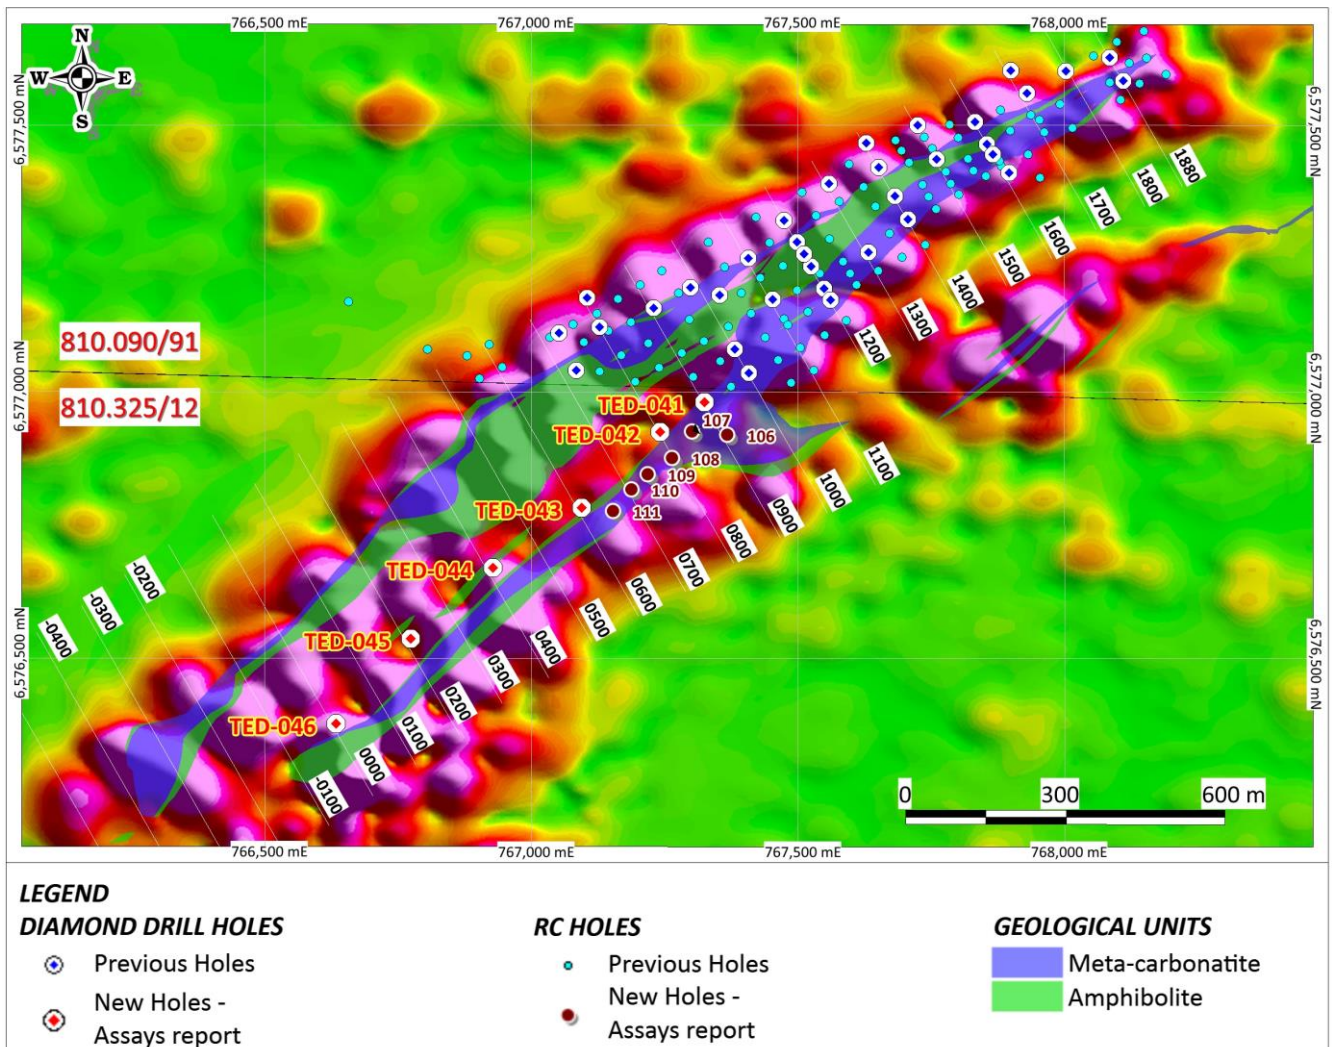


Figure 2: Três Estradas Ground Magnetics Image highlighting the collars of the diamond drilling and reverse circulation holes completed to date.

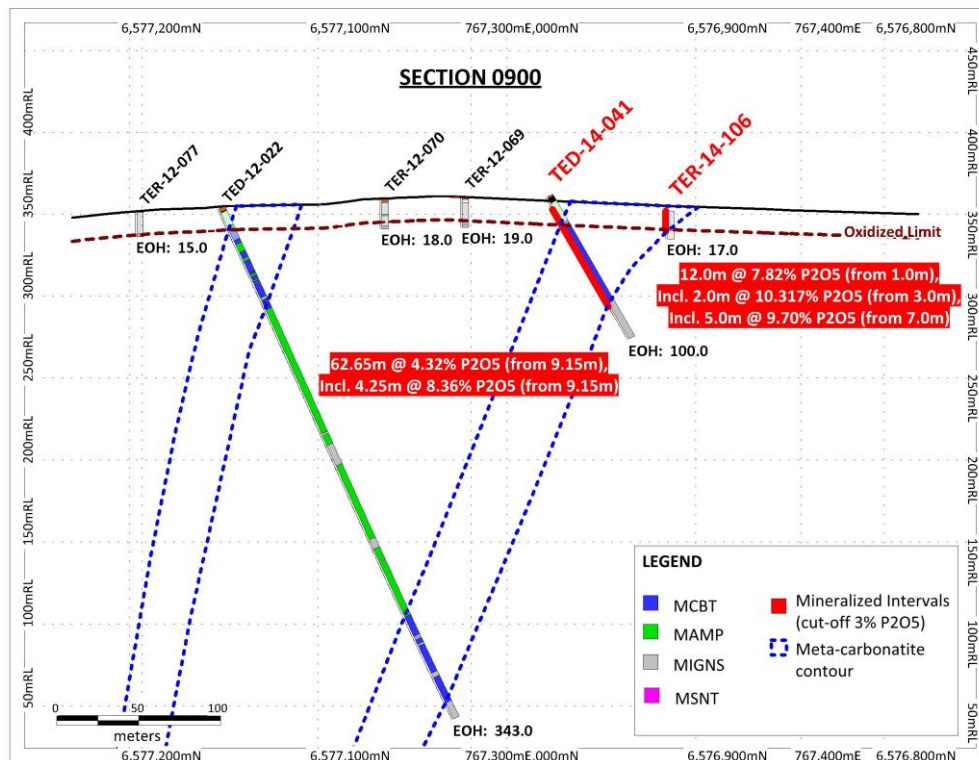


Figure 3: Cross Section 0900 along Três Estradas South showing results of diamond and reverse circulation drilling from the ongoing program (TED-14-041 and TER-14-106) as well as holes drilled in the previous programs (TED-12-022, TER-12-069, TER-12-070 and TER-12-077).

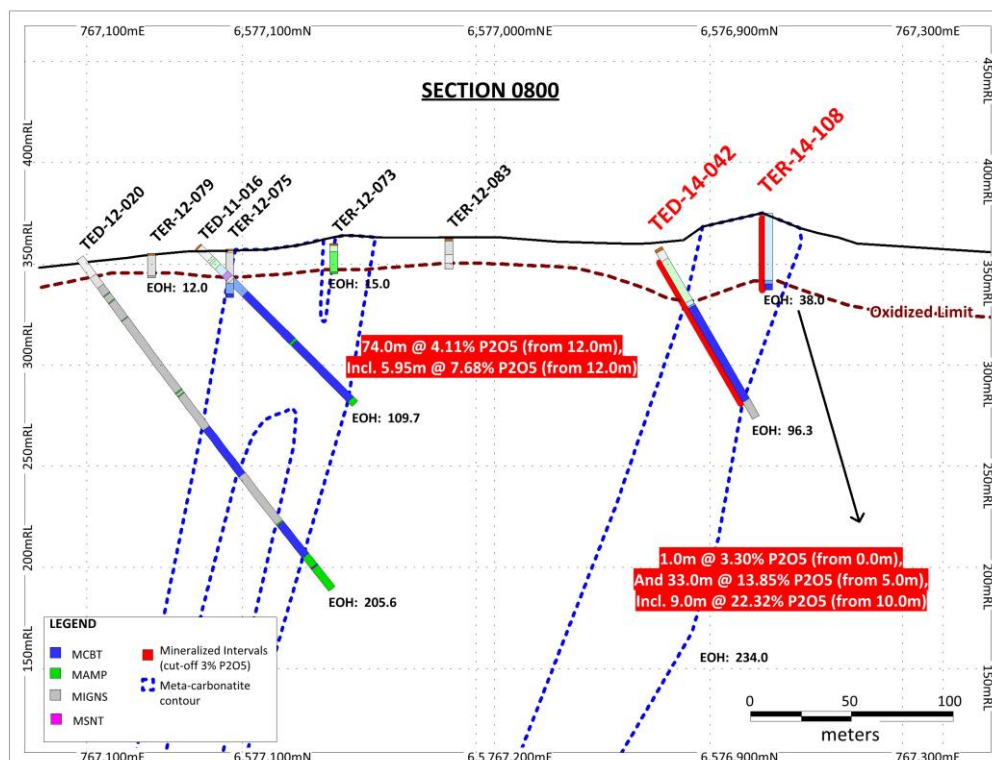


Figure 4: Cross Section 0800 along Três Estradas South showing results of diamond and reverse circulation drilling from the ongoing program (TED-14-042 and TER-14-108) as well as holes drilled in the previous programs (TED-12-020, TED-11-016, TER-12-079, TER-12-075, TER-12-073 and TER-12-083).

Table 1: Diamond drilling results from Três Estradas South.

Hole-ID	Section	Easting	Northing	#Samples	Azimuth	Dip	Depth (m)	From (m)	To (m)	Width (m)	Grade (P ₂ O ₅ %)
TED-14-041	0900	767325	6576981	95	150	-60	100,00	9,15	71,80	62,65	4,32
							Includes	9,15	13,40	4,25	8,36
TED-14-042	0800	767242	6576926	99	150	-60	96,30	12,00	86,00	74,00	4,11
							Includes	12,00	17,95	5,95	7,68
TED-14-043	0600	767094	6576783	97	150	-50	90,80	17,50	71,44	53,94	5,27
							Includes	19,50	33,00	13,50	9,57
TED-14-044	0400	766928	6576670	172	150	-62	190,10	90,00	174,00	84,00	3,81
TED-14-045	0200	766774	6576537	143	150	-60	179,30	90,42	168,03	77,61	3,62
TED-14-046	0000	766634	6576378	99	150	-60	117,80	62,57	85,90	23,33	3,22
							And	94,45	99,70	5,25	3,90

Table 2: Reverse circulation drilling results from Três Estradas South.

Hole-ID	Section	Easting	Northing	#Samples	Azimuth	Dip	Depth (m)	From (m)	To (m)	Width (m)	Grade (P ₂ O ₅ %)
TER-14-106	0900	767368	6576921	17	0	-90	17,00	1,00	13,00	12,00	7,82
							Includes	3,00	5,00	2,00	10,32
							Includes	7,00	12,00	5,00	9,70
TER-14-107	0850	767302	6576927	35	0	-90	35,00	13,00	35,00	22,00	14,07
							Includes	14,00	18,00	4,00	17,98
TER-14-108	0800	767265	6576877	38	0	-90	38,00	0,00	1,00	1,00	3,30
							And	5,00	38,00	33,00	13,85
							Includes	10,00	19,00	9,00	22,32
TER-14-109	0750	767219	6576847	32	0	-90	32,00	0,00	32,00	32,00	8,72
							Includes	3,00	5,00	2,00	15,39
							Includes	10,00	18,00	8,00	13,99
TER-14-110	0700	767189	6576818	44	0	-90	44,00	0,00	44,00	44,00	10,07
							Includes	7,00	23,00	16,00	15,00
							Includes	28,00	34,00	6,00	12,07
TER-14-111	0650	767154	6576778	39	0	-90	39,00	1,00	39,00	38,00	10,74
							Includes	8,00	24,00	16,00	14,85

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. 	<ul style="list-style-type: none"> Work is being carried out using RC and diamond drilling, with samples being analysed by laboratory analyses suitable for the carbonatite mineralisation being targeted Drill hole locations are detailed in a table in the text of this release, and shown graphically on a plan
	<ul style="list-style-type: none"> Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	<ul style="list-style-type: none"> Hole locations are picked up using hand-held GPS. Sampling is carried out using comprehensive Agua protocols and QAQC procedures as per industry best practice
	<ul style="list-style-type: none"> Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Mineralisation is generally visual RC samples are collected and assayed at 1m intervals, with a representative 2kg sample of all intervals being collected for XRF assay at the laboratory. Half core diamond drill samples in mineralized material are generally collected at 1m intervals and sent to the laboratory for assay; however lengths will vary to generally between 0.5 and 1.5m to honour geological boundaries where required. In all cases drilling samples are sent to SGS laboratories in Belo Horizonte and analysed using method XRF79C_10 – Lithium tetra borate fusion. Elements assayed for include SiO₂, Al₂O₃, Fe₂O₃, CaO, MgO, TiO₂, P₂O₅, Na₂O, K₂O, MnO and LOI, which is considered suitable for the type of mineralisation
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Reverse Circulation – Drilling utilized a face sampling Hard Formation Bit with Tungsten buttons and a diameter of 5 ½ inches. No downhole surveys were completed. Core Drilling - Drilling utilized HQ equipment for weathered material and NQ for fresh rock. Downhole surveys are performed on 3-metre intervals using a Maxibore down-hole tool. No core orientation has been carried out.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. 	<ul style="list-style-type: none"> RC – recoveries are monitored by sample weight. The minimum recovery is 85%. Core Drilling - Recovery by sample and by drill run was recorded; core recovery generally exceeds 97%
	<ul style="list-style-type: none"> Measures taken to maximise sample recovery and ensure representative nature of the samples. 	<ul style="list-style-type: none"> Diamond Drilling - Due to the coherent nature of the fresh rock and homogenous nature of the mineralisation sample recovery is not an issue. In the saprolite recovery is maximised using short drill runs and best drilling practices. RC – Dry samples are collected through a cyclone and riffle splitter ensuring homogenisation and

Criteria	JORC Code explanation	Commentary
		representative sampling. Wet samples are dried, and then homogenised and sampled by hand.
	<ul style="list-style-type: none"> Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Mineralisation is homogenous throughout the mineralized intervals, with no relationship between sample recovery and grade on any type of drilling.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. 	<ul style="list-style-type: none"> RC – logging is to a detail considered suitable for inclusion in resource estimations Diamond – logging is considered suitable for inclusion in resource estimations, metallurgical studies and preliminary mining studies. The lack of orientated core and geotechnical logging prior to cutting precludes the use in detailed mining studies
	<ul style="list-style-type: none"> Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. 	<ul style="list-style-type: none"> RC logging includes lithology and weathering Diamond logging includes rock type, alteration structure and qualitative magnetism. No core orientation has been carried out, with structural measurements being limited to alpha angles only. All core is photographed dry before being cut
	<ul style="list-style-type: none"> The total length and percentage of the relevant intersections logged 	<ul style="list-style-type: none"> 100% of the relevant intersections of all drilling are logged
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. 	<ul style="list-style-type: none"> Solid core is sawn in half, with half being sent for assay and half being retained for reference. Friable core is split down the centerline using a spatula or similar tool, with half being retained and half sent for assay.
	<ul style="list-style-type: none"> If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. 	<ul style="list-style-type: none"> RC- One metre samples are collected from the cyclone, with moist samples being split using a plastic liner and metal cross-blade device, and dry samples being split through a riffle splitter. Saturated samples are dried before homogenization. Two representative samples of between 500g and 2kg are collected, with one for assay and a second for reference. For all sampling and drilling, samples are dried and crushed, and then milled to 75% passing 80 mesh using LM mills at the laboratory.
	<ul style="list-style-type: none"> For all sample types, the nature, quality and appropriateness of the sample preparation technique. 	<ul style="list-style-type: none"> The sample preparation techniques are industry standard and are considered appropriate for the mineralisation being investigated
	<ul style="list-style-type: none"> Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	<ul style="list-style-type: none"> Industry standard procedures are employed, including ensuring non-core samples are adequately homogenized before assay and archive samples are collected
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. 	<ul style="list-style-type: none"> No field duplicate samples or second half sampling was done. The target mineralization is largely homogeneous.
	<ul style="list-style-type: none"> Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Sample sizes are considered appropriate to the grain

Criteria	JORC Code explanation	Commentary
		size of the material being assayed
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> 	<ul style="list-style-type: none"> The XRF method used is industry standard and considered appropriate for the analysis of apatite-hosted phosphate mineralisation. Sample preparation and analysis was completed at SGS's Belo Horizonte laboratory in Brazil using standard crushing and pulverization techniques. The prepared pulps are analyzed by a lithium borate fusion XRF spectroscopy for major oxide elements (P2O5, Al2O3, CaO, Fe2O3, K2O, MgO, MnO2, SiO2, TiO2 and LOI (Method code XRF79C and PHY01E). Samples were also analyzed for a suite of 31 elements using an aqua regia digestion and inductively coupled plasma - mass spectrometry (Method code ME-MS81). The preparation and analytical procedures are appropriate for the type of mineralization sampled and are reliable to deliver the total content of the analyzed compounds.
	<ul style="list-style-type: none"> <i>make and model, reading times, calibrations factors applied and their derivation, etc.</i> 	<ul style="list-style-type: none"> Where utilised, hand held XRF is an Olympus Innov-X
	<ul style="list-style-type: none"> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument</i> 	<ul style="list-style-type: none"> There is a calibration plate supplied by Innov-X Systems for the calibration of the Portable X Ray Fluorescence equipment.
	<ul style="list-style-type: none"> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> Agua has prepared two certified phosphate reference materials (standards) from material collected from the Três Estradas deposit – these comprise a mid and high grade standard and are considered appropriate to the mineralisation being drilled This is in addition to fine and coarse blank standards prepared from barren quartz veins. One each of the above company supplied standards is included in each batch of 48 samples, in addition to a pulp duplicate. One batch of 48 samples is sent monthly for umpire laboratory testing. Umpire testing is performed at ALS Chemex in Lima, Peru, where they are analysed for a suite of elements using method code XRF12pt/XRF24. Additionally, Agua relies on the analytical quality control measures implemented by the ISO accredited laboratory used.
Verification of sampling and assaying	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> 	<ul style="list-style-type: none"> The AGR procedures consists an internal double check and, when required an independent verification during the independent audit process.
	<ul style="list-style-type: none"> <i>The use of twinned holes.</i> 	<ul style="list-style-type: none"> Given this is the initial programme at TE South no twin holes have been drilled
	<ul style="list-style-type: none"> <i>Documentation of primary data, data entry procedures, data verification, data storage</i> 	<ul style="list-style-type: none"> Data is manually entered onto logging sheets on site by Agua geologists. This data is then entered into a

Criteria	JORC Code explanation	Commentary
	<i>(physical and electronic) protocols.</i>	digital database consisting of Excel workbooks. Assay data from the laboratory is merged into the downhole sample sheets. All original logging sheets and digital data are stored. Digital data is regularly backed up. <ul style="list-style-type: none"> Data is yet to be externally audited; external audits of previous drilling has confirmed the veracity of work carried out
	<ul style="list-style-type: none"> Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> There is no adjustment to assay data
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	<ul style="list-style-type: none"> All borehole collars were surveyed according to the local UTM coordinate system (South American Datum 1969 – SAD69, Zone 21S), using differential GPS equipment before drilling started, and once drilling had been completed.
	<ul style="list-style-type: none"> Specification of the grid system used. 	<ul style="list-style-type: none"> SAD 1969 UTM system, Zone 21S
	<ul style="list-style-type: none"> Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> A topographic survey of the project area was completed using differential GPS technology. The survey consisting of lines spaced 25 metres apart, and control lines spaced 100 metres apart. The topographic survey generated contour lines at 1-metre intervals in the meta-carbonatite area. Contour lines at 5-metre intervals were obtained for the remaining area using shuttle radar topography mission (SRTM) and ortho-rectified Geoeye images with 0.5 metre resolution.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. 	<ul style="list-style-type: none"> RC Drilling – RC holes, all vertical, at Três Estrada South are being drilled on 50m spaced lines, with spacing along drill lines determined by carbonatite outcrop Diamond Drilling - Diamond holes (inclined) at Três Estradas are being drilled on 100m spaced lines, with spacing along drill lines determined by carbonatite outcrop
	<ul style="list-style-type: none"> Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	<ul style="list-style-type: none"> The data spacing and distribution is considered suitable for the style of mineralisation being tested, and will be suitable for use in Mineral Resource and Reserve estimations
	<ul style="list-style-type: none"> Whether sample compositing has been applied. 	<ul style="list-style-type: none"> For the purposes of reporting of results no sample compositing has been applied
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. 	<ul style="list-style-type: none"> The bulk nature of the mineralisation indicates that sampling bias will not be introduced by changing drilling direction
	<ul style="list-style-type: none"> If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Given the bulk and homogenous nature of the mineralisation it is considered that there is no sampling bias

Criteria	JORC Code explanation	Commentary
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> Chain of custody is managed by Agua. Samples are stored on site. Assay samples are sent by freight express to the relevant laboratories.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> Três Estradas – Audit by SRK Consulting in early 2013 indicated that techniques utilised by Agua were in line with generally accepted industry best practices. The same audit found no issues with the data.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> Tres Estradas <p>Permit 810.090/91, irrevocable right to 100% under an exercised option agreement with Companhia Brasileira de Cobre (CBC).</p> <p>On July 1, 2011, CBC and Agua Metais Ltda., a subsidiary of Agua in Brazil, executed an option agreement providing the irrevocable purchase option of these mineral rights by Agua Metais (or its affiliate or subsidiaries). On May 30, 2012 Agua Metais exercised the purchase option concerning these mineral rights by means of its affiliate Agua Fertilizantes S/A (Agua Fertilizantes). On July 10, 2012, CBC and Agua Fertilizantes executed an irrevocable agreement providing the assignment of these mineral rights to Agua Fertilizantes. On July 20, 2012 CBC filed a request before the DNPM applying for the transfer of these mineral rights to Agua Fertilizantes.</p> <p>The 2nd two year term expired on August 16, 2012, with the Final Exploration Report now under review by the Government, approval of which will allow the Company a further year (from the date of approval) to submit an Economic Exploitation Plan.</p> <ul style="list-style-type: none"> Tres Estradas South <p>Permit 810.325/12, irrevocable right to 100% under an exercised option agreement with Companhia Brasileira de Cobre.</p> <p>Granted April 29, 2013, initial 3 year term expiry April 29, 2016.</p>
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> Tres Estradas and Tres Estrada South <p>Discoveries of phosphate rich rocks at TE were made by a joint exploration programme between Companhia Brasileira do Cobre and Santa Elina in 2007/2008 during a gold exploration programme. This involved an integrated geochemical/ geological/geophysical and drilling programme. The gold results were disappointing, causing Santa Elina to withdraw from the JV, however +6% phosphate values were noted in assaying of soils</p>

Criteria	JORC Code explanation	Commentary
		and drill core.
Geology	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> • Tres Estradas and Tres Estradas South <p>The mineralisation is a carbonatite hosted phosphate deposit, with apatite as the phosphate bearing mineral. The NE-SW trending carbonatite is probably Mid-Proterozoic in age, and has been affected by Neo-Proterozoic shearing and metamorphism. It is hosted in the Santa Maria Chico Granulite Complex, within the Taquarembo Domain of the Achaean to Proterozoic Sul-río-grandense Shield.</p>
Drill hole Information	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • Drillhole information is listed in the appropriate tables in this document, and presented in maps and sections
Data aggregation methods	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> 	<ul style="list-style-type: none"> • Drill intersections are length weighted. A nominal 3% P₂O₅ lower cutoff is used, and there is no upper cut applied to intersections.
	<ul style="list-style-type: none"> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> 	<ul style="list-style-type: none"> • Not applicable
	<ul style="list-style-type: none"> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> • Not applicable
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • RC drilling is targeting the flat lying upper oxide mineralisation – these holes may be terminated in mineralisation once fresh rock has been intersected • Diamond drilling is targeted to intersect the full width of the interpreted steeply dipping carbonatite bodies

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 	<ul style="list-style-type: none"> RC drilling is generally perpendicular to the flat-lying oxide blanket, and oxide intersection widths will reflect the true thickness of the oxide layer. Diamond holes are drilled at an acute angle to the steeply to vertically dipping carbonatite bodies, hence downhole widths will be greater than true widths. For drillholes drilled at -60°, true mineralisation widths will generally be in the order of 40-60% of downhole intersection lengths – this is shown in more detail on included cross sections.
	<ul style="list-style-type: none"> If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> Down hole lengths are reported Relationships between true lengths and true thickness are shown in cross sections
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Refer to maps and sections in release
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Results from all drillholes have been reported
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Geological mapping and interpretation is used as a base for included drillhole plans and sections
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). 	<ul style="list-style-type: none"> As presented in the text of this report
	<ul style="list-style-type: none"> Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> As presented in the text of this report

Section 3 Estimation and Reporting of Mineral Resources

Not applicable to this release – this does not include mineral resource estimations