



25 Feb 2016

Additional Copper and Gold Mineralisation at Star Mountains

Assay results from the final three holes drilled in the 2015 exploration drilling campaign at the Star Mountains project in PNG have confirmed further copper gold mineralisation and extensions of the mineralised zone laterally and at depth.

Assay results from the three additional drill holes include the following intercepts at 0.2% cut-off:

At the Olgal prospect:

- (Hole 019OLG15) 183 metres @ 0.53% copper and 0.58 g/t gold from 168m downhole (Inc 16 metres @ 0.69% copper and 0.53 g/t gold from 198m downhole & 87 meters @ 0.67% copper and 0.84 g/t gold from 260m downhole)
- (Hole 020OLG15) 430 metres @ 0.39% copper and 0.24 g/t gold from 168m downhole

At the Kum Kom prospect:

- (005KUM15) 32 metres @ 0.27% copper and 0.11 g/t gold from 246m downhole

A total of nine holes for 5387 metres were drilled during the campaign, which was completed in the December quarter of 2015. Assay results for the first six holes were released during 2015, confirming the presence of copper/gold mineralisation at the two prospects which were the focus of the campaign.

The final three holes also have encountered broad zones of medium grade porphyry style mineralisation beyond the previous north west and south eastern limits of the known mineralised zones.

"This is a great result for the final holes of the 2015 campaign," said Highlands Pacific CEO John Gooding. "We now have increased confidence that we have a zone of copper and gold mineralization at Olgal that is open both to the southeast and to the northwest toward the Futik prospect. We also have a much better understanding of the geology and the control factors, providing a firm footing to plan further exploration in the current year," he said.

Since the beginning of 2016, additional exploration has been carried out, including a ZTEM survey being flown at present, and specific field work including soil, rock chip and stream sediment sampling.

Previous results from the drilling campaign have included:



At the Olgal prospect:

- (Hole 018OLG15) 260 metres @ 0.31% copper and 0.19 g/t gold (Including 10.9 metres @ 0.60% copper and 0.34 g/t gold from 314m downhole)
- (Hole 017OLG15) 434.9 metres @ 0.52% copper and 0.72 g/t gold (Including 100 metres @ 0.82% copper and 1.39 g/t gold from 76m downhole)




At the Kum Kom prospect:


- (Hole 003Kum15) 30.6 metres @ 0.61% copper and 0.54 g/t gold Including 12.1 metres @ 0.94% copper and 0.72 g/t gold from 292.9m downhole
- (Hole 004KUM15) 13metres @ 1.3% copper and 0.53 g/t gold from 107m downhole
 - 26.5 metres @ 0.89% copper and 1.4 g/t gold from 282m downhole
 - 30 metres @ 1.0% copper and 0.23 g/t gold from 515m downhole

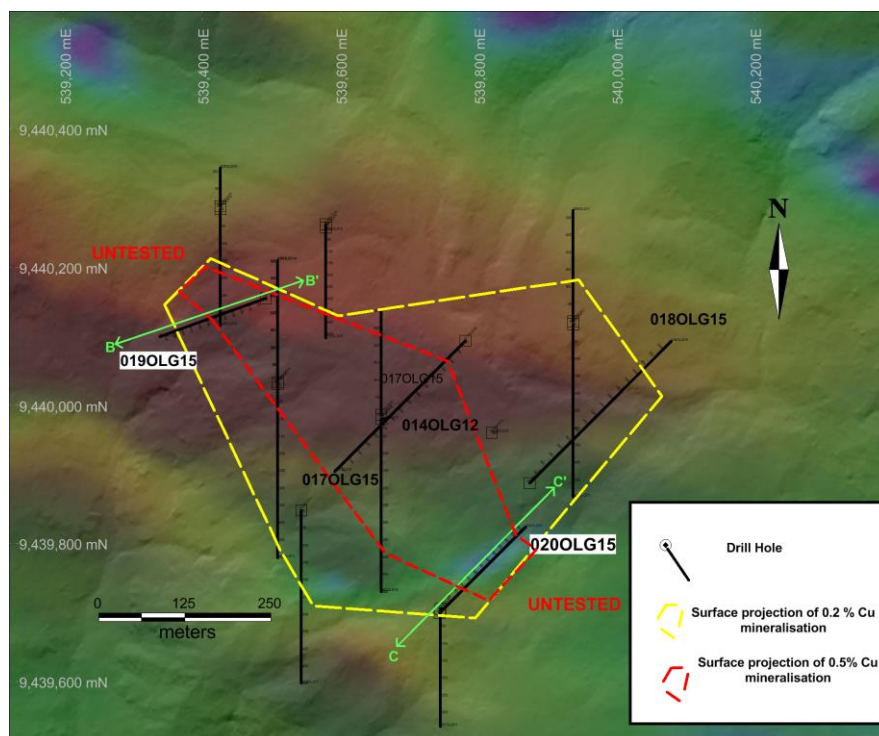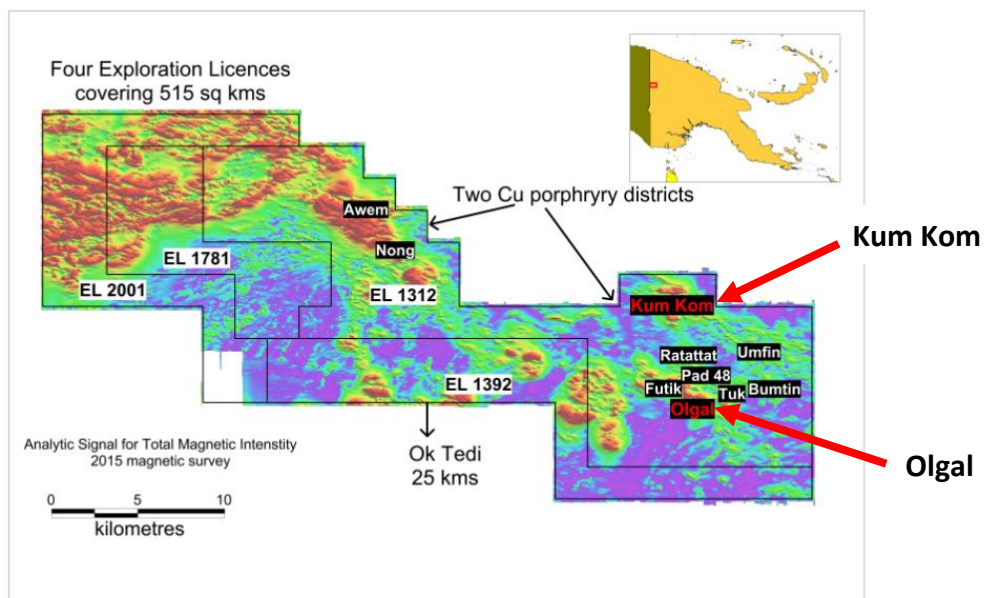


Plan view of Olgal drill holes

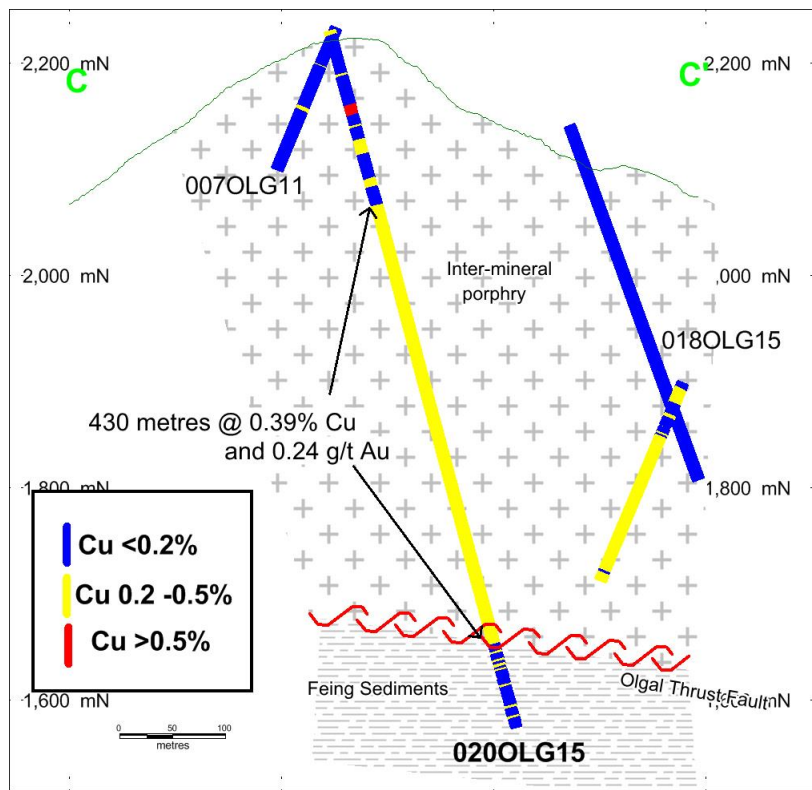


Section view of Olgal drill holes 18 and 20

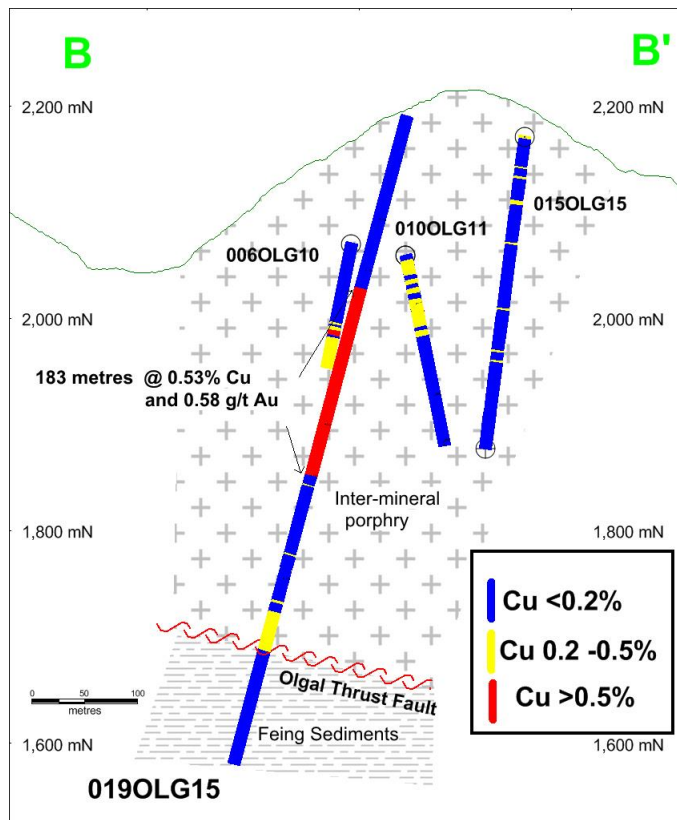

Section view of Olgal hole 19

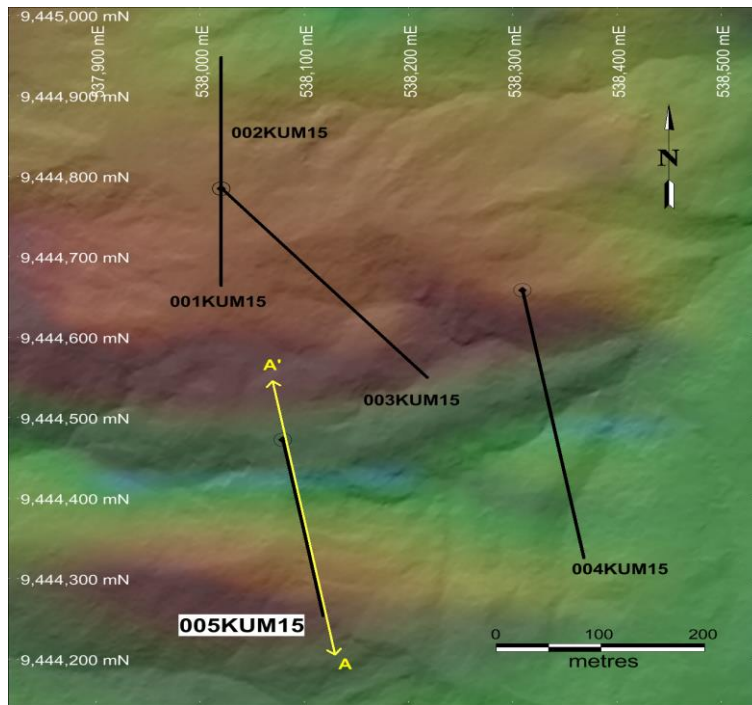

Plan view of Kum Kom drilling

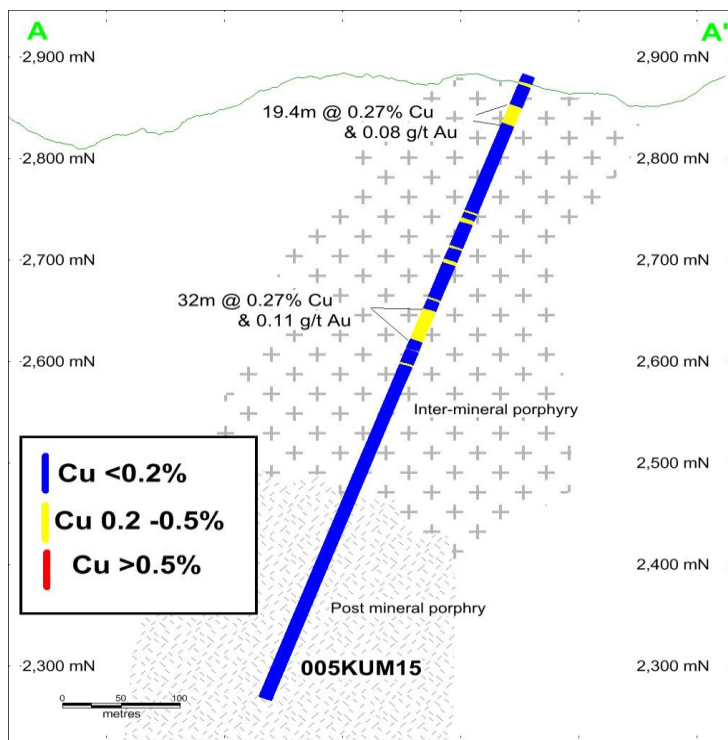

Section view of Kum Kom drilling



The Star Mountains joint venture between Highlands and Anglo American was finalised early in 2015 on the following terms:

- **US\$10 million initial payment** – Anglo American paid Highlands US\$10 million in two tranches of US\$5 million each.
- **Phase 1 (51% interest)** – Anglo American will initially acquire a 51% interest in the Joint Venture with 15% vesting upon a farm-in spend of US\$25m over four years and 36% vesting upon the declaration of a 43-101/JORC compliant Inferred Resource of 3 million tonnes of contained copper equivalent within 5 years of execution.
- **Phase 2 (80% interest)** – Anglo American can move to an 80% interest in the Joint Venture by completing a Bankable Feasibility Study within 15 years of the execution of the Farm-in and Joint Venture Agreements.
- **Development Free Carry** – Anglo American will provide Highlands with up to US\$150 million in project development funding as a deferred free carry following the completion of the BFS. Anglo American will recover this US\$150 million from a portion of Highland's share of project cashflows once in production.
- **Management** – Highlands will manage the project however Anglo American will have the right to take over management when they have spent US\$25 million in project expenditure.

About the Star Mountains Exploration Tenements:

The 100% Highlands owned Star Mountains exploration tenements, which include Nong River EL1312, Mt Scorpion EL1781, Munbil EL2001 and Tifalmin EL1392, cover 515 sq kms and are located approximately 20km north east of the Ok Tedi mine and 25kms from the support town of Tabubil, in the West Sepik Province of PNG. Highlands has identified 17 copper gold targets to date and drilled six of these targets, of which all but one encountered mineralisation.

<http://www.highlandspacific.com/current-projects/star-mountains>

About Anglo American:

Anglo American is a globally diversified mining business. Our portfolio of world-class competitive mining operations and undeveloped resources provides the raw materials to meet the growing consumer-driven demands of the world's developed and maturing economies. Our people are at the heart of our business. It is our people who use the latest technologies to find new resources, plan and build our mines and who mine, process and move and market our products – from diamonds (through De Beers) to platinum and other precious metals and copper – to our customers around the world. As a responsible miner, we are the custodians of those precious resources. We work together with our key partners and stakeholders to unlock the long-term value that those resources represent for our shareholders, but also for the communities and countries in which we operate – creating sustainable value and making a real difference.

For further information, please contact:

Joe Dowling
0421 587755

Competent Persons Statement: Details contained in this report that pertain to exploration results and exploration targets are based upon, and fairly represent, information and supporting documentation compiled by Mr Larry Queen, a member of the Australasian Institute of Mining and Metallurgy, and who is a full-time employee of Highlands Pacific. Mr Queen has sufficient experience relevant to the style of mineralisation and the type of deposit under consideration, and to the activity which he is undertaking, to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Queen consents to the inclusion in the report of the matters based on the information compiled by him in the form and context in which it appears. There has been insufficient exploration to estimate a Mineral Resource and it is uncertain if further exploration will result in the estimation of a Mineral Resource.



ASX Code: HIG

PoMSox Code: HIG

Shares on Issue: 928 million

Performance Rights: 29.8 million

Directors

Ken MacDonald, Chairman
John Gooding, Managing Director
Mike Carroll
Dan Wood
Bart Philemon

Management

Craig Lennon, CFO & Co.Sec
Larry Queen, Chief Geologist
Peter Jolly, GM Projects
Ron Gawi, GM Port Moresby
Leslie Nand, GM Exploration Projects
Joe Dowling, GM Investor Relations
and Communications

Investor and Media Enquiries to:

Joe Dowling - 0421 587755

Website:

www.highlandspacific.com

About Highlands Pacific Limited

Highlands Pacific is a PNG incorporated and registered mining and exploration company listed on the ASX and POMSoX exchanges. Its major assets are interests in the producing US\$2.1bn Ramu nickel cobalt mine and the Frieda River copper gold project; with exploration in progress in the Star Mountains. Highlands also has exploration tenements at on Normanby Island (Sewa Bay).

Star Mountains Prospects*

The Star Mountains exploration tenements, which include Nong River EL1312, Mt Scorpion EL1781, Munbil EL2001 and Tifalmin EL1392, are located approximately 20km north of the Ok Tedi mine, in the West Sepik Province, PNG. They lie within the highly prospective New Guinean Orogenic Belt, which hosts the Grasberg, Ok Tedi, Porgera and Hidden Valley mines, as well as the Frieda deposit. The joint venture with partner Anglo American substantiates the world class potential and has enabled an extensive exploration program to be commence in 2015.

Ramu Nickel Cobalt Mine

The producing Ramu nickel cobalt mine is located 75km west of the provincial capital of Madang, PNG. Highlands 8.56% interest in Ramu will increase to 11.3% at no cost to Highlands after repayment of its share of the project debt. Highlands also has an option to acquire an additional 9.25% interest in Ramu at fair market value, which could increase the company's interest in the mine to 20.55%, if the option is exercised.

Frieda River Copper/Gold Project*

The Frieda River copper gold project is located 175kms north-west of the Porgera gold mine and 75km north-east of the Ok Tedi mine. Highlands has a 20% interest in the project and PanAust 80%. PanAust will be responsible for 100% of the costs incurred by the Frieda River Joint Venture to finalise the definitive feasibility study for PanAust's development concept and will appoint and fund the cost of an independent expert to provide a peer review. PanAust will also be responsible for 100% of the costs to maintain the Frieda River project site, assets and community relations programmes up to the point in time of lodgment of the Mining Lease or Special Mining Lease application.

* Subject to the right of the Independent State of Papua New Guinea to acquire up to a 30% equity interest in any mining development in the country.

JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> Sampling reported for the Star Mountains is for ½ PQ, HQ or NQ diameter diamond drill core Holes were generally steeply dipping (>60°) Hole azimuths were generally planned to perpendicularly intercept any known or inferred structural trends. Sampling was done on sawn half core. Consistency of sampling method was maintained by reference to a written protocol Sampling method is considered appropriate for both porphyry and skarn mineralization
<i>Drilling techniques</i>	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> All holes drilled by Highlands Pacific are triple tube diamond core. Holes were collared in PQ and reduced to HQ and NQ as required. The core was un-oriented.
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> Recoveries recorded on a drill run and sample length basis There were some zones of poor recovery in near surface leached and oxidized zones and in intensely altered shear zones Recovery is good. Most holes average better than 90% recovery in the mineralized zones. No evidence of grade bias with recovery
<i>Logging</i>	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or</i> 	<ul style="list-style-type: none"> All holes were geologically and geotechnically logged to a detail and standard appropriate for mineral resource estimation. The logs are qualitative/semi-quantitative and record lithology, alteration, mineralogy, mineralization, weathering, strength, fracture numbers and orientation and other relevant features of the core. All

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> the core is photographed before it is sampled All core recovered is logged.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Samples are taken by cutting the core in half using a diamond saw. No non-core samples were taken. Except at strong boundaries, are taken on a consistent 2m interval down hole. Sampling protocol is documented with a flow sheet. Half core samples bagged and dispatched to ALS Townsville for crushing, grinding and assay. All sample methods and sample sizes are deemed to be appropriate
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> All drill core samples were assayed using a HF-HNO3-HClO4 acid digest with HCl leach and ICP-AES finish. Gold assay by 50 gram fire assay Assaying carried out by ALS Townsville, an accredited lab. Extensive QAQC programme with standards, blanks, laboratory duplicates & secondary lab checks. Outcomes indicate acceptable precision and no obvious biases
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Significant intersections have been verified by the Competent Person and the Star Mountains Project geologists There have been no twinned holes Highlands Pacific has a series of written protocols relating to sampling, logging, data entry, data checking and data storage There have been no adjustments to the assay data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill hole collars are located by GPS. Elevations were extracted from a LiDAR DEM that Highlands had prepared over the prospect areas. Expected accuracy is +/- 5 m for northing and easting and +/- 5 m for elevation coordinates AMG66 , Zone 54 Topographic control is from a LiDAR survey Highlands Pacific had

Criteria	JORC Code explanation	Commentary
		flown over the area in 2010. A 2 m grid was prepared from the LiDAR.
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • Drill holes in the Olgal deposit are spaced on roughly 300 x 300m centers. Other prospects have only been scout drilled with two to three holes. • Downhole sampling is generally 2m • Compositing has only been applied for reporting purposes as detailed in Section 2
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • The deposits being investigated in the Star Mountains are Cu-Au porphyries. The mineralization appears to be stockworks with no dominant structural direction. • Drilling orientation is believed appropriate with no bias. Where structural control is suggested either by mapping or geophysical trends the drill hole are oriented to perpendicular to the structures.
<i>Sample security</i>	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • Chain of custody is managed by Highlands Pacific. Samples are collected and stored on site by Highlands Pacific personnel. Half core samples are shipped directly to ALS Townsville by freight courier. Tracking sheets have been set up to track the progress of sample batches.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • No audits or reviews have been carried out at this stage.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> • The results reported for the Star Mountains fall under the four Exploration Licenses (EL 1312, 1392, 1781, 2001) that Highlands Pacific holds in the Star Mountains, Sanduan and Western Provinces, Papua New Guinea. The licenses issued under the authority of the PNG Mining Act (1992) • The Star Mountains tenements are subject to the terms of a Joint Venture with Anglo American. The terms of the Joint Venture are detailed in an announcement released 11 February 2015 and

Criteria	JORC Code explanation	Commentary
		available on the Highlands Pacific website.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Porphyry copper and gold mineralization was discovered in the area in late 1960s by Kennecott. In 1971 Kennecott drill five holes in the Futik and Olgal prospects. Between then and 2001 when Highlands acquired the ground a number of companies including BHP, CRA, Newcrest and OTML carried out mapping and sampling programs focused mainly on the previously identified prospects. The work by these companies is considered reliable and has been used to guide Highlands Pacific's work.
<i>Geology</i>	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The mineralization so far identified in the Star Mountains consists of Cu-Au porphyries (Olgal, Futik, Rattatat, Kum Kom) and associated Cu-Au skarns (Kum Kom).
<i>Drill hole Information</i>	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Refer to Annexure 1 in body of text
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> All reported assays have been length weighted. No top-cuts have been applied. A nominal 0.2% Cu lower cut-off is reported as significant in the context of geological setting. High grade copper internals (>0.5% Cu) to broader zones of copper mineralization are reported as included intervals. Reported intervals may include up to 6m meters of internal waste. No metal equivalent values are used for reporting exploration results.
<i>Relationship between</i>	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole 	<p>The geometry of the mineralization is not known. All reported lengths are down hole lengths. True widths are unknown.</p>

Criteria	JORC Code explanation	Commentary
<i>mineralisation widths and intercept lengths</i>	<p>angle is known, its nature should be reported.</p> <ul style="list-style-type: none"> If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	
<i>Diagrams</i>	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Refer to Figures in the report
<i>Balanced reporting</i>	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All results are reported at a 0.2% Cu cut-off. No top cut has been applied.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Since 2001 in addition to the diamond core drilling, the following work has been undertaken on the Star Mountains tenements: Prospect scale mapping and surface sampling at Olgal, Futik, Kum Kom, Nong River and Bumtim In 2005, a 200m line spacing heli-borne magnetic/radiometric survey In 2010 and 2015, LiDAR surveys to cover all of the Star Mountains tenements In 2015, a 100m line spacing heli-borne magnetic/radiometric survey In 2015, IP and AMT surveys orientation surveys over Olgal and Kum Kom In 2015, prospect scale mapping over Tifalmin prospects
<i>Further work</i>	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> - tenement wide field mapping and sampling program - geochemical sampling program - complete ZTEM survey - target definition •



Hole	North	East	Level	Azimuth	Dip	Total Depth (m)
005KUM15	9444473	538079	2881	170	-70	651.6
019OLG15	9440115	539493	2190	250	-75	630.7
020OLG15	9439699	539744	2230	45	-75	678.3

Notes:

The following statements apply to the Star Mountain exploration results:

- Mineralised intersections are quoted as down hole widths, true widths are not known. The porphyry mineralisation occurs as disseminations and vein stockworks. Quoted intercepts may include up to 6 m of internal waste.
- Collar locations are in UTM Zone 54 co-ordinates using the AMG66 horizontal datum.
- Drill core is PQ, HQ or NQ size.
- Assays were carried out on half sawn core. The unused half core is stored on site.
- Samples were analysed at ALS-Chemex in Townsville. Gold is by 50g fire assay and copper by ICP-AES on an three acid digest. Samples assaying greater than 0.5% Cu are re-assayed using an ore grade method suitable for higher grade samples.
- Hole positions are based on GPS survey of drill pads. Actual collars are within 10m of stated locations.
- Competent Persons Statement: The exploration results reported here are based on information compiled by Mr L.D. Queen who is a member of the Australian Institute of Mining and Metallurgy, and who is employed by Highlands Pacific Limited. Mr Queen has sufficient experience relevant to the style of mineralisation and the type of deposit under consideration, and to the activity which he is undertaking, to qualify as a Competent Person as defined in the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves, The JORC Code 2004 Edition". He consents to the inclusion in the report of the matters based on the information compiled by him in the form and context in which it appears.



Hole	From	To	Downhole Interval (m)	Cu (%)	Au (ppm)	Core Recovery %
005KUM15(at a 0.2% Cu lower cut-off)	8	11	3	0.26	0.05	100
	32.2	51.6	19.4	0.27	0.08	100
	143	145	2	0.20	0.07	100
	151	155	4	0.26	0.10	100
	180	182	2	0.29	0.08	100
	194	196	2	0.24	0.09	100
	234	236	2	0.24	0.10	100
	246	278	32	0.27	0.11	100
	286	288	2	0.22	0.10	100
	302	304	2	0.35	0.10	100
Including the following intervals at a 0.5% Cu lower cut-off						
	50	51.6	1.6	0.54	0.19	100
019OLG15(at a 0.2% Cu lower cut-off)	168.2	351	182.8	0.53	0.58	99
	360	361	1	0.31	0.33	100
	427.1	428.6	1.5	0.20	0.17	100
	440	442	2	0.26	0.23	100
	472.8	475	2.2	0.25	0.31	100
	484	519.4	35.4	0.31	0.50	99
Including the following intervals at a 0.5% Cu lower cut-off						
	198	214	16	0.69	0.53	100
	228	232	4	0.90	0.54	100
	260	347	87	0.67	0.84	99
	516	518	2	0.64	1.03	100
020OLG15(at a 0.2% Cu lower cut-off)	0	4	4	0.21	0.23	85
	42	44	2	0.24	0.17	100
	72	80	8	0.64	0.37	100
	92	94	2	0.24	0.21	100
	106	120	14	0.25	0.29	100
	144	152	8	0.30	0.14	100
	168	598.1	430.1	0.39	0.24	95
	605	607	2	0.28	0.13	100
	613	615	2	0.47	0.26	95
	617.3	620	2.7	0.25	0.17	78
	622	623.3	1.3	0.20	0.17	90
	629	631	2	0.24	0.18	100
	635	637	2	0.20	0.15	100
	658	660	2	0.29	0.29	100
	668	670	2	0.29	0.24	100



Including the following intervals at a 0.5% Cu
lower cut-off

72	80	8	0.64	0.37	100
110	112	2	0.56	0.07	100
184	186	2	1.05	0.47	100
194	196	2	0.51	0.31	100
210	216	6	0.86	0.58	80
248	250	2	0.68	0.28	100
290	292	2	0.63	0.34	100
310	312	2	0.52	0.25	100
328	330	2	0.77	0.42	85
336	340	4	0.78	0.48	100
362	366	4	0.54	0.36	100
374	376	2	0.57	0.36	100
385.2	390	4.8	0.60	0.53	96
401	405	4	0.87	0.58	68
424.6	428	3.4	0.73	0.31	100
453	455	2	0.68	0.40	100
496	502	6	1.06	0.51	100
522	535	13	0.66	0.37	99
552	554	2	0.52	0.32	95
558	560	2	0.53	0.25	100
568	572	4	1.35	0.61	98
583	587	4	0.59	0.32	100
590	592	2	0.56	0.24	100