



LION ONE REPORTS LATEST RESULTS FROM ITS PHASE 2 INFILL DRILL PROGRAM FROM TUVATU, FIJI, DEMONSTRATING SIGNIFICANT NEW MINERALIZATION, INCLUDING A BONANZA INTERCEPT OF 584.07 g/t Au OVER 0.30m

North Vancouver, B.C., June 6, 2022 - Lion One Metals Limited (TSX-V: LIO) (OTCQX: LOMLF) (ASX: LLO) ("Lion One" or the "Company") is pleased to announce results from ongoing infill drilling at its Tuvatu Alkaline Gold Project in Fiji.

Results for the first 11 holes of Lion One's Phase 2 infill program on Zone 5 of their fully permitted Tuvatu alkaline gold deposit are here reported. The results to date indicate significant new intercepts of high- to bonanza-grade Au mineralization that was not known to occur as part of the existing resource model. The Phase 2 infill drill program was designed to confirm the location, size, and continuity of the known mineralized lodes, in a portion of the orebody slated for early production (Figure 1A).

Top Intercepts include:

- **18.47 g/t Au over 1.20m from 104.7-105.9m, and 584.07 g/t Au over 0.30m from 122.4-122.7m from TUDDH-586 (new)**
- **24.72 g/t Au over 0.60m from 187.4-188.0m, incl. 43.34 g/t Au over 0.30m from 187.7-188.0m from TUDDH-580 (new)**
- **25.23 g/t Au over 1.20m from 70.9-72.1m, incl. 78.02 g/t Au over 0.30m from TUG-139**
- **18.77 g/t Au over 2.10m from 118.8-120.9m, incl. 26.07 g/t Au over 1.50m from TUDDH-577**
- **11.95 g/t Au over 2.70m from 55.9-58.6m, incl. 35.91 g/t Au over 0.60m from TUDDH-578**
- **11.18 g/t Au over 1.20m from 153.5-154.7m, incl. 40.05 g/t Au over 0.30m from TUDDH-580**

The mineralization reported here is considered to be a highly significant development, representing a substantive addition of Au mineralization at grades well in excess of the average resource grade, intersected at relatively shallow levels in the orebody. As a result, the new high-grade mineralization defined by the ongoing infill drill program can be expected to substantially enhance the early part the production stream and hence the immediate economic viability of Tuvatu.

Results of the ongoing infill drill program to date are summarized below in Table 1. Highlighted in blue on Table 1 are specific drill intercepts that are outside of the mineralized lodes that make up the existing resource model. Each of these additional intercepts has the potential to add width, grade, and continuity to the resource in this portion of the Tuvatu orebody.

Lion One CEO Walter Berukoff, stated "We are confident that the high-grade intercepts indicated by our infill programs and the increased drilling density will lead to a more robust resource model overall with higher localized grades earlier in the production schedule at Tuvatu. Furthermore, when considering the substantially higher grade near-surface infill results reported here, along with the continuing success of the deep drilling program, this underscores the significance of Tuvatu as a potentially multi-million ounce, world-class high-grade Au producer. As we expand our drilling fleet to eight rigs and our laboratory



capacity to 12,000 samples per month, we are well positioned to continue securing impressive results from all three tiers of our exploration strategy: from ongoing near-surface infill drilling; from extensions of deep high-grade feeder targets at Tuvatu; and from our pipeline of regional targets in the surrounding Navilawa caldera”.

Since the start of Phase 2 infill drill program in February 2022, Lion One has to date completed approximately 3,700m out of a planned 8,000m of infill drilling. This news release reports the results from approximately 2,375m of drilling, equivalent to approximately 30% of the planned program.

Infill Drilling Program

Two phases of infill drilling have been planned at Tuvatu with the aim of infilling areas within the current resource and thus augmenting the data density, to further improve the resolution of the geological model in portions of the deposit scheduled for earliest production. Phase 1 infill drilling was completed over Zone 2 (Figure 1A) in mid-February 2022, adding over 8,400m of new drill data, including 7,475m of new drilling and 955m of sampling of previously unsampled historic drill core (see Feb. 23, 2022 News Release).

This release presents final assay data from the initial 11 drill holes completed as part of the Phase 2 infill program, which is planned for approximately 8000m of diamond drilling from surface and underground, and is aimed at upgrading the resource database in Zone 5 of the Tuvatu orebody (Figure 1). The program as planned includes 30 holes totalling 5,400m carried out from 4 separate drill stations at surface, and 34 holes totalling 2,600m carried out from 6 underground drill stations. Phase 2 infill drill program began February 17, 2022 with drill hole TUDDH-577, and is expected to require 5-6 months of drilling using three rigs (two from surface and one from underground) to complete.

The results from the initial approximately 2,375m of drilling in Zone 5 (Figure 2), representing approximately 30% of the planned program total, indicate consistent high-grade to locally bonanza-grade Au mineralization for known mineralized lodes in this portion of the current resource (Table 1). Additionally, the results from the initial 30% of the Phase 2 infill program indicates significant new high-grade mineralization not previously known to occur prior to this program, and therefore not included in the current resource statement.

Overall, results to date suggest higher-than-expected continuity and widths of mineralization, locally at grades above the calculated average grade of the deposit. Indeed, the Phase 2 infill program is confirming, and in certain instances, extending previously modelled lodes in this part of the resource. Intercepts of exceptionally high-grades (e.g. 584.07 g/t Au in TUDDH-586) are in line with bonanza results documented from several intercepts from the previously completed Phase 1 infill drill program, providing further support to the expectation of an overall increase in average grades of the lodes scheduled for earliest phases of mining.

Numerous mineralized intervals, including the 584.07 g/t Au bonanza-grade intercept in hole TUDDH-586 as well as 43.34 g/t Au over 0.30m from 187.7-188.0m in hole TUDDH-580, occur fully outside of existing modelled lodes (Table 1, highlighted), adding to our understanding of the lode geometry, as well as to the overall inventory of high-grade mineralization slated for early production at Tuvatu.

As per the Phase 1 infill program, numerous strategically located historic holes have also been identified for resampling, the results of which will be reported in future news releases.

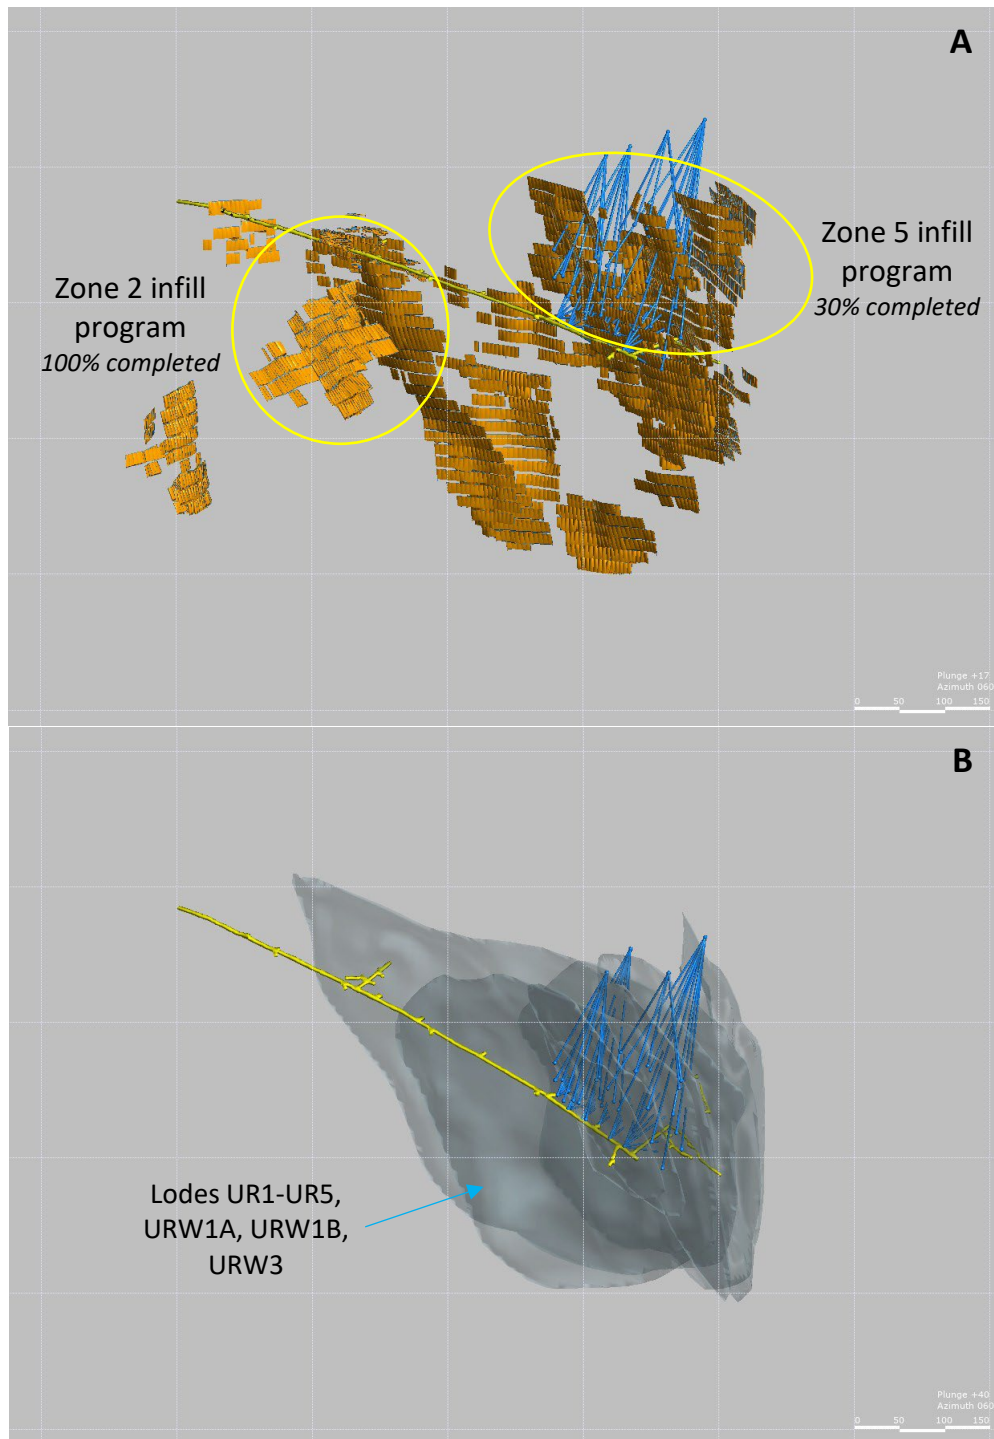


Figure 1: A) Oblique view looking N060° and down 17° showing the current conceptual mine plan ore panels (gold) highlighting the location of Zone 2 and Zone 5, the exploration decline (yellow) and the planned Zone 5 infill drilling program (blue). The planned drilling consists of 4 surface and 6 underground drill stations. **B)** Oblique view looking N060° and down 40° showing the UR1 to UR5, URW1A, URW1C, and URW3 lodes (transparent gray), exploration decline (yellow) and the planned Zone 5 infill drilling program (blue).

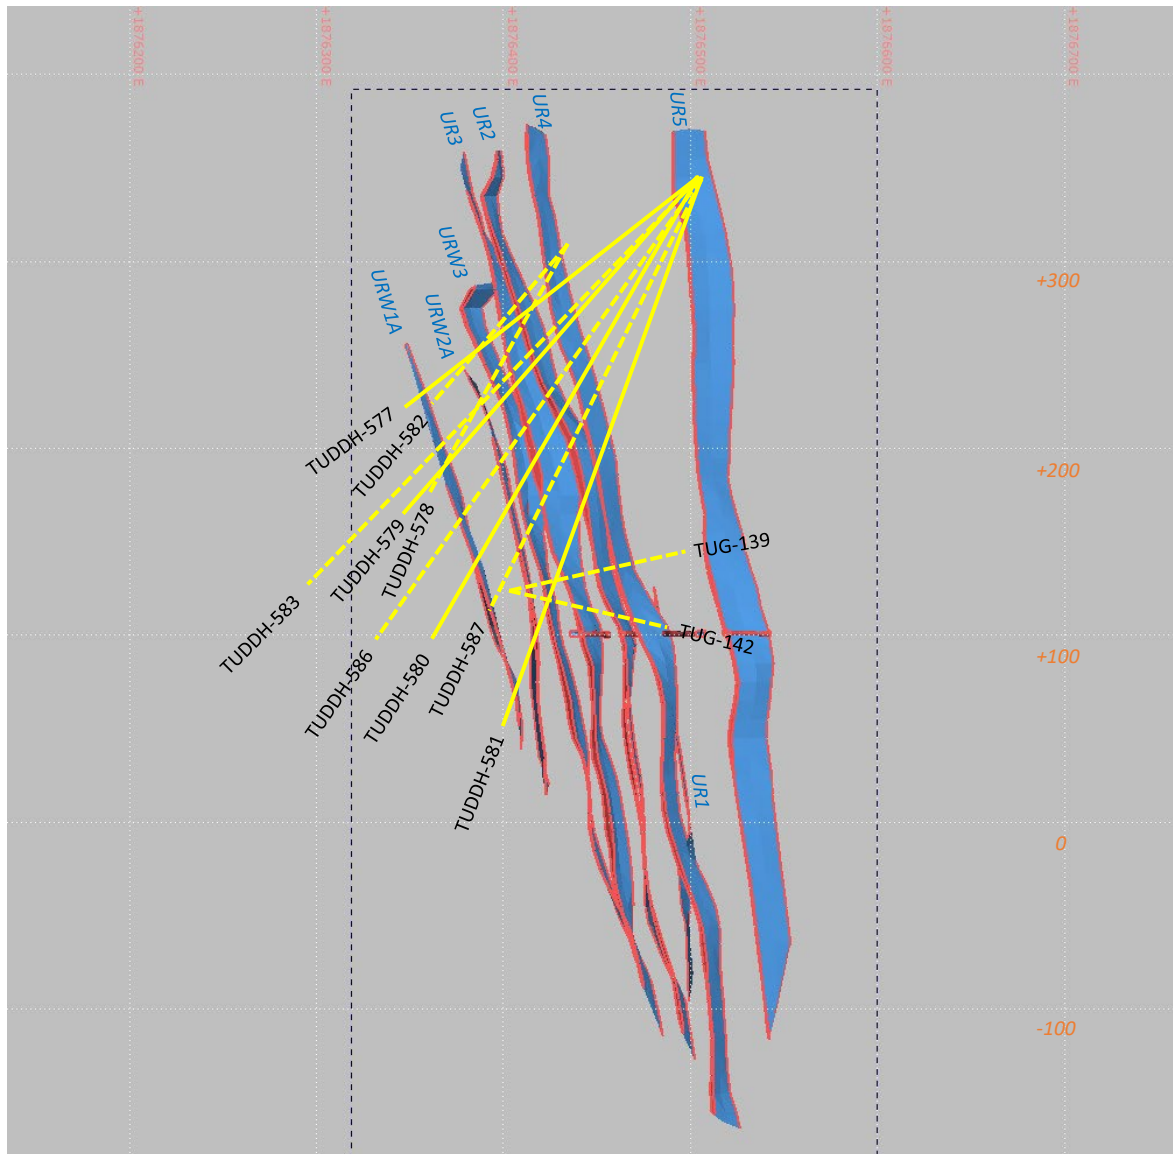


Figure 2: Composite vertical section looking N through Zone 5 at Tuvatu, showing the UR1 to UR5, URW1A, URW2A, and URW3 lodes (blue labels) and the trace of the infill drilling reported in this release (yellow traces). Solid lines are in the section, dotted lines are projected to this section.



Table 1: Drilling intervals returning >0.5 g/t Au (intervals > 3.0 g/t Au cutoff are shown in red, and intervals >9.0 g/t Au or longer than 1.2m are bolded). Intercepts that are outside of the current geological model are highlighted in light blue.

<i>Hole ID</i>	<i>From (m)</i>	<i>To (m)</i>	<i>Interval (m)</i>	<i>Grade (g/t Au)</i>
TUDDH-577	7.2	8.1	0.9	1.25
	59.1	60.3	1.2	1.13
	100.8	101.4	0.6	0.86
	118.8	120.9	2.1	18.77
including	118.8	120.3	1.5	26.07
	127.5	127.8	0.3	16.30
	135.6	136.2	0.6	1.09
	138.6	138.9	0.3	24.66
	182.2	182.8	0.6	0.65
TUDDH-578	45.4	45.7	0.3	0.72
	55.9	58.6	2.7	11.95
including	55.9	56.5	0.6	35.91
and	58.0	58.3	0.3	22.39
	64.3	65.2	0.9	0.58
	82.3	82.9	0.6	0.77
	100.6	101.5	0.9	1.39
TUDDH-579	22.0	22.3	0.3	0.73
	126.1	126.4	0.3	2.43
	129.7	131.8	2.1	0.94
	135.1	135.4	0.3	13.56
	140.5	142.3	1.8	2.88
including	140.5	140.8	0.3	11.62
and	142.0	142.3	0.3	5.2
	161.2	163.6	2.4	1.78
TUDDH-580	8.0	9.2	1.2	4.53
	46.7	47.3	0.6	1.67
	81.8	82.4	0.6	0.78
	83.6	85.1	1.5	1.48
	153.5	154.7	1.2	11.18
including	153.5	153.8	0.3	40.05
	157.7	158.6	0.9	0.66



	159.5	159.8	0.3	0.66
	165.2	167.0	1.8	1.11
including	166.7	167.0	0.3	5.01
	173.6	173.9	0.3	0.76
	187.4	188.0	0.6	24.72
including	187.4	187.7	0.3	6.12
including	187.7	188.0	0.3	43.34
	192.8	196.4	3.6	1.88
including	193.1	193.4	0.3	11.17
including	194.6	194.9	0.3	4.11
TUDDH-581	20.9	21.2	0.3	4.12
	81.8	82.4	0.6	0.76
	100.4	101.0	0.6	1.56
	106.4	107.0	0.6	0.82
	168.5	170.0	1.5	4.41
including	168.5	168.8	0.3	8.27
and	168.8	170.0	1.2	3.25
	179.3	182.0	2.7	1.32
	186.8	187.1	0.3	0.54
	206.6	206.9	0.3	3.07
	208.4	209.9	1.5	1.91
	212.3	213.2	0.9	0.69
	226.1	227.9	1.8	2.39
including	227.0	227.3	0.3	7.48
	249.8	250.7	0.9	1.38
	251.9	252.2	0.3	2.38
	307.4	308.9	1.5	1.55
TUDDH-582	47.6	48.5	0.9	3.21
	91.8	93.6	1.8	3.81
including	92.4	93.6	1.2	5.22
	99.3	102.0	2.7	3.33
including	99.3	100.2	0.9	5.77
TUDDH-583	7.5	8.1	0.6	2.26
	46.5	47.1	0.6	1.02
	72.0	72.3	0.3	1.48
	87.3	88.5	1.2	0.69



	96.3	96.9	0.6	2.68
	114.0	114.3	0.3	1.62
	121.5	122.7	1.2	1.48
	126.9	128.7	1.8	1.93
including	128.4	128.7	0.3	4.39
	132.0	132.3	0.3	25.32
	137.4	137.7	0.3	0.66
	138.9	140.1	1.2	3.11
including	138.9	139.2	0.3	7.12
	241.2	241.5	0.3	1.48
TUDDH-586	9.3	11.1	1.8	4.28
including	10.2	11.1	0.9	7.91
	63.6	64.2	0.6	0.53
	67.8	68.4	0.6	1.8
	84.6	84.9	0.3	5.95
	98.1	98.4	0.3	2.95
	104.7	105.9	1.2	18.47
	116.7	117.3	0.6	0.55
	122.1	122.7	0.6	292.69
including	122.4	122.7	0.3	584.07
	127.5	127.8	0.3	1.68
	129.3	129.9	0.6	10.74
	133.2	133.8	0.6	3.41
	141.6	143.7	2.1	1.75
including	142.5	142.8	0.3	7.33
	238.5	241.2	2.7	0.95
TUDDH-587	17.2	17.5	0.3	0.69
	62.8	63.4	0.6	1.11
	76.6	76.9	0.3	1.57
	89.5	89.8	0.3	0.59
	103.6	103.9	0.3	2.34
	146.2	146.5	0.3	4.43
	159.1	160.9	1.8	1.66
	232.9	233.5	0.6	6.43
including	232.9	233.2	0.3	11.40
	234.7	235.9	1.2	4.27
including	235	235.6	0.6	5.42



	237.4	238.6	1.2	8.89
TUG-139	17.8	18.1	0.3	1.42
	22.0	22.3	0.3	0.82
	26.5	26.8	0.3	1.47
	28.9	29.2	0.3	1.42
	31.0	31.3	0.3	0.75
	48.7	49.6	0.9	1.49
	54.4	59.2	4.8	4.20
including	54.7	55.0	0.3	5.91
and	55.0	55.3	0.3	12.60
and	55.6	55.9	0.3	7.27
and	55.9	56.2	0.3	5.70
and	57.1	57.4	0.3	15.09
	70.9	72.1	1.2	25.23
including	70.9	71.2	0.3	8.96
and	71.2	71.5	0.3	8.32
and	71.5	71.8	0.3	5.00
and	71.8	72.1	0.3	78.02
	82.3	82.6	0.3	2.78
	91.6	91.9	0.3	1.66
	95.5	95.8	0.3	1.84
TUG-142	20.4	20.7	0.3	1.15
	29.4	29.7	0.3	1.49
	31.2	36.3	5.1	0.65
	41.4	42	0.6	1.88
	45.3	45.6	0.3	0.69
	61.3	63.7	2.4	3.55
including	62.5	63.1	0.6	8.14
additional results pending				

Table 2: Survey details of diamond drill holes referenced in this release



Hole No	Coordinates (Fiji map grid)		RL	final depth	dip	azimuth
	N	E				(TN)
TUDDH-577	3920435	1876442	314.0	197.9	-39	268
TUDDH-578	3920520	1876513	348.6	150.3	-59	267
TUDDH-579	3920435	1876513	348.6	239.0	-49	269
TUDDH-580	3920435	1876513	348.6	284.9	-60	265
TUDDH-581	3920435	1876513	348.6	311.6	-70	265
TUDDH-582	3920435	1876442	314.0	120.2	-49	267
TUDDH-583	3920435	1876513	348.6	303.2	-44	289
TUDDH-586	3920435	1876513	348.6	302.3	-55	289
TUDDH-587	3920435	1876513	348.6	256.8	-63	289
TUG-139	3920480	1876411	103.1	123.3	+13	091
TUG-142	3920480	1876411	103.1	85.8	-30	090

Qualified Person

In accordance with National Instrument 43-101 – Standards of Disclosure for Mineral Projects (“NI 43-101”), Sergio Cattalani, P.Geo, Senior Vice President Exploration, is the Qualified Person for the Company and has reviewed and is responsible for the technical and scientific content of this news release.

QAQC Procedures

Lion One adheres to rigorous QAQC procedures above and beyond basic regulatory guidelines in conducting its sampling, drilling, testing, and analyses. The Company utilizes its own fleet of diamond drill rigs, using PQ, HQ and NQ sized drill core rods. Drill core is logged and split by Lion One personnel on site. Samples are delivered to and analysed at the Company’s geochemical and metallurgical laboratory in Fiji. Duplicates of all samples with grades above 0.5 g/t Au are both re-assayed at Lion One’s lab and delivered to ALS Global Laboratories in Australia (ALS) for check assay determinations. All samples for all high-grade intercepts are sent to ALS for check assays. All samples are pulverized to 80% passing through 75 microns. Gold analysis is carried out using fire assay with an AA finish. Samples that have returned grades greater than 10.00 g/t Au are then re-analysed by gravimetric method. For samples that return greater than 0.50 g/t Au, repeat fire assay runs are carried out and repeated until a result is obtained that is within 10% of the original fire assay run. For samples with multiple fire assay runs, the average of duplicate runs is presented. Lion One’s laboratory can also assay for a range of 71 other elements through Inductively Coupled Plasma Optical Emission Spectrometry (ICP-OES), but currently focuses on a suite of 9 important pathfinder elements. All duplicate anomalous samples are sent to ALS labs in Townsville QLD and are analysed by the same methods (Au-AA26, and Au-GRA22 where applicable). ALS also analyses for 33 pathfinder elements by HF-HNO₃-HClO₄ acid digestion, HCl leach and ICP-AES (method ME-ICP61).



About Lion One Metals Limited

Lion One's flagship asset is 100% owned, fully permitted high grade Tuvatu Alkaline Gold Project, located on the island of Viti Levu in Fiji. Lion One envisions a low-cost high-grade underground gold mining operation at Tuvatu coupled with exciting exploration upside inside its tenements covering the entire Navilawa Caldera, an underexplored yet highly prospective 7km diameter alkaline gold system. Lion One's CEO Walter Berukoff leads an experienced team of explorers and mine builders and has owned or operated over 20 mines in 7 countries. As the founder and former CEO of Miramar Mines, Northern Orion, and La Mancha Resources, Walter is credited with building over \$3 billion of value for shareholders.

On behalf of the Board of Directors of Lion One Metals Limited

"Walter Berukoff"

Chairman and CEO

For further information

Contact Investor Relations

Toll Free (North America) Tel: 1-855-805-1250

Email: info@liononemetals.com

Website: www.liononemetals.com

Neither the TSX Venture Exchange nor its Regulation Service Provider accepts responsibility for the adequacy or accuracy of this release.

This press release may contain statements that may be deemed to be "forward-looking statements" within the meaning of applicable Canadian securities legislation. All statements, other than statements of historical fact, included herein are forward looking information. Generally, forward-looking information may be identified by the use of forward-looking terminology such as "plans", "expects" or "does not expect", "proposed", "is expected", "budget", "scheduled", "estimates", "forecasts", "intends", "anticipates" or "does not anticipate", or "believes", or variations of such words and phrases, or by the use of words or phrases which state that certain actions, events or results may, could, would, or might occur or be achieved. This forward-looking information reflects Lion One Metals Limited's current beliefs and is based on information currently available to Lion One Metals Limited and on assumptions Lion One Metals Limited believes are reasonable. These assumptions include, but are not limited to, the actual results of exploration projects being equivalent to or better than estimated results in technical reports, assessment reports, and other geological reports or prior exploration results. Forward-looking information is subject to known and unknown risks, uncertainties and other factors that may cause the actual results, level of activity, performance or achievements of Lion One Metals Limited or its subsidiaries to be materially different from those expressed or implied by such forward-looking information. Such risks and other factors may include, but are not limited to: the stage development of Lion One Metals Limited, general business, economic, competitive, political and social uncertainties; the actual results of current research and development or operational activities; competition; uncertainty as to patent applications and intellectual property rights; product liability and lack of insurance; delay or failure to receive board or regulatory approvals; changes in legislation, including environmental legislation, affecting mining, timing and availability of external financing on acceptable terms; not realizing on the potential benefits of technology; conclusions of economic evaluations; and lack of qualified, skilled labour or loss of key individuals. Although Lion One Metals Limited has attempted to identify important factors that could cause actual results to differ materially from those contained in forward-looking information, there may be other factors that cause results not to be as anticipated, estimated or intended. Accordingly, readers should not place undue reliance on forward-looking information. Lion One Metals Limited does not undertake to update any forward-looking information, except in accordance with applicable securities laws.

JORC Code 2012 Table 1

The following extract from the JORC Code 2012 Table 1 is provided for compliance with the Code requirements for the reporting of Mineral Resources:

‘JORC Code 2012 Table 1’ Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections).

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none">• Nature and quality of sampling (eg cut channels, random chips, or specific specialized industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.• Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.• Aspects of the determination of mineralization that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverized to produce a 30g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (eg submarine nodules) may warrant disclosure of detailed information.	<ul style="list-style-type: none">• Core drilling, logging and sampling at Tuvatu proceeded as follows:• Diamond drillholes prefixed TUDDH are drilled from the surface, whilst those prefixed TUG are drilled from the underground. All holes are completed with diamond drilling methods. The eleven diamond drill holes included in the release, were drilled as follows:• TUDDH577 was drilled through poorly consolidated transported material from surface to 11.45m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 11.45m to 197.90m using HQ3 diamond drill core (61.10mm diameter) from surface to 17.40m and NQ3 diamond drill core (45.00mm diameter) from 17.40m to 197.90m, where the hole was terminated.• TUDDH578 was drilled through poorly consolidated transported material from surface to 8.80m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 8.80m to 150.30m using HQ3 diamond drill core (61.10mm diameter) from surface to 17.70m and NQ3 diamond drill core (45.00mm diameter) from 17.70m to 150.30m, where the hole was terminated.• TUDDH579 was drilled through poorly consolidated transported material from surface to 10.60m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 10.60m to 239.00m using HQ3 diamond drill core (61.10mm diameter) from surface to 15.80m and NQ3 diamond drill core (45.00mm diameter) from 15.80m to 239.00m, where the hole was terminated.• TUDDH580 was drilled through poorly consolidated transported material from surface to 9.90m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 9.90m to 284.90m using HQ3 diamond drill core (61.10mm diameter) from surface to 11.90m and NQ3 diamond drill core (45.00mm diameter) from 11.90m to 284.90m, where the hole was terminated.• TUG-142 was drilled through fresh intercalating monzonite and andesite from collar to 85.80m using LTK60 diamond drill core (43.90mm diameter) from surface to 85.80m, where the hole was terminated.

		<p>TUDDH581 was drilled through poorly consolidated transported material from surface to 8.60m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 8.60m to 311.60m using HQ3 diamond drill core (61.10mm diameter) from surface to 14.60m and NQ3 diamond drill core (45.00mm diameter) from 14.60m to 311.60m, where the hole was terminated.</p> <p>TUDDH582 was drilled through poorly consolidated transported material from surface to 9.30m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 9.30m to 120.20m using HQ3 diamond drill core (61.10mm diameter) from surface to 14.90m and NQ3 diamond drill core (45.00mm diameter) from 14.90m to 120.20m, where the hole was terminated.</p> <p>TUDDH583 was drilled through poorly consolidated transported material from surface to 9.10m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 9.10m to 303.20m using HQ3 diamond drill core (61.10mm diameter) from surface to 16.70m and NQ3 diamond drill core (45.00mm diameter) from 16.70m to 303.20m, where the hole was terminated.</p> <p>TUDDH586 was drilled through poorly consolidated transported material from surface to 8.50m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 8.50m to 302.30m using HQ3 diamond drill core (61.10mm diameter) from surface to 17.30m and NQ3 diamond drill core (45.00mm diameter) from 17.30m to 302.30m, where the hole was terminated.</p> <p>TUDDH587 was drilled through poorly consolidated transported material from surface to 9.00m downhole depth, and through weathered and fresh intercalating monzonite and andesite from 9.00m to 256.80m using HQ3 diamond drill core (61.10mm diameter) from surface to 13.10m and NQ3 diamond drill core (45.00mm diameter) from 13.10m to 256.80m, where the hole was terminated.</p> <p>TUG-139 was drilled through fresh intercalating monzonite and andesite from collar to 123.30m using LTK60 diamond drill core (43.90mm diameter) from surface to 123.30m, where the hole was terminated.</p>
--	--	--

		<ul style="list-style-type: none">• Lithological logging included rock type, mineralogy, weathering, alteration, texture, grainsize, lodes and geotechnical data where relevant.• Each tray of drill core was photographed.• Zones of mineralization defined by alkaline rich veining and brecciation, plus or minus sulphides or iron oxides after sulphides; are sampled selectively to minimise the effects of dilution by barren host rock. This selective sampling means sample intervals can vary from 15 cm to over 1 m in length. At least one meter of core on either side of a mineralized section is also sampled.• Samples are composited where there is more than one consecutive >0.5 g/t Au interval.• Sample intervals were marked up on site.• Core is cut using a diamond core saw.• Half core of mineralised intervals are cut by diamond saw and sampled for assay.• Drillholes were downhole surveyed using a Ranger Explorer Mark 2 electronic multishot camera. Surveys are taken at least once every 30 m.• Core recovery was generally high, averaging over 95%.• Bulk density measurements have yet to be taken, but will be calculated for this programme. Bulk density measurements are taken using the water immersion method by comparing wet and dry weights.
--	--	--

Drilling techniques	<ul style="list-style-type: none"> • Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, multishot camera, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> • In some cases, diamond drilling used PQ3 core for up to 85.5 meters of unconsolidated, partly weathered or fresh material before converting to HQ3 core for the remainder of the drill hole. Other holes were collared with HQ or NQ core drilling. • Core is orientated using a spear or crayon to mark the position on the core. Orientations are carried out as regularly as required. • Downhole surveys are carried out using a Ranger Explorer Mark 2 electronic multishot camera. Surveys are taken at least once every 30 m.
Drill sample recovery	<ul style="list-style-type: none"> • Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximize sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> • Diamond drill core sample recovery was measured and recorded during the drilling and logging process. In general very little sample loss has been noted once the surface unconsolidated material has been drilled through. • In places where it is believed core loss may be greater than expected, triple tube diamond drilling is carried out. • Sample recoveries are generally high. No significant sample loss was recorded with a corresponding increase in Au present. No sample bias is anticipated and no preferential loss/gain of grade material was noted.
Logging	<ul style="list-style-type: none"> • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> • Lion One personnel geologically and geotechnical log the core on a continuous basis. Geological logs are of the detail to support appropriate Mineral Resource estimation. Lion One's Competent Person is managing the improvement of geotechnical logging of the core • Diamond drill core logging database records collar details, collar metadata, downhole surveys, assays, weathering, lithology, alteration, Geotech, SG data and Lode tags. • All drill holes were logged in full. • All drill core is photographed.

Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximize the representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. 	<ul style="list-style-type: none"> • All diamond core samples are logged on site and then mineralized intervals are half cored. • Sample intervals vary as determined by the geologist logging the hole depending on the visual potential to host mineralization. • The core samples are bagged on site in sealed bags, placed in bound poly weave bags for transport, and then collected by courier for airfreight to Australia. • Samples are transported to Lion One's custom built geochemical and metallurgical laboratory at its Fiji Head office at Waimalika in Nadi, Fiji, where they are processed and assayed. • Check samples are sent to Australian Laboratory Services Pty Ltd. (ALS), in Queensland, an independent accredited analytical laboratory. • All samples were finely crushed (>75% passing through -2 mm) and a 1 kg split then pulverized (>85% passing through -75 µm). • Field QAQC procedures included the insertion of 4% certified reference 'standards' and 2% field duplicates for all drilling. • The same side of the half core is always collected.
---	---	--

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> A sample size of between 2.5 and 4.5 kg is collected, depending on the length of the sample interval. This size is considered appropriate and representative of the material being sampled given the width and continuity of the intersections, and the grain size of the material being collected.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Samples are assayed at Lion One's custom built geochemical and metallurgical laboratory at its Fiji Head office at Waimalika in Nadi, Fiji, where they are processed and assayed. Once dried and pulverized, diamond samples were analyzed using a 30g charge lead collection Fire Assay with AAS finish. This is an industry standard for gold analysis. All samples are then analyzed for a range of 9 elements with an aqua regia digest and ICP-OES finish (including Ag, As, Cu, Fe, Pb, Se, Te, V, and Zn). Lion One's laboratory is able to assay for 71 elements via ICP-OES but restricts that number to the 9 main pathfinder elements at this point in time. Other elements are determined on an as required basis. Check samples are also submitted to Australian Laboratory Services (ALS) in Townsville, Australia for analysis. These samples are analyzed for a range of 36 elements with an aqua regia digest and ICP-MS finish (including Ag, Al, As, Ba, Be, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, Hg, K, La, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Se, Sr, Te, Th, Ti, U, V, W, Zn). No geophysical tools have been used at Tuvatu during this stage of work. Field QAQC procedures include the insertion of both field duplicates and certified reference 'standards'. Assay results have been satisfactory and demonstrate an acceptable level of accuracy and precision. Laboratory QAQC involves the use of external certified reference standards, as well as blanks, splits and replicates. Analysis of these results also demonstrates an acceptable level of precision and accuracy. Laboratory QAQC procedures include the insertion of certified reference 'standards'. Assay results have been satisfactory and demonstrate an exceptional level of accuracy and precision. Lion One Laboratory QAQC involves the use of external certified reference standards. The laboratory is using the Geostats Certified Reference Standards. For the field samples, four different gold CRM standards supplied by Rocklabs Ltd of New Zealand have been used by Lion One for quality control in this core sampling. These standards are submitted for every 20 samples. Field blanks are obtained from within the vicinity of the project by selecting an unmineralized outcrop of similar mineralogy and weathering as the sample being submitted. A representative number of blank material samples are submitted for analysis to provide reference concentrations of elements of interest. Duplicates are split by laboratory after sample preparation and are reported on in the process.

Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • All drill holes and any significant intersections were visually field verified by Company geologists. • Diamond drill holes are reviewed by Competent Person prior to logging and once assays have been received. • No twinned holes have been completed in this set of results. • No adjustments to assay data have been undertaken. • Primary data, including geological logs and assay results are forwarded to rOREdata Perth, an independent company, for validation and entry into an Access database. This database is managed by rOREdata, and cannot be altered by anyone within Lion One, or any other external party.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • All drill hole collars were surveyed using differential GPS (DGPS) equipment. Coordinates are relative to Fiji Map Grid. A down hole survey was taken at least every 30m in diamond drill holes by a Ranger Explorer Mark 2 electronic multishot camera by the drilling contractors. • Aerial topographic data was collected in 2013. Detailed ground surveys have also been undertaken by independent survey companies in Fiji. Results from the DGPS are compared with this topographic data as a double check. • Lion One has used an NSS-MOSS-I-TS16 to allow it to even more accurately locate collars on the surface and potentially underground. This equipment will allow accuracy within 10 mm.
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • The drill spacing for the reported exploration results are variable due to the rugged topography. • Although collar positions are variable due to the topography, the intersections are part of a program to develop drill spacings approximately 30-40 meters apart on section and plan view. • It has yet to be determined whether the mineralized domains have sufficient continuity in both geology and grade to be considered appropriate for the Mineral Resource and Ore Reserve estimation procedures and classification applied under the 2012 JORC Code, but the drill program is ongoing and the results of subsequent drilling will clarify this matter. • Sample intervals are variable and sample lengths can vary from 15 cm to over 100 cm. Reported intersections are then composited. Intersections in excess of 0.5 g/t Au are included over the variable thicknesses. Reported intervals are drill thicknesses, as true thicknesses are currently difficult to accurately calculate.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • Drilling sections are orientated perpendicular to the strike of the mineralized host rocks where possible, but due to the rugged topography, it is often difficult to locate drill collars in the preferred or ideal location. The drilling is angled at 54 to 81 degrees for the surface diamond drill holes, and -30 to -60 degrees for the underground drill holes, to allow for the preferred distance between intersections, and where possible is targeting zones approximately perpendicular to the dip of the lodes. Once again due to the rugged topography the location of collars and the dips of the holes aren't always ideal. • No orientation based sampling bias has been identified in the data

Criteria	JORC Code explanation	Commentary
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> The following specific security measures were used during the life of the Tuvatu project. Visible free gold is rare and off-site laboratories have been used throughout. Half core splits of drill core are retained on site. This core is well catalogued and is available for inspection. Chain of custody is managed by Lion One. Core is cut and sampled in the presence of at least one geologist and two or three field technicians. Samples are bagged and sealed on site, and then transported to the Lion One office in Fiji (16 km away), where they are processed and analyses. For check samples to be sent to ALS in Australia, the samples are inspected by the Fiji Mineral Resources Department (MRD), before an export licence is granted. The samples to be sent to ALS in Australia are then collected by DHL couriers, and internationally recognized courier transport company, who subsequently transport them to Australia for sample analysis.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> The process of drilling, sample selection, core cutting, sample bagging, and sample dispatch have all been reviewed by a Competent Person as defined by JORC, and audits and reviews have been undertaken by independent persons from time to time. Geological logs and assay results are forwarded to rOREdata Perth, an independent company, for validation and entry into an Access database. This database is managed by rOREdata, and cannot be altered by anyone within Lion One, or any external party. The database is available for review.

‘JORC Code 2012 Table 1’ Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section).

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area. 	<ul style="list-style-type: none"> The Tuvatu Project is situated in Fiji on granted Mining License SML62. Lion One has a 100% interest in the tenement. The area surrounding Tuvatu is also held by Lion One and includes four Special Prospecting Licenses (SPL1283, 1296, 1465 and 1512). Lion One has 100% interest in these tenements. The tenement are in good standing and no known impediments exist.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The tenement area has been previously explored by a number of other companies, and has been referenced in a number of Lion One news releases and independent technical reports. The details are not applicable to reporting of these results.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralization. 	<ul style="list-style-type: none"> Tuvatu deposit is one of several alkaline gold systems situated along the >250 km Viti Levu lineament in Fiji. The majority of mineralization is hosted by late Miocene to early Pliocene monzonite which has intruded the late Oligocene – middle Miocene volcanic breccias. The Tuvatu deposit is structurally controlled and occurs as a series of sub- vertical lodes, shallow dipping lodes and stockworks. Individual “lodes” can have strike length in excess of 500 m and vertical extent often only limited by the depth of drilling; and range from less than 1 m to 9 meters in width. The mineralogy is predominantly quartz, pyrite, and occasional base metal sulphides. A high proportion of gold occurs as very fine free gold or intimately associated with pyrite grains.

Drill hole information	<ul style="list-style-type: none"> • A summary of all information material to the under-standing of the exploration results including a tabulation of the following information for all Material drill holes: • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in meters) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • All drill holes logistics of those holes reported in this news release include: <ul style="list-style-type: none"> - easting and northing of drill hole collar, - elevation, - dip and azimuth of hole, - hole length, - downhole length, and - interception depth.
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • All reported assays have been length weighted if appropriate. No top cuts have been applied. A nominal 0.5 g/t Au lower cut off has been applied. • High grade gold (Au) intervals lying within broader zones of Au mineralization are reported as included intervals. In calculating the zones of mineralization, internal dilution has been allowed.

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	<ul style="list-style-type: none"> Drill azimuth and dips are such that intersections are orthogonal to the expected orientation of mineralization where possible. Due to the rugged topography this is often not the case. True widths are reported where possible.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> No diagrams have been included within the news release report main body of text, but a table with drill hole logistics is included.
Balanced Reporting	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All drill hole collars were surveyed using differential GPS (DGPS) equipment. Coordinates are relative to Fiji map grid. A down hole survey was taken at least every 30m in each diamond drill hole by the drilling contractors using a Ranger Explorer Mark 2 electronic multishot camera. Aerial topographic data was collected in 2013. Detailed surveys have also been undertaken by independent survey companies in Fiji. Results from the DGPS are compared with this topographic data as a double check. Lion One acquired a NSS-MOSS-I-TS16 to allow it to even more accurately locate collars on the surface and potentially underground. This equipment will allow accuracy within 10 mm.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> No other substantive exploration data relative to these results are available for this area.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> It is proposed to drill a number of additional diamond drill holes in this area to determine orientation, dip, true thickness, length, and potentially depth of mineralization.

‘JORC Code 2012 Table 1’ Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in the preceding section also apply to this section).

Criteria	JORC Code explanation	Commentary
Database integrity	<ul style="list-style-type: none"> <i>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</i> <i>Data validation procedures used.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results. That said, discussion of database integrity has been included in previous Section 1.
Site visits	<ul style="list-style-type: none"> <i>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</i> <i>If no site visits have been undertaken indicate why this is the case.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results. That said, site visits have been undertaken by Competent Person for both resource estimation and exploration.

Geological interpretation	<ul style="list-style-type: none"> • <i>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</i> • <i>Nature of the data used and of any assumptions made.</i> • <i>The effect, if any, of alternative interpretations on Mineral Resource estimation.</i> • <i>The use of geology in guiding and controlling Mineral Resource estimation.</i> • <i>The factors affecting continuity both of grade and geology.</i> 	<ul style="list-style-type: none"> • Details not applicable to reporting of exploration results. • That said brief discussion on geology is included in Section 1.
Dimensions	<ul style="list-style-type: none"> • <i>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</i> 	<ul style="list-style-type: none"> • The dimensions of mineralization identified in this area to date cannot be determined by the data which have been collected and will require further drilling.
Estimation and modelling	<ul style="list-style-type: none"> • <i>The nature and appropriateness of the estimation technique(s) applied and key assumptions,</i> 	<ul style="list-style-type: none"> • Details not applicable to reporting of exploration results.

Criteria	JORC Code explanation	Commentary
techniques	<p><i>including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i></p> <ul style="list-style-type: none"> <i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i> <i>The assumptions made regarding recovery of by-products.</i> <i>Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterization).</i> <i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i> <i>Any assumptions behind modelling of selective mining units.</i> <i>Any assumptions about correlation between variables.</i> <i>Description of how the geological interpretation was used to control the resource estimates.</i> <i>Discussion of basis for using or not using grade cutting or capping.</i> <i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i> 	<ul style="list-style-type: none"> ICP multi-element geochemical data is collected for all sampled intervals assayed by Lion One's own custom made geochemical and metallurgical laboratory in Fiji. Check samples are sent to ALS Laboratories in Australia where a larger range of elements are analyzed. To date, there does not appear to be any significant deleterious elements.
Moisture	<ul style="list-style-type: none"> <i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results
Cut-off parameters	<ul style="list-style-type: none"> <i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results
Mining factors or assumptions	<ul style="list-style-type: none"> <i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results

Criteria	JORC Code explanation	Commentary
	<i>parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i>	
Metallurgical factors or assumptions	<ul style="list-style-type: none"> <i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results
Environmental factors or assumptions	<ul style="list-style-type: none"> <i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results
Bulk density	<ul style="list-style-type: none"> <i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i> <i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i> <i>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results
Classification	<ul style="list-style-type: none"> <i>The basis for the classification of the Mineral Resources into varying confidence categories.</i> <i>Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</i> <i>Whether the result appropriately reflects the Competent Person's view of the deposit.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results.
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of Mineral Resource estimates.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results
Discussion of relative accuracy/ confidence	<ul style="list-style-type: none"> <i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i> 	<ul style="list-style-type: none"> Details not applicable to reporting of exploration results

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> • <i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i> • <i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i> 	