

23 June 2022

Finland Nickel and Lithium Projects Due Diligence Commencing

Highlights

- Evaluation commences on the Ruossakero Nickel, Hirvikallio Lithium, and Kola Lithium projects located in Finland as part of due diligence program
- Acquisition of significant historical information and non-ground disturbing exploration program to assess exploration potential and develop exploration targets and budgets
- RMC has secured an Exclusive Option¹ to acquire one Nickel and two Lithium projects in Finland: Ruossakero Nickel, Hirvikallio Lithium, and Kola Lithium
- Four-month option term to complete due diligence and finalise negotiations



- Significant potential with historic intersections including 14m @ 1.03% Ni (Ruossakero, Hole ID M183483R404) and 5m @ 2.30% Li₂O (Hirvikallio, Hole ID M202458R1).

- Finland is rated among the top ten mining investment jurisdictions globally, as per the 2021 Fraser Institute's policy perception index.

Nickel exploration company Resource Mining Corporation Limited (ASX:RMI) ("RMC" or the "Company") is pleased to advise the Company is proceeding with the evaluation of the 3 Finland projects exploration potential as part of the due diligence program to be undertaken during the Exclusive Option period.

¹ Refer to ASX announcement dated 7 June 2022 titled "Lithium and Nickel Tenements Under Exclusive Option".


As previously announced, RMC has secured an exclusive option to acquire 3 projects in Finland: the Ruossakero Nickel Project in Northern Finland, the Kola Lithium Project in Central Finland and the Hirvikallio Nickel Project in Southern Finland (together, the “**Target Projects**”).

The Target Project’s areas are currently covered by 2-year “exploration reservations”, valid till May 2024. These reservations allow completion of initial, non-invasive prospecting work, including mapping, outcrop sampling, soil sampling, and geophysics (drilling, pitting, or trenching are not allowed until conversion into exploration licence).

The exclusive option secured by the Company is a four month option to acquire Element92 Pte Ltd, a Singaporean domiciled entity, which is indirectly the sole legal and beneficial owner of the Target Projects through its own wholly owned Finnish subsidiary.

As the reservation owner, it has the exclusive right to convert these exploration reservations into an exploration license.

During the term of the Option, the Company is conducting due diligence to assess the Target Projects (and their holding company), as well as negotiating the terms of the acquisition should the Company elect to proceed.

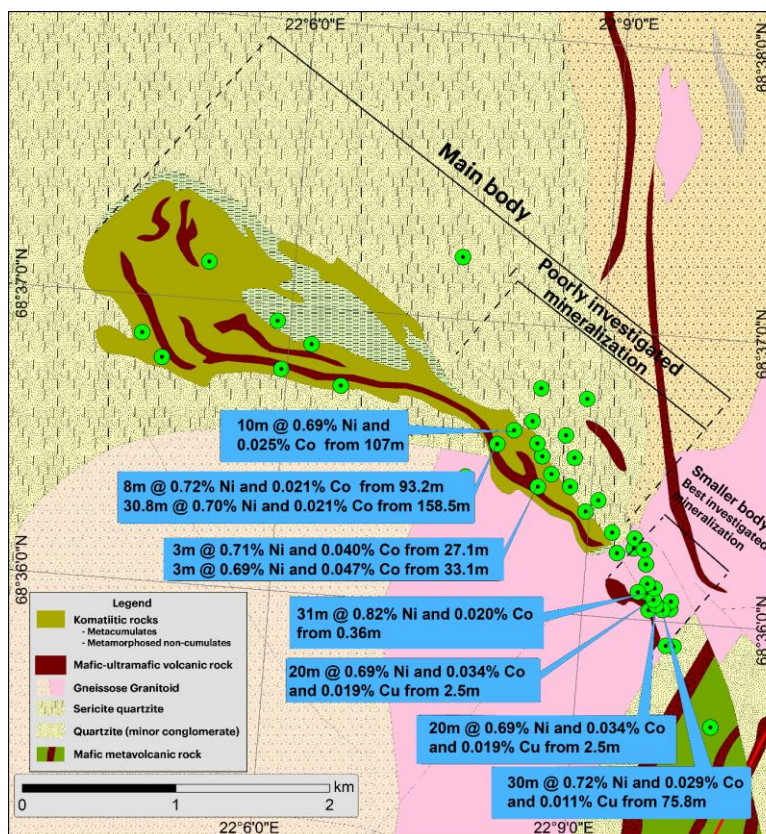

Executive Chairman, Asimwe Kabunga, commented:

“Commencing the due diligence exploration activities at the Target Projects in Finland is an exciting next step for us as we further develop our understanding of the potential value of these nickel and lithium projects. We look forward to reporting the outcomes of this due diligence exercise to shareholders in due course.”

Ruossakero Nickel Project Drillhole Assay Results


Project Due Diligence

Historical work confirmed the presence of Nickel (Ruossakero) and Lithium (Kola and Hirvikallio) in the reservation areas. As a result of this past exploration work by private companies and by the Finnish Geological Survey (GTK), extensive geological, geochemical and geophysical datasets are available.

To evaluate the Target Projects in detail, the Company is undertaking the following program at its own expense to further its due diligence investigations:

1. Acquire and process all relevant existing datasets from GTK.
2. Complete a general survey of the full project areas to obtain a better understanding of the local geology, to verify and correct existing geological maps and to sample relevant outcrops.
3. Complete a detailed survey of the areas with known mineralisation, including detailed geological and structural mapping and sampling of existing pits and trenches and outcrop.
4. Complete a detailed survey of potential new targets identified during the general area survey.
5. Consider a geochemical soil sampling In Hirvikallio

It is anticipated that processing purchased data and desktop preparations will take 3 to 4 weeks, and that field work and reporting will take a further 4 to 5 weeks.

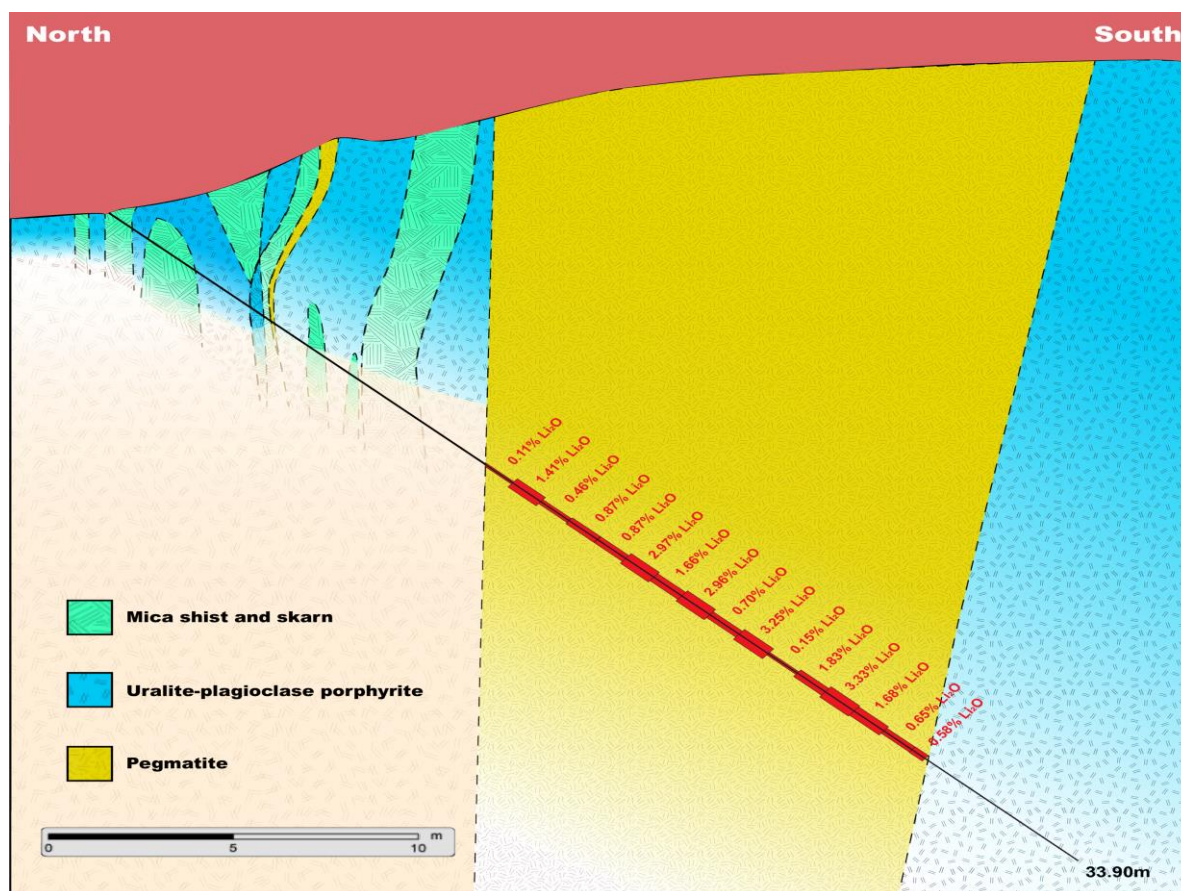

Initial exploration works completed by GTK across the Hirvikallio project area identified ~25 sq. km. with pegmatite dykes returning promising results including 5m @ 2.30% Li₂O and 2m @ 1.33% Li₂O (Hirvikallio DH n° M202458R1, presented).

Finland as an attractive mining jurisdiction

The widely followed Fraser Mining Institute currently ranks Finland as the 9th most attractive jurisdiction for mining investment, and among the top ten over the last nine surveys. The country boasts a good geological database and ore potential, political stability, high educational level, and high-quality infrastructure. Mining is a key part of the Finnish economy, and the nation is Europe's leading producer of Nickel.

The Company will continue to update shareholders as negotiations and due diligence progress.

This ASX announcement has been authorised for lodgement by the Board of Resource Mining Corporation Limited.

For further information, contact	For investor or media inquiries, contact
Asimwe Kabunga Executive Chairman P: +61 8 9482 0500 E: rmc@resmin.com.au	Sonny Didugu Reign Advisory P: +61 2 9174 5388 E: rmi@reignadvisory.com


About Resource Mining Corporation

Resource Mining Corporation Limited (ASX: RMI) is an independent Australian mineral resource company on a mission to create wealth from mineral commodities using innovative technical, marketing and financial skills.

RMC is currently exploring the Kabulwanyele Nickel Project (KNP) in Tanzania, where initial exploration conducted in 2021 was extremely promising, and identified a strong nickel anomaly.

An acquisition of the Massive Nickel Pty Ltd portfolio is currently pending, comprising five projects: Kabanga North, Kapalagulu, and Southern projects: Liparamba, Kitai and Mbinga, all in Tanzania.

The board has strong ties to Tanzania, Chaired by Asimwe Kabunga, a Tanzanian-born Australian entrepreneur who was instrumental in establishing the Tanzania Community of Western Australia Inc. and served as its first President.

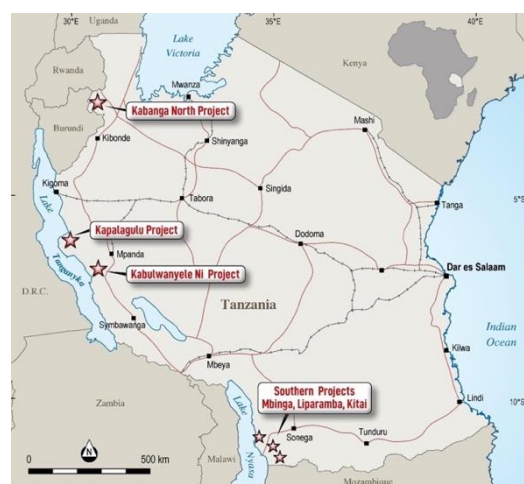

Competent Person Statement

Exploration Results

Information in this announcement that relates to Exploration results and targets is based on, and fairly reflects, information compiled by Mr. Pascal Van Osta, a Competent Person who is a Member of the European Federation of Geologists, a 'Recognised Professional Organisation' (RPO). Mr. Van Osta was engaged as a consultant by the Vendor.

Mr. Van Osta has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined by the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Van Osta consents to the inclusion of the data in the form and context in which it appears.

Forward Looking Statements

Some of the statements appearing in this announcement may be in the nature of forward looking statements. You should be aware that such statements are only predictions and are subject to inherent risks and uncertainties. Those risks and uncertainties include factors and risks specific to the industries in which the Company operates and proposes to operate as well as general economic conditions, prevailing exchange rates and interest rates and conditions in the financial markets, among other things. Actual events or results may differ materially from the events or results expressed or implied in any forward-looking statement.

No forward looking statement is a guarantee or representation as to future performance or any other future matters, which will be influenced by a number of factors and subject to various uncertainties and contingencies, many of which will be outside the Company's control.

The Company does not undertake any obligation to update publicly or release any revisions to these forward-looking statements to reflect events or circumstances after today's date or to reflect the occurrence of unanticipated events. No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions or conclusions contained in this announcement. To the maximum extent permitted by law, none of the Company's Directors, employees, advisors or agents, nor any other person, accepts any liability for any loss arising from the use of the information contained in this announcement. You are cautioned not to place undue reliance on any forward-looking statement. The forward-looking statements in this announcement reflect views held only as at the date of this announcement.

This announcement is not an offer, invitation or recommendation to subscribe for, or purchase securities by the Company. Nor does this announcement constitute investment or financial product advice (nor tax, accounting or legal advice) and is not intended to be used for the basis of making an investment decision. Investors should obtain their own advice before making any investment decision.

Annexure One – JORC Code, 2012 Edition – Table 1

The purpose of Table 1 below is to comply with Question 36 of the ASX “Mining Reporting Rules for Mining Entities: Frequently Asked Questions”.

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> No verifiable sampling technique was employed during the exploration programs. Ruossakero Nickel mineralization is hosted by komatiitic ultramafic bodies. The occurrences are in the basal contact zone of an NW-trending komatiitic cumulate sequence. Hirvikallio Lithium mineralization is hosted within steeply dipping Li-Cs-Ta-(B, Sn) pegmatite dykes, intruded in the Forssa Volcanic Suite (Svecofennian). In the Kola Lithium project, boulders of Li-Cs-Ta-(B, Sn) pegmatite were identified. The source rock of the boulders is not identified yet.
<i>Drilling techniques</i>	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> For the Lithium projects, Diamond drilling was used. For the Nickel Project, the drilling method that was employed is not documented. No bit or hole diameter sizes documented.
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results</i> 	<ul style="list-style-type: none"> The historical information did not provide recovery data that

	<p>assessed.</p> <ul style="list-style-type: none"> Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	could be verified.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> No geological logs were presented. Verification of the retained sample material is required.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> The competent person is not aware of the method that was used in obtained samples for laboratory.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the 	<ul style="list-style-type: none"> The QP is unable to verify any QAQC measures that were put in place during the sampling.

	<p><i>parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <ul style="list-style-type: none"> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	
Verification of sampling and assaying	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> • <i>The competent person is not aware if the intercepts have been verified by either the independent or alternative company personnel.</i>
Location of data points	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> • <i>The competent person is not aware of the survey system that was used to locate the drill holes.</i>
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • <i>The data spacing is not sufficient to establish a relatively high confidence in geological and grade continuity.</i> • <i>The competent person is not aware if there was any sample compositing that was employed.</i>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised</i> 	<ul style="list-style-type: none"> • <i>The QP is not aware of the sampling orientation.</i> • <i>The QP is not aware of the relationship between drilling orientation and mineralised structures.</i>

	<i>structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	
<i>Sample security</i>	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • The competent person was not able to verify this.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • There is no external audit of the results.

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> • Ruossakero: reservation notification authorization number VA2022: 0014 and the diary number Tukes 2879 / 10.01 / 2022. Reservation notification in good standing. • Hirvikallio: reservation notification authorization code VA2022: 0012 and the diary number Tukes 2869 / 10.01 / 2022. Reservation notification in good standing. • Kola: reservation notification authorization number VA2022: 0013 and the diary number Tukes 2876 / 10.01 / 2022. Reservation notification in good standing.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> • <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> • The Ruossakero nickel project was discovered by GTK in 1980 and further explored by Outokumpu Oy, Dragon Mining Oy and Anglo American. • The Hirvikallio lithium project was explored by the Finnish Geological Survey in 1957 (GTK). • There is no documented exploration conducted in Kola Lithium Project.
<i>Geology</i>	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> • The Hirvikallio lithium project is located in Southern Finland's Somero-Tamela area, a lithium pegmatite provinces in Finland. The area identified approximately 25 km² with pegmatite dykes. • Kola project is situated in South of Finland, There have been numerous spodumene-containing pegmatite boulders identified within the project area. • Ruossakero is set to the North of Finland with potential

		for a continuum of mafic/ultramafics intrusions.
<i>Drill hole Information</i>	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • All discussions captured within the announcement above are based on available drill hole information, summarized in Annex 2 and Annex 3 of this document.
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • The competent person was not aware of the data aggregation methods used. • No metal equivalents are discussed or reported.
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true 	<ul style="list-style-type: none"> • The information in the historical reports does not allow the QP to determine the relationship between mineralisation widths and intercept lengths.

	<i>width not known').</i>	
<i>Diagrams</i>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • Please see the main body of the announcement for the relevant figures.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • QP considers the presented results are representative.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • The images where obtained from the Finland's public domain. • Geological maps on different scales are published by GTK. • Airborne geophysical datasets (magnetic, EM and radiometric), ground based geophysical datasets (including gravity, magnetic, EM, VLF) and geochemical data including analyses of boulder samples, outcrop samples and base of till sampling is available from GTK.
<i>Further work</i>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • RMC intends to continue to explore and drill the known prospects and extend the mineralised occurrences within these Projects and ensure historical work is verified and future work reportable in accordance with the listing rules and JORC 2012. • Diagrams pertinent to the area's in question are supplied in the body of this announcement.

Annexure Two: Drill collars for the Ruossakero Nickel Project (KKJ, Finland Uniform Coordinate System, EPSG 2393).

Hole ID	X	Y	length	azimuth	dip
M183483R401	3302555	7621816	252.3	225	45
M183483R402	3302404	7621710	233.8	225	45
M183483R403	3302940	7621227	151.00	225	48
M183483R404	3303052	7620915	129.24	225	45
M183483R405	3299869	7622473	247.85	240	45
M183483R406	3300622	7622709	250.20	225	50
M183484R407	3302638	7622200	200.50	225	44
M183484R408	3302282	7622054	91.80	180	46
M183484R409	3302499	7621962	248.80	225	45
M183484R410	3303033	7620933	119.80	225	45
M183484R411	3303036	7620824	150.00	225	45
M183484R412	3303177	7620831	113.30	180	45
M183484R413	3302160	7621996	192.20	225	45
M183484R414	3300843	7622557	362.40	225	45
M183484R415	3300646	7622395	133.80	225	44
M183485R416	3303199	7620587	109.30	90	47
M183485R417	3303149	7620592	146.15	90	45
M183485R418	3303181	7620880	172.00	180	47
M183485R419	3303126	7620825	79.70	180	45
M183485R420	3303084	7620858	170.70	225	45
M183485R421	3303068	7620891	161.80	225	45
M183485R422	3303075	7620966	172.60	225	45
M183485R423	3303028	7620996	147.15	225	45
M183485R424	3302967	7620942	152.05	225	46
M183485R425	3303020	7621122	135.00	225	45
M183485R426	3303009	7621219	129.40	225	45
M183485R427	3302946	7621290	187.85	225	43
M183485R428	3302831	7621196	141.05	225	45
M183485R429	3302799	7621330	248.50	225	44
M183485R430	3302626	7621467	170.30	225	45
M183485R431	3302709	7621540	179.90	225	44
M183485R432	3302526	7621628	216.50	225	46
M183485R433	3302345	7621827	263.20	225	45
M183485R434	3302051	7621906	300.30	45	44
M183485R435	3301844	7621695	165.05	200	34
M183485R436	3301033	7622287	141.10	180	43
M183486R437	3300177	7623094	255.60	45	45
M183486R438	3299740	7622634	237.2	225	45

M183486R439	3302313	7621910	402.00	225	60
M183486R440	3303439	7620061	124.80	315	45
M183486R441	3301828	7623124	167.10	270	60
M183486R442	3302338	7622270	183.20	255	60
M183486R443	3302315	7621629	164.00	225	46
M183487R601	3302470	7621920	14.50	360	90
M183487R602	3302465	7621916	12.50	360	90
M183487R603	3302462	7621914	13.00	360	90
M183487R604	3302458	7621911	13.00	360	90
M183487R605	3302454	7621907	9.10	360	90
M183487R606	3302450	7621905	14.40	360	90
M183487R607	3302446	7621901	29.00	360	90
M183487R608	3302498	7621852	56.90	360	90
M183487R609	3302499	7621862	24.50	360	90
M183487R610	3302500	7621872	33.80	360	90
M183487R611	3302501	7621882	18.20	360	90
M183487R612	3302502	7621892	21.30	360	90
M183487R613	3302503	7621902	55.70	360	90
M183487R614	3302504	7621912	26.00	360	90
M183487R615	3302505	7621922	25.70	360	90
M183487R616	3302506	7621932	13.70	360	90
M183487R617	3302507	7621942	16.40	360	90
M183487R618	3302508	7621951	14.50	360	90
M183487R619	3302551	7621882	20.00	360	90
M183487R620	3302551	7621877	18.00	360	90
M183487R621	3302550	7621867	27.00	360	90
M183487R622	3302549	7621857	21.60	360	90
M183487R623	3302548	7621847	23.00	360	90
M183487R624	3302594	7621802	20.90	360	90
M183487R625	3302593	7621792	21.25	360	90
M183487R626	3302592	7621782	22.00	360	90
M183487R627	3302591	7621772	19.30	360	90
M183487R628	3302590	7621763	12.40	360	90
M183487R629	3302589	7621753	12.70	360	90
M183487R630	3302588	7621743	11.20	360	90

Annexure Three: Drill collar for the Hirvikallio Lithium Project (KKJ, Finland Uniform Coordinate System, EPSG 2393).

Hole ID	X	Y	length	azimuth	dip
M202458R1	3315811	6739907	33.90	180	43

Annexure 4: Drill hole assay results for the Ruossakero Nickel Project and Hirvikallio Lithium Project (commences on the following page)

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pet
R401	32.65	33.65	1.00	32	150	36	1.07
R401	33.65	34.65	1.00	62	140	56	1.15
R401	34.65	34.95	0.30	85	100	36	0.26
R401	34.95	36.65	1.70	34	1100	62	1.92
R401	47.80	48.80	1.00	99	50	47	1.42
R401	48.80	49.80	1.00	130	1680	92	22.10
R401	49.80	50.40	0.60	160	22020	56	10.10
R401	50.40	50.80	0.40	80	3120	55	5.03
R401	50.80	51.30	0.50	140	10870	110	6.89
R401	51.30	52.30	1.00	19	390	10	0.16
R401	52.30	53.30	1.00	73	1470	50	3.74
R401	53.30	54.30	1.00	53	1470	45	3.23
R401	54.30	55.30	1.00	81	2900	44	4.54
R401	55.30	56.30	1.00	65	1050	40	2.27
R401	56.30	57.30	1.00	97	180	31	3.27
R401	57.30	58.30	1.00	52	21	26	1.18
R401	58.30	59.30	1.00	31	12	26	0.89
R401	59.30	60.30	1.00	44	11	43	1.46
R401	60.30	61.30	1.00	48	10	55	1.51
R401	61.30	62.30	1.00	35	24	41	1.82
R401	77.40	78.40	1.00	880	480	180	33.10
R401	78.40	78.65	0.25	550	2060	49	12.20
R401	78.65	79.65	1.00	110	200	14	2.22
R401	79.65	80.65	1.00	120	190	25	3.14
R401	80.65	81.65	1.00	120	110	28	3.18
R401	81.65	82.65	1.00	220	290	35	8.08
R401	82.65	83.65	1.00	220	330	61	10.08
R401	83.65	84.65	1.00	230	370	88	15.10
R401	84.65	85.25	0.60	270	590	14	5.11
R401	85.60	86.40	0.80	160	10	61	4.95
R401	86.40	87.40	1.00	180	39	28	5.84
R401	87.40	87.80	0.40	59	13	12	0.50
R401	93.80	95.80	2.00	480	9	150	0.74
R401	95.80	97.80	2.00	390	3	135	0.39
R401	97.80	99.80	2.00	193	1	40	0.13
R401	109.50	110.50	1.00	900	10	68	0.18
R401	110.50	111.50	1.00	1240	18	65	0.13
R401	111.50	112.50	1.00	100	46	72	0.20
R401	118.40	119.40	1.00	2160	26	110	0.34
R401	119.40	120.40	1.00	2900	13	140	0.50
R401	183.50	185.50	2.00	1390	25	85	0.21
R401	185.50	187.50	2.00	2200	29	135	0.36
R401	187.50	189.50	2.00	2200	28	113	0.29
R401	189.50	191.50	2.00	2600	17	111	0.21
R401	191.50	193.50	2.00	2200	14	94	0.22
R401	212.40	213.40	1.00	1310	19	120	0.28
R401	213.40	214.40	1.00	1700	39	120	0.30
R401	214.40	215.40	1.00	1580	20	140	0.53
R401	215.40	216.40	1.00	1510	24	100	0.20
R401	216.40	217.40	1.00	1580	18	140	0.37

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R401	231.45	232.45	1.00	4480	26	220	0.75
R401	232.45	233.45	1.00	1830	22	130	0.38
R401	233.45	234.40	0.95	1650	18	110	0.31
R401	234.40	235.40	1.00	1970	33	150	0.41
R401	235.40	236.40	1.00	1860	31	130	3.11
R401	236.40	237.40	1.00	1770	19	120	0.21
R401	237.40	239.40	2.00	1560	27	101	0.14
R401	239.40	241.40	2.00	1480	24	105	0.14
R401	241.40	243.40	2.00	1510	24	120	0.21
R401	243.40	245.40	2.00	1480	18	130	0.21
R401	245.40	247.40	2.00	1510	21	144	0.30
R401	247.40	249.40	2.00	1470	22	136	0.28
R401	249.40	251.40	2.00	1720	34	148	0.31
R401	251.40	252.30	0.90	1260	29	110	0.21
R402	10.19	11.19	1.00	7900	50	260	0.89
R402	11.19	12.19	1.00	6160	34	220	0.53
R402	12.19	13.30	1.11	6500	74	240	0.41
R402	13.30	15.30	2.00	5600	57	188	0.40
R402	15.30	16.30	1.00	7230	39	230	0.86
R402	16.30	17.30	1.00	7670	39	240	0.72
R402	17.30	18.30	1.00	5270	39	170	0.35
R402	18.30	19.30	1.00	6870	55	240	0.85
R402	19.30	20.30	1.00	6160	48	220	0.82
R402	20.30	21.30	1.00	6550	69	240	0.01
R402	21.30	22.30	1.00	6480	94	230	0.76
R402	22.30	23.15	0.85	5880	66	200	0.83
R402	23.35	24.35	1.00	7900	62	210	1.10
R402	24.35	25.35	1.00	4800	24	120	0.53
R402	25.35	26.35	1.00	8000	60	220	0.99
R402	26.35	27.35	1.00	4600	45	160	0.64
R402	27.35	28.35	1.00	6700	54	250	0.98
R402	28.35	29.35	1.00	4400	28	130	0.54
R402	29.35	30.35	1.00	3100	16	1	0.32
R402	30.35	31.35	1.00	6300	70	210	0.82
R402	31.35	32.35	1.00	3200	23	120	0.43
R402	32.35	33.35	1.00	4100	25	130	0.47
R402	33.35	34.35	1.00	5400	33	160	0.67
R402	34.35	35.35	1.00	5400	36	180	0.76
R402	35.35	36.35	1.00	3100	32	110	0.43
R402	36.35	37.35	1.00	4700	32	150	0.56
R402	37.35	38.35	1.00	4800	31	180	0.79
R402	38.35	39.35	1.00	3500	31	110	0.36
R402	39.35	40.35	1.00	6600	47	250	1.34
R402	40.35	41.35	1.00	5900	52	220	1.64
R402	41.35	42.35	1.00	6900	63	210	1.31
R402	42.35	43.35	1.00	6300	78	220	1.48

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R402	43.35	44.35	1.00	6700	63	240	1.63
R402	44.35	45.35	1.00	4600	30	110	0.43
R402	45.35	46.35	1.00	6800	79	150	0.88
R402	46.35	47.35	1.00	5900	56	140	0.81
R402	47.35	48.35	1.00	5400	45	180	0.01
R402	48.35	49.35	1.00	3300	33	120	0.53
R402	49.35	50.35	1.00	3300	31	110	0.44
R402	50.35	51.35	1.00	3400	29	120	0.56
R402	51.35	52.35	1.00	3800	31	82	0.23
R402	52.35	53.35	1.00	3600	29	75	0.23
R402	53.35	54.35	1.00	3500	35	78	0.25
R402	54.35	55.35	1.00	3600	25	96	0.43
R402	55.35	56.35	1.00	5500	25	100	0.27
R402	56.35	57.35	1.00	3800	19	82	0.21
R402	57.35	58.35	1.00	4000	23	92	0.25
R402	58.35	59.35	1.00	3530	21	100	0.10
R402	59.35	60.35	1.00	2610	20	84	0.14
R402	60.35	61.35	1.00	2990	20	150	0.28
R402	61.35	62.35	1.00	2790	25	110	0.36
R402	62.35	63.35	1.00	3110	22	95	0.22
R402	63.35	64.35	1.00	2920	21	89	0.15
R402	64.35	65.35	1.00	3030	22	100	0.17
R402	65.35	66.35	1.00	2500	12	89	0.14
R402	66.35	67.35	1.00	3010	13	96	0.15
R402	67.35	68.35	1.00	3130	10	92	0.12
R402	68.35	69.35	1.00	3010	10	92	0.05
R402	69.35	70.35	1.00	3090	11	98	0.05
R402	70.35	71.35	1.00	3500	7	100	0.10
R402	71.35	72.35	1.00	3400	9	106	0.01
R402	72.35	73.35	1.00	3500	8	101	0.08
R402	73.35	74.35	1.00	3800	7	114	0.07
R402	74.35	75.60	1.25	3300	8	100	0.14
R402	75.60	76.60	1.00	2270	10	90	0.11
R402	76.60	77.60	1.00	2500	10	100	0.14
R402	77.60	78.60	1.00	3500	8	120	0.12
R402	78.60	79.60	1.00	3400	14	116	0.07
R402	79.60	80.60	1.00	2050	9	84	0.12
R402	80.60	81.60	1.00	3200	6	124	0.13
R402	81.60	82.60	1.00	2600	11	110	0.08
R402	82.60	83.60	1.00	3300	18	126	0.07
R402	83.60	84.60	1.00	3500	19	135	0.12
R402	84.60	85.60	1.00	1520	9	64	0.06
R402	85.60	86.60	1.00	2800	15	112	0.13
R402	86.60	87.60	1.00	3400	17	107	0.07
R402	87.60	88.60	1.00	3700	16	152	0.07
R402	88.60	89.15	0.55	2030	16	111	0.05

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R402	89.15	90.15	1.00	2220	29	130	0.09
R402	90.15	91.15	1.00	2190	15	92	0.10
R402	91.15	92.15	1.00	2230	22	100	0.17
R402	92.15	93.15	1.00	3900	26	230	0.18
R402	93.15	94.15	1.00	3500	17	143	0.17
R402	94.15	94.45	0.30	1840	4	71	0.08
R402	94.45	95.45	1.00	2380	43	110	0.14
R402	95.45	96.45	1.00	2850	14	170	0.07
R402	96.45	97.45	1.00	1160	28	53	0.04
R402	97.45	98.45	1.00	2060	24	130	0.11
R402	98.45	99.45	1.00	1960	26	100	0.21
R402	99.45	100.45	1.00	3300	32	145	0.13
R402	100.45	101.45	1.00	2060	16	106	0.15
R402	101.60	102.60	1.00	1980	14	94	0.15
R402	102.60	103.60	1.00	2180	31	110	0.17
R402	103.60	104.60	1.00	3800	12	154	0.24
R402	104.60	105.60	1.00	3200	17	107	0.16
R402	105.60	106.60	1.00	2090	26	96	0.20
R402	106.60	107.60	1.00	3000	25	108	0.21
R402	107.60	108.60	1.00	1850	14	79	0.10
R402	108.60	109.60	1.00	1880	14	84	0.15
R402	109.60	110.60	1.00	2700	14	94	0.21
R402	110.60	111.90	1.30	2700	14	96	0.18
R402	111.00	112.00	1.00	2220	16	86	0.23
R402	112.00	113.00	1.00	2020	15	77	0.23
R402	113.00	114.00	1.00	1700	23	71	0.23
R402	114.00	115.00	1.00	2080	40	110	0.36
R402	115.00	116.00	1.00	2060	48	120	0.32
R402	116.00	117.30	1.30	1790	59	113	0.22
R402	117.30	118.30	1.00	1730	52	140	0.40
R402	118.30	119.30	1.00	1760	53	150	0.80
R402	119.30	120.30	1.00	1780	80	140	1.08
R402	120.30	121.30	1.00	1310	29	190	2.15
R402	121.30	122.30	1.00	1820	10	190	2.35
R402	122.30	123.30	1.00	2530	41	210	1.94
R402	123.30	124.30	1.00	2650	51	72	0.24
R402	124.30	125.30	1.00	590	49	22	0.00
R402	125.30	126.30	1.00	1390	28	38	0.03
R402	126.30	127.30	1.00	1700	24	130	0.59
R402	127.30	128.30	1.00	5500	74	168	0.57
R402	128.30	129.30	1.00	4100	55	137	0.33
R402	129.30	130.30	1.00	4400	41	115	0.30
R402	130.30	131.30	1.00	3700	16	100	0.28
R402	157.80	158.80	1.00	1700	31	150	1.15
R402	158.80	159.80	1.00	1560	22	130	0.81
R402	159.80	160.80	1.00	2120	40	300	1.91

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R402	163.85	164.85	1.00	1650	29	120	0.53
R402	164.85	165.85	1.00	1860	21	160	0.64
R402	165.85	166.85	1.00	1800	39	94	0.28
R402	166.85	167.85	1.00	1700	26	93	0.25
R402	167.85	168.85	1.00	1680	18	210	0.67
R402	168.85	169.85	1.00	1700	26	136	0.45
R402	169.85	170.85	1.00	1480	16	119	0.37
R402	170.85	171.85	1.00	1730	38	82	0.23
R402	171.85	172.85	1.00	1470	16	90	0.28
R402	172.85	173.85	1.00	1550	41	99	0.41
R402	173.85	174.85	1.00	1460	32	78	0.22
R402	174.85	175.85	1.00	1560	64	64	0.16
R402	175.85	176.85	1.00	1510	24	67	0.15
R402	176.85	177.85	1.00	1560	27	94	0.21
R402	177.85	178.85	1.00	1580	29	91	0.18
R402	178.85	179.85	1.00	1750	22	91	0.22
R402	179.85	180.85	1.00	1800	51	113	0.23
R402	180.85	181.85	1.00	1370	14	82	0.15
R402	181.85	182.85	1.00	1700	22	102	0.21
R402	182.85	183.85	1.00	1760	17	115	0.26
R402	183.85	184.85	1.00	1660	14	99	0.23
R402	184.85	185.85	1.00	1320	9	85	0.16
R402	185.85	186.85	1.00	1310	9	83	0.16
R402	186.85	187.85	1.00	1690	45	108	0.27
R402	187.85	188.85	1.00	1640	20	106	0.25
R402	188.85	189.85	1.00	1310	9	84	0.19
R402	189.85	190.85	1.00	1650	21	108	0.26
R402	190.85	191.85	1.00	1490	27	97	0.27
R402	191.85	192.85	1.00	1150	121	83	0.29
R402	192.85	193.85	1.00	1180	64	67	0.36
R402	193.95	194.95	1.00	110	310	81	1.31
R402	194.95	195.95	1.00	140	310	77	1.07
R402	195.95	196.95	1.00	64	220	42	0.56
R403	8.60	9.60	1.00	710	7	41	0.14
R403	9.60	10.60	1.00	1300	50	60	0.17
R403	10.60	11.60	1.00	1840	66	112	0.25
R403	11.60	12.60	1.00	2400	21	108	0.30
R403	12.60	13.60	1.00	6700			
R403	13.60	14.60	1.00	4500			
R403	14.60	15.60	1.00	4200			
R403	38.65	39.65	1.00	1400	23	87	0.24
R403	39.65	40.65	1.00	1540	51	82	0.17
R403	40.65	41.65	1.00	1920	27	103	0.21
R403	41.65	42.65	1.00	1920	27	100	0.23
R403	42.65	43.65	1.00	2060	27	102	0.29
R403	43.65	44.65	1.00	2100	48	96	0.29

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R403	44.65	45.65	1.00	1570	105	75	0.27
R403	45.65	46.65	1.00	1870	41	86	0.26
R403	46.65	47.65	1.00	370	5	68	0.24
R403	47.65	48.65	1.00	710	5	144	0.52
R403	98.05	99.05	1.00	3200	35	138	0.23
R403	99.05	100.05	1.00	2900	39	117	0.44
R403	100.05	101.05	1.00	2400	39	147	0.64
R403	101.05	102.05	1.00	2500	29	107	0.26
R403	106.60	107.60	1.00	1460	13	162	1.24
R403	107.60	108.60	1.00	1600	14	134	1.03
R403	108.60	109.60	1.00	2200	27	270	2.08
R404	0.36	1.36	1.00	7100	44	190	0.90
R404	1.36	2.36	1.00	8800	83	210	0.98
R404	2.36	3.36	1.00	10400	100	270	1.31
R404	3.36	4.36	1.00	11300	160	330	1.63
R404	4.36	5.36	1.00	10900	160	260	1.19
R404	5.36	6.36	1.00	13300	110	380	1.78
R404	6.36	7.36	1.00	12200	140	330	1.57
R404	7.36	8.36	1.00	9100	1	280	1.27
R404	8.36	9.36	1.00	9300	67	250	1.17
R404	9.36	10.36	1.00	9900	99	230	1.06
R404	10.36	11.36	1.00	10000	72	230	1.07
R404	11.36	12.36	1.00	10200	120	260	1.10
R404	12.36	13.36	1.00	9300	240	270	1.13
R404	13.36	14.36	1.00	11900	180	320	1.46
R404	14.36	15.36	1.00	7400	50	230	1.07
R404	15.36	16.36	1.00	5400	76	140	0.58
R404	16.36	17.20	0.84	5300	57	97	0.27
R404	17.20	17.75	0.55	5700	34	85	0.24
R404	17.75	18.50	0.75	6300	88	200	1.04
R404	18.50	19.50	1.00	7600	110	180	0.91
R404	19.50	20.50	1.00	8000	150	160	0.68
R404	20.50	21.50	1.00	8800	100	130	0.51
R404	21.50	22.50	1.00	8400	96	170	0.76
R404	22.50	23.50	1.00	9500	99	170	0.76
R404	23.50	24.50	1.00	6500	76	120	0.52
R404	24.50	25.50	1.00	8300	95	180	0.75
R404	25.50	26.50	1.00	4200	46	98	0.36
R404	26.50	27.50	1.00	4500	42	87	0.29
R404	27.50	28.50	1.00	6100	56	140	0.59
R404	28.50	29.50	1.00	5800	49	100	0.42
R404	29.50	30.50	1.00	6800	78	110	0.44
R404	30.50	31.50	1.00	5000	64	83	0.23
R404	31.50	32.50	1.00	1810	41	53	0.15
R404	32.50	33.50	1.00	2380	38	64	0.27
R404	33.50	34.50	1.00	1690	23	60	0.18

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R404	34.50	35.50	1.00	2530	38	85	0.29
R404	35.50	36.50	1.00	2410	42	100	0.50
R404	36.50	37.50	1.00	1690	65	59	0.26
R404	37.50	38.50	1.00	1590	44	58	0.21
R404	38.50	39.50	1.00	1580	28	65	0.20
R404	39.50	40.50	1.00	1700	33	72	0.25
R404	40.50	41.50	1.00	1550	39	53	0.09
R404	41.50	42.50	1.00	1760	63	58	0.13
R404	42.50	43.50	1.00	1870	43	69	0.20
R404	43.50	44.50	1.00	1390	15	47	0.07
R404	50.36	51.36	1.00	1320	10	79	0.22
R404	51.36	52.36	1.00	1100	10	62	0.11
R404	52.36	53.36	1.00	1010	10	65	0.18
R404	53.36	54.36	1.00	1030	10	54	0.07
R404	54.36	55.36	1.00	1060	25	28	0.02
R404	55.36	56.36	1.00	1410	55	62	0.16
R404	56.36	57.36	1.00	1750	19	78	0.25
R404	58.15	59.15	1.00	2490	49	160	0.57
R404	59.15	60.15	1.00	4900	17	130	0.46
R404	60.15	61.15	1.00	6300	36	480	2.03
R404	61.15	62.15	1.00	4700	68	190	0.73
R405	31.00	32.00	1.00	95	8	20	
R405	32.00	33.00	1.00	164	33	50	
R405	33.00	34.00	1.00	190	120	90	18.00
R405	34.00	35.00	1.00	220	66	130	30.10
R405	41.00	42.00	1.00	95	65	44	35.10
R405	42.00	43.00	1.00	65	44	23	19.00
R405	43.00	45.00	2.00	64	57	26	
R405	45.00	47.00	2.00	53	29	30	
R405	47.00	48.00	1.00	62	27	18	
R405	48.00	49.00	1.00	63	59	15	
R405	49.00	50.00	1.00	60	54	15	
R405	50.00	51.00	1.00	114	162	41	
R405	51.00	52.00	1.00	49	15	18	
R405	52.00	53.00	1.00	152	69	30	
R405	53.00	54.00	1.00	120	100	64	30.20
R405	54.00	55.00	1.00	64	32	14	9.21
R405	71.00	72.00	1.00	63	43	50	
R405	72.00	73.00	1.00	83	80	29	18.60
R405	73.00	74.00	1.00	150	170	48	29.40
R405	77.00	79.00	2.00	95	230	45	
R405	79.00	81.00	2.00	115	184	63	
R405	81.00	83.00	2.00	86	119	36	
R405	83.00	84.00	1.00	119	250	58	
R405	84.00	85.00	1.00	240	260	40	15.30
R405	85.00	86.00	1.00	120	94	69	

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R405	86.00	87.00	1.00	105	30	53	
R405	87.00	88.00	1.00	33	13	19	
R405	88.00	89.00	1.00	36	15	13	
R405	89.00	90.00	1.00	22	6	14	
R405	90.00	91.00	1.00	20	15	16	
R405	91.00	92.00	1.00	63	15	36	
R405	91.75	94.00	2.25	1000	4	50	
R405	95.00	96.00	1.00	1030	1	127	1.84
R405	96.00	97.00	1.00	1040	2	74	0.88
R405	97.00	98.00	1.00	1640	3	104	1.19
R405	98.00	99.00	1.00	1380	2	70	0.76
R405	99.00	100.00	1.00	1350	99	66	0.84
R405	100.00	101.00	1.00	1710	6	95	1.00
R405	101.00	102.00	1.00	1800	16	136	1.53
R405	102.00	103.00	1.00	1810	54	90	1.03
R405	103.00	104.00	1.00	1460	12	74	0.66
R405	104.00	105.00	1.00	1260	62	73	0.85
R405	105.00	106.00	1.00	1780	7	99	0.96
R405	106.00	108.00	2.00	1710	12	101	1.05
R405	112.50	114.50	2.00	620	2	113	1.59
R405	114.50	115.50	1.00	860	2	104	1.72
R405	115.50	116.00	0.50	940	10	140	2.80
R405	116.00	118.00	2.00	700	2	130	2.28
R405	118.00	120.00	2.00	780	2	180	2.54
R405	123.50	125.50	2.00	1680	10	116	1.19
R405	125.50	127.50	2.00	2500	29	107	0.97
R405	127.50	129.50	2.00	1810	8	107	1.03
R405	129.50	131.50	2.00	1730	54	90	0.76
R405	131.50	133.50	2.00	1720	120	98	1.19
R405	133.50	135.50	2.00	1830	177	97	0.72
R405	135.50	137.50	2.00	1520	101	94	0.97
R405	137.50	139.50	2.00	1260	7	200	2.23
R405	139.50	141.50	2.00	1490	360	152	1.68
R405	141.50	143.50	2.00	1230	144	135	1.58
R405	143.50	145.50	2.00	1250	20	123	1.32
R405	145.50	147.50	2.00	1140	31	113	1.07
R405	155.80	157.80	2.00	92	37	64	
R405	157.80	159.80	2.00	250	135	45	
R405	184.60	186.60	2.00	141	15	44	
R405	186.60	187.60	1.00	1250	5	73	
R406	28.40	30.40	2.00	1340	122	102	0.62
R406	30.40	32.40	2.00	1750	99	100	0.59
R406	32.40	34.40	2.00	1460	95	84	0.26
R406	34.40	36.40	2.00	880	63	93	0.26
R406	36.40	38.40	2.00	1040	74	99	0.42
R406	38.40	40.40	2.00	1470	103	126	0.46

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R406	40.40	41.70	1.30	1240	130	89	0.34
R406	41.70	43.70	2.00	1250	280	630	5.30
R406	43.70	45.70	2.00	1140	290	95	0.99
R406	45.70	47.70	2.00	770	320	87	0.95
R406	47.70	49.70	2.00	2400	156	105	0.81
R406	49.70	51.70	2.00	1900	112	97	0.55
R406	51.70	52.70	1.00	2600	126	85	0.12
R406	141.60	143.60	2.00	1690	41	99	
R406	143.60	145.60	2.00	1760	33	107	
R406	145.60	147.60	2.00	1760	27	110	
R406	147.60	149.60	2.00	1510	37	95	
R406	149.60	151.60	2.00	1450	44	105	
R406	151.60	153.60	2.00	1810	32	100	
R406	153.60	155.60	2.00	1730	54	116	
R406	155.60	157.60	2.00	1570	12	102	
R406	157.60	159.60	2.00	1600	24	98	
R406	159.60	161.60	2.00	1730	39	114	
R406	161.60	163.60	2.00	1820	33	125	
R406	163.60	165.60	2.00	1720	29	149	
R406	165.60	167.60	2.00	1460	25	102	
R406	167.60	169.60	2.00	1300	21	98	
R406	189.55	191.55	2.00	2900	97	164	
R406	191.55	193.55	2.00	2800	65	130	
R406	193.55	195.55	2.00	2900	69	143	
R406	195.55	197.55	2.00	1930	59	123	
R406	197.55	199.55	2.00	3000	75	159	
R406	199.55	201.55	2.00	2900	80	147	
R406	201.55	203.55	2.00	3000	86	133	
R406	203.55	205.55	2.00	2700	85	152	
R406	205.55	206.45	0.90	2800	80	151	
R406	206.45	207.45	1.00	2500	71	138	0.78
R406	207.45	208.45	1.00	2300	55	132	0.68
R406	208.45	209.45	1.00	2400	50	139	0.65
R406	209.45	210.45	1.00	1560	38	107	0.44
R406	210.45	212.45	2.00	1660	27	113	
R406	212.45	214.45	2.00	1610	31	112	
R406	214.45	216.45	2.00	2010	47	113	
R406	216.45	218.45	2.00	2010	60	120	
R406	218.45	220.45	2.00	2600	62	115	
R406	220.45	222.45	2.00	2700	61	109	
R408	37.30	38.30	1.00	83	157	37	8.60
R408	38.30	39.30	1.00	123	390	44	17.30
R408	39.30	40.30	1.00	63	100	6	3.10
R408	40.30	41.30	1.00	155	420	66	22.49
R408	41.30	42.30	1.00	81	330	41	8.00
R408	42.30	43.30	1.00	79	143	39	8.90

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R408	43.30	44.30	1.00	53	95	29	6.10
R408	44.30	45.30	1.00	63	29	52	8.50
R408	45.30	46.30	1.00	140	580	81	14.60
R408	46.30	47.30	1.00	157	480	26	9.10
R408	47.30	48.30	1.00	96	220	12	5.10
R408	48.30	49.30	1.00	198	320	65	19.10
R408	49.30	50.30	1.00	140	370	49	14.80
R408	62.10	63.10	1.00	1700	109	135	1.71
R408	63.10	64.10	1.00	1820	44	94	1.17
R408	64.10	65.10	1.00	1800	55	88	0.67
R408	65.10	66.10	1.00	1970	109	172	2.91
R408	66.10	67.10	1.00	1040	15	121	1.65
R408	67.10	68.10	1.00	1110	4	109	1.19
R408	68.10	69.10	1.00	1390	19	107	1.05
R408	69.10	70.10	1.00	1800	23	63	0.45
R408	70.10	71.10	1.00	1830	86	70	0.53
R408	71.10	72.10	1.00	1860	68	77	0.60
R408	72.10	73.10	1.00	1780	20	92	0.81
R408	73.10	74.10	1.00	1580	13	82	0.74
R408	74.10	75.10	1.00	1760	22	59	0.33
R408	75.10	76.10	1.00	1340	4	151	1.14
R408	76.10	77.10	1.00	1690	24	97	0.73
R408	77.10	77.60	0.50	1920	130	81	0.63
R409	63.15	64.15	1.00	126	3800	50	1.42
R409	64.15	65.15	1.00	134	5100	107	9.70
R409	65.15	66.15	1.00	270	870	54	22.20
R409	66.15	67.15	1.00	136	810	37	24.40
R409	67.15	68.50	1.35	136	360	52	4.57
R409	70.90	71.90	1.00	37	340	8	0.16
R409	71.90	72.90	1.00	34	800	10	0.53
R409	72.90	73.90	1.00	105	6000	59	8.80
R409	73.90	74.90	1.00	156	7200	46	5.60
R409	74.90	75.90	1.00	460	12600	68	19.95
R409	75.90	77.10	1.20	36	1370	151	2.39
R409	77.10	78.10	1.00	55	7800	26	2.10
R409	78.10	78.50	0.40	98	710	63	4.75
R409	80.60	81.60	1.00	150	6300	117	10.55
R409	81.60	82.80	1.20	108	420	109	5.96
R409	157.70	158.70	1.00	2600	86	137	1.89
R409	158.70	159.70	1.00	3500	108	133	1.83
R409	159.70	160.70	1.00	2800	119	117	1.67
R409	160.70	161.70	1.00	3300	51	148	1.37
R409	161.70	162.70	1.00	4200	22	125	1.52
R409	162.70	163.70	1.00	2800	56	135	1.87
R409	163.70	164.70	1.00	750	4	103	0.89
R409	164.70	165.70	1.00	610	10	52	0.40

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R409	165.70	166.70	1.00	152	3	40	0.11
R409	166.70	167.60	0.90	160	35	37	0.09
R409	167.60	168.60	1.00	1400	19	178	1.54
R409	168.60	169.60	1.00	1680	145	72	0.32
R409	169.60	170.60	1.00	990	26	89	0.22
R409	170.60	171.60	1.00	1490	77	89	0.22
R409	171.60	172.60	1.00	1100	84	97	0.45
R409	172.60	173.60	1.00	1320	110	61	0.23
R409	173.60	174.60	1.00	1040	86	116	0.80
R409	174.60	175.60	1.00	1370	6	148	1.22
R409	175.60	176.60	1.00	1190	8	84	0.34
R409	176.60	177.60	1.00	530	3	102	0.43
R409	179.00	180.00	1.00	1250	8	89	0.36
R409	180.00	181.00	1.00	1160	116	83	0.25
R409	181.00	182.00	1.00	990	10	107	0.34
R409	183.05	184.05	1.00	850	5	35	0.06
R409	184.05	184.55	0.50	1050	3	100	0.16
R409	185.85	186.85	1.00	1230	13	83	0.18
R409	186.85	187.85	1.00	1790	46	84	0.22
R409	187.85	188.85	1.00	2200	20	88	0.18
R409	188.85	189.85	1.00	3100	11	97	0.14
R409	189.85	190.85	1.00	3000	20	99	0.08
R409	190.85	191.85	1.00	1740	13	77	0.09
R409	191.85	192.85	1.00	2600	1	94	0.17
R409	192.85	193.85	1.00	2800	9	95	0.24
R409	193.85	194.85	1.00	3100	0	102	0.24
R409	194.85	195.85	1.00	2300	0	97	0.22
R409	195.85	196.85	1.00	2100	2	72	0.13
R409	197.75	198.75	1.00	2600	39	83	0.22
R409	198.75	199.75	1.00	4300	0	131	0.20
R409	199.75	200.75	1.00	3200	1	110	0.25
R409	200.75	201.75	1.00	3500	0	109	0.18
R409	201.75	202.75	1.00	4700	0	122	0.17
R409	202.75	203.75	1.00	3000	8	99	0.15
R409	203.75	204.75	1.00	3300	15	111	0.25
R409	204.75	205.75	1.00	2500	8	85	0.23
R409	205.80	207.80	2.00	4000	13	121	0.25
R409	207.80	209.80	2.00	3100	15	115	0.25
R409	209.80	211.80	2.00	3100	18	118	0.30
R409	211.80	213.80	2.00	3200	23	121	0.35
R409	213.80	215.80	2.00	4100	30	131	0.39
R409	215.80	217.80	2.00	3500	19	108	0.30
R409	217.80	219.80	2.00	3600	17	108	0.31
R409	219.80	221.80	2.00	3300	18	107	0.30
R409	221.80	223.80	2.00	3300	20	106	0.30
R409	223.80	225.80	2.00	3200	21	112	0.21

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R409	225.80	227.80	2.00	3000	21	107	0.21
R409	227.80	229.80	2.00	3400	20	130	0.27
R409	229.80	231.80	2.00	3200	12	110	0.24
R409	231.80	233.80	2.00	3400	8	107	0.20
R409	233.80	235.80	2.00	3100	7	101	0.15
R409	235.80	237.80	2.00	3400	6	107	0.22
R409	237.80	239.80	2.00	2900	5	92	0.36
R409	239.80	241.80	2.00	3500	6	106	0.20
R409	241.80	243.80	2.00	3200	7	93	0.20
R409	243.80	245.80	2.00	3700	10	103	0.21
R409	245.80	247.80	2.00	3700	11	101	0.21
R409	247.80	248.80	1.00	3900	10	108	0.25
R410	7.20	8.20	1.00	5500	144	134	0.74
R410	8.20	9.20	1.00	5100	114	121	0.69
R410	9.20	10.20	1.00	2600	270	102	0.26
R410	10.20	11.20	1.00	9400	470	300	1.01
R410	11.20	12.20	1.00	8000	310	240	0.87
R410	12.20	13.20	1.00	7500	270	163	0.79
R410	13.20	14.20	1.00	8800	310	240	1.02
R410	14.20	15.20	1.00	7900	200	230	1.09
R410	15.20	16.20	1.00	8200	173	176	0.97
R410	16.20	17.20	1.00	8000	200	162	0.82
R410	17.20	18.20	1.00	9000	147	230	0.89
R410	18.20	19.20	1.00	10200	400	280	1.32
R410	19.20	20.20	1.00	11900	630	320	1.43
R410	20.20	21.20	1.00	9900	460	290	1.25
R410	21.20	22.20	1.00	4700	210	159	0.81
R410	22.20	23.20	1.00	7900	280	250	0.96
R410	23.20	24.20	1.00	15900	870	550	2.15
R410	24.20	25.20	1.00	13400	260	530	1.83
R410	25.20	26.20	1.00	7100	190	280	1.03
R410	26.20	27.20	1.00	4100	7	136	0.56
R410	27.20	28.20	1.00	250	6	16	0.03
R410	28.20	29.20	1.00	260	1	10	0.01
R410	29.20	30.20	1.00	470	5	20	0.01
R410	30.20	31.20	1.00	640	42	93	0.19
R410	31.20	32.20	1.00	620	15	46	0.13
R410	32.20	33.20	1.00	280	0	28	0.07
R410	33.20	34.20	1.00	390	9	25	0.05
R410	34.20	35.20	1.00	140	1	9	0.01
R410	35.20	36.20	1.00	188	1	12	0.01
R410	36.20	37.20	1.00	182	2	20	0.03
R410	37.20	38.20	1.00	192	22	22	0.03
R410	38.20	39.20	1.00	600	8	62	0.12
R410	39.20	40.20	1.00	1180	36	160	0.29
R410	40.20	41.20	1.00	1000	7	127	0.20

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R410	41.20	42.20	1.00	1740	4	310	0.45
R410	42.20	43.20	1.00	1110	4	102	0.22
R410	43.20	44.20	1.00	800	7	140	0.51
R410	44.20	44.55	0.35	840	35	74	0.10
R410	44.55	45.00	0.45	133	2	10	0.01
R410	45.00	46.00	1.00	166	4	6	0.01
R410	46.00	47.00	1.00	1250	140	26	0.24
R410	47.00	48.00	1.00	2700	410	71	0.52
R410	48.00	49.00	1.00	1870	21	115	1.38
R410	49.00	50.00	1.00	650	52	32	0.31
R410	50.00	51.00	1.00	1260	91	73	0.42
R410	51.00	52.00	1.00	1930	290	84	0.52
R410	52.00	53.00	1.00	350	11	16	0.05
R410	53.00	54.00	1.00	112	2	6	0.01
R410	54.00	55.00	1.00	480	34	32	0.29
R410	55.00	56.00	1.00	123	1	51	0.61
R410	56.00	57.00	1.00	129	1	11	0.02
R410	57.00	58.00	1.00	172	1	8	0.01
R410	58.00	59.00	1.00	203	1	14	0.01
R410	59.00	60.00	1.00	300	1	17	0.01
R410	60.00	61.00	1.00	620	28	94	0.85
R410	61.00	62.00	1.00	460	72	89	0.75
R410	62.00	63.00	1.00	40	20	17	0.06
R410	63.00	64.00	1.00	65	8	7	0.01
R410	64.00	65.00	1.00	109	60	4	0.01
R410	65.00	66.00	1.00	85	31	7	0.01
R410	66.00	67.00	1.00	7	65	4	0.01
R410	67.00	68.00	1.00	113	1	7	0.01
R410	68.00	69.00	1.00	118	1	6	0.01
R410	69.00	70.30	1.30	100	5	4	0.01
R410	70.30	72.20	1.90	210	1	164	1.12
R410	72.20	73.20	1.00	920	1	63	0.33
R410	73.20	74.20	1.00	1150	4	10	1.09
R410	74.20	75.20	1.00	930	90	124	0.84
R410	75.20	76.20	1.00	1450	13	75	0.30
R410	76.20	77.20	1.00	1210	45	168	1.18
R410	77.20	78.20	1.00	1520	260	48	0.21
R410	78.20	79.20	1.00	1630	15	31	0.09
R410	79.20	80.20	1.00	1730	46	156	0.80
R410	80.20	81.20	1.00	1970	97	49	0.19
R410	81.20	82.20	1.00	1650	8	108	0.58
R410	82.20	83.20	1.00	1120	15	82	0.33
R410	83.20	84.20	1.00	1290	86	52	0.22
R410	84.20	85.20	1.00	1070	78	50	0.22
R410	85.20	86.20	1.00	1320	16	91	0.39
R410	86.20	87.20	1.00	1260	4	85	0.30

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R410	87.20	88.20	1.00	1580	29	126	0.53
R410	88.20	89.20	1.00	1380	30	54	0.19
R410	89.20	90.20	1.00	420	7	13	0.02
R410	90.20	91.20	1.00	600	2	63	0.23
R410	91.20	92.20	1.00	910	8	56	0.22
R410	92.20	93.20	1.00	1060	14	78	0.34
R410	93.20	94.20	1.00	1080	45	61	0.26
R410	94.20	95.20	1.00	880	62	61	0.19
R410	95.20	96.20	1.00	510	3	81	0.39
R410	96.20	97.20	1.00	197	2	117	0.55
R410	97.20	98.20	1.00	890	119	158	0.76
R410	98.20	99.20	1.00	760	14	123	0.49
R410	99.20	100.20	1.00	600	5	109	0.63
R410	100.20	101.20	1.00	270	2	74	0.60
R410	101.20	102.20	1.00	154	1	20	0.11
R411	9.30	10.30	1.00	1970	21	62	0.12
R411	10.30	11.30	1.00	2500	11	86	0.16
R411	11.30	12.30	1.00	2800	51	116	0.28
R411	12.30	14.30	2.00	2130	9	76	0.23
R411	14.30	16.30	2.00	2780	13	113	0.23
R411	16.30	18.30	2.00	2170	14	71	0.18
R411	18.30	20.30	2.00	2450	39	75	0.15
R411	20.30	21.30	1.00	2300	19	72	0.15
R411	21.30	22.30	1.00	1900	23	53	0.13
R411	22.30	23.30	1.00	1830	19	61	0.09
R411	23.30	25.30	2.00	2270	18	85	0.17
R411	25.30	27.30	2.00	2270	20	84	0.24
R411	27.30	29.30	2.00	2730	28	98	0.21
R411	29.30	31.30	2.00	2680	50	91	0.16
R411	31.30	32.30	1.00	3900	61	118	0.19
R411	32.30	33.30	1.00	4100	31	111	0.24
R411	33.30	34.30	1.00	4400	27	111	0.10
R411	34.30	36.30	2.00	3820	90	122	0.16
R411	36.30	38.30	2.00	3400	44	100	0.20
R411	38.30	40.30	2.00	2660	39	98	0.21
R411	40.30	41.30	1.00	2080	39	81	0.20
R411	41.30	42.30	1.00	2000	34	90	0.22
R411	42.30	43.30	1.00	1300	38	77	0.25
R411	43.30	44.30	1.00	1450	13	102	0.46
R412	27.40	28.40	1.00	4100	18	144	1.27
R412	28.40	29.40	1.00	4700	11	174	1.52
R412	29.40	30.40	1.00	5900	3	270	1.98
R412	30.40	31.40	1.00	9300	162	134	1.29
R412	31.40	32.40	1.00	4100	380	102	0.75
R412	32.40	33.40	1.00	6500	920	128	0.84
R412	33.40	34.40	1.00	4600	147	170	0.49

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R412	34.40	35.40	1.00	3000	49	210	0.80
R412	35.40	36.40	1.00	1300	53	95	0.92
R412	36.40	37.40	1.00	1550	12	78	0.45
R412	37.40	38.40	1.00	2600	11	310	1.43
R412	38.40	39.40	1.00	4400	134	300	1.64
R412	39.40	40.40	1.00	8300	510	370	1.49
R412	40.40	41.40	1.00	6200	390	240	1.13
R412	41.40	42.40	1.00	5600	390	210	0.83
R412	42.40	43.40	1.00	5900	370	230	0.63
R412	43.40	44.40	1.00	6100	160	420	1.73
R412	44.40	45.40	1.00	8100	370	830	3.60
R412	45.40	46.40	1.00	5300	400	810	3.70
R412	46.40	47.40	1.00	6700	360	350	1.52
R412	47.40	48.40	1.00	7200	128	490	2.01
R412	48.40	49.40	1.00	6900	22	760	3.85
R412	49.40	50.40	1.00	8600	36	1340	3.90
R412	50.40	51.40	1.00	670	1	77	0.49
R412	51.40	52.40	1.00	5200	164	370	2.40
R412	52.40	53.40	1.00	7200	220	580	3.38
R412	53.40	54.40	1.00	5100	310	360	1.85
R412	54.40	55.40	1.00	3600	170	64	0.34
R412	55.40	56.40	1.00	8600	630	440	1.96
R412	56.40	57.40	1.00	6400	81	638	2.90
R412	57.40	58.40	1.00	5100	330	440	1.64
R412	58.40	59.40	1.00	6000	590	410	1.62
R412	59.40	60.40	1.00	7200	960	370	1.98
R412	60.40	61.40	1.00	9700	2600	460	1.85
R412	61.40	62.40	1.00	6900	2200	290	1.32
R412	62.40	63.40	1.00	5100	400	240	1.06
R412	63.40	64.40	1.00	12700	700	590	2.30
R412	64.40	65.40	1_00	3000	150	176	0.76
R412	65.40	66.40	1.00	3800	133	180	0.73
R412	66.40	67.40	1.00	9800	510	530	1.77
R412	67.40	68.40	1.00	6100	230	360	1.30
R412	68.40	69.40	1.00	3700	145	250	0.81
R412	69.40	70.40	1.00	1940	95	129	0.47
R412	70.40	71.40	1.00	3700	157	181	0.69
R412	71.40	72.40	1.00	2400	88	106	0.28
R412	72.40	73.40	1.00	2900	85	117	0.63
R412	73.40	74.40	1.00	1500	51	81	0.34
R412	74.40	75.40	1.00	3300	210	230	0.82
R412	75.40	76.40	1.00	2800	105	240	0.76
R412	76.40	77.40	1.00	1410	80	230	0.84
R412	77.40	78.40	1.00	1060	62	123	0.44
R412	78.40	79.40	1.00	880	56	107	0.37
R412	79.40	80.40	1.00	1130	104	82	0.31

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R412	80.40	81.40	1.00	1610	260	97	0.45
R412	81.40	82.40	1.00	1190	98	155	0.73
R412	82.40	83.40	1.00	1060	6	88	0.30
R412	83.40	84.40	1.00	460	14	89	0.31
R412	90.30	91.30	1.00	450	2	30	0.40
R412	91.30	92.05	0.75	340	3	43	14.00
R412	92.20	93.20	1.00	890	450	102	0.84
R412	93.20	94.20	1.00	1720	7	94	0.71
R412	94.20	95.20	1.00	1470	14	91	0.59
R412	95.20	96.20	1.00	1260	36	71	0.53
R412	100.30	101.30	1.00	35	4	23	1.45
R413	5.80	6.80	1.00	3000	19	103	0.37
R413	6.80	7.80	1.00	3200	17	107	0.21
R413	7.80	8.80	1.00	3100	18	115	0.41
R413	8.80	9.80	1.00	3000	17	113	0.46
R413	9.80	10.80	1.00	3000	17	112	0.39
R413	10.80	11.80	1.00	3200	18	112	0.56
R413	11.80	12.80	1.00	3300	19	112	0.39
R413	12.80	13.80	1.00	2900	16	110	0.53
R413	13.80	14.80	1.00	3100	19	120	0.56
R413	14.80	15.80	1.00	3300	20	124	0.59
R413	15.80	16.80	1.00	2600	17	155	0.40
R413	16.80	17.80	1.00	2700	14	111	0.24
R413	17.80	18.80	1.00	2700	15	107	0.22
R413	18.80	19.80	1.00	2700	11	106	0.15
R413	43.00	45.00	2.00	2400	6	87	0.12
R413	45.00	46.00	1.00	2500	5	89	0.14
R413	46.00	48.00	2.00	2400	6	89	0.12
R413	48.00	50.00	2.00	2500	5	96	0.12
R413	50.00	51.00	1.00	2600	6	98	0.10
R413	51.00	53.00	2.00	2800	7	104	0.14
R413	53.00	55.00	2.00	2500	6	96	0.18
R413	55.00	56.00	1.00	2600	7	100	0.15
R413	56.00	58.00	2.00	2800	9	109	0.19
R413	58.00	60.00	2.00	2700	10	119	0.20
R413	60.00	61.00	1.00	2600	10	116	0.20
R413	61.00	63.00	2.00	2900	17	137	0.16
R413	63.00	65.00	2.00	3000	12	113	0.20
R413	65.00	66.00	1.00	3000	10	111	0.17
R413	66.00	68.00	2.00	2600	14	97	0.17
R413	68.00	70.00	2.00	2900	14	102	0.25
R413	70.00	71.00	1.00	2700	17	106	0.30
R413	71.00	73.00	2.00	3000	15	107	0.28
R413	73.00	74.00	1.00	3000	33	142	0.25
R413	74.00	75.00	1.00	6500	32	330	0.79
R413	75.00	76.00	1.00	3000	21	122	0.23

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R413	76.00	77.00	1.00	3800	26	167	0.63
R413	77.00	78.00	1.00	4200	27	240	0.82
R413	78.00	79.00	1.00	2900	21	138	0.33
R413	79.00	80.00	1.00	3100	26	123	0.43
R413	80.00	81.00	1.00	3300	23	150	0.66
R413	81.00	82.00	1.00	2600	14	360	1.25
R413	82.00	83.00	1.00	2900	18	172	0.75
R413	83.00	84.00	1.00	3300	25	122	0.44
R413	84.00	85.00	1.00	3900	28	131	0.39
R413	85.00	86.00	1.00	2800	16	168	0.53
R413	86.00	87.00	1.00	2600	21	134	0.45
R413	87.00	88.00	1.00	2900	21	104	0.29
R413	88.00	90.00	2.00	3000	21	108	0.29
R413	90.00	91.00	1.00	3300	23	150	0.23
R413	91.00	92.00	1.00	1180	9	61	0.11
R413	92.00	93.00	1.00	3400	15	260	0.82
R413	93.00	94.00	1.00	2500	14	122	0.34
R413	94.00	95.00	1.00	3100	17	154	0.50
R413	95.00	96.00	1.00	2900	28	130	0.41
R413	96.00	97.00	1.00	300	21	176	0.71
R413	97.00	98.00	1.00	300	22	146	0.38
R413	98.00	99.00	1.00	3200	24	150	0.54
R413	99.00	100.00	1.00	3400	23	220	0.95
R413	100.00	101.00	1.00	2900	22	170	0.85
R413	101.00	102.00	1.00	5900	56	420	1.84
R413	102.00	103.00	1.00	6000	43	240	0.81
R413	103.00	104.00	1.00	6600	48	270	1.01
R413	104.00	105.00	1.00	7000	54	280	0.96
R413	105.00	106.00	1.00	2500	19	99	0.45
R413	106.00	107.00	1.00	5900	32	122	0.79
R413	107.00	108.00	1.00	7800	49	166	0.95
R413	108.00	109.00	1.00	9200	43	230	1.05
R413	109.00	110.00	1.00	3700	29	174	1.47
R413	110.00	111.00	1.00	400	23	250	1.48
R413	111.00	112.00	1.00	7700	52	310	2.21
R413	112.00	113.00	1.00	9700	70	380	2.41
R413	113.00	114.00	1.00	8800	61	260	1.96
R413	114.00	115.00	1.00	5600	35	153	1.26
R413	115.00	116.00	1.00	7200	55	180	1.62
R413	116.00	117.00	1.00	8800	53	360	2.66
R413	117.00	118.00	1.00	6200	42	400	3.18
R413	118.00	119.00	1.00	6200	45	220	1.40
R413	119.00	120.00	1.00	4300	57	104	0.47
R413	120.00	121.00	1.00	7900	56	240	1.09
R413	121.00	122.00	1.00	6500	46	260	1.25
R413	122.00	123.00	1.00	6200	60	300	1.73

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R413	123.00	124.00	1.00	3400	26	264	1.13
R413	124.00	125.00	1.00	3900	17	270	1.64
R413	125.00	126.00	1.00	4600	32	175	1.00
R413	126.00	127.00	1.00	4300	26	141	0.65
R413	127.00	128.00	1.00	2600	17	119	0.47
R413	128.00	129.00	1.00	3100	16	126	0.46
R413	129.00	130.00	1.00	2900	17	106	0.37
R413	130.00	131.00	1.00	3400	27	128	0.39
R413	131.00	132.00	1.00	4100	18	146	0.56
R413	132.00	133.00	1.00	2700	14	101	0.26
R413	133.00	134.00	1.00	3200	20	133	0.47
R413	134.00	135.00	1.00	3200	19	121	0.43
R413	135.00	136.00	1.00	3600	22	126	0.50
R413	136.00	137.00	1.00	3500	25	125	0.46
R413	137.00	138.00	1.00	3900	16	130	0.39
R413	138.00	139.00	1.00	3000	42	99	0.30
R413	139.00	140.00	1.00	3000	43	96	0.32
R413	140.00	141.00	1.00	2900	26	91	0.32
R413	141.00	142.00	1.00	2900	26	94	0.31
R413	142.00	143.00	1.00	2900	17	104	0.37
R413	143.00	144.00	1.00	3100	17	102	0.35
R413	144.00	145.00	1.00	3000	17	100	0.37
R413	145.00	146.00	1.00	3200	21	131	0.60
R413	146.00	147.00	1.00	3300	27	114	0.34
R413	147.00	148.00	1.00	3300	27	114	0.33
R413	148.00	149.00	1.00	3000	21	115	0.46
R413	149.00	150.00	1.00	2900	14	121	0.50
R413	150.00	151.00	1.00	2700	32	124	0.47
R413	151.00	152.00	1.00	3000	33	122	0.34
R413	152.00	153.00	1.00	2700	31	117	0.44
R413	153.00	154.00	1.00	2400	11	98	0.23
R413	154.00	155.00	1.00	3200	7	111	0.50
R413	155.00	156.00	1.00	3000	18	167	0.73
R413	156.00	157.00	1.00	2600	24	111	0.57
R413	157.00	158.00	1.00	2500	24	109	0.46
R413	158.00	159.00	1.00	2500	25	116	0.42
R413	159.00	160.00	1.00	2800	21	150	0.65
R413	160.00	161.00	1.00	2800	22	112	0.35
R413	161.00	162.00	1.00	2700	23	103	0.34
R413	162.00	163.00	1.00	3100	81	115	0.41
R413	163.00	164.00	1.00	2700	14	172	0.97
R413	164.00	165.00	1.00	2900	13	170	1.08
R413	165.00	166.00	1.00	3100	20	167	0.84
R413	166.00	167.00	1.00	3200	35	123	0.30
R413	167.00	168.00	1.00	3200	35	129	0.35
R413	168.00	169.00	1.00	2500	41	97	0.31

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R413	169.00	170.00	1.00	3100	50	93	0.28
R414	44.50	45.50	1.00	1740	760	780	11.10
R414	45.50	46.50	1.00	1860	750	360	3.80
R414	46.50	47.50	1.00	1560	380	143	1.29
R414	47.50	48.50	1.00	1660	370	109	1.13
R414	172.10	173.10	1.00	2900	52	96	0.29
R414	173.10	174.10	1.00	3000	65	106	0.89
R414	174.10	175.10	1.00	2600	57	108	1.00
R414	196.60	197.60	1.00	2000	21	107	0.24
R414	197.60	198.60	1.00	1410	12	86	0.22
R414	198.60	199.60	1.00	3000	34	113	0.30
R414	199.60	200.60	1.00	3000	32	103	0.43
R414	200.60	201.60	1.00	2900	29	96	0.24
R414	201.60	202.60	1.00	3000	31	124	0.35
R414	202.60	203.60	1.00	2900	29	101	0.40
R414	203.60	204.60	1.00	3000	31	96	0.48
R414	204.60	205.60	1.00	2800	28	100	0.49
R414	205.60	206.60	1.00	2800	27	101	0.70
R414	206.60	208.60	2.00	2600	27	106	0.32
R414	212.00	213.00	1.00	3100	28	118	0.75
R414	213.00	214.00	1.00	2900	31	115	0.62
R414	214.00	215.00	1.00	2700	23	104	0.45
R414	231.00	232.00	1.00	2800	47	107	0.72
R414	232.00	233.00	1.00	2700	50	105	0.83
R414	233.00	234.00	1.00	2800	85	114	1.17
R414	234.00	235.00	1.00	2200	83	89	0.75
R414	235.00	236.00	1.00	1800	54	79	0.76
R414	236.00	237.00	1.00	2600	76	103	0.77
R414	237.00	238.00	1.00	2400	94	97	1.25
R414	238.00	239.00	1.00	1710	74	79	1.12
R414	239.00	240.00	1.00	2000	91	93	1.27
R414	240.00	241.00	1.00	1900	88	95	1.03
R414	241.00	242.00	1.00	2400	101	90	0.77
R414	242.00	243.00	1.00	2700	139	9	0.87
R414	243.00	244.00	1.00	2700	126	99	0.90
R414	244.00	245.00	1.00	2900	230	96	0.98
R414	265.00	266.00	1.00	2800	82	111	0.53
R414	266.00	267.00	1.00	2900	85	99	0.43
R414	267.00	268.00	1.00	2800	65	98	0.41
R414	268.00	269.00	1.00	3100	55	95	0.27
R414	273.20	273.70	0.50	4400	320	480	4.80
R414	273.70	274.70	1.00	1380	131	65	0.93
R414	276.80	277.80	1.00	2700	165	109	0.96
R414	277.80	278.80	1.00	2800	151	93	0.85
R414	278.80	279.40	0.60	1430	128	108	1.64
R414	279.40	280.40	1.00	2700	122	88	1.02

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R414	297.90	298.90	1.00	300	68	105	0.79
R414	298.90	299.90	1.00	1240	51	73	0.34
R414	301.85	302.60	0.75	2600	52	103	0.66
R414	305.15	306.15	1.00	2800	54	108	0.50
R414	306.15	307.15	1.00	2500	59	110	0.60
R414	307.15	308.15	1.00	2400	37	94	0.39
R414	311.00	312.00	1.00	2900	63	99	0.35
R414	312.00	313.00	1.00	1450	37	94	0.76
R414	313.00	314.00	1.00	1800	104	86	0.64
R414	314.00	315.00	1.00	2200	113	104	0.63
R414	315.00	316.00	1.00	2100	108	113	0.98
R414	316.00	317.00	1.00	2300	110	111	0.35
R414	319.70	32010.00	1.00	3300	171	150	2.15
R414	320.70	321.70	1.00	4200	137	152	1.71
R414	321.70	322.70	1.00	3000	110	125	0.67
R414	322.70	323.70	1.00	3200	89	146	0.84
R414	323.70	324.70	1.00	2300	58	113	0.47
R414	324.70	325.70	1.00	2200	64	106	0.41
R414	325.70	326.70	1.00	2200	60	119	0.60
R414	326.70	327.70	1.00	2000	32	102	0.62
R414	349.30	350.30	1.00	1040	87	97	0.30
R414	350.30	351.30	1.00	1440	66	157	0.64
R415	5.30	6.30	1.00	410	93	54	0.12
R415	6.30	7.30	1.00	860	36	119	0.46
R415	7.30	8.30	1.00	1000	22	117	0.43
R415	8.30	9.30	1.00	840	42	103	0.38
R415	9.30	10.30	1.00	850	9	98	0.32
R415	10.30	11.30	1.00	1260	41	116	0.52
R415	11.30	12.30	1.00	1490	61	240	1.03
R415	12.30	13.30	1.00	1300	14	139	0.75
R415	13.30	14.30	1.00	1280	46	114	0.37
R415	14.30	15.30	100.00	1470	27	122	0.48
R415	15.30	16.30	1.00	1810	60	150	0.59
R415	16.30	17.30	1.00	1580	29	156	0.71
R415	17.30	18.30	1.00	1370	60	131	0.45
R415	18.30	19.30	1.00	1190	82	89	0.29
R415	19.30	20.30	1.00	1080	64	121	0.65
R415	20.30	21.30	1.00	1450	100	105	0.45
R415	21.30	22.50	1.20	950	104	141	0.92
R415	39.50	40.50	1.00	1300	36	115	1.15
R415	40.50	41.50	1.00	1140	21	119	1.21
R415	41.50	42.50	1.00	1230	25	113	1.29
R415	42.50	43.50	1.00	120	45	118	0.96
R415	43.50	44.50	1.00	530	14	126	1.76
R415	44.50	45.50	1.00	1010	16	128	1.24
R415	45.50	46.50	1.00	1240	330	114	0.89

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R415	46.50	47.50	1.00	1200	33	120	0.79
R415	47.50	48.50	1.00	780	1	111	0.98
R415	48.50	49.50	1.00	1270	96	114	0.78
R415	49.50	50.50	1.00	1120	61	117	0.78
R415	50.50	51.50	1.00	890	1	129	1.23
R415	64.60	65.60	1.00	470	3	127	1.07
R415	65.60	66.60	1.00	630	3	112	0.95
R415	66.60	67.60	1.00	1380	30	145	0.81
R415	67.60	68.60	1.00	1560	54	123	0.52
R415	68.60	69.60	1.00	1300	17	108	0.47
R415	69.60	70.60	1.00	960	18	83	0.31
R415	70.60	71.60	1.00	430	7	43	0.11
R415	71.60	72.60	1.00	149	1	101	0.62
R415	72.60	73.60	1.00	1030	4	81	0.39
R415	73.60	74.60	1.00	1450	49	105	0.49
R415	74.60	75.60	1.00	1480	81	103	0.33
R415	75.60	76.60	1.00	1370	36	110	0.55
R415	76.60	77.60	1.00	1260	31	72	0.44
R415	77.60	78.60	1.00	1610	3	87	0.26
R415	78.60	79.60	1.00	1430	32	120	0.51
R415	79.60	80.60	1.00	1790	30	109	0.49
R415	80.60	81.60	1.00	1830	15	153	0.81
R415	81.60	82.60	1.00	1390	51	86	0.43
R415	82.60	83.60	1.00	1910	16	107	0.47
R415	83.60	84.60	1.00	1430	60	77	0.34
R415	84.60	85.60	1.00	1230	1	119	0.70
R415	85.60	86.60	1.00	1860	51	104	0.61
R415	86.60	87.60	1.00	1740	58	110	0.71
R415	87.60	88.60	1.00	1910	52	92	0.77
R415	88.60	89.60	1.00	1150	2	123	1.09
R415	89.60	90.60	1.00	1820	8	97	1.04
R415	90.60	91.60	1.00	1450	6	132	1.26
R415	91.60	92.60	1.00	1920	40	127	1.39
R415	92.60	93.60	1.00	1470	1	97	1.13
R415	93.60	94.60	1.00	1830	70	123	1.25
R415	13.30	14.30	1.00	1280	46	114	0.37
R415	14.30	15.30	100.00	1470	27	122	0.48
R415	15.30	16.30	1.00	1810	60	150	0.59
R415	16.30	17.30	1.00	1580	29	156	0.71
R415	17.30	18.30	1.00	1370	60	131	0.45
R415	18.30	19.30	1.00	1190	82	89	0.29
R415	19.30	20.30	1.00	1080	64	121	0.65
R415	20.30	21.30	1.00	1450	100	105	0.45
R415	21.30	22.50	1.20	950	104	141	0.92
R415	39.50	40.50	1.00	1300	36	115	1.15
R415	40.50	41.50	1.00	1140	21	119	1.21

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R415	41.50	42.50	1.00	1230	25	113	1.29
R415	42.50	43.50	1.00	120	45	118	0.96
R415	43.50	44.50	1.00	530	14	126	1.76
R415	44.50	45.50	1.00	1010	16	128	1.24
R415	45.50	46.50	1.00	1240	330	114	0.89
R415	46.50	47.50	1.00	1200	33	120	0.79
R415	47.50	48.50	1.00	780	1	111	0.98
R415	48.50	49.50	1.00	1270	96	114	0.78
R415	49.50	50.50	1.00	1120	61	117	0.78
R415	50.50	51.50	1.00	890	1	129	1.23
R415	64.60	65.60	1.00	470	3	127	1.07
R415	65.60	66.60	1.00	630	3	112	0.95
R415	66.60	67.60	1.00	1380	30	145	0.81
R415	67.60	68.60	1.00	1560	54	123	0.52
R415	68.60	69.60	1.00	1300	17	108	0.47
R415	69.60	70.60	1.00	960	18	83	0.31
R415	70.60	71.60	1.00	430	7	43	0.11
R415	71.60	72.60	1.00	149	1	101	0.62
R415	72.60	73.60	1.00	1030	4	81	0.39
R415	73.60	74.60	1.00	1450	49	105	0.49
R415	74.60	75.60	1.00	1480	81	103	0.33
R415	75.60	76.60	1.00	1370	36	110	0.55
R415	76.60	77.60	1.00	1260	31	72	0.44
R415	77.60	78.60	1.00	1610	3	87	0.26
R415	78.60	79.60	1.00	1430	32	120	0.51
R415	79.60	80.60	1.00	1790	30	109	0.49
R415	80.60	81.60	1.00	1830	15	153	0.81
R415	81.60	82.60	1.00	1390	51	86	0.43
R415	82.60	83.60	1.00	1910	16	107	0.47
R415	83.60	84.60	1.00	1430	60	77	0.34
R415	84.60	85.60	1.00	1230	1	119	0.70
R415	85.60	86.60	1.00	1860	51	104	0.61
R415	86.60	87.60	1.00	1740	58	110	0.71
R415	87.60	88.60	1.00	1910	52	92	0.77
R415	88.60	89.60	1.00	1150	2	123	1.09
R415	89.60	90.60	1.00	1820	8	97	1.04
R415	90.60	91.60	1.00	1450	6	132	1.26
R415	91.60	92.60	1.00	1920	40	127	1.39
R415	92.60	93.60	1.00	1470	1	97	1.13
R415	93.60	94.60	1.00	1830	70	123	1.25
R415	94.60	95.60	1.00	1880	69	134	1.04
R415	95.60	96.60	1.00	1830	26	122	1.28
R415	96.60	97.60	1.00	1840	68	106	1.05
R415	97.60	98.60	1.00	1610	25	83	0.87
R415	98.60	99.60	1.00	1370	1	61	0.86
R415	99.60	100.60	1.00	290	4	93	0.15

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R415	102.70	103.70	1.00	1110	8	68	1.08
R415	103.70	104.70	1.00	1860	35	105	1.19
R415	104.70	105.70	1.00	1710	43	82	0.86
R415	105.70	106.70	1.00	1390	3	71	0.93
R415	106.70	107.70	1.00	2030	7	72	1.00
R415	107.70	108.70	1.00	360	7	69	1.53
R415	108.70	109.70	1.00	130	33	65	1.80
R415	109.70	110.70	1.00	840	8	96	0.98
R415	110.70	111.70	1.00	2800	104	80	1.00
R415	111.70	112.70	1.00	1840	72	90	1.07
R415	112.70	113.70	1.00	1780	93	77	1.05
R415	113.70	114.70	1.00	1930	200	85	1.24
R415	114.70	115.70	1.00	1790	550	108	1.19
R415	115.70	116.70	1.00	1780	123	118	1.82
R415	116.70	117.70	1.00	2040	101	98	1.47
R415	117.70	118.70	1.00	1780	40	114	1.71
R415	118.70	119.20	0.50	1750	109	73	0.99
R416	24.15	26.15	2.00	960	22	97	0.31
R416	26.15	27.15	1.00	1680	50	106	0.45
R416	27.15	28.15	1.00	1320	49	71	0.22
R416	28.15	30.15	2.00	1640	69	83	0.22
R416	30.15	32.15	2.00	1670	143	126	0.43
R416	32.15	34.15	2.00	1500	270	135	0.50
R416	34.15	36.15	2.00	1770	310	148	0.48
R416	36.15	38.15	2.00	1790	131	144	0.41
R416	38.15	40.15	2.00	2000	145	149	0.47
R416	40.15	42.15	2.00	1450	40	91	0.27
R416	42.15	44.15	2.00	1250	49	77	0.29
R416	44.15	46.15	2.00	1310	33	106	0.37
R416	46.15	48.15	2.00	1390	40	69	0.24
R416	90.40	92.40	2.00	1560	49	103	0.37
R416	92.40	94.40	2.00	1530	50	79	0.26
R417	132.00	133.00	1.00	1630	220	77	0.00
R417	133.00	134.00	1.00	1230	89	57	0.00
R417	134.00	135.00	1.00	1910	130	71	0.00
R417	135.00	136.00	1.00	1990	122	222	0.00
R417	136.00	137.00	1.00	1003	57	59	0.00
R417	137.00	138.00	1.00	942	28	47	0.00
R419	17.10	19.10	2.00	1560	9	250	1.79
R419	19.10	21.10	2.00	1510	46	104	0.50
R419	21.10	23.10	2.00	1540	19	105	0.53
R419	23.10	25.10	2.00	1280	37	70	0.38
R419	25.10	27.10	2.00	1270	98	71	0.39
R419	39.80	41.80	2.00	660	4	62	0.23
R419	41.80	43.65	1.85	540	1	40	0.17
R419	44.20	46.20	2.00	1070	53	91	0.30

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R419	46.20	48.20	2.00	1460	39	131	0.40
R419	48.20	50.20	2.00	1340	30	126	0.37
R419	50.20	52.20	2.00	1650	71	101	0.30
R419	52.20	54.20	2.00	1470	35	76	0.30
R419	54.20	56.20	2.00	670	3	106	0.36
R419	56.20	57.80	1.60	440	2	66	0.32
R420	4.85	6.85	2.00	3200	30	165	0.90
R420	6.85	8.85	2.00	1750	26	114	0.50
R420	8.85	10.85	2.00	1900	37	112	0.45
R420	10.85	12.85	2.00	2000	26	135	0.60
R420	12.85	14.85	2.00	2800	49	124	0.55
R420	14.85	16.85	2.00	1900	36	121	0.53
R420	16.85	18.85	2.00	1350	17	81	0.59
R420	21.20	23.20	2.00	620	7	48	0.28
R420	23.20	25.20	2.00	680	3	73	0.49
R420	25.20	27.20	2.00	650	6	130	0.82
R420	27.20	29.20	2.00	750	7	136	0.67
R420	29.20	31.20	2.00	600	8	90	0.44
R420	31.20	34.45	3.25	330	6	69	0.31
R420	34.45	35.65	1.20	470	1	126	0.74
R420	48.70	50.30	1.60	410	1	54	0.28
R420	50.30	52.30	2.00	1670	22	125	0.72
R420	52.30	54.30	2.00	300	2	57	0.27
R420	54.30	56.30	2.00	1580	23	81	0.41
R420	56.30	58.30	2.00	2100	26	107	0.52
R420	58.30	60.30	2.00	4700	27	230	1.39
R420	60.30	62.30	2.00	6100	41	280	1.50
R420	62.30	64.30	2.00	6700	62	260	1.27
R420	64.30	66.10	1.80	1640	75	94	0.41
R420	66.10	67.10	1.00	1430	21	350	
R420	67.10	68.40	1.30	1050	6	250	
R420	68.40	69.50	1.10	470	4	240	
R420	70.30	70.40	0.10	200	1	370	
R420	70.40	72.40	2.00	4900	84	280	1.27
R420	72.40	73.65	1.25	2700	16	143	0.76
R420	73.65	74.00	0.35	2200	19	3200	12.70
R420	74.00	75.05	1.05	2900	110	270	1.10
R420	75.05	75.40	0.35	1680	42	370	
R420	75.70	75.80	0.10	1500	21	3800	17.60
R420	75.80	77.80	2.00	8900	140	350	1.75
R420	77.80	79.80	2.00	8300	127	300	1.40
R420	79.80	81.80	2.00	7100	94	360	1.88
R420	81.80	83.80	2.00	7000	121	270	1.25
R420	83.80	85.80	2.00	7800	240	290	1.35
R420	85.80	87.80	2.00	6500	153	310	1.40
R420	87.80	89.80	2.00	4100	44	167	0.87

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R420	89.80	91.80	2.00	5600	97	190	1.02
R420	91.80	93.80	2.00	6300	71	230	1.08
R420	93.80	95.80	2.00	6100	60	220	1.11
R420	95.80	97.80	2.00	6900	71	240	1.14
R420	97.80	99.80	2.00	11000	113	500	2.85
R420	99.80	101.80	2.00	6900	106	250	1.26
R420	101.80	103.80	2.00	11200	146	420	2.10
R420	103.80	105.80	2.00	4200	68	240	1.05
R420	105.80	107.40	1.60	320	1	12	0.05
R420	107.40	109.40	2.00	1720	37	113	0.46
R420	109.40	111.40	2.00	1600	51	104	0.24
R420	111.40	113.40	2.00	1430	84	84	0.21
R420	113.40	115.40	2.00	1450	164	87	0.27
R420	115.40	117.40	2.00	1400	43	89	0.26
R420	117.40	119.40	2.00	1470	60	129	0.40
R420	119.40	121.40	2.00	3600	129	260	0.79
R420	121.40	123.40	2.00	2100	59	145	0.35
R420	123.40	123.90	0.50	154	1	80	
R420	123.90	124.90	1.00	530	87	102	
R420	124.90	125.90	1.00	1130	780	157	
R420	125.90	126.90	1.00	1210	0	135	
R420	126.90	128.00	1.10	1700	990	990	
R420	128.00	129.00	1.00	1110	430	470	
R421	0.50	2.50	2.00	1980	28	71	0.16
R421	2.50	4.50	2.00	8500	250	180	2.00
R421	4.50	6.50	2.00	8300	260	370	3.06
R421	6.50	8.50	2.00	8300	240	420	3.10
R421	8.50	10.50	2.00	6400	174	520	3.64
R421	10.50	12.50	2.00	6200	162	390	3.80
R421	12.50	14.50	2.00	5900	127	370	3.59
R421	14.50	16.50	2.00	6000	149	280	3.08
R421	16.50	18.50	2.00	5500	131	270	2.29
R421	18.50	20.50	2.00	5900	177	260	3.25
R421	20.50	22.50	2.00	7600	106	370	4.00
R421	22.50	24.50	2.00	6500	102	350	4.02
R421	24.50	26.50	2.00	6900	91	360	4.04
R421	26.50	28.50	2.00	4700	63	300	2.75
R421	28.50	30.50	2.00	5300	131	280	2.68
R421	30.50	32.50	2.00	3200	57	173	1.58
R421	32.50	34.50	2.00	3900	75	340	2.50
R421	34.50	36.50	2.00	2700	61	360	3.04
R421	36.50	38.50	2.00	1730	46	240	2.40
R421	38.50	40.50	2.00	1730	46	173	1.98
R421	40.50	42.50	2.00	1920	54	230	2.06
R421	42.50	44.50	2.00	1770	76	69	0.74
R421	44.50	46.50	2.00	1580	65	240	2.04

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R421	46.50	48.50	2.00	2070	134	270	2.18
R421	48.50	50.00	1.50	1290	38	104	0.88
R421	50.00	50.85	0.85	480	11	33	0.18
R421	50.85	52.85	2.00	1700	77	66	0.35
R421	52.85	54.85	2.00	1390	82	55	0.35
R421	54.85	56.85	2.00	1570	161	148	0.66
R421	56.85	58.85	2.00	2040	220	180	1.66
R421	58.85	60.85	2.00	1700	340	100	0.82
R421	60.85	62.85	2.00	1920	250	125	1.05
R421	62.85	64.85	2.00	3500	250	250	2.08
R421	64.85	66.85	2.00	300	260	300	2.12
R421	66.85	68.85	2.00	3900	240	290	2.22
R421	68.85	70.85	2.00	4200	400	460	3.86
R421	70.85	72.85	2.00	3800	370	420	3.64
R421	72.85	74.85	2.00	2700	460	89	0.92
R421	74.85	76.85	2.00	2700	260	157	2.00
R421	76.85	78.85	2.00	4900	400	400	4.25
R421	78.85	80.85	2.00	1110	64	122	1.28
R421	80.85	82.85	2.00	700	114	78	0.66
R421	85.45	86.45	1.00	61	173	19	0.13
R421	86.45	87.45	1.00	470	2700	144	0.13
R421	87.45	87.80	0.35	1110	17000	1020	1.33
R421	87.80	88.80	1.00	1690	180	146	2.72
R421	88.80	89.80	1.00	1720	114	119	2.85
R421	89.80	90.80	1.00	1630	1000	143	2.60
R421	90.80	91.80	1.00	680	350	67	1.74
R421	91.80	92.80	1.00	620	240	53	1.36
R421	92.80	93.80	1.00	123	75	31	0.79
R421	93.80	94.80	1.00	320	103	74	2.55
R421	99.30	99.80	0.50	156	2200	60	1.06
R422	2.50	4.50	2.00	3100	135	117	0.64
R422	4.50	6.50	2.00	3900	80	190	1.29
R422	7.65	9.25	1.60	1160	940	86	0.90
R422	22.20	22.80	0.60	56	10	61	3.48
R422	73.00	75.00	2.00	2700	123	154	1.20
R422	75.00	77.00	2.00	2900	66	134	0.79
R422	77.00	79.00	2.00	2000	121	133	0.86
R422	79.00	80.35	1.35	2500	85	220	1.41
R422	81.20	83.20	2.00	1440	108	142	0.88
R422	83.20	85.20	2.00	1850	17	95	0.52
R422	86.65	88.65	2.00	2700	88	151	1.05
R422	88.65	90.65	2.00	1750	62	79	0.33
R422	90.65	92.65	2.00	1770	68	73	0.34
R422	95.10	97.10	2.00	820	18	87	0.60
R422	97.10	99.10	2.00	2000	113	115	0.75
R422	99.10	101.10	2.00	1600	51	142	0.98

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R422	101.10	103.10	2.00	1720	106	119	0.81
R423	7.00	8.00	1.00	103	95	32	1.64
R423	8.00	9.00	1.00	124	7	42	1.03
R423	9.60	10.50	0.90	88	1	63	0.91
R423	21.75	22.40	0.65	290	1	17	0.15
R423	22.40	23.40	1.00	1580	2	67	0.55
R423	23.40	25.40	2.00	7200	340	190	2.44
R423	25.40	26.40	1.00	4500	250	170	2.48
R423	28.20	30.20	2.00	320	8	57	0.58
R423	30.20	32.20	2.00	94	3	77	0.83
R423	32.20	33.20	1.00	280	8	49	0.37
R423	38.50	40.50	2.00	1830	60	99	0.58
R423	40.50	42.50	2.00	3400	147	98	0.61
R423	42.50	44.50	2.00	1600	28	128	0.80
R423	44.50	46.50	2.00	2000	58	139	0.84
R423	46.50	48.50	2.00	2000	21	72	0.40
R423	48.50	50.50	2.00	2900	103	96	0.56
R423	50.50	52.50	2.00	1780	95	110	0.67
R423	52.50	54.50	2.00	2000	61	125	0.93
R423	54.50	55.90	1.40	1730	16	210	1.58
R423	58.70	60.70	2.00	1310	30	96	0.96
R423	60.70	61.70	1.00	1090	7	129	1.44
R423	64.60	66.60	2.00	2700	43	79	0.53
R423	66.60	68.40	1.80	2400	117	133	0.70
R423	68.40	70.40	2.00	1820	38	71	0.32
R423	70.40	72.40	2.00	1500	76	94	0.39
R423	72.40	74.40	2.00	1720	73	90	0.34
R423	74.40	76.40	2.00	1820	32	92	0.34
R423	76.40	78.40	2.00	1700	40	124	0.46
R423	78.40	80.40	2.00	1930	28	125	0.49
R423	80.40	82.40	2.00	1670	27	110	0.31
R423	82.40	84.40	2.00	1700	26	100	0.29
R423	84.40	86.40	2.00	1830	28	113	0.32
R423	86.40	88.40	2.00	2200	50	116	0.39
R423	88.40	90.40	2.00	3000	95	136	0.51
R423	90.40	92.40	2.00	3100	89	118	0.53
R423	92.40	94.40	2.00	2600	65	127	0.56
R423	94.40	96.40	2.00	1860	97	75	0.33
R423	96.40	98.40	2.00	200	57	126	0.55
R423	98.40	100.40	2.00	2200	3	125	0.55
R423	100.40	102.40	2.00	2500	5	113	0.40
R423	102.40	104.40	2.00	1680	13	81	0.31
R423	104.40	106.40	2.00	2400	4	46	0.18
R423	106.40	108.40	2.00	2400	10	200	0.75
R423	108.40	110.40	2.00	3100	34	130	0.50
R423	110.40	112.40	2.00	2000	71	85	0.26

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R423	112.40	114.40	2.00	2200	62	86	0.26
R423	114.40	116.40	2.00	2000	19	110	0.29
R423	116.40	118.40	2.00	1770	33	104	0.26
R423	118.40	120.40	2.00	2000	80	84	0.32
R423	120.40	122.40	2.00	2000	79	118	0.20
R423	122.40	124.40	2.00	1670	70	163	0.82
R423	124.40	125.50	1.10	840	9	68	0.42
R423	125.50	126.50	1.00	38	10	36	1.18
R423	126.50	127.50	1.00	35	9	90	1.96
R423	127.50	128.50	1.00	27	10	17	0.40
R424	10.20	12.10	1.90	2800	30	120	0.32
R424	12.10	14.20	2.10	3900	45	145	0.37
R424	14.20	15.80	1.60	9100	310	360	1.24
R424	15.80	17.80	2.00	1110	20	63	0.04
R424	57.20	58.20	1.00	1120	390	117	3.58
R424	66.20	66.90	0.70	260	290	83	4.24
R424	80.40	82.40	2.00	50	75	32	1.12
R424	99.30	100.30	1.00	38	440	46	1.62
R424	100.30	101.30	1.00	40	410	31	0.75
R425	10.10	12.10	2.00	880	9	109	0.51
R425	12.10	14.10	2.00	1260	18	77	0.30
R425	14.10	16.10	2.00	1290	26	56	0.21
R425	16.10	18.10	2.00	1550	22	153	0.78
R425	18.10	20.10	2.00	2800	53	164	0.58
R425	20.10	22.10	2.00	1480	16	157	0.35
R425	22.10	24.10	2.00	3400	27	120	0.25
R425	24.10	26.10	2.00	2600	23	87	0.16
R425	26.10	28.10	2.00	3000	33	90	0.24
R425	28.10	30.10	2.00	2500	15	76	0.18
R425	30.10	32.10	2.00	1300	3	45	0.10
R425	32.10	34.10	2.00	1900	18	88	0.19
R425	95.25	97.25	2.00	2600	25	109	0.39
R425	97.25	99.25	2.00	2400	22	100	0.47
R425	99.25	101.25	2.00	2500	36	184	1.41
R425	101.25	103.25	2.00	1480	27	89	0.34
R425	103.25	105.25	2.00	760	2	24	0.10
R425	111.60	113.60	2.00	500	1	91	2.30
R425	119.00	120.00	1.00	280	186	90	3.48
R425	121.00	122.00	1.00	1150	90	145	4.12
R425	122.00	123.00	1.00	1300	240	135	3.38
R425	126.10	127.10	1.00	42	30	8	0.38
R425	127.10	128.10	1.00	54	85	10	0.35
R426	44.60	46.60	2.00	1230	14	84	0.11
R426	46.60	48.60	2.00	1260	21	83	0.13
R426	54.45	55.45	1.00	480	1	32	0.10
R426	55.45	57.45	2.00	330	1	19	0,07

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R426	57.45	59.45	2.00	1190	8	102	0.44
R426	59.45	61.45	2.00	4400	35	135	0.72
R426	61.45	63.45	2.00	4800	24	220	1.03
R426	63.45	65.45	2.00	3200	19	108	0.38
R426	65.45	67.45	2.00	3700	23	122	0.37
R426	67.45	69.45	2.00	300	25	137	0.31
R426	69.45	71.45	2.00	3200	13	149	0.37
R426	71.45	73.45	2.00	3100	20	92	0.21
R426	73.45	75.45	2.00	1900	10	65	0.15
R426	75.45	77.45	2.00	3100	22	89	0.32
R426	77.45	79.45	2.00	4800	33	139	0.22
R426	79.45	81.45	2.00	3600	26	123	0.38
R426	81.45	83.45	2.00	2400	13	94	0.26
R426	83.45	85.45	2.00	2900	33	115	0.35
R426	85.45	87.45	2.00	3700	35	290	1.25
R426	87.45	89.45	2.00	430	0	21	0.07
R426	89.45	91.45	2.00	1590	19	99	0.36
R426	91.45	93.45	2.00	2100	38	105	0.47
R426	93.45	95.45	2.00	1670	29	70	0.18
R426	95.45	97.45	2.00	2200	24	96	0.21
R426	97.45	99.45	2.00	1690	12	70	0.21
R426	99.45	101.45	2.00	1400	25	63	0.20
R426	101.45	103.45	2.00	1170	19	78	0.23
R426	103.45	105.45	2.00	580	3	52	0.18
R426	107.10	109.10	2.00	1380	20	68	0.27
R426	109.10	111.10	2.00	1530	9	79	0.29
R426	111.10	113.10	2.00	1680	23	123	0.56
R426	113.10	115.10	2.00	1300	7	46	0.14
R426	115.10	117.10	2.00	1240	6	118	0.30
R426	117.10	119.10	2.00	1030	2	86	0.40
R426	119.10	121.10	2.00	710	1	51	0.21
R426	121.10	123.10	2.00	430	1	250	0.99
R426	123.10	124.55	1.45	1060	1	130	0.82
R427	67.40	68.40	1.00	1770	15	148	0.61
R427	68.40	69.40	1.00	5900	64	172	0.65
R427	69.40	70.40	1.00	5300	43	130	0.44
R427	120.00	122.00	2.00	2200	50	200	0.81
R427	122.00	124.00	2.00	2300	50	162	0.73
R427	124.00	126.00	2.00	2900	26	95	0.28
R427	126.00	128.00	2.00	1800	20	270	1.20
R427	128.00	129.00	1.00	820	10	154	1.04
R427	139.50	141.50	2.00	1360	15	61	0.32
R427	141.50	143.50	2.00	1800	25	73	0.30
R427	143.50	145.50	2.00	2600	18	97	0.39
R427	145.50	147.50	2.00	3100	27	145	0.61
R427	147.50	149.50	2.00	3600	30	114	0.40

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R427	149.50	151.50	2.00	2000	15	59	0.18
R427	151.50	153.50	2.00	3100	15	90	0.29
R427	153.50	155.50	2.00	2700	12	101	0.34
R427	155.50	157.50	2.00	1460	21	92	0.38
R427	157.50	159.50	2.00	3600	36	154	0.68
R427	159.50	161.50	2.00	2100	15	146	0.74
R427	161.50	163.50	2.00	2500	29	148	0.71
R427	163.50	165.50	2.00	2200	32	135	0.73
R427	165.50	167.50	2.00	2700	29	155	0.91
R427	167.50	169.50	2.00	2200	23	110	0.46
R427	169.50	171.50	2.00	2200	32	92	0.43
R427	171.50	173.50	2.00	2400	43	114	0.61
R427	173.50	175.50	2.00	1900	21	178	1.13
R427	175.50	178.10	2.60	1560	23	71	0.40
R428	12.80	13.80	1.00	2030	52	300	0.87
R428	13.80	14.80	1.00	1750	200	165	0.62
R428	14.80	16.80	2.00	1780	59	60	0.21
R428	16.80	18.80	2.00	1710	166	76	0.26
R428	18.80	20.80	2.00	1640	37	44	0.12
R428	28.95	29.95	1.00	840	19	93	0.29
R428	29.95	31.00	1.05	1740	20	370	1.17
R428	31.00	33.00	2.00	1640	26	94	0.26
R428	33.00	35.00	2.00	1560	30	105	0.26
R428	35.00	37.00	2.00	1840	24	126	0.36
R428	37.00	39.05	2.05	2020	15	73	0.26
R428	39.05	41.05	2.00	1900	12	69	0.20
R428	41.05	42.05	1.00	2600	26	81	0.19
R428	42.05	44.05	2.00	2020	9	75	0.20
R428	44.05	46.05	2.00	2500	33	1	0.26
R428	108.50	110.50	2.00	1630	53	141	0.64
R428	110.50	112.50	2.00	1710	74	119	0.48
R428	112.50	114.50	2.00	1800	25	131	0.45
R428	114.50	116.50	2.00	1870	11	93	0.44
R428	116.50	118.50	2.00	5300	220	173	0.92
R428	118.50	120.50	2.00	3400	60	190	1.36
R428	120.50	122.30	1.80	3800	31	290	1.65
R428	125.70	127.70	2.00	2420	64	178	0.96
R428	127.70	128.50	0.80	5550	480	350	3.10
R429	32.25	32.80	0.55	510	2	39	0.15
R429	33.60	34.80	1.20	540	3	141	1.36
R429	37.65	39.65	2.00	145	1	65	0.29
R429	39.65	41.65	2.00	340	1	61	0.30
R429	41.65	43.65	2.00	990	41	55	0.09
R429	43.65	45.65	2.00	1120	18	88	0.18
R429	45.65	47.65	2.00	670	12	46	0.08
R429	47.65	49.65	2.00	680	33	35	0.06

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R429	49.65	51.65	2.00	1630	50	172	0.80
R429	51.65	53.65	2.00	1100	15	200	0.86
R429	53.65	55.65	2.00	560	5	167	0.73
R429	55.65	59.65	4.00	1040	46	155	0.41
R429	59.65	61.65	2.00	1130	167	450	1.04
R429	61.65	63.65	2.00	3100	83	157	0.30
R429	63.65	65.65	2.00	2020	22	78	0.12
R429	65.65	67.65	2.00	3300	56	179	0.23
R429	94.00	96.00	2.00	1230	6	164	1.09
R429	96.00	97.00	1.00	860	14	380	2.20
R429	163.20	165.20	2.00	3900	176	130	0.73
R429	165.20	167.20	2.00	6600	390	360	1.86
R429	167.20	169.20	2.00	900	16	83	0.43
R429	172.90	173.90	1.00	1730	41	89	0.41
R429	173.90	174.90	1.00	1800	7	116	0.47
R429	222.60	223.60	1.00	166	8	31	1.22
R429	224.05	225.05	1.00	680	2	126	0.81
R429	225.05	226.05	1.00	920	54	60	0.19
R430	19.90	21.90	2.00	550	4	39	0.06
R430	21.90	23.90	2.00	2100	20	290	0.87
R430	33.65	35.65	2.00	2200	20	124	0.26
R430	35.65	37.65	2.00	2500	15	138	0.31
R430	75.00	77.00	2.00	2000	72	106	0.33
R430	77.00	79.00	2.00	1650	54	104	0.33
R430	79.00	81.00	2.00	1720	76	101	0.32
R430	81.00	83.00	2.00	1320	29	118	0.40
R431	51.50	53.50	2.00	660	58	128	0.73
R431	53.50	55.50	2.00	1380	43	280	1.05
R431	55.50	57.50	2.00	370	33	176	0.78
R431	57.50	59.50	2.00	750	8	71	0.14
R431	59.50	61.50	2.00	1520	23	139	0.26
R431	61.50	63.50	2.00	1700	35	165	0.28
R431	63.50	65.50	2.00	1670	41	190	0.25
R431	65.50	67.50	2.00	1520	28	128	0.22
R431	67.50	69.50	2.00	1530	24	120	0.20
R431	69.50	71.50	2.00	1420	7	130	0.18
R431	71.50	73.50	2.00	1270	28	107	0.19
R431	73.50	75.50	2.00	1310	8	137	0.17
R431	75.50	77.50	2.00	1430	27	141	0.15
R431	77.50	79.50	2.00	1030	12	177	0.31
R431	79.50	81.50	2.00	1520	30	116	0.14
R431	81.50	83.50	2.00	1000	6	103	0.20
R431	83.50	85.50	2.00	530	4	67	0.12
R431	85.50	87.50	2.00	1530	18	200	0.32
R431	87.50	89.50	2.00	1450	18	170	0.32
R431	89.50	91.50	2.00	1670	24	160	0.32

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R431	91.50	93.50	2.00	2100	34	146	0.18
R431	93.50	95.50	2.00	530	3	65	0.09
R431	95.50	97.50	2.00	940	4	50	0.05
R431	97.50	99.50	2.00	1450	12	136	0.14
R431	99.50	101.50	2.00	760	7	44	0.08
R431	101.50	103.50	2.00	1170	4	82	0.10
R431	103.50	105.50	2.00	1430	6	101	0.16
R431	105.50	107.50	2.00	1240	3	91	0.20
R431	107.50	109.50	2.00	1430	8	136	0.21
R431	109.50	110.50	1.00	1510	5	110	0.16
R431	144.25	146.25	2.00	1260	4	120	0.21
R431	146.25	148.25	2.00	1640	23	112	0.16
R431	148.25	150.25	2.00	2600	34	260	0.57
R431	158.60	160.60	2.00	1250	55	97	0.25
R431	160.60	162.60	2.00	1490	51	130	0.32
R431	162.60	164.60	2.00	1180	39	118	0.27
R431	164.60	166.60	2.00	920	22	48	0.08
R431	166.60	168.60	2.00	1310	53	53	0.26
R431	168.60	170.60	2.00	1080	31	94	0.12
R431	170.60	172.60	2.00	110	13	52	0.18
R431	172.60	174.60	2.00	1150	8	71	0.18
R431	174.60	176.60	2.00	870	29	78	0.23
R431	176.60	178.60	2.00	540	9	37	0.06
R432	25.00	25.10	0.10	1070	6	86	
R432	30.00	31.10	1.10	1700	6	75	
R432	35.00	35.10	0.10	250	2	49	
R432	40.00	40.10	0.10	3700	4	120	
R432	45.00	45.10	0.10	1610	2	76	
R432	50.00	50.10	0.10	2800	11	98	
R432	55.00	55.10	0.10	660	6	42	
R432	60.00	60.10	0.10	900	4	50	
R432	75.00	75.10	0.10	840	28	74	
R432	80.00	80.10	0.10	460	15	65	
R432	85.00	85.10	0.10	152	142	39	
R432	90.00	91.10	1.10	52	40	55	
R432	92.00	94.00	2.00	210	3	14	0.04
R432	94.00	96.00	2.00	1880	43	200	0.15
R432	96.00	98.00	2.00	1390	10	97	0.07
R432	98.00	100.00	2.00	1340	2	79	0.07
R432	100.00	102.00	2.00	1720	2	115	0.07
R432	102.00	104.00	2.00	2900	7	155	0.09
R432	104.00	106.00	2.00	1990	8	130	0.13
R432	106.00	108.00	2.00	2500	10	128	0.15
R432	108.00	110.00	2.00	4500	20	220	16.00
R432	110.00	112.00	2.00	2400	21	122	0.14
R432	112.00	114.00	2.00	2600	13	114	0.12

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R432	114.00	116.00	2.00	2800	7	110	0.13
R432	116.00	118.00	2.00	2500	12	82	0.07
R432	118.00	120.00	2.00	4600	24	107	0.12
R432	120.00	122.00	2.00	3500	12	86	0.12
R432	122.00	124.00	2.00	4200	17	97	0.21
R432	124.00	126.00	2.00	2800	5	64	0.13
R432	126.00	128.00	2.00	2900	9	71	0.24
R432	128.00	130.00	2.00	3200	9	78	0.14
R432	130.00	132.00	2.00	2800	10	64	0.09
R432	132.00	134.00	2.00	3200	11	72	0.13
R432	134.00	136.00	2.00	2800	9	73	0.14
R432	136.00	138.00	2.00	3800	17	103	0.10
R432	138.00	140.00	2.00	5900	27	126	0.30
R432	140.00	142.00	2.00	4000	11	96	0.11
R432	142.00	144.00	2.00	3900	14	105	0.13
R432	144.00	145.00	1.00	3300	2	94	0.16
R432	145.00	147.00	2.00	3300	14	106	0.08
R432	147.00	149.00	2.00	5100	23	156	0.14
R432	149.00	151.00	2.00	3300	12	109	0.11
R432	151.00	153.00	2.00	3200	12	104	0.18
R432	153.00	154.00	1.00	2700	19	87	0.20
R432	154.00	156.50	2.50	2900	15	230	0.70
R432	156.50	158.50	2.00	3600	33	410	0.83
R432	158.50	160.50	2.00	2600	34	220	0.67
R432	160.50	162.50	2.00	1900	38	107	0.35
R432	162.50	164.50	2.00	4200	57	113	0.25
R432	164.50	166.50	2.00	2800	27	104	0.28
R432	166.50	168.50	2.00	3400	25	126	0.31
R432	168.50	170.50	2.00	3900	27	142	0.28
R432	170.50	172.50	2.00	2900	42	95	0.23
R432	172.50	174.50	2.00	1240	19	55	0.10
R432	174.50	176.50	2.00	1800	7	135	0.18
R432	176.50	178.50	2.00	3400	13	160	0.26
R432	178.50	180.50	2.00	2600	18	124	0.18
R432	180.50	182.50	2.00	2900	29	144	0.26
R432	182.50	184.50	2.00	2600	9	123	0.26
R432	184.50	186.50	2.00	2600	17	134	23.00
R432	186.50	188.50	2.00	2800	13	156	0.23
R432	188.50	190.50	2.00	2300	8	145	0.21
R432	190.50	192.50	2.00	2200	7	106	0.17
R432	192.50	194.50	2.00	2500	15	113	0.20
R432	194.50	196.50	2.00	3100	32	139	0.16
R432	196.50	198.50	2.00	4500	37	240	0.53
R432	198.50	200.35	1.85	3900	34	159	0.47
R432	200.35	202.35	2.00	5700	35	230	0.63
R432	202.35	204.35	2.00	4400	39	143	0.48

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R432	204.35	206.35	2.00	2800	39	88	0.35
R432	206.35	208.35	2.00	2600	17	250	1.17
R432	210.00	210.10	0.10	91	3	101	
R433	74.10	75.10	1.00	2900	20	97	0.24
R433	75.10	78.10	3.00	3200	18	105	0.24
R433	78.10	80.10	2.00	3100	20	104	0.20
R433	168.40	170.80	2.40	2700	22	89	0.11
R433	170.80	172.80	2.00	2700	25	78	0.24
R433	172.80	174.80	2.00	2300	46	150	0.61
R433	187.00	189.00	2.00	3200	27	103	0.26
R433	189.00	191.00	2.00	5400	76	160	0.60
R433	191.00	193.00	2.00	6000	76	164	0.68
R433	193.00	195.00	2.00	6000	92	173	0.77
R433	195.00	197.00	2.00	4700	85	161	0.77
R433	197.00	199.00	2.00	4500	68	160	0.68
R433	199.00	201.00	2.00	2900	32	105	0.30
R433	201.00	203.00	2.00	2400	10	79	0.14
R433	203.00	205.00	2.00	2300	28	107	0.32
R433	205.00	207.00	2.00	1230	11	120	0.61
R433	207.00	209.00	2.00	2200	64	108	0.23
R433	209.00	211.00	2.00	5200	106	190	0.77
R433	211.00	213.00	2.00	4600	103	154	0.59
R433	213.00	215.00	2.00	5500	75	176	0.61
R433	215.00	217.00	2.00	4200	42	137	0.44
R433	217.00	219.00	2.00	2040	44	97	0.27
R433	219.00	221.00	2.00	2030	45	84	0.24
R433	221.00	223.00	2.00	1930	26	56	0.22
R433	223.00	224.40	1.40	1520	28	98	0.61
R433	226.80	228.80	2.00	1110	22	50	0.27
R433	228.80	231.25	2.45	2040	58	113	0.49
R433	231.25	233.25	2.00	1520	48	63	0.13
R433	233.25	235.25	2.00	1640	36	97	0.20
R433	235.25	237.25	2.00	1600	33	122	0.37
R433	237.25	239.25	2.00	1500	28	112	0.44
R433	239.25	241.25	2.00	4100	65	147	0.49
R433	241.25	243.25	2.00	4100	62	155	0.55
R433	243.25	245.25	2.00	3300	62	167	0.53
R433	245.25	247.25	2.00	2100	23	108	0.21
R433	247.25	249.25	2.00	1600	6	86	0.17
R433	249.25	251.25	2.00	1620	14	106	0.17
R433	251.25	253.25	2.00	1600	13	103	0.18
R433	253.25	255.25	2.00	1800	11	115	0.22
R433	255.25	257.25	2.00	1700	14	96	0.20
R433	257.25	259.25	2.00	1770	10	101	0.19
R433	259.25	261.25	2.00	1710	10	95	0.23
R433	261.25	263.20	1.95	3700	29	142	0.40

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R434	69.20	71.20	2.00	3300	24	240	0.97
R434	71.20	73.20	2.00	3200	28	147	0.64
R434	73.20	75.20	2.00	2900	20	89	0.17
R434	75.20	77.20	2.00	3300	16	97	0.20
R434	77.20	79.20	2.00	2600	14	91	0.19
R434	79.20	81.20	2.00	3000	19	95	0.23
R434	81.20	83.20	2.00	5000	43	161	0.62
R434	83.20	85.20	2.00	4700	71	159	0.69
R434	85.20	87.20	2.00	6300	45	157	0.56
R434	87.20	89.20	2.00	5800	56	159	0.53
R434	89.20	91.20	2.00	4700	44	158	0.35
R434	91.20	93.20	2.00	3400	29	107	0.39
R434	93.20	95.20	2.00	6200	53	162	0.93
R434	95.20	97.20	2.00	6400	55	181	0.93
R434	97.20	99.20	2.00	7300	60	188	0.62
R434	99.20	101.20	2.00	8900	71	290	1.12
R434	101.20	103.20	2.00	5200	43	167	1.03
R434	103.20	105.20	2.00	4700	38	141	0.73
R434	105.20	107.20	2.00	4700	40	153	0.86
R434	107.20	109.20	2.00	6900	57	270	1.01
R434	109.20	111.20	2.00	2800	20	101	0.22
R434	111.20	113.20	2.00	3100	11	100	0.20
R434	113.20	115.20	2.00	2800	15	100	0.19
R434	115.20	117.20	2.00	1590	16	107	0.24
R434	117.20	119.20	2.00	3300	31	133	0.32
R434	119.20	121.20	2.00	3200	28	128	0.38
R434	121.20	123.20	2.00	3100	15	102	0.22
R434	123.20	125.20	2.00	3100	13	107	0.21
R434	125.20	127.20	2.00	3100	17	117	0.15
R434	127.20	129.20	2.00	3100	11	105	0.21
R434	129.20	131.20	2.00	3000	18	118	0.17
R434	131.20	133.20	2.00	3100	27	124	0.13
R434	133.20	135.20	2.00	3100	12	102	0.21
R434	135.20	137.20	2.00	3200	13	116	0.21
R434	137.20	139.20	2.00	3700	31	147	0.44
R434	139.20	141.20	2.00	5100	47	161	0.58
R434	141.20	143.20	2.00	3400	33	124	0.35
R434	143.20	145.20	2.00	2900	40	116	0.39
R434	145.20	146.20	1.00	2700	41	125	0.49
R434	146.20	146.55	0.35	3000	39	680	0.73
R434	146.55	148.55	2.00	3800	49	1580	0.83
R434	148.55	150.55	2.00	6600	78	173	0.79
R434	150.55	152.55	2.00	5600	75	166	0.73
R434	152.55	154.55	2.00	5300	93	177	0.97
R434	154.55	156.55	2.00	2900	42	93	0.30
R434	156.55	158.55	2.00	5400	85	145	0.66

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R434	158.55	160.55	2.00	8600	171	270	1.34
R434	160.55	162.55	2.00	6200	133	240	1.42
R434	162.55	164.55	2.00	6600	101	160	0.78
R434	164.55	166.55	2.00	6400	64	160	0.61
R434	166.55	168.05	1.50	9500	104	290	0.99
R434	168.05	169.70	1.65	5400	115	161	0.81
R434	169.70	171.70	2.00	8100	110	220	0.87
R434	171.70	173.70	2.00	9700	108	280	1.12
R434	173.70	175.35	1.65	5600	61	151	0.59
R434	175.35	177.35	2.00	6200	69	166	0.65
R434	177.35	179.35	2.00	8400	105	260	0.93
R434	179.35	181.35	2.00	4500	60	135	0.49
R434	181.35	183.35	2.00	4500	69	146	0.56
R434	183.35	185.35	2.00	6500	90	180	0.67
R434	185.35	187.35	2.00	7400	102	230	0.81
R434	187.35	189.35	2.00	7800	101	250	0.90
R434	189.35	191.35	2.00	3000	40	113	0.35
R434	191.35	193.35	2.00	2100	30	109	0.30
R434	193.35	195.35	2.00	2700	35	116	0.28
R434	195.35	197.35	2.00	2050	25	109	0.22
R434	197.35	199.35	2.00	1960	13	99	0.13
R434	199.35	201.35	2.00	2010	15	97	0.18
R434	201.35	203.35	2.00	2600	21	96	0.19
R434	203.35	205.35	2.00	3300	38	130	0.28
"R434	205.35	206.80	1.45	3400	41	128	0.38
R434	206.80	208.80	2.00	4500	61	153	0.51
R434	208.80	210.80	2.00	4800	50	152	0.57
R434	210.80	212.80	2.00	5600	65	168	0.65
R434	212.80	214.80	2.00	4200	50	136	0.55
R434	214.80	216.80	2.00	8400	111	280	1.29
R434	216.80	218.80	2.00	4900	60	148	0.67
R434	218.80	220.80	2.00	2500	31	96	0.34
R434	220.80	222.80	2.00	3100	40	110	0.41
R434	222.80	224.80	2.00	6400	79	220	0.98
R434	224.80	226.80	2.00	4300	55	148	0,49
R434	226.80	228.80	2.00	4300	47	148	0.51
R434	228.80	230.80	2.00	3700	35	129	0.40
R435	24.50	26.50	2.00	3700	40	142	0.07
R435	26.50	28.50	2.00	1550	42	65	0.06
R435	28.50	30.50	2.00	3400	6	114	0.06
R435	30.50	32.50	2.00	5200	1	165	0.05
R435	57.50	59.50	2.00	3600	20	121	0.29
R435	59.50	61.50	2.00	4200	2	133	0.26
R435	63.50	65.50	2.00	5400	32	164	1.05
R435	65.50	67.50	2.00	2800	29	84	0.27
R435	67.50	68.50	1.00	4200	38	100	0.48

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R435	68.50	70.50	2.00	4700	52	162	0.88
R435	70.50	72.50	2.00	4100	22	160	0.91
R435	72.50	74.50	2.00	3700	24	220	1.49
R435	74.50	76.50	2.00	2300	12	102	0.66
R435	76.50	78.50	2.00	2600	20	116	0.82
R435	78.50	80.50	2.00	2700	20	250	1.66
R435	80.50	82.50	2.00	2400	17	105	0.44
R435	82.50	84.50	2.00	2500	17	93	0.33
R435	84.50	86.50	2.00	3800	26	125	0.23
R435	86.50	88.50	2.00	3600	25	100	0.26
R435	88.50	90.50	2.00	2300	17	133	0.39
R435	90.50	92.50	2.00	3000	22	123	0.31
R435	92.50	94.50	2.00	3100	23	113	0.34
R435	94.50	96.50	2.00	2500	19	141	0.39
R435	96.50	98.50	2.00	3000	25	175	0.83
R435	98.50	100.50	2.00	2400	18	163	0.83
R435	100.50	102.50	2.00	3200	24	116	0.26
R435	102.50	104.50	2.00	2700	86	100	0.11
R435	104.50	106.50	2.00	2600	17	101	0.30
R435	106.50	108.50	2.00	2100	17	86	0.19
R435	108.50	110.50	2.00	3000	20	98	0.32
R435	110.50	112.50	2.00	3500	17	100	0.27
R435	112.50	114.50	2.00	2700	12	89	0.26
R435	114.50	116.50	2.00	2800	16	82	0.17
R435	116.50	118.50	2.00	2800	18	101	0.24
R435	118.50	120.50	2.00	3100	13	135	0.62
R435	120.50	122.50	2.00	2800	15	137	0.73
R435	122.50	124.50	2.00	3000	15	158	0.91
R435	124.50	126.50	2.00	3200	17	130	0.50
R435	126.50	128.50	2.00	3400	17	103	0.26
R435	128.50	130.50	2.00	2800	15	89	0.16
R435	130.50	132.50	2.00	2600	11	96	0.18
R435	132.50	134.50	2.00	3200	13	109	0.18
R435	134.50	136.50	2.00	2500	12	99	0.17
R435	136.50	138.50	2.00	2500	11	108	0.26
R435	138.50	140.50	2.00	2700	9	105	0.17
R435	140.50	142.50	2.00	2400	15	115	0.22
R435	142.50	143.50	1.00	4100	33	132	0.31
R435	143.50	145.50	2.00	4800	24	151	0.14
R435	145.50	147.50	2.00	4200	26	110	0.05
R435	147.50	149.50	2.00	5900	32	163	0.06
R435	149.50	151.50	2.00	4000	20	95	0.04
R435	151.50	153.50	2.00	3300	43	127	0.04
R435	153.50	155.75	2.25	1300	94	164	0.04
R436	14.00	16.00	2.00	2900	30	142	0.35
R436	16.00	18.00	2.00	2800	31	123	0.36

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R436	18.00	20.00	2.00	2500	29	104	0.40
R436	20.00	21.30	1.30	2100	24	124	0.51
R436	22.35	24.35	2.00	900	7	88	0.35
R436	30.55	32.55	2.00	3500	27	200	0.69
R436	32.55	34.55	2.00	2700	34	137	0.42
R436	34.55	36.55	2.00	2900	38	167	0.68
R436	36.55	38.55	2.00	2900	33	160	0.82
R436	38.55	40.55	2.00	2600	44	160	1.15
R436	40.55	42.85	2.30	2600	110	122	0.92
R436	42.85	44.85	2.00	1910	340	134	1.63
R436	44.85	46.85	2.00	1620	840	135	2.47
R436	46.85	48.85	2.00	2500	155	98	0.96
R436	48.85	50.85	2.00	2600	139	120	0.96
R436	50.85	52.85	2.00	2600	107	129	1.06
R436	52.85	54.85	2.00	2400	114	112	0.89
R436	54.85	56.85	2.00	2400	61	120	0.69
R436	56.85	58.85	2.00	2500	56	132	0.95
R436	58.85	60.85	2.00	2500	39	129	0.82
R436	60.85	62.85	2.00	2700	77	116	0.51
R436	62.85	64.85	2.00	2700	66	107	0.93
R436	64.85	66.85	2.00	2800	64	118	0.49
R436	66.85	68.85	2.00	2500	76	111	0.46
R436	68.85	70.85	2.00	2500	70	117	0.58
R436	70.85	71.85	1.00	2400	83	108	0.51
R436	75.10	77.10	2.00	1870	51	151	1.73
R436	77.10	79.10	2.00	2400	123	114	0.99
R436	79.10	81.10	2.00	2600	91	119	0.88
R436	81.10	83.10	2.00	1740	49	77	0.52
R436	83.10	85.10	2.00	2100	78	75	0.36
R436	85.10	87.10	2.00	1330	35	87	1.17
R436	87.10	89.10	2.00	2700	55	103	0.38
R436	89.10	91.10	2.00	2600	44	106	0.34
R436	91.10	93.10	2.00	2500	29	97	0.33
R436	93.10	95.10	2.00	2900	52	126	0.50
R436	95.10	97.10	2.00	2500	87	105	0.42
R436	97.10	99.10	2.00	1840	52	130	0.87
R436	99.10	101.10	2.00	2400	58	98	0.37
R436	101.10	103.10	2.00	2900	71	108	0.45
R436	103.10	105.10	2.00	2800	35	98	0.37
R436	105.10	107.10	2.00	3000	60	89	0.38
R436	107.10	108.75	1.65	2200	67	102	0.78
R436	109.40	111.40	2.00	2400	88	110	1.08
R436	111.40	113.40	2.00	2500	104	95	0.54
R436	113.40	115.40	2.00	2400	107	91	0.53
R436	115.40	117.40	2.00	2400	182	168	1.05
R436	117.40	119.40	2.00	1430	6	75	0.72

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R436	119.40	120.10	0.70	1640	3300	82	1.05
R436	120.10	121.70	1.60	740	2500	110	3.32
R438	58.60	60.60	2.00	990	35	98	
R438	60.60	62.60	2.00	770	35	100	
R438	62.60	64.60	2.00	370	10	90	
R438	64.60	65.60	1.00	360	12	98	
R438	65.60	66.60	1.00	420	7	107	
R438	66.60	67.60	1.00	1700	99	164	
R438	67.60	68.60	1.00	1890	102	164	
R438	68.60	69.60	1.00	1250	39	143	
R438	69.60	70.60	1.00	1580	58	150	
R438	70.60	71.60	1.00	1100	14	123	
R438	71.60	72.60	1.00	710	22	116	
R438	72.60	74.60	2.00	1080	94	135	
R438	74.60	75.60	1.00	1550	82	145	
R438	75.60	75.95	0.35	5300	154	280	
R438	88.70	89.70	1.00	32	55	40	
R438	89.70	90.70	1.00	29	85	63	
R438	91.20	92.20	1.00	29	18	58	
R438	92.20	93.20	1.00	34	27	51	
R438	108.60	109.60	1.00	590	181	128	
R438	109.60	110.60	1.00	590	210	118	
R438	110.60	111.60	1.00	390	40	43	
R438	111.60	112.60	1.00	240	74	40	
R438	112.60	113.60	1.00	300	88	44	
R438	113.60	114.60	1.00	230	220	60	
R438	114.60	115.60	1.00	280	260	69	
R438	115.60	116.60	1.00	430	450	120	
R438	116.60	117.60	1.00	620	960	260	
R438	117.60	118.60	1.00	1040	890	340	
R438	124.90	125.90	1.00	470	470	110	
R438	125.90	126.90	1.00	490	450	116	
R438	126.90	127.90	1.00	470	410	160	
R438	127.90	128.90	1.00	590	490	131	
R438	141.90	142.90	1.00	290	500	360	
R438	142.90	143.90	1.00	280	480	125	
R438	163.70	164.70	1.00	470	340	89	
R439	34.20	36.20	2.00	3000	15	98	0.29
R439	36.20	38.20	2.00	3000	15	106	0.32
R439	38.20	40.20	2.00	3100	15	111	0.38
R439	40.20	42.20	2.00	3000	18	131	0.58
R439	42.20	44.20	2.00	2900	12	118	0.47
R439	44.20	46.20	2.00	3200	17	210	0.11
R439	46.20	48.20	2.00	3400	15	126	0.56
R439	48.20	50.20	2.00	3300	14	119	0.42
R439	50.20	52.20	2.00	3400	15	110	0.40

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R439	52.20	54.20	2.00	5700	18	177	0.53
R439	54.20	56.20	2.00	3500	17	122	0.40
R439	95.10	96.10	1.00	5100	36	138	0.58
R439	96.10	97.10	1.00	6600	55	180	0.83
R439	97.10	98.10	1.00	4400	36	135	0.47
R439	106.00	107.00	1.00	2600	30	93	0.36
R439	107.00	108.00	1.00	9400	102	300	0.16
R439	108.00	109.00	1.00	8900	123	270	0.18
R439	109.00	110.00	1.00	9100	140	300	0.18
R439	110.00	111.00	1.00	7500	98	240	0.14
R439	119.20	120.20	1.00	2800	29	96	0.40
R439	120.20	121.20	1.00	6000	73	173	0.89
R439	121.20	122.20	1.00	9100	123	300	0.16
R439	122.20	123.20	1.00	7100	85	210	0.11
R439	123.20	124.20	1.00	5200	62	165	0.77
R439	173.00	175.00	2.00	4900	73	154	0.97
R439	175.00	177.00	2.00	6000	73	220	0.15
R439	177.00	179.00	2.00	4400	50	143	0.82
R439	179.00	181.00	2.00	3800	39	140	0.74
R439	181.00	183.00	2.00	5800	50	169	0.12
R439	183.00	185.00	2.00	9000	110	280	0.17
R439	185.00	187.00	2.00	5400	60	163	0.80
R439	187.00	189.00	2.00	5400	41	149	0.54
R439	189.00	191.00	2.00	7700	62	220	0.94
R439	191.00	193.00	2.00	7100	72	220	0.11
R439	193.00	195.00	2.00	5900	73	177	0.89
R439	195.00	197.00	2.00	5400	75	210	0.90
R439	197.00	199.00	2.00	5700	65	148	0.72
R439	199.00	201.00	2.00	9500	121	280	0.12
R439	201.00	203.00	2.00	6900	61	169	0.79
R439	203.00	205.00	2.00	8400	93	230	0.96
R439	205.00	207.00	2.00	8600	113	210	0.11
R439	207.00	209.00	2.00	4900	73	154	0.84
R439	209.00	211.00	2.00	4500	67	141	0.70
R439	211.00	213.00	2.00	4400	62	145	0.70
R439	213.00	215.00	2.00	3400	39	108	0.48
R439	215.00	217.00	2.00	7700	77	220	0.12
R439	217.00	219.00	2.00	9700	103	300	0.15
R439	219.00	221.00	2.00	5100	70	147	0.82
R439	221.00	223.00	2.00	5500	78	220	0.11
R439	223.00	225.00	2.00	7000	88	220	0.11
R439	225.00	227.00	2.00	6500	66	210	0.11
R439	227.00	229.00	2.00	6000	64	159	0.91
R439	229.00	231.00	2.00	1640	31	58	0.29
R439	231.00	233.00	2.00	7500	68	220	0.11
R439	233.00	235.00	2.00	5800	81	152	0.77

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R439	235.00	237.00	2.00	9600	98	300	0.15
R439	237.00	239.00	2.00	6600	76	220	0.11
R439	239.00	241.00	2.00	7900	73	210	0.11
R439	241.00	243.00	2.00	10300	77	250	0.15
R439	243.00	245.00	2.00	11700	82	300	0.12
R439	245.00	247.00	2.00	10000	80	350	0.11
R439	247.00	249.00	2.00	7200	82	290	0.00
R439	249.00	251.00	2.00	7200	93	250	0.00
R439	251.00	253.00	2.00	6000	87	230	0.00
R439	253.00	255.00	2.00	4700	66	157	0.89
R439	255.00	257.00	2.00	3500	45	136	0.74
R439	257.00	259.00	2.00	3600	46	140	0.89
R439	259.00	261.00	2.00	3300	45	143	0.92
R439	261.00	263.00	2.00	4200	63	171	0.11
R439	263.00	265.00	2.00	2800	59	119	0.65
R439	265.00	267.00	2.00	4900	55	136	0.85
R439	267.00	269.00	2.00	2800	86	94	0.43
R439	269.00	271.00	2.00	4100	119	146	0.85
R439	271.00	273.00	2.00	2800	93	200	0.13
R439	273.00	275.00	2.00	2300	55	114	0.78
R439	275.00	277.00	2.00	2800	70	105	0.38
R439	277.00	279.00	2.00	2900	38	94	0.36
R439	279.00	281.00	2.00	2500	63	102	0.45
R439	281.00	283.00	2.00	2200	33	115	0.37
R439	283.00	285.00	2.00	1680	22	107	0.37
R439	285.00	287.00	2.00	2200	29	125	0.38
R439	287.00	289.00	2.00	1870	44	89	0.30
R439	289.00	291.00	2.00	2500	27	93	0.25
R439	291.00	293.00	2.00	2400	13	95	0.20
R439	293.00	295.00	2.00	2500	4	95	0.24
R439	295.00	297.00	2.00	3000	26	101	0.29
R439	297.00	299.00	2.00	3000	22	112	0.36
R439	299.00	301.00	2.00	2500	36	107	0.35
R439	301.00	302.20	1.20	3600	31	151	0.52
R439	302.20	304.20	2.00	3800	49	210	0.69
R439	304.20	306.20	2.00	5200	69	300	0.14
R439	306.20	308.20	2.00	6300	81	280	0.13
R439	308.20	310.20	2.00	6600	157	420	0.32
R439	310.20	312.20	2.00	5100	154	172	0.11
R439	312.20	314.20	2.00	2600	30	82	0.35
R439	314.20	316.20	2.00	5600	54	140	0.50
R439	316.20	318.20	2.00	5800	46	135	0.55
R439	318.20	320.20	2.00	2500	32	68	0.25
R439	320.20	322.20	2.00	7100	55	173	0.79
R439	322.20	324.20	2.00	3000	107	86	0.33
R439	324.20	326.20	2.00	5100	65	136	0.56

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R439	326.20	328.20	2.00	5800	85	150	0.71
R439	328.20	330.20	2.00	4800	48	147	0.58
R439	330.20	332.20	2.00	4000	44	103	0.41
R439	332.20	334.20	2.00	1780	48	85	0.32
R439	334.20	335.80	1.60	163	175	68	0.12
R439	336.40	337.40	1.00	300	300	63	0.13
R439	344.80	346.80	2.00	4100	61	181	0.13
R439	346.80	348.80	2.00	3500	76	174	0.12
R439	348.80	350.40	1.60	3600	80	330	0.25
R439	354.60	355.60	1.00	39	280	16	0.20
R439	356.40	358.40	2.00	1820	61	148	0.14
R439	358.40	360.40	2.00	2200	170	101	0.78
R439	360.40	362.40	2.00	1770	93	90	
R439	362.40	364.40	2.00	1830	93	103	
R439	364.40	366.40	2.00	1800	102	94	
R439	366.40	368.40	2.00	2300	162	127	
R439	377.00	379.00	2.00	1690	21	95	
R439	379.00	381.00	2.00	1510	44	86	
R439	381.00	383.00	2.00	1820	29	141	
R440	12.50	13.50	1.00	35	12	43	
R440	38.90	39.90	1.00	22	112	43	
R440	114.10	115.10	1.00	34	11	57	
R442	31.35	31.55	0.20	21	170	70	
R442	136.70	138.70	2.00	32	17	32	
R442	138.70	140.70	2.00	77	46	51	
R442	140.70	142.70	2.00	88	9	49	
R442	142.70	144.70	2.00	77	3	43	
R442	144.70	146.70	2.00	79	3	56	
R442	146.70	148.70	2.00	82	33	59	
R442	148.70	150.70	2.00	74	27	55	
R442	150.70	152.70	2.00	71	8	52	
R442	152.70	154.70	2.00	83	13	59	
R442	154.70	155.70	1.00	72	8	47	
R442	156.00	158.00	2.00	17	18	17	
R442	158.00	160.00	2.00	23	15	23	
R442	162.90	163.90	1.00	69	22	46	
R442	175.50	176.50	1.00	42	39	43	
R443	27.10	28.10	1.00	7576	136	442	
R443	28.10	30.10	2.00	6584	55	359	
R443	30.10	32.10	2.00	4314	55	215	
R443	32.10	33.10	1.00	4700	78	280	
R443	33.10	34.10	1.00	7200	62	460	
R443	34.10	35.10	1.00	6400	49	330	
R443	35.10	36.10	1.00	7100	40	630	
R443	36.10	37.10	1.00	3800	67	171	
R443	37.10	38.10	1.00	3000	43	117	

HOLE-ID	FROM	TO	LENGTH	Ni_ppm	Cu_ppm	Co_ppm	S_pct
R443	38.10	40.10	2.00	3933	35	172	
R443	40.10	42.10	2.00	5613	69	219	
R443	42.10	44.10	2.00	2038	9	82	
R443	117.00	118.00	1.00	5400	22	177	
R443	118.00	119.00	1.00	2700	20	91	
R443	119.00	120.00	1.00	8500	38	220	
R443	120.00	121.00	1.00	4500	18	125	
R443	121.00	122.00	1.00	7500	62	60	
R443	122.00	123.00	1.00	4500	20	141	
R443	123.00	125.00	2.00	3051	18	132	
R443	125.00	127.00	2.00	2972	22	139	
R443	127.00	129.00	2.00	3067	24	132	
R443	129.00	131.00	2.00	2382	13	97	
R443	131.00	133.00	2.00	1632	28	84	
R443	133.00	134.70	1.70	982	48	135	