

6 November 2024

CODA NORTH DRILLING RESULTS EXCEED INITIAL EXPECTATIONS
MULTIPLE HIGH-GRADE RUNS ABOVE 5,000 PPM TREO
THICK INTERSECTION UP TO 45m @ 2,430 PPM TREO
HIGH GRADE INTERCEPTS UP TO 10m @ 5,208 PPM TREO
ENOVA COMMENCES DRILLING AT CODA CENTRAL PROJECT

Enova Mining (ASX: ENV) reports further high-grade drill results from CODA North which solidify the project's position as a major emerging resource

- 3,101m drilling completed at the CODA North project site,
- 6 reverse circulation drillholes, totalling 297m in a new area, continuing the drilling campaign in the Coda Central project site,
- Over 1,000 samples from CODA North are still undergoing assay at the SGS Geosol laboratory in Minas Gerais,
- Significant TREO (maximum mineralised intercepts and high-grade runs) results¹ from 12 drillholes (the third batch of Coda North samples) are as follows,

Hole ID	From (m)	To (m)	Intercept(m)	TREO (ppm)	NdPr %
CDN-DD-0010	37	68.21	31.2	3,235	20.2
<i>including</i>	43	52	10	4,482	24.1
CDN-DD-0011	9	26	17	1,346	20.5
CDN-DD-0012	8	42.7	34.7	2,031	21.7
<i>including</i>	30.16	42.7	12.6	3,718	23.4
CDN-DD-0013	14	44	30	1,422	17.7
CDN-DD-0014	6	35.2	29.2	2,725	21.6
<i>including</i>	22	35.2	13.2	4,540	23.8
CDN-RC-0012	16	57	42	2,677	20.7
<i>including</i>	20	41	21	3,701	20.9
CDN-RC-0013	37	59	22	4,034	23.0
CDN-RC-0014	3	31	28	2,946	20.2
<i>including</i>	3	30	27	3,009	20.2
CDN-RC-0015	9	54	45	2,430	22.2
<i>including</i>	33	53	20	4,004	23.6
CDN-RC-0016	9	23	14	3,171	21.2
<i>including</i>	12	23	11	3,587	21.8
CDN-RC-0017	14	24	10	3,309	22.9

¹ Significant TREO results have been calculated at nominal cut-off 1,000 ppm, 2,000ppm and 3,000 ppm

<i>including</i>	19	24	5	4,076	21.8
CDN-RC-0018	12	41	29	1,940	20.9
<i>including</i>	28	39	11	3,254	20.6

- **Notable high-grade REE assays² in this release include:**

Hole ID	From (m)	To (m)	Intercept	TREO (ppm)
CDN-DD-0010	43	53	10	4,482
CDN-DD-0012	35	42.7	7.7	4,472
CDN-DD-0014	23	33	10	5,208
CDN-RC-0012	23	32	9	4,961
CDN-RC-0013	37	57	20	4,155
CDN-RC-0014	9	30	21	3159
CDN-RC-0015	39	53	14	4,464
CDN-RC-0016	13	23	10	3,696

- ✓ **Drilling results verify strike extension of mineralisation across the tenement**
- **Enova advances metallurgical work with composite samples dispatched to specialised laboratories in Minas Gerais, for comprehensive mineral characterisation and sighter leach tests, a critical step in unlocking CODA North's full resource potential,**
- **The broad footprint of high-grade mineralisation in the extensive volcanoclastic Patos Formation is a testament to the project's immense potential. Recent drilling assisted to delineate mineralisation under approximately 11 sq.km of the 20 sq.km CODA North area. Mineralisation is open along strike in the remaining area,**
- **Exploration commences in the CODA Central tenement, a new region and significant growth opportunity for Enova,**
- **Enova's Competitive Advantage:**
 - **Extensive flat, accessible pasture and farmlands available for drilling,**
 - **About 5km E-W strike extension of REE mineralisation delineated in CODA North while other five project sites (CODA Central, East, XS, XN and South) are still awaiting drilling,**
 - **Successful stakeholder management with commitment to ESG,**
 - **Over 20% NdPr/TREO ratio.**

² Notable high-grade REE assays have been calculated at nominal cut-off 3,000ppm

Enova CEO Eric Vesel commented,

CODA North Consistently Yields Exceptional Results

"Recent drill results further reinforce our confidence in a significant, high-grade REE deposit at CODA North, supplying crucial data that will be used to develop a comprehensive resource model. Our team has strategically advanced exploration across CODA North, using both wide-spaced and infill drilling to ensure thorough coverage. We will continue to update the market as assay results come in and are actively engaging expert service providers to begin metallurgical testing on our mineralisation samples. The progress to date has exceeded our initial expectations, and we're keen to maintain this momentum."

CODA North Demonstrates Strike Extension of High-Grade REE Mineralisation

Drilling Results Validate Mineralisation Continuity in CODA North

Enova Mining Limited is pleased to release results from twelve new high-grade drill hole assays at the CODA North project, further underscoring its resource potential across a vast, unencumbered area (Figure 2, Table 4). These assays reveal substantial mineralised thickness and confirm extensive, high-grade mineralisation over substantial area of the CODA North tenement. This fresh data significantly strengthens the understanding of the resource's scale, continuity, and grade, aligning with Enova's commitment to ongoing exploration and reinforcing a strong growth outlook for CODA North Project.

Enova Unveils New Exploration Frontier at Coda Central Project Site

Reverse circulation (RC) drilling has commenced at CODA Central project site (Figure 1, Figure 11 Table 1), marking a new phase of exploration within Enova's CODA project. This approach enables rapid sampling across broad areas, essential for evaluating CODA Central's potential as a rare earth element (REE) resource base. With promising initial indicators, Enova is optimistic about uncovering valuable potential mineralisation and expanding its resource footprint within this new frontier.

Drilling	Project Area	Number of drill holes	Total meterage
Diamond drill holes	Coda North	24	1,310 m
RC drill holes	Coda North	40	1,791 m
RC drill holes	Coda Central	6	297 m
Total		62	3,398 m

Table 1: Drilling statistics until 26 Oct 2024

Enova's Exploration Momentum Continues to Accelerate

Recent drilling at CODA North has revealed substantial high-grade REE mineralisation within the Patos Formation, confirming a strong and continuous REE system extending across the plateau from east to west. This discovery surpasses initial expectations, validating our geological model and positioning Enova for notable resource growth and increased project value. The Board is enthusiastic about the potential to further expand our exploration footprint, driving additional value for our shareholders.



Figure 1: Enova commenced drilling in Coda Central Project site, next vast frontier of potential REE mineralisation



Figure 2: Enova's CODA North: Vast pastureland for potential REE Exploration
(Enova's diamond drill rig on the horizon)



Figure 3: Diamond drill core from transition zone from laterite to brown saprolite representing kamafugite litho-unit



Figure 4: Enova's professional geologist is reviewing the diamond core in core box

Promising Drilling Results Confirm High-Grade REE Mineralisation at CODA North

Recent drilling at the CODA North tenements confirms widespread high-grade rare earth element (REE) mineralisation. Employing both diamond drilling (DD) and reverse circulation (RC) methods, the campaign has successfully completed 3,101m of drilling in CODA North project site (refer to Figures 2, 3, 4 and 5, 6 and Table 1). Over 1,000 samples from this drilling campaign are still pending assays from SGS Geosol laboratory in Vespasiano, MG. Preliminary data analysis reveals extensive mineralised zones, indicating strong potential for a significant expansion of the project's resource base.

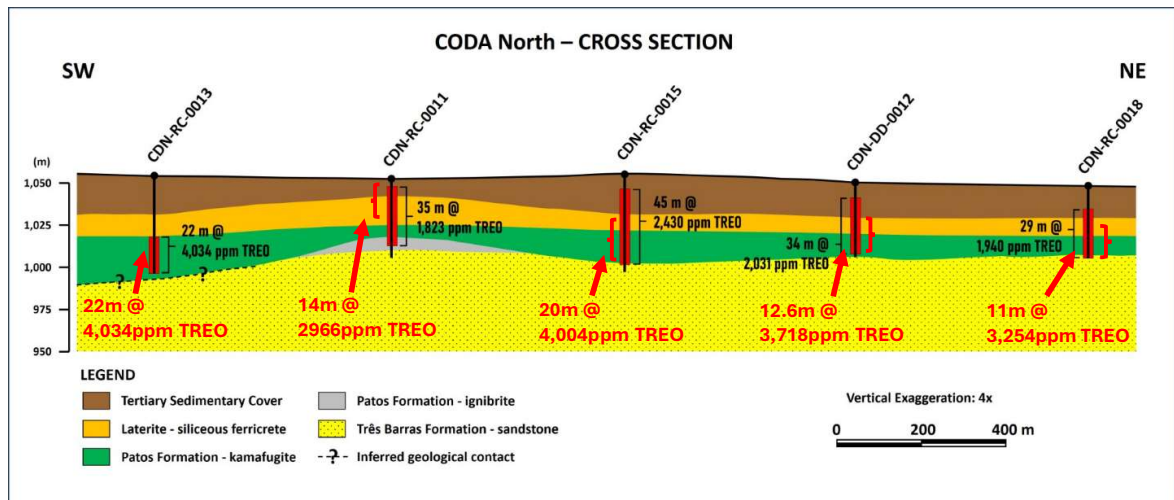


Figure 5: Schematic cross section (only significant values such as maximum intercepts and high grades of the current announcement are shown)

Enova's High Performing Team Drives Exploration Success

Enova's team is currently preparing samples, employing industry-standard methods to guarantee data precision. This collaborative effort, which brings together geologists, technicians, and field personnel, is essential to our exploration success. Their expertise and dedication to accuracy drive our mission to uncover substantial mineral resources at CODA North. The Board is confident that their commitment will consistently yield outstanding results and advance Enova's growth.

Enova's Strategic Edge

The high-grade REE mineralisation discovered at CODA North is set to be a cornerstone of Enova's future growth trajectory. Consistent mineralisation highlights the project's exceptional potential, establishing it as a flagship asset in our portfolio. With further assay results forthcoming, the company remains committed to maximising the value of CODA North. By deepening the understanding of the mineralised zones and pinpointing additional high-value targets, the team is strategically positioning the company for significant resource expansion and long-term economic gains. In tandem with the above, Enova has

access to vast areas of flat pasture and farmland for exploration with support of its stakeholders.

Enova will continue to capitalise on the success of recent drilling results to steer future exploration initiatives at CODA North. Our objective is to fully unlock the potential of this unique saprolite-hosted mineralisation, driving substantial value for our shareholders.



Figure 6: Reverse circulation drill cuttings are arranged prior to transfer to the sample shed



Figure 7: Enova professional geologist is checking the drill cuttings during logging



Figure 8: RC drill chips of variegated colour of saprolite are stored in chip library



Figure 9: Enova's site team is arranging samples for logging

Figure 10 below is a map illustrating the completed drill hole collar locations at CODA North to date, including the twelve newly reported holes highlighted in this announcement. This map provides an overview of our drilling activities and strategies.

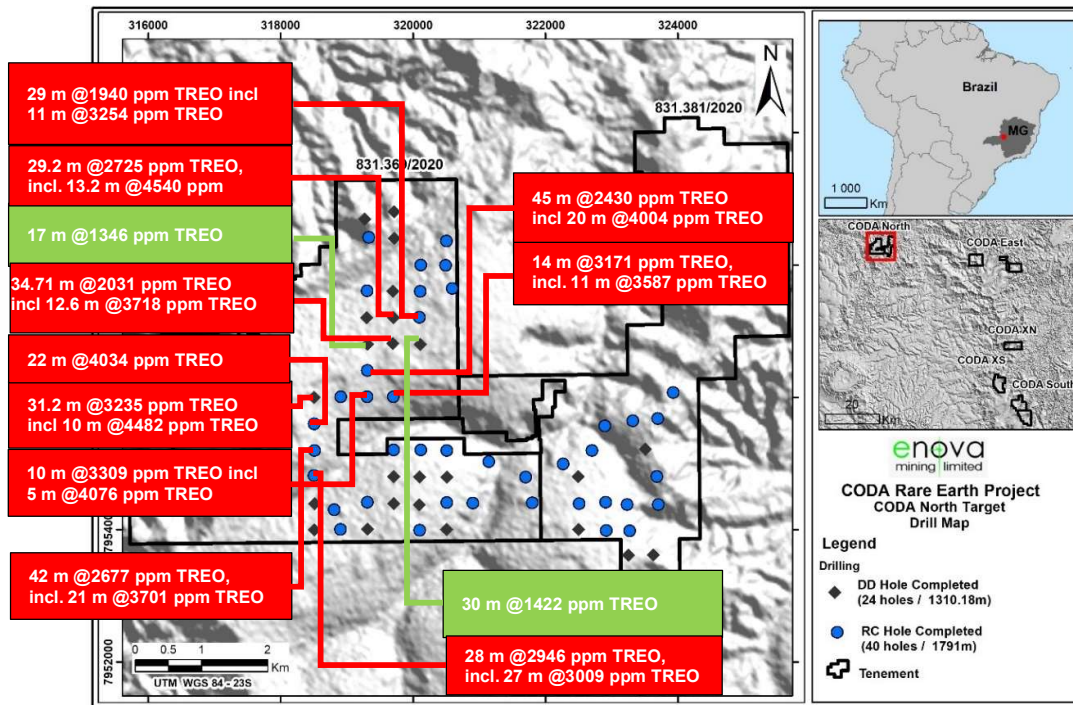


Figure 10: Drillhole map of CODA North (only significant values such as maximum intercepts and high grades of the current announcement are shown)

Commencement of drilling in a new project area of CODA Central, see Figure 11 below:

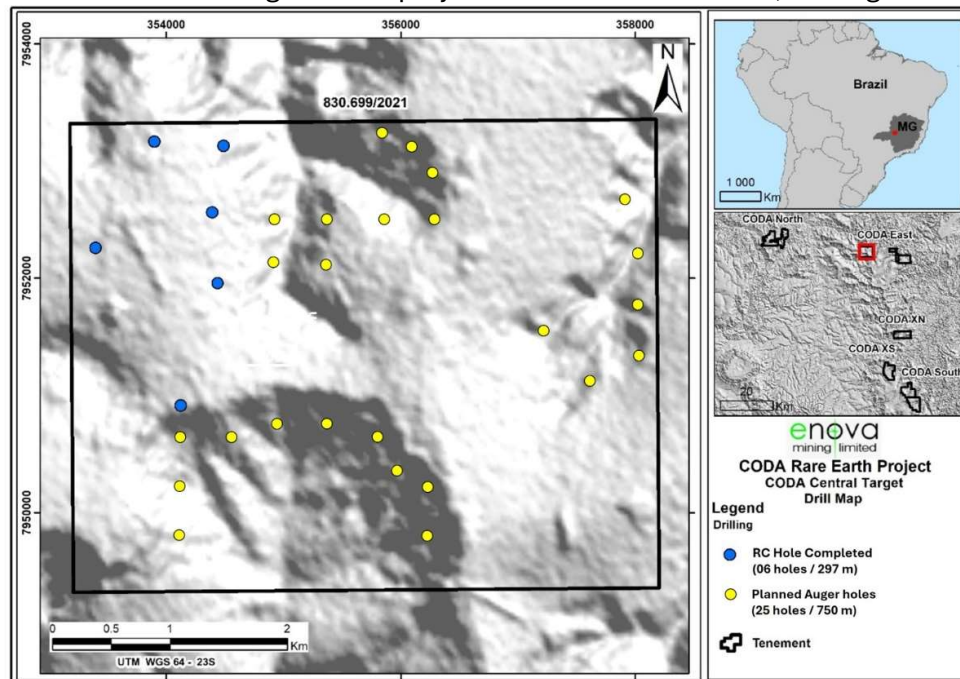


Figure 11: Drillhole map of CODA Central (Only completed drillholes are shown)

NEXT STEPS

Enova's Drilling Campaign Targets Resource Expansion and Upgradation

Enova's next phase of drilling at CODA North will concentrate on expanding and refining the high-grade REE mineralised zones identified in recent assays. The company will implement a strategic mix of infill and step-out drilling to accurately delineate the lateral extent and continuity of mineralisation. By increasing drill density in key areas, the company aims to elevate a significant portion of our identified resources to higher-confidence categories.

Simultaneously, Enova team will engage in resource modelling and metallurgical testing to ensure that the resource estimates accurately capture the deposit's true potential. These efforts will establish a solid foundation for future project development phases, including scoping studies and opportunities for resource expansion.

In addition to the focus on CODA North, the company has commenced drilling in a new exploration frontier, the CODA Central Project. In addition, to CODA North and Central, the company will carefully coordinate the future exploration efforts in the CODA East, Coda XN, Coda XS, Coda South project sites, taking into account local crop planting seasons. This multi-faceted exploration strategy reflects our commitment to maximising value and unlocking the full potential of the entire CODA tenement area.

MINERAL POTENTIAL OF CODA

The CODA tenements overlay the Patos geologic formation, with potential for REE enriched Ionic Absorption Clays (IAC). Significant historical exploration drilling results from the CODA project (Reference 1) confirm the potential for REE enriched IAC in the Northern and Southern CODA tenements where drilling has been completed. The extent of the mineralised area at CODA North prospect is yet to be determined. All intersections from CODA South start from surface and are open in all directions including depth.

Enova has arrangements with metallurgical laboratories within Brazil and abroad to investigate the metallurgical character of the CODA mineralisation. Metallurgical samples have been dispatched to local laboratories. CODA is well placed with mineralised zones of potential IAC with exceptionally high REE grade. This is underpinned by CODA's potential for broad areas of mineralised zones of exceptional thickness which are expected to translate to a significant resource base giving longevity to future extractive operations.

REGIONAL GEOLOGY AND TENEMENT OVERVIEW

Enova is encouraged by the location and size of the tenements in relation to prospective geological features. The prospective geological unit present in the CODA project is composed of the Patos Formation. It formed during the Upper Cretaceous period, when a massive volcanic event occurred in the western part of Minas Gerais state. The volcanic activity exhibited both effusive (lava flows) and explosive (pyroclastic deposits) eruptions. The predominant rock type in this formation is kamafugite, which is classified as an alkaline-

ultramafic rock. High-grade REE are also enriched in this formation.

Regionally the prospective unit consists of a horizontal bed of kamafugite, which can be up to 40 metres thick. Overburden at CODA varies from 0 to 30 metres. Weathering processes with thick clay zones are prevalent throughout this profile, leading to the accumulation of REE closer to the upper part of the formation. The rocks within this formation are predominantly soft and friable, with an extremely fine particle size. These characteristics are considered advantageous for the exploration of Ionic Clay REE deposits. Refer to Figure 12 below for the locations of the tenements at the CODA Project.

TENEMENTS/PERMITS

The title holder of the CODA tenements currently is Rodrigo De Brito Mello (Earlier RBM Consultoria Mineral), who filed transfer requests of the granted exploration permits to its sole owner, Rodrigo de Brito Mello. The application cannot be transferred until the permit is published, however Rodrigo and RBM Consultoria Mineral will undertake contractual obligations to transfer the title to Enova as soon as the permit is published in the official gazette. Details of the CODA tenements are provided in the following table.

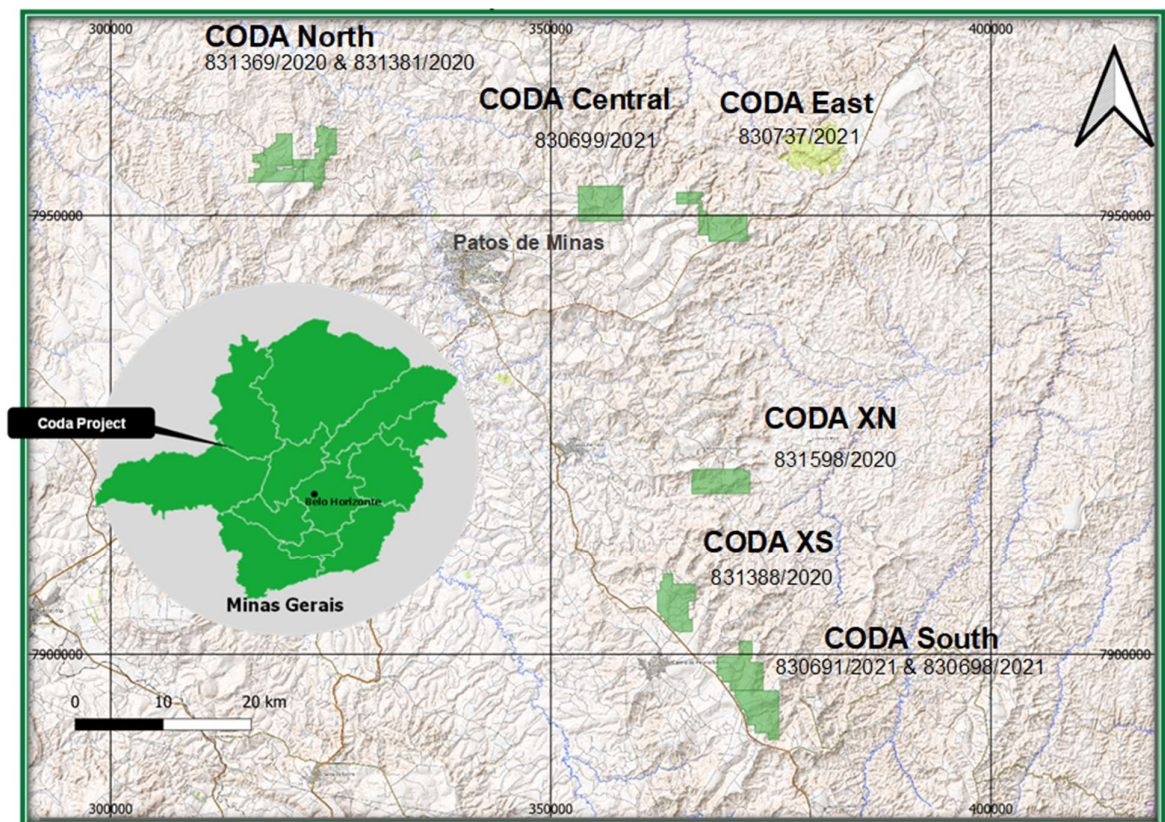


Figure 12: The CODA REE project tenements (100% ENV) Minas Gerais, Brazil

License ID	Area (Ha)	Ownership	In transference to	Status
831381-2020	1,537.60	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
831369-2020	1,997.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830699-2021	1,999.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830737-2021	1,999.60	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
831598-2020	1,807.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
831388-2020	1,999.60	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830691-2021	1,992.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830698-2021	1,997.40	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
	15,332.40			

Table 2: CODA Project tenements Minas Gerais, Brazil

ATTRACTIVE BUSINESS ENVIRONMENT

Brazil has well developed and sophisticated mining industry, and is amongst the leading exporters of iron ore, tin, bauxite, manganese, copper, gold, rare earth and lithium. The sovereign investment risk is low, and business environment is secured, based on:

- Mining is recognised as a key economic industry in Brazil and the State of Minas Gerais.
- Progressive mining policies, seeking investment, encouraging explorers and new developments,
- Mining investment free of government mandated ownership,
- Low sovereign risk and government interference,
- Attractive cost base and sophisticated support network for the mining industry
- High level of exploration/mining technical skills and expertise in country
- Excellent infrastructure is in place and practical proximity to cities


MANAGING OUR COMMITMENTS

Enova is currently focussed on the exploration drilling program at the CODA project. Enova also remains committed to the development of Charley Creek rare earth project with metallurgical process improvement test work continuing in Brisbane.

The Company will also continue to review projects and business opportunities as they arise.

The market will be kept appraised of developments, as required under ASX Listing Rules and in accord with continuous disclosure requirements.

Approved for release by the Board of Enova Mining Limited

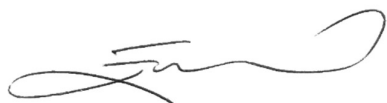

Eric Vesel,
Enova Mining Limited
 CEO/ Executive Director
Contact:
eric@enovamining.com

Competent Person Statement

The information related to Exploration Targets and Exploration Results is based on data compiled by Subhajit Deb Roy, a Competent Person and Chartered Member of The Australasian Institute of Mining and Metallurgy. Mr Deb Roy is currently working as Exploration Manager with Enova Mining. Subhajit has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Subhajit consents to the inclusion in presenting the matters based on his information in the form.

Forward-looking statements

This announcement contains forward-looking statements which involve a number of risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialise, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

Precautionary Statement

The information contained in this announcement regarding the exploration results at CODA North is based on data collected from diamond and reverse circulation (RC) drilling programs. While the identification of significant mineralised zones within the Patos formation of the Mata Do Corda Group suggests the potential for Rare Earth Element (REE) mineral resources, it is important to note the following cautionary considerations. The project is currently at an exploration stage, and while initial drilling results are promising, further exploration and evaluation are necessary to ascertain the extent, quality, and economic viability of the mineral resources. Potential mineralisation identified by sampling in drill holes is currently undergoing comprehensive assaying, mineralogical evaluation, structural analysis and metallurgical test work. Until these analyses are completed, surety of resource estimates in the future remains speculative.

Disclaimer

This ASX announcement (Announcement) has been prepared by Enova Mining Limited ("Enova" or "the Company"). It should not be considered as an offer or invitation to subscribe for or purchase any securities in the Company or as an inducement to make an offer or invitation with respect to those securities. No agreement to subscribe for securities in the Company will be entered into on the basis of this Announcement.

This Announcement contains summary information about Enova, its subsidiaries, and their activities, which is current as at the date of this Announcement. The information in this Announcement is of a general nature and does not purport to be complete nor does it contain all the information which a prospective investor may require in evaluating a possible investment in Enova.

By its very nature exploration for minerals is a high-risk business and is not suitable for certain investors. Enova's securities are speculative. Potential investors should consult their stockbroker or financial advisor. There are many risks, both specific to Enova and of a general nature which may affect the future operating and financial performance of Enova and the value of an investment in Enova including but not limited to economic conditions, stock market fluctuations, commodity price movements, regional infrastructure constraints, timing of approvals from relevant authorities, regulatory risks, operational risks and reliance on key personnel.

Certain statements contained in this announcement, including information as to the future financial or operating performance of Enova and its projects, are forward-looking statements that: may include, among other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions; are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Enova, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies; and, involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Enova disclaims any intent or obligation to update publicly any forward-looking statements, whether because of new information, future events, or results or otherwise. The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements. All forward-looking statements made in this announcement are qualified by the foregoing cautionary statements. Investors are cautioned that forward-looking statements are not guarantee of future performance and accordingly investors are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein. No verification: although all reasonable care has been undertaken to ensure that the facts and opinions given in this Announcement are accurate, the information provided in this Announcement has not been independently verified

APPENDIX A

JORC TABLE 1

Section 1 - Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<p>Coda Central Project</p> <p>Coda Central Project site consisting of 830699/2021 tenement was sampled using a Reverse Circulation drilling.</p> <p>Reverse Circulation (RC) drillholes</p> <p>In RC drillholes, sample was collected at 2m or 4m or longer in the unmineralised or less mineralised overburden litho-stratigraphic unit (Tertiary Sedimentary Cover) which is tertiary undifferentiated detritus and/or lateritised cover.</p> <p>Samples were collected at every 1m for underlying mineralised zone in Patos formation.</p> <p>All samples were sent for preparation to the contracted laboratory, SGS Geosol in Vespasiano, MG, Brazil.</p> <p>The sample was homogeneously reduced by using riffle splitter and one part is sent for assaying, other part is stored and retained or returned to Patos De Minas as umpire sample.</p> <p>The tertiary undifferentiated detritus cover layer (Tertiary Sedimentary Cover; Refer Table 4) has been visually differentiated from kamaugite of Patos formation by professional geologist and additionally, magnetic susceptibility test carried out by Terraplus KT10-V2 device to differentiate the ferromagnetic iron bearing kamaugite litho-unit within Patos formation from overlying and underlying formations.</p> <p>CODA North Project</p> <p>Coda North consisting of 831369/2020 and 831381/2020 areas were sampled using a diamond drill rig, and a Reverse Circulation drill rig.</p> <p>Diamond drillholes</p> <p>The drill cores representing in-situ rocks are collected in plastic core trays, and depth markers record the depth at the end of each drill run.</p> <p>In the initial holes sample was collected for every 2m or every 4m or longer intervals in the unmineralised or less mineralised overburden litho-stratigraphic unit which is tertiary undifferentiated detritus and/or lateritised cover.</p> <p>Samples were collected at every 1m for underlying mineralised zone in Patos formation.</p> <p>In the unconsolidated drill samples, the core was halved with a metal spatula and bagged in plastic bags, while a powered saw halved the hard and consolidated rock, bagged, and each sample was tagged with sample number.</p> <p>Reverse Circulation (RC) drillholes</p> <p>In RC drillholes, sample was collected at 2m or 4m or longer in the unmineralised or less mineralised overburden litho-stratigraphic unit which is tertiary undifferentiated detritus and/or lateritised cover.</p>

		<p>Samples were collected at every 1m for underlying mineralised zone in Patos formation.</p> <p>All samples were sent for preparation to the contracted laboratory, SGS Geosol in Vespasiano, MG, Brazil.</p> <p>The sample was riffle split and one part is sent for assaying and other part is stored and retained or returned to Patos De Minas as umpire sample.</p> <p>The tertiary undifferentiated detritus cover layer has been visually differentiated from kamafugite of Patos formation by professional geologist and additionally, magnetic susceptibility test carried out by Terraplus KT10-V2 device to differentiate the ferromagnetic iron bearing kamafugite litho-unit within Patos formation from overlying and underlying formations.</p>
Drilling techniques	<ul style="list-style-type: none"> • Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<p>Diamond Drillholes</p> <p>Diamond drilling was carried out by Maquesonda MACH 1210 rig, drilling vertically and sampled generally at intervals of 1.0m within the mineralised strata. The drilling used a wireline diamond core of HQ diameter of 2.63 inches (core diameter).</p> <p>Drilling of each hole was conducted by the diamond core rig and terminated upon intercepting between 1 to 10 meters of underlying Areado Group, indicative of penetration into the underlying unmineralised or less mineralised zone.</p> <p>Diamond Drill rig was demobilised after completing Coda North Drilling</p> <p>Reverse Circulation Drillholes</p> <p>RC drilling was conducted using with a 4.75-inch diameter downhole rigs.</p> <p>The drill site preparation included clearing, levelling the ground, and delineating the drilling area. The RC drilling was terminated upon intercepting between 1 to 10 meters of underlying Areado Group, indicative of penetration into the underlying unmineralised or less mineralised zone.</p> <p>Diamond drilling was predominantly used for establishing the extent of the ore body while RC drilling being used to test the continuity of mineralised zone between diamond drillholes.</p>
Drill sample recovery	<ul style="list-style-type: none"> • Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p>Recovery in Diamond Drillholes</p> <p>Calculated after each run, comparing the length of core recovery vs. drill depth by visual inspection. Overall core recoveries are above 90% in diamond drilling.</p> <p>Recovery in RC drillholes</p> <p>Every 1m sample in the mineralised strata is collected in plastic bags and weighed. Each sample averages approximately 6-12kg, which is considered given the hole diameter, material loss sticky clay content in the lithological units and the specific density of the material. The estimated sample recovery was initially above 50% due to high clay content in the strata, loss of drill cuttings and in the later drillholes the estimated recovery of drill cuttings improved up to 70%. The recovery</p>

		<p>has been estimated by visual inspection.</p> <p>Any sample bias due to low recovery will be determined after the assay and mineral characterisation completed.</p>
Logging	<ul style="list-style-type: none"> • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged. 	<p>Diamond Drillholes</p> <p>Lithological descriptions are carried out at site or in Enova's warehouse facility by professional geologist, describing broadly about the pedolith, saprolite, SAP rock and underlying Areado group and the lithological contacts. Parameters such as grain size, texture, colour, mineralogy, magnetism, type of alterations (hydrothermal or weathering) will be logged in detail in due course. The type of lithological contact is identified by visual inspections and magnetic susceptibility readings which can help to differentiate the overlying and underlying lithology from mineralised zone.</p> <p>All drill holes are photographed and stored at the core facility in Patos De Minas.</p> <p>Reverse Circulation Drillholes</p> <p>A professional geologist logs the material at the drill site or in the Enova's warehouse facility, describing broadly about the pedolith, saprolite, SAP rock and Areado group and the lithological contacts. Other parameters including grain size, texture, and colour, will be logged in detail in due course which can help identify the parent rock before weathering.</p> <p>Due to the nature of the drilling, sampling is done at 1m intervals within the mineralised zone. 1m samples weighing approximately 6-12kg are collected in a bucket and presented for sampling and logging. The average weight improved up to 15kg with increasing recovery of samples by arresting the loss of drill cuttings.</p> <p>The chip trays of all drilled holes have a digital photographic record and are stored at the Enova's warehouse facility in Patos De Minas.</p> <p>A schematic north-south cross section is shown in Figure 6</p>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all cores taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality, and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field 	<p>Diamond Drillholes</p> <p>Collection and labelling: Samples of diamond cores are taken at 1.0m intervals from mineralised kamafugite lithological unit</p> <p>The cores are split longitudinally using a spatula for unconsolidated portions or using riffle splitter (Figure 8) and a rock-cutting saw for hard rock.</p> <p>The samples were placed in labelled plastic bags and in the process of dispatching to SGS Geosol laboratory in Vespasiano.</p> <p>Field Duplicates: Duplicates are inserted approximately every 20 samples using quarter core for QA/QC procedures</p> <p>Reverse Circulation (RC) Drillholes</p> <p>RC drillholes samples are currently sent to SGS Geosol Laboratory for preparation and subsampling. SGS Geosol laboratory follows industry standard protocols for sub-sampling procedure.</p> <p>The sample assays were conducted in the following method</p> <p>Sample Preparation in SGS Laboratory</p> <p>At the lab, SGS-Geosol commercial laboratory, in Vespasiano, the</p>

	<p>duplicate/second-half sampling.</p> <ul style="list-style-type: none">Whether sample sizes are appropriate to the grain size of the material being sampled.	<p>samples are dried at 60° or 105° C, 75% material crushed to a nominal 3mm using a jaw crusher before being split using Jones riffle splitter for pulverising.</p> <p>The aliquots are pulverised to a nominal >95% of 300g passing 150 micron for which a 100g sample is then selected for analysis. A spatula is used to sample from the pulverised sample for digestion.</p> <p>Quality Control The laboratory follows strict quality control procedures, ensuring the accuracy and precision of the assay data. Internally, the laboratory uses duplicate assays, standards, and blanks to maintain quality.</p>																																																																						
Quality of assay data and laboratory tests	<ul style="list-style-type: none">The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	<p>Samples are analysed at the SGS Geosol laboratory in batches of approximately 50 samples including control samples (duplicate, blank, and standards).</p> <p>Industry standard protocols are used by SGS-Geosol to prepare samples for analysis. Samples are dried, and a sub sample of 300g was pulverised. For rare earth element analysis, samples are prepared with lithium/Metaborate fusion and are analysed by Inductively Coupled Plasma Mass Spectrometry (ICP-MS) or Inductively Coupled Plasma Optical Emission Spectrometry (ICP-OES).</p> <p>SGS Geosol detection limits of major oxides and minor and trace elements are given below</p> <p>3.1) ICP95A</p> <table><tr><th colspan="4">Determinação por Fusão com Metaborato de Lítio - ICP OES</th><th>PM-000003/2</th></tr><tr><td>Al2O3 0.01 - 75 (%)</td><td>Ba 10 - 100000 (ppm)</td><td>CaO 0.01 - 60 (%)</td><td>Cr2O3 0.01 - 10 (%)</td><td></td></tr><tr><td>Fe2O3 0.01 - 75 (%)</td><td>K2O 0.01 - 25 (%)</td><td>MgO 0.01 - 30 (%)</td><td>MnO 0.01 - 10 (%)</td><td></td></tr><tr><td>Na2O 0.01 - 30 (%)</td><td>P2O5 0.01 - 25 (%)</td><td>SiO2 0.01 - 90 (%)</td><td>Sr 10 - 100000 (ppm)</td><td></td></tr><tr><td>TiO2 0.01 - 25 (%)</td><td>V 5 - 10000 (ppm)</td><td>Zn 5 - 10000 (ppm)</td><td>Zr 10 - 100000 (ppm)</td><td></td></tr></table> <p>3.2) IMS95A</p> <table><tr><th colspan="4">Determinação por Fusão com Metaborato de Lítio - ICP MS</th><th>PM-000003/2</th></tr><tr><td>Ce 0.1 - 10000 (ppm)</td><td>Co 0.5 - 10000 (ppm)</td><td>Cs 0.05 - 1000 (ppm)</td><td>Cu 5 - 10000 (ppm)</td><td></td></tr><tr><td>Dy 0.05 - 1000 (ppm)</td><td>Er 0.05 - 1000 (ppm)</td><td>Eu 0.05 - 1000 (ppm)</td><td>Ga 0.1 - 10000 (ppm)</td><td></td></tr><tr><td>Gd 0.05 - 1000 (ppm)</td><td>Hf 0.05 - 500 (ppm)</td><td>Ho 0.05 - 1000 (ppm)</td><td>La 0.1 - 10000 (ppm)</td><td></td></tr><tr><td>Lu 0.05 - 1000 (ppm)</td><td>Mo 2 - 10000 (ppm)</td><td>Nb 0.05 - 1000 (ppm)</td><td>Nd 0.1 - 10000 (ppm)</td><td></td></tr><tr><td>Ni 5 - 10000 (ppm)</td><td>Pr 0.05 - 1000 (ppm)</td><td>Rb 0.2 - 10000 (ppm)</td><td>Sm 0.1 - 1000 (ppm)</td><td></td></tr><tr><td>Sn 0.3 - 1000 (ppm)</td><td>Ta 0.05 - 1000 (ppm)</td><td>Tb 0.05 - 1000 (ppm)</td><td>Th 0.1 - 10000 (ppm)</td><td></td></tr><tr><td>Ti 0.5 - 1000 (ppm)</td><td>Tm 0.05 - 1000 (ppm)</td><td>U 0.05 - 10000 (ppm)</td><td>W 0.1 - 10000 (ppm)</td><td></td></tr><tr><td>Y 0.05 - 10000 (ppm)</td><td>Yb 0.1 - 1000 (ppm)</td><td></td><td></td><td></td></tr></table> <p>QA/QC samples are included amongst the submitted samples. Both standards, duplicates and blank QA/QC samples were inserted in the sample stream.</p> <p>Oreas 460 and Oreas 461 samples sent from Australia which was used in 12gm package as certified reference material at an interval every 15-20 samples.</p> <p>The assays were done using ICP MS, ICP AES after Fusion with Lithium Metaborate - ICP MS for major Oxides.</p>	Determinação por Fusão com Metaborato de Lítio - ICP OES				PM-000003/2	Al2O3 0.01 - 75 (%)	Ba 10 - 100000 (ppm)	CaO 0.01 - 60 (%)	Cr2O3 0.01 - 10 (%)		Fe2O3 0.01 - 75 (%)	K2O 0.01 - 25 (%)	MgO 0.01 - 30 (%)	MnO 0.01 - 10 (%)		Na2O 0.01 - 30 (%)	P2O5 0.01 - 25 (%)	SiO2 0.01 - 90 (%)	Sr 10 - 100000 (ppm)		TiO2 0.01 - 25 (%)	V 5 - 10000 (ppm)	Zn 5 - 10000 (ppm)	Zr 10 - 100000 (ppm)		Determinação por Fusão com Metaborato de Lítio - ICP MS				PM-000003/2	Ce 0.1 - 10000 (ppm)	Co 0.5 - 10000 (ppm)	Cs 0.05 - 1000 (ppm)	Cu 5 - 10000 (ppm)		Dy 0.05 - 1000 (ppm)	Er 0.05 - 1000 (ppm)	Eu 0.05 - 1000 (ppm)	Ga 0.1 - 10000 (ppm)		Gd 0.05 - 1000 (ppm)	Hf 0.05 - 500 (ppm)	Ho 0.05 - 1000 (ppm)	La 0.1 - 10000 (ppm)		Lu 0.05 - 1000 (ppm)	Mo 2 - 10000 (ppm)	Nb 0.05 - 1000 (ppm)	Nd 0.1 - 10000 (ppm)		Ni 5 - 10000 (ppm)	Pr 0.05 - 1000 (ppm)	Rb 0.2 - 10000 (ppm)	Sm 0.1 - 1000 (ppm)		Sn 0.3 - 1000 (ppm)	Ta 0.05 - 1000 (ppm)	Tb 0.05 - 1000 (ppm)	Th 0.1 - 10000 (ppm)		Ti 0.5 - 1000 (ppm)	Tm 0.05 - 1000 (ppm)	U 0.05 - 10000 (ppm)	W 0.1 - 10000 (ppm)		Y 0.05 - 10000 (ppm)	Yb 0.1 - 1000 (ppm)			
Determinação por Fusão com Metaborato de Lítio - ICP OES				PM-000003/2																																																																				
Al2O3 0.01 - 75 (%)	Ba 10 - 100000 (ppm)	CaO 0.01 - 60 (%)	Cr2O3 0.01 - 10 (%)																																																																					
Fe2O3 0.01 - 75 (%)	K2O 0.01 - 25 (%)	MgO 0.01 - 30 (%)	MnO 0.01 - 10 (%)																																																																					
Na2O 0.01 - 30 (%)	P2O5 0.01 - 25 (%)	SiO2 0.01 - 90 (%)	Sr 10 - 100000 (ppm)																																																																					
TiO2 0.01 - 25 (%)	V 5 - 10000 (ppm)	Zn 5 - 10000 (ppm)	Zr 10 - 100000 (ppm)																																																																					
Determinação por Fusão com Metaborato de Lítio - ICP MS				PM-000003/2																																																																				
Ce 0.1 - 10000 (ppm)	Co 0.5 - 10000 (ppm)	Cs 0.05 - 1000 (ppm)	Cu 5 - 10000 (ppm)																																																																					
Dy 0.05 - 1000 (ppm)	Er 0.05 - 1000 (ppm)	Eu 0.05 - 1000 (ppm)	Ga 0.1 - 10000 (ppm)																																																																					
Gd 0.05 - 1000 (ppm)	Hf 0.05 - 500 (ppm)	Ho 0.05 - 1000 (ppm)	La 0.1 - 10000 (ppm)																																																																					
Lu 0.05 - 1000 (ppm)	Mo 2 - 10000 (ppm)	Nb 0.05 - 1000 (ppm)	Nd 0.1 - 10000 (ppm)																																																																					
Ni 5 - 10000 (ppm)	Pr 0.05 - 1000 (ppm)	Rb 0.2 - 10000 (ppm)	Sm 0.1 - 1000 (ppm)																																																																					
Sn 0.3 - 1000 (ppm)	Ta 0.05 - 1000 (ppm)	Tb 0.05 - 1000 (ppm)	Th 0.1 - 10000 (ppm)																																																																					
Ti 0.5 - 1000 (ppm)	Tm 0.05 - 1000 (ppm)	U 0.05 - 10000 (ppm)	W 0.1 - 10000 (ppm)																																																																					
Y 0.05 - 10000 (ppm)	Yb 0.1 - 1000 (ppm)																																																																							
Verification of sampling and assaying	<ul style="list-style-type: none">The verification of significant intersections by either independent or alternative company personnel.The use of twinned holes.Documentation of primary data, data entry procedures, data verification,	<p>Enova’s Brazilian team of professional geologist has reviewed the data collated and compared with electronic copies to verify the accuracy. Assay data, in electronic form, is checked to verify the data files are correctly handled in spreadsheets where calculations are needed. The process of verifying sampling and assaying is still ongoing as drilling progresses. Competent people also visited the site in September 2024 to verify the sampling process.</p>																																																																						

	<p><i>data storage (physical and electronic) protocols.</i></p> <ul style="list-style-type: none"> <i>Discuss any adjustment to assay data.</i> 	<p>This was a maiden drilling program by Enova. Hence, twinned holes were not drilled to verify the representation of historical drill data.</p> <p>2m or 4m or longer interval composite samples of the overburden strata of tertiary undifferentiated detritus and/or lateritised cover. 1m samples taken from the mineralised zone of kamafugite within Patos formation</p> <p>Field geological data was recorded on logs (Appendix 2 Table 4 and Table 4 are shown alongside the assay results) and typed into a spreadsheet for subsequent import to a database.</p> <p>Assay data is received in spreadsheet form from the laboratory</p>
Location of data points	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<p>The drill hole collars were picked up using a Garmin handheld GPS. Datum for all sitework is considered SIRGAS 2000, Zone 23 South or WGS 84 UTM Zone 23S (Appendix 1, Table 2). The error in the handheld GPS is around ±3m. A DGPS survey picks up of collar of all drill holes have been planned and will be implemented in next couple of months. This universal grid system facilitates consistent data interpretation and integration with other geospatial datasets.</p>
Data spacing and distribution	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<p>The average spacing between adjacent planned holes is about 400m x 400 m, varied according to the extent, width, and length of the tenements.</p> <p>Diamond drilling is to provide insights into lateral extent of the potential mineralised zones. The exploratory nature of the diamond drilling further supports the overall geological understanding. Hence, they are drilled at larger spacings 400m x 400m. However, the current holes are being drilled at the margin of the grid which put the holes apart by more than 400 m spacings.</p> <p>Reverse circulation (RC) drilling carried out on a structured grid with a 400 x 400 metres spacing. This grid pattern is tailored to enhancing the understanding of the mineral distribution, extent of mineralisation along strike and geological continuity across the target zone. The hole locations have been occasionally adjusted according to the outcome of intersects of mineralised zone in already drilled holes.</p> <p>2m or 4m or longer interval compositing was used to produce a sample for assay of unmineralised and less mineralised overburden zone (Tertiary Sedimentary Cover). No other compositing of samples done at this stage. The samples in the mineralised zone are done for every meter drill run.</p> <p>No resources are reported.</p>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key</i> 	<p>Mineralisation is moderately flat lying. The drillholes are vertical, which is closely perpendicular to mineralised horizons.</p> <p>Vertical drillholes are considered appropriate due to the characteristics of the deposit. The deposit is saprolitised resulting in supergene enrichment. This kind of deposit is typically extended horizontally with a relatively less variable thickness and stratabound.</p> <p>There is no evidence that the drilling orientation has introduced any</p>

	<i>mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	sampling bias regarding the critical mineralised structures. The drilling orientation is well-aligned with the known geology of the deposit, ensuring accurate representation and unbiased sampling of the mineralised zones. Any potential bias due to drilling orientation is considered negligible in this context.
Sample security	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	All samples were collected by qualified and skilled field geologists and meticulously packed in labelled plastic bags. They were then transported directly to the SGS-GEOSOL laboratory, Vespasiano, Minas Gerais in Brazil. The samples were secured during transit to prevent tampering, contamination, or loss. A chain of custody was maintained from the field to the laboratory, with proper documentation accompanying each batch to ensure transparency and traceability throughout the sampling process. Utilising a reputable laboratory further ensures the security and integrity of the assay results.
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	The site is attended by Enova's Brazilian Professional Geology Team to inspect drilling and sampling procedures, verify survey methods, inspect the storage shed, verification geological records, review QAQC procedures and review the geologic model. The competent person had audited and visited CODA project sites on 17 September 2024.

Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> • Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<p>The title holder of the tenements is now Rodrigo De Britto Mello (Earlier RBM Consultoria Mineral), who filed transfer requests of the granted exploration permits to its sole owner, Rodrigo de Brito Mello. The application cannot be transferred until the permit is published, however Rodrigo and RBM Consultoria Mineral will undertake contractual obligations to transfer the title to Enova as soon as the permit is published in the official gazette. Details of the CODA tenements are provided in the Table 2 and Figure 12.</p> <p>The drilling is completed in Coda North area consisting of tenements 831369/2020 and 831381/2020. The RC drilling is commenced in Coda Central consisting of 830699/2021 from 3 Oct 2024</p> <p>Enova has submitted the required fees and annual reports of the above tenements to ANM on and before 2 August 2024 and the renewal of the tenements is under process through to the next year.</p>
Exploration done by other parties	<ul style="list-style-type: none"> • Acknowledgment and appraisal of exploration by other parties. 	<p>The Coda North area was earlier explored by Vicenza and the significant results of historical drilling of Coda North are announced via ASX release³ dated 18 March 2024. The historical data provides the guidance for current exploration drilling.</p> <p>Coda Central project area was previously sampled under Regional Surface Geochemical sampling program⁴. However, no other party explored Coda Central.</p>
Geology	<ul style="list-style-type: none"> • Deposit type, geological setting and style of mineralisation. 	<p>The prospective geological unit present in the CODA project areas including Coda North and Coda Central, is composed of the Patos formation. It formed during the Upper Cretaceous period, when a massive volcanic event occurred in the western part of Minas Gerais state. The volcanic activity exhibited both effusive (lava flows) and explosive (pyroclastic deposits) eruptions. The predominant rock type in this formation is kamafugite, which is classified as an alkaline-ultramafic rock. High-grade REE are also enriched in this formation.</p> <p>The prospective unit consists of a horizontal bed of kamafugite, which can be up to 40 metres thick, overlain by overburden that varies from 0 to 50 metres. Weathering processes with thick clay zones are prevalent throughout this profile, leading to the accumulation of REE closer to the upper part of the formation. The rocks within this formation are predominantly soft and friable, with an extremely fine particle size. These characteristics are considered advantageous for the exploration of Clay hosted REE deposits.</p>

³ ASX announcement "World class clay hosted rare earth grades uncovered at CODA North" dated 18 March 2024

⁴ ASX Announcement "CODA Geochem. sampling reveals high-grade REE mineralisation" 15 Aug 2024

Drill hole Information	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<p>The data and information of about the drillholes are given below,</p> <p>Total number of drill holes completed (Table 1)</p> <p>In Coda North Project,</p> <p>Diamond Drill holes 24 numbers</p> <p>RC drillholes 40 numbers</p> <p>In Coda Central Project,</p> <p>RC drillholes 6 numbers</p> <p>Collar information of all drillholes completed so far is given in Table 3</p> <p>The current report documents the significant assays of 12 drillholes (Refer Table 4 and Figure 11 and 12) evaluated by Enova team.</p> <p>Further assays are still under assaying in SGS Geosol laboratory and work in progress.</p>
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<p>The data are being compiled in Collar, Survey, Assay and Geology files.</p> <p>The Assay data has been compiled in the Assay table and TREO and NdPr% are given in the Appendix C, Table 4. The database has been compiled as per industry standard practices and for the use of resource modelling in the next stage.</p> <p>The conversion of Total Rare Earth Oxide (TREO) will be calculated using standard conversion table as mentioned below.</p> <p>The conversion of elemental assay results to expected common rare earth oxide products, uses conversion factors applied relating to the atomic composition of common rare earth oxide sale products. The following calculation for TREO provides REE to RE oxide conversion factors and lists the REE included:</p> <p>TREO=</p> $(Ce*1.23) + (Dy*1.15) + (Er*1.14) + (Gd*1.15) + (Ho*1.15) + (La*1.17) + (Lu*1.14) + (Nd*1.17) + (Pr*1.21) + (Sm*1.16) + (Tb*1.18) + (Tm*1.14) + (Y*1.27) + (Yb*1.14)$ <p>For the reporting of significant intersections, the downhole aggregation for the cut-off calculation is based on the average of 3 consecutive samples that are greater than the nominal cutoff. No more than 3 samples below cut-off are accepted in any 3m consecutive aggregation but the aggregation with the below cut-off sample must remain above the nominal cut-off.</p>

		<p>Nominal cut-offs of 1000 ppm, 2000 ppm and 3000 ppm have been applied for calculation of significant results. Notable high-grade assays have been calculated with nominal cut-off 3000 ppm.</p> <p>A schematic cross section in North South direction is shown in Figure 5.</p>
<p>Relationship between mineralisation widths and intercept lengths</p>	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<p>Due to the geometry of the mineralisation, the vertical orientation of the drill holes, the downhole lengths are likely to be close approximations of the true widths of the mineralised zones.</p> <p>In instances where discrepancies between downhole lengths and true widths may occur, it should be noted as "downhole thickness or length, not the true width".</p> <p>All drill holes are vertical and suitable for the deposit type, ensuring unbiased sampling of the mineralisation</p>
<p>Diagrams</p>	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<p>The data provided in this report aids readers in comprehending the information more effectively. The document includes various diagrams and supplementary details, which enhance the clarity and accessibility of the geological findings and exploration results. Please refer to the Figure 1 to 9 for drilling, sampling related data and information and Figure 10 and 11 for drillhole locations in Coda North and Coda Central respectively.</p>
<p>Balanced reporting</p>	<ul style="list-style-type: none"> • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<p>The data presented in this report aims to offer a transparent and comprehensive overview of the exploration activities and findings. It thoroughly covers information on sampling techniques, geological context, prior exploration work, and assay results. Relevant cross-references to previous announcements are included to ensure continuity and clarity. Diagrams, such as drillhole plan and tenements maps and tables, are provided to facilitate a deeper understanding of the data.</p> <p>Additionally, the report distinctly mentions the source of the samples, whether from saprolitic clays, kamafugite lithounits under Patos formation, to ensure a balanced perspective. This report represents the exploration activities and findings without any undue bias or omission.</p>
<p>Other substantive exploration data</p>	<ul style="list-style-type: none"> • Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of 	<p>There is no additional substantive, relevant and significant exploration data to report currently.</p>

	<p><i>treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	
Further work	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive</i> 	<p>In the current stage, resource delineation drilling is focused on systematically mapping the extent and continuity of the mineralised zones identified during initial exploration. This involves both infill and step-out drilling to provide detailed information on the grade and distribution of the mineralised zones, reducing geological uncertainty and will improve the confidence and accuracy of the resource model in the next stage.</p> <p>As we move to the next stage, resource definition will take precedence, leading to a compliant mineral resource estimate.</p> <p>Diagrams and figures in the current document entail the future infill drilling requirement in the gaps to enhance the confidence on geological, grade continuity and resource categorisation.</p>

Appendix -B

The drillholes collars presented in the current release

HoleID	Project	East_UTM	North_UTM	Elev	Datum	Zone	DIP	EOH (m)	Drill Type
CDN-DD-0001	CODA North	318514	7954393	1016	WGS84	23S	90	39.36	DD
CDN-DD-0002	CODA North	318509	7954001	1046	WGS84	23S	90	57.1	DD
CDN-DD-0003	CODA North	320507	7954002	1033	WGS84	23S	90	53.42	DD
CDN-DD-0004	CODA North	320514	7954795	1043	WGS84	23S	90	79.9	DD
CDN-DD-0005	CODA North	320093	7954375	1074	WGS84	23S	90	81.21	DD
CDN-DD-0006	CODA North	319310	7954007	1058	WGS84	23S	90	81.11	DD
CDN-DD-0007	CODA North	319710	7954396	1061	WGS84	23S	90	61.81	DD
CDN-DD-0008	CODA North	320096	7954797	1053	WGS84	23S	90	63.09	DD
CDN-DD-0009	CODA North	319707	7954802	1048	WGS84	23S	90	59.45	DD
CDN-DD-0010	CODA North	318502	7955997	1064	WGS84	23S	90	68.65	DD
CDN-DD-0011	CODA North	319310	7956801	1020	WGS84	23S	90	45.89	DD
CDN-DD-0012	CODA North	319697	7956813	1057	WGS84	23S	90	43.31	DD
CDN-DD-0013	CODA North	320110	7956800	1065	WGS84	23S	90	54.27	DD
CDN-DD-0014	CODA North	319706	7957204	1047	WGS84	23S	90	36.24	DD
CDN-DD-0015	CODA North	319298	7957202	957	WGS84	23S	90	27.71	DD
CDN-DD-0016	CODA North	319714	7957607	1021	WGS84	23S	90	25.58	DD
CDN-DD-0017	CODA North	319710	7958398	1011	WGS84	23S	90	27.72	DD
CDN-DD-0018	CODA North	319714	7958809	1029	WGS84	23S	90	30.1	DD
CDN-DD-0019	CODA North	319249	7958670	1023	WGS84	23S	90	50.63	DD
CDN-DD-0020	CODA North	322517	7954400	1050	WGS84	23S	90	40.81	DD
CDN-DD-0021	CODA North	322512	7954008	1067	WGS84	23S	90	80.05	DD
CDN-DD-0022	CODA North	323252	7953613	1011	WGS84	23S	90	85.22	DD
CDN-DD-0023	CODA North	323629	7953620	1045	WGS84	23S	90	57.5	DD
CDN-DD-0024	CODA North	323298	7953599	955	WGS84	23S	90	60.05	DD
CDN-RC-0001	CODA North	320905	7954403	1014	WGS84	23S	90	50	RC

CDN-RC-0002	CODA North	320512	7955196	1012	WGS84	23S	90	42	RC
CDN-RC-0003	CODA North	320101	7953991	1056	WGS84	23S	90	48	RC
CDN-RC-0004	CODA North	321145	7955026	997	WGS84	23S	90	30	RC
CDN-RC-0005	CODA North	320512	7954410	1046	WGS84	23S	90	67	RC
CDN-RC-0006	CODA North	318904	7954006	1055	WGS84	23S	90	62	RC
CDN-RC-0007	CODA North	318812	7954302	1036	WGS84	23S	90	40	RC
CDN-RC-0008	CODA North	319312	7954414	1049	WGS84	23S	90	56	RC
CDN-RC-0009	CODA North	320118	7955206	1026	WGS84	23S	90	51	RC
CDN-RC-0010	CODA North	319710	7955202	1016	WGS84	23S	90	35	RC
CDN-RC-0011	CODA North	318912	7956006	1054	WGS85	23S	90	44	RC
CDN-RC-0012	CODA North	318514	7955195	1043	WGS86	23S	90	58	RC
CDN-RC-0013	CODA North	318509	7955597	1054	WGS87	23S	90	59	RC
CDN-RC-0014	CODA North	318503	7954814	1015	WGS88	23S	90	36	RC
CDN-RC-0015	CODA North	319313	7956404	1062	WGS89	23S	90	58	RC
CDN-RC-0016	CODA North	319702	7956008	979	WGS90	23S	90	27	RC
CDN-RC-0017	CODA North	319308	7956007	1024	WGS91	23S	90	28	RC
CDN-RC-0018	CODA North	320097	7957207	1059	WGS92	23S	90	41	RC
CDN-RC-0019	CODA North	320108	7957600	1048	WGS93	23S	90	40	RC
CDN-RC-0020	CODA North	320495	7957992	1047	WGS94	23S	90	51	RC
CDN-RC-0021	CODA North	320592	7957645	1070	WGS95	23S	90	62	RC
CDN-RC-0022	CODA North	319311	7957605	1000	WGS96	23S	90	21	RC
CDN-RC-0023	CODA North	320108	7957994	1018	WGS97	23S	90	12	RC
CDN-RC-0024	CODA North	320510	7958365	1026	WGS98	23S	90	32	RC
CDN-RC-0025	CODA North	319337	7958404	1024	WGS99	23S	90	50	RC
CDN-RC-0026	CODA North	321794	7954422	1033	WGS100	23S	90	50	RC
CDN-RC-0027	CODA North	321712	7954802	1006	WGS101	23S	90	38	RC
CDN-RC-0028	CODA North	322270	7954994	978	WGS84	23S	90	35	RC
CDN-RC-0029	CODA North	322705	7955200	1003	WGS84	23S	90	29	RC
CDN-RC-0030	CODA North	322501	7954808	1032	WGS84	23S	90	67	RC

CDN-RC-0031	CODA North	322914	7954005	1051	WGS84	23S	90	72	RC
CDN-RC-0032	CODA North	323314	7953608	1057	WGS84	23S	90	54	RC
CDN-RC-0033	CODA North	322912	7954416	1043	WGS84	23S	90	57	RC
CDN-RC-0034	CODA North	323235	7954381	1013	WGS84	23S	90	37	RC
CDN-RC-0035	CODA North	323708	7954381	1007	WGS84	23S	90	33	RC
CDN-RC-0036	CODA North	323684	7954803	1029	WGS84	23S	90	52	RC
CDN-RC-0037	CODA North	323931	7956073	1040	WGS84	23S	90	48	RC
CDN-RC-0038	CODA North	323697	7955677	1050	WGS84	23S	90	60	RC
CDN-RC-0039	CODA North	323323	7955646	1042	WGS84	23S	90	52	RC
CDN-RC-0040	CODA North	322899	7955567	978	WGS84	23S	90	15	RC

Table 3A: The coordinates of Diamond and RC drillholes for which assays received in Coda North area

HoleID	Project	East_UTM	North_UTM	Elev	Datum	Zone	DIP	EOH (m)	Drill Type
CDC-RC-0001	CODA Central	354488	7953131	1033	WGS84	23S	90	45.00	RC
CDC-RC-0002	CODA Central	353899	7953166	1077	WGS84	23S	90	50.00	RC
CDC-RC-0003	CODA Central	354392	7952562	1074	WGS84	23S	90	50.00	RC
CDC-RC-0004	CODA Central	353397	7952259	1096	WGS84	23S	90	52.00	RC
CDC-RC-0005	CODA Central	354439	7951958	1002	WGS84	23S	90	50.00	RC
CDC-RC-0006	CODA Central	354122	7950914	1057	WGS84	23S	90	50.00	RC

Table 3B: The coordinates of RC drillholes for which assays received in Coda Central area

Appendix -C

SampleID	FROM	TO	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-DD-0010-0001	0	3	3	575.1	15%	Tertiary Sedimentary Cover
CDN-DD-0010-0002	3	6	3	647.7	14%	
CDN-DD-0010-0003	6	9	3	781.9	13%	
CDN-DD-0010-0005	9	12	3	929.9	16%	
CDN-DD-0010-0006	12	15	3	963.1	18%	
CDN-DD-0010-0007	15	18	3	1132.3	21%	
CDN-DD-0010-0008	18	21	3	1162.0	22%	
CDN-DD-0010-0009	21	24	3	1198.5	22%	
CDN-DD-0010-0010	24	26	2	1140.0	23%	
CDN-DD-0010-0012	26	28.15	2.15	1072.3	23%	
CDN-DD-0010-0013	28.15	30	1.85	603.0	22%	Laterite
CDN-DD-0010-0014	30	32.84	2.84	1343.2	20%	
CDN-DD-0010-0015	32.84	34	1.16	903.0	19%	Kamafugite
CDN-DD-0010-0016	34	35	1	456.2	19%	
CDN-DD-0010-0018	35	36	1	503.3	18%	
CDN-DD-0010-0019	36	37	1	748.4	16%	
CDN-DD-0010-0020	37	38	1	2780.6	17%	
CDN-DD-0010-0021	38	39	1	4423.4	18%	
CDN-DD-0010-0022	39	40	1	2342.6	18%	
CDN-DD-0010-0023	40	41	1	2619.8	18%	
CDN-DD-0010-0024	41	42	1	2677.4	17%	
CDN-DD-0010-0026	42	43	1	2228.3	18%	
CDN-DD-0010-0027	43	44	1	4899.4	20%	
CDN-DD-0010-0028	44	45	1	10383.0	24%	
CDN-DD-0010-0029	45	46	1	5213.3	23%	
CDN-DD-0010-0030	46	47	1	2488.3	19%	
CDN-DD-0010-0032	47	48	1	3905.3	25%	
CDN-DD-0010-0033	48	49	1	2049.6	22%	
CDN-DD-0010-0034	49	50	1	2439.4	24%	
CDN-DD-0010-0036	50	51	1	5428.7	27%	
CDN-DD-0010-0037	51	52	1	4718.6	28%	
CDN-DD-0010-0038	52	53	1	3291.0	28%	
CDN-DD-0010-0039	53	54	1	2121.4	22%	
CDN-DD-0010-0040	54	55	1	2111.1	24%	
CDN-DD-0010-0041	55	56	1	2208.8	24%	
CDN-DD-0010-0042	56	57	1	2202.1	21%	
CDN-DD-0010-0043	57	58	1	1794.2	20%	
CDN-DD-0010-0044	58	59	1	3882.1	13%	
CDN-DD-0010-0045	59	60	1	3622.8	9%	
CDN-DD-0010-0047	60	61	1	2268.0	15%	
CDN-DD-0010-0048	61	62	1	3274.8	11%	
CDN-DD-0010-0049	62	63	1	2754.4	12%	
CDN-DD-0010-0050	63	64	1	1548.4	21%	
CDN-DD-0010-0052	64	65	1	2592.6	21%	
CDN-DD-0010-0054	65	66	1	2754.5	22%	
CDN-DD-0010-0055	66	67	1	2975.8	23%	
CDN-DD-0010-0056	67	68.21	1.21	2450.1	22%	
CDN-DD-0010-0057	68.21	68.65	0.44	195.8	20%	Sandstone

SampleID	FROM	TO	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-DD-0011-0002	3	6	3	754.1	14%	Tertiary Seimentary Cover
CDN-DD-0011-0003	6	9	3	993.9	14%	
CDN-DD-0011-0004	9	11.49	2.49	1028.5	18%	
CDN-DD-0011-0005	11.49	14	2.51	789.5	21%	Laterite
CDN-DD-0011-0006	14	16.04	2.04	1233.3	22%	
CDN-DD-0011-0007	16.04	17	0.96	3164.1	24%	
CDN-DD-0011-0009	17	18	1	1614.9	18%	Kamafugite
CDN-DD-0011-0011	18	19	1	2067.2	18%	
CDN-DD-0011-0012	19	20	1	2141.7	17%	
CDN-DD-0011-0013	20	21	1	1422.5	19%	
CDN-DD-0011-0014	21	22	1	1127.4	21%	
CDN-DD-0011-0016	22	23	1	1087.6	22%	
CDN-DD-0011-0017	23	24	1	990.8	21%	
CDN-DD-0011-0018	24	25	1	1291.2	22%	
CDN-DD-0011-0019	25	26	1	1043.1	25%	
CDN-DD-0011-0020	26	27	1	770.8	26%	
CDN-DD-0011-0021	27	28	1	244.7	22%	
CDN-DD-0011-0022	28	29	1	563.8	27%	
CDN-DD-0011-0023	29	30	1	344.3	27%	
CDN-DD-0011-0025	30	31	1	561.5	25%	
CDN-DD-0011-0026	31	32	1	147.5	31%	
CDN-DD-0011-0027	32	33	1	146.7	32%	
CDN-DD-0011-0028	33	34	1	101.0	30%	
CDN-DD-0011-0030	34	35	1	105.1	33%	
CDN-DD-0011-0031	35	36	1	73.0	35%	
CDN-DD-0011-0032	36	37	1	79.3	34%	
CDN-DD-0011-0033	37	38	1	128.3	36%	
CDN-DD-0011-0034	38	39	1	141.6	31%	
CDN-DD-0011-0035	39	40	1	107.0	27%	
CDN-DD-0011-0037	40	41	1	97.9	23%	
CDN-DD-0011-0039	41	42	1	88.1	19%	
CDN-DD-0011-0040	42	43	1	91.5	21%	
CDN-DD-0011-0041	43	44	1	101.6	22%	
CDN-DD-0011-0042	44	45.89	1.89	87.9	26%	

SampleID	FROM	TO	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-DD-0012-0002	2	4	2	691.1	14%	Tertiary Sedimentary Cover
CDN-DD-0012-0003	4	6	2	751.5	14%	
CDN-DD-0012-0004	6	8	2	920.0	14%	
CDN-DD-0012-0005	8	10	2	1029.8	16%	
CDN-DD-0012-0006	10	12	2	1123.8	19%	
CDN-DD-0012-0008	12	14	2	1176.5	20%	
CDN-DD-0012-0009	14	16	2	1295.5	21%	
CDN-DD-0012-0011	16	18	2	1293.5	21%	
CDN-DD-0012-0012	18	20	2	1277.8	22%	
CDN-DD-0012-0013	20	21	1	1213.4	22%	
CDN-DD-0012-0014	21	23	2	1001.7	23%	Laterite
CDN-DD-0012-0016	23	25	2	463.7	21%	
CDN-DD-0012-0017	25	27	2	810.2	22%	
CDN-DD-0012-0018	27	29	2	1202.7	21%	Kamafugite
CDN-DD-0012-0019	29	30.16	1.16	1099.9	21%	
CDN-DD-0012-0020	30.16	31	0.84	2505.3	21%	
CDN-DD-0012-0021	31	32	1	2746.3	21%	
CDN-DD-0012-0022	32	33	1	2468.7	20%	
CDN-DD-0012-0023	33	34	1	2140.1	20%	
CDN-DD-0012-0025	34	35	1	2726.5	19%	
CDN-DD-0012-0026	35	36	1	3678.4	26%	
CDN-DD-0012-0028	36	37	1	6058.4	27%	
CDN-DD-0012-0029	37	38	1	5070.6	26%	
CDN-DD-0012-0030	38	39	1	3052.0	20%	
CDN-DD-0012-0031	39	40	1	3305.6	22%	
CDN-DD-0012-0032	40	41	1	5806.9	28%	
CDN-DD-0012-0033	41	42.71	1.71	4388.3	27%	Sandstone
CDN-DD-0012-0034	42.71	43.31	0.6	264.0	34%	

SampleID	FROM	TO	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-DD-0013-0003	2	4	2	670.0	15%	Tertiary Sedimentary Cover
CDN-DD-0013-0005	4	6	2	724.1	14%	
CDN-DD-0013-0006	6	8	2	862.2	15%	
CDN-DD-0013-0007	8	10	2	937.2	17%	
CDN-DD-0013-0008	10	12	2	944.9	18%	
CDN-DD-0013-0009	12	14	2	973.9	19%	
CDN-DD-0013-0010	14	16	2	1143.2	20%	
CDN-DD-0013-0011	16	18	2	1129.5	21%	
CDN-DD-0013-0013	18	20	2	1235.9	21%	
CDN-DD-0013-0014	20	21.32	1.32	1182.8	22%	
CDN-DD-0013-0015	21.32	23	1.68	1234.0	22%	Laterite
CDN-DD-0013-0016	23	25	2	1141.4	23%	
CDN-DD-0013-0017	25	27	2	949.9	23%	
CDN-DD-0013-0019	27	28	1	825.2	22%	
CDN-DD-0013-0020	28	29.49	1.49	529.3	22%	
CDN-DD-0013-0021	29.49	31	1.51	1100.9	18%	Kamafugite
CDN-DD-0013-0022	31	32	1	3340.1	19%	
CDN-DD-0013-0024	32	33	1	1409.5	16%	
CDN-DD-0013-0025	33	34	1	1204.5	15%	
CDN-DD-0013-0026	34	35	1	769.2	15%	
CDN-DD-0013-0027	35	36	1	516.4	18%	
CDN-DD-0013-0028	36	37	1	643.1	15%	
CDN-DD-0013-0029	37	38	1	1555.1	19%	
CDN-DD-0013-0030	38	39	1	3408.9	11%	
CDN-DD-0013-0031	39	40	1	4715.2	15%	
CDN-DD-0013-0033	40	41	1	1892.6	5%	
CDN-DD-0013-0035	41	42	1	2027.1	7%	
CDN-DD-0013-0036	42	43	1	1911.2	9%	
CDN-DD-0013-0037	43	44	1	1158.4	5%	
CDN-DD-0013-0038	44	45	1	452.4	13%	
CDN-DD-0013-0039	45	46	1	606.1	14%	
CDN-DD-0013-0040	46	47	1	468.6	14%	
CDN-DD-0013-0041	47	48	1	442.1	23%	
CDN-DD-0013-0042	48	49	1	319.7	9%	
CDN-DD-0013-0043	49	50	1	383.4	24%	
CDN-DD-0013-0045	50	51	1	705.7	25%	
CDN-DD-0013-0046	51	52	1	1827.3	28%	
CDN-DD-0013-0048	52	53	1	1652.1	30%	
CDN-DD-0013-0049	53	53.72	0.72	1239.5	30%	
CDN-DD-0013-0051	53.72	54.27	0.55	697.6	29%	Sandstone

SampleID	FROM	TO	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-DD-0014-0003	3	6	3	897.1	15%	Tertiary Sedimentary Cover
CDN-DD-0014-0004	6	9	3	1149.8	16%	
CDN-DD-0014-0005	9	12	3	1276.1	19%	
CDN-DD-0014-0006	12	15	3	1452.4	20%	
CDN-DD-0014-0007	15	16.64	1.64	784.1	21%	
CDN-DD-0014-0008	16.64	18	1.36	830.3	22%	Laterite
CDN-DD-0014-0010	18	20.69	2.69	1267.0	22%	
CDN-DD-0014-0011	20.69	22	1.31	1616.6	19%	Kamfugite
CDN-DD-0014-0012	22	23	1	2776.3	20%	
CDN-DD-0014-0013	23	24	1	3937.0	23%	
CDN-DD-0014-0015	24	25	1	6063.5	30%	
CDN-DD-0014-0016	25	26	1	6764.0	25%	
CDN-DD-0014-0017	26	27	1	6961.9	29%	
CDN-DD-0014-0018	27	28	1	3577.6	29%	
CDN-DD-0014-0020	28	29	1	3206.3	27%	
CDN-DD-0014-0021	29	30	1	5703.8	25%	
CDN-DD-0014-0022	30	31	1	4571.3	21%	
CDN-DD-0014-0023	31	32	1	6144.7	19%	
CDN-DD-0014-0025	32	33	1	5151.4	20%	
CDN-DD-0014-0026	33	34	1	2716.0	23%	
CDN-DD-0014-0027	34	35.24	1.24	2046.8	21%	
CDN-DD-0014-0028	35.24	36.24	1	298.5	27%	Sandstone

SampleID	From	To	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-RC-0012-0001	0	3	3	753.6	15%	Tertiary Sedimentary Cover
CDN-RC-0012-0002	3	6	3	843.1	15%	
CDN-RC-0012-0003	6	8	2	1166.2	17%	
CDN-RC-0012-0004	8	10	2	827.8	20%	Laterite
CDN-RC-0012-0005	10	12	2	677.0	21%	
CDN-RC-0012-0007	12	14	2	641.7	22%	
CDN-RC-0012-0008	14	16	2	791.2	21%	
CDN-RC-0012-0009	16	18	2	1270.5	19%	
CDN-RC-0012-0010	18	19	1	1397.6	17%	Kamafugite
CDN-RC-0012-0011	19	20	1	1705.2	16%	
CDN-RC-0012-0012	20	21	1	2385.3	18%	
CDN-RC-0012-0013	21	22	1	1805.1	17%	
CDN-RC-0012-0014	22	23	1	2253.1	21%	
CDN-RC-0012-0015	23	24	1	6106.1	28%	
CDN-RC-0012-0017	24	25	1	3985.0	25%	
CDN-RC-0012-0018	25	26	1	5654.0	26%	
CDN-RC-0012-0019	26	27	1	5480.5	27%	
CDN-RC-0012-0020	27	28	1	5629.4	25%	
CDN-RC-0012-0021	28	29	1	4284.7	25%	
CDN-RC-0012-0022	29	30	1	5075.2	23%	
CDN-RC-0012-0023	30	31	1	4543.2	22%	
CDN-RC-0012-0024	31	32	1	3893.4	22%	
CDN-RC-0012-0026	32	33	1	2814.0	22%	
CDN-RC-0012-0028	33	34	1	2701.4	22%	
CDN-RC-0012-0029	34	35	1	2388.9	21%	
CDN-RC-0012-0030	35	36	1	2553.4	19%	
CDN-RC-0012-0031	36	37	1	2901.6	22%	
CDN-RC-0012-0033	37	38	1	5756.4	7%	
CDN-RC-0012-0034	38	39	1	2162.1	19%	
CDN-RC-0012-0035	39	40	1	2939.3	14%	
CDN-RC-0012-0036	40	41	1	2406.9	15%	
CDN-RC-0012-0037	41	42	1	1934.6	20%	
CDN-RC-0012-0038	42	43	1	1903.4	20%	
CDN-RC-0012-0039	43	44	1	1911.0	22%	
CDN-RC-0012-0040	44	45	1	2220.6	22%	
CDN-RC-0012-0041	45	46	1	2163.2	22%	
CDN-RC-0012-0042	46	47	1	1466.6	21%	
CDN-RC-0012-0043	47	48	1	1330.1	20%	
CDN-RC-0012-0044	48	49	1	1590.3	21%	
CDN-RC-0012-0045	49	50	1	1711.6	21%	
CDN-RC-0012-0047	50	51	1	1481.7	21%	
CDN-RC-0012-0049	51	52	1	986.5	20%	
CDN-RC-0012-0051	52	53	1	2541.2	22%	
CDN-RC-0012-0052	53	54	1	2021.0	22%	
CDN-RC-0012-0053	54	55	1	1658.0	22%	
CDN-RC-0012-0054	55	56	1	1870.6	22%	
CDN-RC-0012-0055	56	57	1	1411.3	22%	
CDN-RC-0012-0056	57	58	1	884.8	22%	Sandstone

SampleID	From	To	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-RC-0013-0001	0	3	3	702.8	15%	Tertiary Sedimentary Cover
CDN-RC-0013-0002	3	6	3	737.2	14%	
CDN-RC-0013-0003	6	9	3	1013.2	15%	
CDN-RC-0013-0004	9	12	3	1080.6	17%	
CDN-RC-0013-0005	12	15	3	1237.5	20%	
CDN-RC-0013-0006	15	18	3	1289.6	21%	
CDN-RC-0013-0007	18	21	3	1321.2	21%	
CDN-RC-0013-0009	21	24	3	1373.6	22%	
CDN-RC-0013-0010	24	27	3	1040.6	23%	
CDN-RC-0013-0012	27	30	3	487.5	22%	
CDN-RC-0013-0013	30	33	3	800.4	20%	Laterite
CDN-RC-0013-0015	33	35	2	836.2	18%	
CDN-RC-0013-0016	35	36	1	905.6	17%	Kamafugite
CDN-RC-0013-0017	36	37	1	901.1	19%	
CDN-RC-0013-0018	37	38	1	3087.4	20%	
CDN-RC-0013-0019	38	39	1	4764.9	20%	
CDN-RC-0013-0020	39	40	1	3972.9	21%	
CDN-RC-0013-0021	40	41	1	4325.5	20%	
CDN-RC-0013-0022	41	42	1	3395.2	22%	
CDN-RC-0013-0023	42	43	1	3980.9	24%	
CDN-RC-0013-0025	43	44	1	4736.2	25%	
CDN-RC-0013-0026	44	45	1	3353.6	24%	
CDN-RC-0013-0027	45	46	1	2973.5	23%	
CDN-RC-0013-0028	46	47	1	5517.4	27%	
CDN-RC-0013-0030	47	48	1	4281.6	28%	
CDN-RC-0013-0031	48	49	1	4218.4	27%	
CDN-RC-0013-0032	49	50	1	5016.9	27%	
CDN-RC-0013-0033	50	51	1	5553.0	26%	
CDN-RC-0013-0034	51	52	1	5476.5	25%	
CDN-RC-0013-0035	52	53	1	5014.4	24%	
CDN-RC-0013-0037	53	54	1	2671.2	20%	
CDN-RC-0013-0038	54	55	1	3885.8	21%	
CDN-RC-0013-0039	55	56	1	3574.9	21%	
CDN-RC-0013-0041	56	57	1	3303.8	21%	
CDN-RC-0013-0042	57	59	2	2825.5	21%	Sandstone

SampleID	From	To	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-RC-0014-0001	0	3	3	901.0	19%	Tertiary Sedimentary Cover
CDN-RC-0014-0002	3	6	3	2267.7	19%	
CDN-RC-0014-0003	6	9	3	2694.4	20%	
CDN-RC-0014-0004	9	12	3	4148.7	25%	
CDN-RC-0014-0005	12	15	3	3567.0	20%	
CDN-RC-0014-0006	15	17	2	2802.5	19%	
CDN-RC-0014-0008	17	19	2	3127.8	19%	
CDN-RC-0014-0009	19	20	1	2894.8	19%	
CDN-RC-0014-0010	20	23	3	2260.1	19%	Laterite
CDN-RC-0014-0011	23	26	3	3378.4	21%	
CDN-RC-0014-0012	26	29	3	3084.4	20%	
CDN-RC-0014-0013	29	30	1	2274.3	19%	Kamafugite
CDN-RC-0014-0014	30	31	1	1254.6	19%	
CDN-RC-0014-0016	31	32	1	988.6	19%	
CDN-RC-0014-0018	32	33	1	861.0	20%	
CDN-RC-0014-0019	33	36	3	248.1	18%	Sandstone

SampleID	From	To	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-RC-0015-0001	0	3	3	726.6	15%	Tertiary Sedimentary Cover
CDN-RC-0015-0002	3	6	3	812.3	15%	
CDN-RC-0015-0003	6	9	3	998.6	16%	
CDN-RC-0015-0004	9	12	3	1025.3	18%	
CDN-RC-0015-0005	12	15	3	1222.8	20%	
CDN-RC-0015-0006	15	18	3	1291.5	21%	
CDN-RC-0015-0007	18	21	3	1337.2	21%	
CDN-RC-0015-0009	21	24	3	1390.3	22%	
CDN-RC-0015-0010	24	27	3	863.0	22%	
CDN-RC-0015-0011	27	29	2	743.6	22%	
CDN-RC-0015-0012	29	32	3	1018.6	23%	Laterite
CDN-RC-0015-0014	32	33	1	1624.6	23%	
CDN-RC-0015-0015	33	34	1	2401.9	21%	Kamafugite
CDN-RC-0015-0016	34	35	1	2161.7	22%	
CDN-RC-0015-0017	35	36	1	4656.0	28%	
CDN-RC-0015-0019	36	37	1	2821.3	23%	
CDN-RC-0015-0020	37	38	1	2928.7	22%	
CDN-RC-0015-0021	38	39	1	2615.6	21%	
CDN-RC-0015-0022	39	40	1	3855.0	22%	
CDN-RC-0015-0023	40	41	1	6136.9	25%	
CDN-RC-0015-0024	41	42	1	4882.8	26%	
CDN-RC-0015-0025	42	43	1	4070.4	24%	
CDN-RC-0015-0026	43	44	1	3086.8	21%	
CDN-RC-0015-0027	44	45	1	2687.2	20%	
CDN-RC-0015-0029	45	46	1	3288.3	23%	
CDN-RC-0015-0030	46	47	1	2821.2	23%	
CDN-RC-0015-0032	47	48	1	6738.3	29%	
CDN-RC-0015-0033	48	49	1	5054.7	25%	
CDN-RC-0015-0034	49	50	1	4900.1	26%	
CDN-RC-0015-0035	50	51	1	5775.6	22%	
CDN-RC-0015-0036	51	52	1	4796.4	24%	
CDN-RC-0015-0037	52	53	1	4406.7	25%	
CDN-RC-0015-0039	53	54	1	1726.3	24%	Sandstone
CDN-RC-0015-0040	54	55	1	759.9	24%	
CDN-RC-0015-0041	55	58	3	197.4	26%	

SampleID	From	To	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-RC-0016-0001	0	3	3	654.0	16%	Tertiary Sedimentary Cover
CDN-RC-0016-0002	3	5	2	771.5	20%	Laterite
CDN-RC-0016-0003	5	7	2	686.2	21%	
CDN-RC-0016-0004	7	9	2	814.5	21%	
CDN-RC-0016-0005	9	11	2	1495.0	20%	
CDN-RC-0016-0007	11	12	1	1940.3	16%	Kamafugite
CDN-RC-0016-0009	12	13	1	2504.4	16%	
CDN-RC-0016-0010	13	14	1	3386.7	17%	
CDN-RC-0016-0011	14	15	1	2188.6	18%	
CDN-RC-0016-0012	15	16	1	4476.1	20%	
CDN-RC-0016-0013	16	17	1	2662.8	22%	
CDN-RC-0016-0014	17	18	1	3467.2	23%	
CDN-RC-0016-0015	18	19	1	4025.7	24%	
CDN-RC-0016-0016	19	20	1	5284.4	26%	
CDN-RC-0016-0018	20	21	1	4170.5	23%	
CDN-RC-0016-0019	21	22	1	3688.0	24%	
CDN-RC-0016-0020	22	23	1	3608.2	25%	
CDN-RC-0016-0021	23	24	1	959.7	25%	
CDN-RC-0016-0022	24	25	1	282.4	25%	
CDN-RC-0016-0024	25	27	2	324.2	25%	Sandstone

SampleID	From	To	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-RC-0017-0001	0	3	3	667.3	16%	Tertiary Sedimentary Cover
CDN-RC-0017-0002	3	6	3	788.3	15%	
CDN-RC-0017-0004	6	9	3	966.8	18%	
CDN-RC-0017-0005	9	10	1	705.5	20%	
CDN-RC-0017-0006	10	11	1	801.7	22%	Laterite
CDN-RC-0017-0007	11	13	2	777.6	23%	
CDN-RC-0017-0008	13	14	1	900.2	23%	
CDN-RC-0017-0009	14	15	1	2579.8	23%	Kamafugite
CDN-RC-0017-0010	15	16	1	2723.3	22%	
CDN-RC-0017-0011	16	17	1	2469.3	22%	
CDN-RC-0017-0012	17	18	1	2758.3	22%	
CDN-RC-0017-0013	18	19	1	2173.8	22%	
CDN-RC-0017-0015	19	20	1	3767.0	25%	
CDN-RC-0017-0016	20	21	1	3799.8	24%	
CDN-RC-0017-0018	21	22	1	3830.9	24%	
CDN-RC-0017-0019	22	23	1	4848.0	23%	
CDN-RC-0017-0020	23	24	1	4136.4	22%	
CDN-RC-0017-0021	24	25	1	812.3	23%	
CDN-RC-0017-0023	25	26	1	336.5	24%	
CDN-RC-0017-0024	26	27	1	332.0	23%	Sandstone
CDN-RC-0017-0025	27	28	1	306.7	22%	

SampleID	From	To	Interval	TREO Inc Y2O3ppm	NdPr%	Lithology
CDN-RC-0018-0001	0	3	3	558.8	15%	Tertiary Sedimentary Cover
CDN-RC-0018-0002	3	6	3	668.6	15%	
CDN-RC-0018-0003	6	9	3	919.5	15%	
CDN-RC-0018-0004	9	12	3	923.4	18%	
CDN-RC-0018-0005	12	15	3	1096.9	20%	
CDN-RC-0018-0006	15	18	3	1159.3	21%	Laterite
CDN-RC-0018-0007	18	21	3	838.5	22%	
CDN-RC-0018-0008	21	23	2	693.2	22%	
CDN-RC-0018-0010	23	26	3	1851.3	20%	
CDN-RC-0018-0012	26	27	1	1648.6	19%	
CDN-RC-0018-0013	27	28	1	911.1	17%	Kamafugite
CDN-RC-0018-0014	28	29	1	2525.5	17%	
CDN-RC-0018-0015	29	30	1	1494.5	19%	
CDN-RC-0018-0017	30	31	1	2876.6	21%	
CDN-RC-0018-0018	31	32	1	3201.8	19%	
CDN-RC-0018-0019	32	33	1	3066.2	19%	
CDN-RC-0018-0020	33	34	1	2802.9	19%	
CDN-RC-0018-0021	34	35	1	2287.2	23%	
CDN-RC-0018-0022	35	36	1	3448.7	22%	
CDN-RC-0018-0023	36	37	1	2797.4	22%	
CDN-RC-0018-0024	37	38	1	6945.0	24%	
CDN-RC-0018-0025	38	39	1	4347.7	23%	Sandstone
CDN-RC-0018-0027	39	40	1	581.4	25%	
CDN-RC-0018-0028	40	41	1	1091.7	24%	

Table 4: Significant results of assays from drillholes of CODA North area

Appendix -D:

References:

1. ASX announcement, “World Class Clay hosted rare earth grade uncovered at Coda North”, 18 March 2024
2. ASX Announcement “Diamond drilling commences at coda”, 16 July 2024
3. ASX Announcement “Significant REE mineralised zones intersected in drilling at coda”, 7 August 2024
4. ASX Announcement “Drilling broadens potential REE mineralisation footprint at coda north”, 6 September 2024
5. ASX Announcement “Coda north demonstrates significant growth potential”, 24 September 2024
6. ASX Announcement “CODA Geochem. sampling reveals high-grade REE mineralisation” 15 Aug 2024

Abbreviations & Legend

CREO = Critical Rare Earth Element Oxide

HREO = Heavy Rare Earth Element Oxide

IAC = Ion Adsorption Clay

LREO = Light Rare Earth Element Oxide

REE = Rare Earth Element

REO = Rare Earth Element Oxide

TREO = Total Rare Earth Element Oxides including Yttrium Oxide

NdPr% = Percentage amount of neodymium and praseodymium oxides as a proportion of the total amount of rare earth oxide

wt% = Weight percent

Colour legend

<1,000 ppm TREO
>1,000 ppm TREO
>2,000 ppm TREO
>3,000 ppm TREO