

17 February 2022

Extensive 1200m Long Structurally-Controlled Gold Anomaly Identified

HIGHLIGHTS

- **Extensive anomaly identified at the Top Knot Shear, 1200m in strike length and the Au geochemistry highlights a clear extensive anomaly of 25-50m width which is well constrained and open off the sampling grid to the NE.**
- **The UFF+ Au anomaly follows the Top Knot Shear, is outlined by the >25 ppb contour and supported by the presence of shallow historic workings and anomalous gold values from rock chip sampling proximal to the shear zone.**
- **In-fill and extensional geochemical surveys will follow up the highly encouraging first pass regional soil sampling results.**
- **Additional fieldwork continues to define gold targets for future drilling, in conjunction with the Company's wider Gold Duke exploration program.**
- **Drilling permits expected shortly for the planned RC drill program for the 22,000m drilling program announced to the market on 18th November 2021.**
- **Immediate drilling will evaluate:**
 - **The northern and southern extension of mineralisation at the Eagle Prospect;**
 - **Previous interpretation of the SAM survey over the Wren Block that covers 3km strike length of the Joyners Find Shear Zone (see ASX release 11 November 2021) identified 10 new gold targets.**
- **Resource upgrade to the current combined JORC-2012 Mineral Resource estimate of 4,570,000 tonnes at 2.0 g/t Au for 293,000 oz Au (refer Table 1) currently being prepared.**

Western Gold Resources (ASX: WGR) ("**WGR**" or "**the Company**") is pleased to announce an update on exploration activities at the Gold Duke Project (Figure 1), that contains a combined Mineral Resource estimate JORC-2012 Mineral Resource estimate of 4,570,000 tonnes at 2.0 g/t Au for 293,000 oz Au (refer Table 1).

Assays have been received from the ongoing Ultra Fine Fraction (UFF+) soil program being conducted over targets previously highlighted by the Sub-Audio Magnetism survey completed by WGR over the Joyners Find Shear Zone (see ASX announcement 9th November 2021).

The northeast-southwest trending UFF+ gold anomaly feature which follows the "Top Knot Shear" is outlined by the 25 ppb contour. It is 1200m in strike length and is open off the

sampling grid to the NE (Figure 2) with Au geochemistry highlighting a clear extensive anomaly of 25-50m width which is well constrained

WGR Managing Director Warren Thorne commented:

“The discovery of the gold anomaly along the trend of the Top Knot Shear is extremely exciting for the exploration team as it confirms the strong structural control that NE-SW trending shears play in the localisation of gold mineralisation within the project area.

The integration of the results with the recent Sub-Audio Magnetics data indicates that the historic gold workings at Wren and Top Knot are hosted by the same shear and further exploration along this structure is considered a high priority.

We eagerly await receipt of drilling permits to enable the Company to immediately embark on its extensive 22,000m drill program. Concurrently the team is working to finalise a resource upgrade to the current combined JORC-2012 Mineral Resource estimate of 4,570,000 tonnes at 2.0 g/t Au for 293,000 oz Au (refer Table 1).”

UFF+ Soil Sampling Program

WGR completed 426 UFF+ soil samples over the Wren project area with samples spaced 25m apart on lines 200m apart (25m x 200m). Samples were analysed using the UltraFine+ method (LabWest Minerals Analysis Pty Ltd, Malaga, WA) to fully assess the soil properties and relationships (to the geochemistry) to improve the chances of future discovery.

The soil sampling program is part of WGR’s industry partnership with the CSIRO ‘UltraFine+ research project. The project calls upon CSIRO’s world-leading expertise to analyse the soil sample geochemical assay data and provide new data analytics and targeting for mineral exploration.

The UFF+ data indicates that structural breaks which were interpreted from the gold contours and are also evident in contours for some of the other elements. These consist of:

- Structural cross-breaks trending 315°.
- Top Knot Shear trending 040° associated with the main gold anomaly. This shear parallels the western contact of one of the ultramafics.
- The major gold anomaly feature which follows the Top Knot Shear” is outlined by the 25 ppb contour. The anomaly is 1200m in strike length and is open off the sampling grid to the NE. The Au geochemistry highlights a clear extensive anomaly of 25-50m width which is well constrained.
- North of the Quail prospect, where previous rock chip results up to 1.59 g/t, including samples with visible gold (See ASX announcement 22nd September 2021), a 600m Au north-trending anomaly extends along a steeply west-dipping chert ridge
- To the north of Wren, a series of NW-trending Au anomalies are interpreted to be structurally controlled by NW-trending faults.

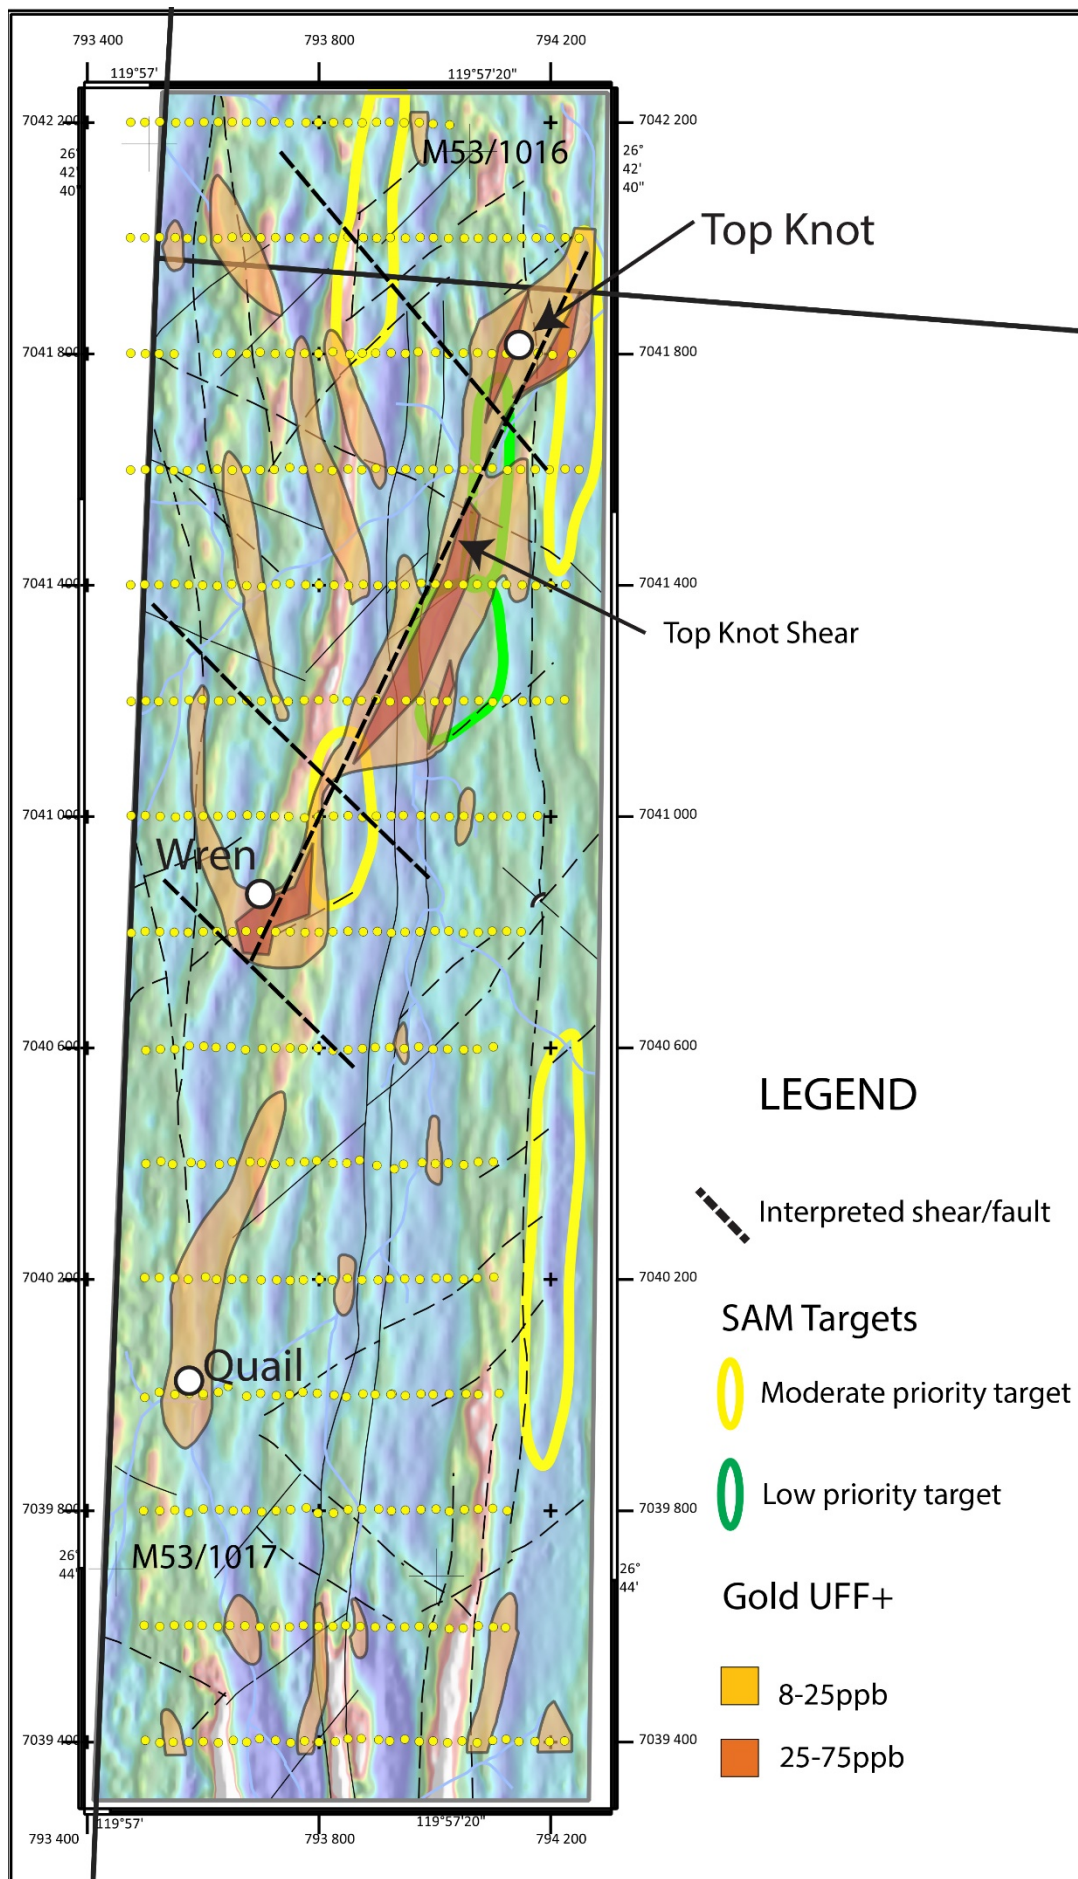


Figure 1. UFF+ soil geochemistry Au anomalies over MMC 1VD E Shaded (L) image

Next Steps

WGR plans to follow up prospective geochemical anomalies at the Gold King project with additional infill and extensional UFF soil sampling, rock chip sampling and geological mapping. Aircore and RC drilling will then be designed to test high priority geochemical anomalies delineated by these programs.

Drilling is planned for Q2 2022 as part of WGR's aggressive 22,000m regional exploration program (see ASX announcement 18 November 2021) including a focus on three priority targets resulting from the SAM survey over the Brilliant Shear (see ASX announcement 20 January 2022).

This ASX announcement was authorised for release by the Board.

For further information please contact:

Gary Lyons
Chairman

E: garylions@heiniger.com.au

Warren Thorne
Managing Director

E: warrent@westerngoldresources.com.au

Mark Pitts
Company Secretary

E: markp@endeavourcorp.com.au

Competent Person's Statement

The information in this report which relates to Exploration Results is based on information compiled by Dr Warren Thorne, is a member of the Australasian Institute of Mining and Metallurgy (AusIMM) and a full-time employee of the company. Dr Thorne who is an option-holder, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for reporting of Exploration Results, Exploration Targets, Mineral Resources and Ore Reserves" (JORC Code). Dr Thorne consents to inclusion in the report of the matters based on this information in the form and context in which it appears

Where the Company refers to previous Exploration Results and to the Mineral Resource estimate included in its recently announced Prospectus dated 18 May 2021 and in previous announcements, it notes that the relevant JORC 2012 disclosures are included in the Prospectus and those previous announcements and it confirms that it is not aware of any new information or data that materially affects the information included in those announcements and all information in relation to the Exploration Results and material assumptions and technical parameters underpinning the Mineral Resource estimate within those announcements continues to apply and has not materially changed.

Table 1 Gold Duke Project – JORC 2012 Mineral Resource Estimate

JORC Status	Year	Prospect	Classification	Tonnes	Grade (g/t Au)	Ounces
JORC 2012 at 0.5 g/t cut-off	2019	Golden Monarch	Measured	30,000	3.0	3,000
			Indicated	380,000	2.1	26,000
			Inferred	390,000	2.1	26,000
			Subtotal	800,000	2.2	55,000
		Eagle	Indicated	110,000	2.8	10,000
			Inferred	680,000	1.6	35,000
			Subtotal	790,000	1.8	45,000
		Emu	Inferred	600,000	2.2	42,000
			Joyners Find	90,000	2.6	7,000
	2021	Bottom Camp	Inferred	640,000	1.6	33,000
		Bowerbird	Inferred	230,000	2.4	17,000
		Brilliant	Inferred	210,000	3.1	21,000
		Bronzewing	Inferred	110,000	2.7	9,000
		Comedy King	Inferred	260,000	1.5	12,000
		Gold Hawk	Inferred	150,000	1.5	7,000
		Gold King	Inferred	580,000	1.9	36,000
		Wren	Inferred	110,000	2.4	8,000
	Total JORC 2012		Measured	30,000	3.0	3,000
			Indicated	490,000	2.3	36,000
			Inferred	4,050,000	2.0	254,000
			Combined	4,570,000	2.0	293,000

JORC 2012 Table 1

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> Ultra-fine Fraction (UFF) soil sampling: A total of 426 (including standards and duplicates) were collected by WGR over the Joyners Shear Zone in August and September 2021. The UFF soil geochemical samples were collected at nominal 25 x 200m grid designed to cover a three-kilometre strike length of the Joyners Shear Zone. All geochemical sampling completed by WGR was located on GDA94 using a GPS. Samples were collected in the field by removing any surface vegetation, lag and topsoil and then digging down to a nominal depth of approximately 20cm. The collected sample was sieved to -2mm with and placed in a pre-numbered paper sample bag. WGR submitted all UFF soil samples to LabWest – Perth for analysis utilising sample preparation including separation and collection of <2µm fraction. Gold and multi-element analysis by LabWest's Ultrafine+ microwave digest with an ICP-EOS/MS finish was undertaken on the ultrafine fraction.
Drilling techniques	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> No drilling completed
Drill sample recovery	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> No drilling completed
Logging	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> No drilling completed. Regolith logging was completed to an appropriate level of detail for soil sampling programs using a standard set of codes Samples were logged in their entirety
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> 	<ul style="list-style-type: none"> No drilling completed. Sample depth (nominally 20cm below surface) and location of soil sample recorded at each site. All samples were dry sieved (-2mm) and approximately 200 grams of minus 2mm material sampled in the field and bagged. A 200g sample is considered appropriate for UFF soil sampling Soil samples were placed directly into prenumbered paper bags at the site location from which they were collected

Criteria	JORC Code explanation	Commentary																																																																																																																							
Quality of assay data and laboratory tests	<ul style="list-style-type: none">Whether sample sizes are appropriate to the grain size of the material being sampled.	<ul style="list-style-type: none">Standards (prepared on site) were submitted every 40 samples; duplicates were taken every 40 samples.																																																																																																																							
	<ul style="list-style-type: none">The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	<ul style="list-style-type: none">WGR submitted all UFF soil samples to LabWest – Perth for analysis utilising sample preparation including separation and collection of <2um fraction.Gold and multi-element analysis by LabWest’s Ultrafine+ microwave digest with an ICP-EOS/MS finish was undertaken on the ultrafine fraction.Gold detection limit of 0.001 ppm Au (1 part per billion)Multi-element analysis included <table><tr><th>Element</th><th>DL (ppm)</th><th>Element</th><th>DL (ppm)</th><th>Element</th><th>DL (ppm)</th><th>Element</th><th>DL (ppm)</th></tr><tr><td>Ag</td><td>0.003</td><td>Cu</td><td>0.1</td><td>Nb</td><td>0.01</td><td>Te</td><td>0.001</td></tr><tr><td>Al</td><td>10</td><td>Fe</td><td>50</td><td>Ni</td><td>0.2</td><td>Th</td><td>0.02</td></tr><tr><td>As</td><td>0.5</td><td>Ga</td><td>0.05</td><td>Pb</td><td>0.05</td><td>Ti</td><td>2</td></tr><tr><td>Au</td><td>0.0005</td><td>Ge</td><td>0.05</td><td>Pd</td><td>0.001</td><td>Tl</td><td>0.003</td></tr><tr><td>Ba</td><td>0.2</td><td>Hf</td><td>0.002</td><td>Pt</td><td>0.001</td><td>U</td><td>0.003</td></tr><tr><td>Be</td><td>0.01</td><td>Hg</td><td>0.001</td><td>Rb</td><td>0.1</td><td>V</td><td>1</td></tr><tr><td>Bi</td><td>0.002</td><td>In</td><td>0.001</td><td>Re</td><td>0.0001</td><td>W</td><td>0.001</td></tr><tr><td>Br</td><td>1</td><td>K</td><td>10</td><td>S</td><td>5</td><td>Y</td><td>0.005</td></tr><tr><td>Ca</td><td>10</td><td>La</td><td>0.05</td><td>Sb</td><td>0.001</td><td>Zn</td><td>0.2</td></tr><tr><td>Cd</td><td>0.004</td><td>Li</td><td>0.05</td><td>Sc</td><td>0.2</td><td>Zr</td><td>0.1</td></tr><tr><td>Ce</td><td>0.05</td><td>Mg</td><td>10</td><td>Se</td><td>0.05</td><td></td><td></td></tr><tr><td>Co</td><td>0.01</td><td>Mn</td><td>0.5</td><td>Sn</td><td>0.02</td><td></td><td></td></tr><tr><td>Cr</td><td>2</td><td>Mo</td><td>0.03</td><td>Sr</td><td>0.1</td><td></td><td></td></tr><tr><td>Cs</td><td>0.03</td><td>Na</td><td>10</td><td>Ta</td><td>0.001</td><td></td><td></td></tr></table> <ul style="list-style-type: none">No geophysical tools or other non-assay instrument types were used in the analyses reported.Standards (prepared on site) were submitted every 40 samples, duplicates were inserted every 40 samplesAnalyses were undertaken at recognized industry specific laboratory. It is therefore expected that the reported assay results achieved acceptable levels of accuracy and precision for the relevant analytical method employed.	Element	DL (ppm)	Element	DL (ppm)	Element	DL (ppm)	Element	DL (ppm)	Ag	0.003	Cu	0.1	Nb	0.01	Te	0.001	Al	10	Fe	50	Ni	0.2	Th	0.02	As	0.5	Ga	0.05	Pb	0.05	Ti	2	Au	0.0005	Ge	0.05	Pd	0.001	Tl	0.003	Ba	0.2	Hf	0.002	Pt	0.001	U	0.003	Be	0.01	Hg	0.001	Rb	0.1	V	1	Bi	0.002	In	0.001	Re	0.0001	W	0.001	Br	1	K	10	S	5	Y	0.005	Ca	10	La	0.05	Sb	0.001	Zn	0.2	Cd	0.004	Li	0.05	Sc	0.2	Zr	0.1	Ce	0.05	Mg	10	Se	0.05			Co	0.01	Mn	0.5	Sn	0.02			Cr	2	Mo	0.03	Sr	0.1			Cs	0.03	Na	10	Ta	0.001	
Element	DL (ppm)	Element	DL (ppm)	Element	DL (ppm)	Element	DL (ppm)																																																																																																																		
Ag	0.003	Cu	0.1	Nb	0.01	Te	0.001																																																																																																																		
Al	10	Fe	50	Ni	0.2	Th	0.02																																																																																																																		
As	0.5	Ga	0.05	Pb	0.05	Ti	2																																																																																																																		
Au	0.0005	Ge	0.05	Pd	0.001	Tl	0.003																																																																																																																		
Ba	0.2	Hf	0.002	Pt	0.001	U	0.003																																																																																																																		
Be	0.01	Hg	0.001	Rb	0.1	V	1																																																																																																																		
Bi	0.002	In	0.001	Re	0.0001	W	0.001																																																																																																																		
Br	1	K	10	S	5	Y	0.005																																																																																																																		
Ca	10	La	0.05	Sb	0.001	Zn	0.2																																																																																																																		
Cd	0.004	Li	0.05	Sc	0.2	Zr	0.1																																																																																																																		
Ce	0.05	Mg	10	Se	0.05																																																																																																																				
Co	0.01	Mn	0.5	Sn	0.02																																																																																																																				
Cr	2	Mo	0.03	Sr	0.1																																																																																																																				
Cs	0.03	Na	10	Ta	0.001																																																																																																																				
Verification of sampling and assaying	<ul style="list-style-type: none">The verification of significant intersections by either independent or alternative company personnel.The use of twinned holes.Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.Discuss any adjustment to assay data.	<ul style="list-style-type: none">Not relevant for surface samplesSample results and standards were reviewed by the company’s technical consultants.Results are uploaded into the company database, checked, and verifiedAll data is stored in a Company database system and maintained by the Database Manager.There were no adjustments to assay data																																																																																																																							
Location of data points	<ul style="list-style-type: none">Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	<ul style="list-style-type: none">All samples were located using a handheld GPS system to an accuracy of +/- 5m. The coordinates are stored in the exploration database referenced to																																																																																																																							

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	the MGA Zone 50
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • The UFF+ soil geochemical samples were collected at nominal 25 x 200m grid designed to cover a three-kilometre strike length of the Joyners Shear Zone. Follow up infill soil sampling may be considered to tighten and better resolve areas of anomalous gold mineralisation. Soil lines may be extended to close off some anomalies • Not applicable for the reporting of geochemical sampling results • Not applicable for the reporting of geochemical sampling results
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • Not applicable, this is early-stage exploration geochemical sampling and the orientation of sampling to the mineralisation is not fully known. The data is primarily an initial exploration reconnaissance sampling program and is useful for identifying broad geological trends. • The orientation of the sample lines is perpendicular to the strike of the targeted Joyners shear Zone. The orientation of sampling is considered appropriate with respect to the structure being tested. • Not applicable for this type of sampling.
<i>Sample security</i>	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • Samples were bagged into numbered plastic RC bags and transported to the laboratory in Perth by WGR. • The laboratory was sent a sample submission sheet detailing the sample numbers, method of sample preparation and analyses and a full list of analytes. The sample submission sheet was cross referenced with the samples on arrival at the laboratory. • No sample preparation or analyses was to commence if there were any discrepancies
<i>Audits or reviews</i>	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • Sample methodologies are routine, and no audits or reviews has taken place.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i> 	<ul style="list-style-type: none"> • The Gold Duke project is located in Western Australia approximately 45km southeast of the township of Wiluna. The tenements comprising the project are listed below.

Criteria	JORC Code explanation	Commentary																																
		<table><tr><th>Tenement</th><th>Holder</th><th>Expires</th><th>Area (Ha)</th></tr><tr><td>M53/971-I</td><td>GWR</td><td>24/01/2023</td><td>9.71</td></tr><tr><td>M53/972-I</td><td>GWR</td><td>24/01/2023</td><td>9.71</td></tr><tr><td>M53/1016-I</td><td>GWR</td><td>29/01/2027</td><td>617.45</td></tr><tr><td>M53/1017-I</td><td>GWR</td><td>29/01/2027</td><td>808.7</td></tr><tr><td>M53/1018-I</td><td>GWR</td><td>29/01/2027</td><td>593.65</td></tr><tr><td>M53/1087-I</td><td>GWR</td><td>22/09/2031</td><td>6,343.37</td></tr><tr><td>M53/1096-I</td><td>GWR</td><td>12/04/2037</td><td>195.1</td></tr></table> <ul style="list-style-type: none">All tenements are 100% owned by the GWR Group Limited. The soil sampling described in this report is located over M53/1016 and M53/1017.All tenements are covered by the granted Wiluna Native Title Claim (WCD2013/004) and are subject to a Mining Agreement with the Native Title Holders.M53/1016, M53/1017 and M53/1018 are subject to a Royalty Agreement of \$10 per troy ounce to 50,000 ounces of gold produced and \$5 per troy ounce thereafterAll the tenements are in good standing	Tenement	Holder	Expires	Area (Ha)	M53/971-I	GWR	24/01/2023	9.71	M53/972-I	GWR	24/01/2023	9.71	M53/1016-I	GWR	29/01/2027	617.45	M53/1017-I	GWR	29/01/2027	808.7	M53/1018-I	GWR	29/01/2027	593.65	M53/1087-I	GWR	22/09/2031	6,343.37	M53/1096-I	GWR	12/04/2037	195.1
Tenement	Holder	Expires	Area (Ha)																															
M53/971-I	GWR	24/01/2023	9.71																															
M53/972-I	GWR	24/01/2023	9.71																															
M53/1016-I	GWR	29/01/2027	617.45																															
M53/1017-I	GWR	29/01/2027	808.7																															
M53/1018-I	GWR	29/01/2027	593.65																															
M53/1087-I	GWR	22/09/2031	6,343.37																															
M53/1096-I	GWR	12/04/2037	195.1																															
Exploration done by other parties	<ul style="list-style-type: none">Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none">The Gold Duke has been explored for gold since approximately 1920 and evidence of historical mine workings and prospecting pits are found in more than 20 separate locations over 15 km confined to the better exposed portions of the Joyners Find Greenstone Belt. Gold exploration has been carried out within the project area since 1980 with a peak between 1984 and 1990. In total, approximately 23,000 metres of reverse circulation and 15,000 metres of rotary air blast drilling was completed. Detailed and regional geological mapping was also undertaken along with aeromagnetic and aerial photography surveysThe ground has been held by GWR Group limited since 2004; where the primary focus has been iron ore exploration, but more recently gold exploration																																
Geology	<ul style="list-style-type: none">Deposit type, geological setting and style of mineralisation.	<ul style="list-style-type: none">Gold mineralisation is related to two regional shear zones within the Archaean Joyners Find greenstone belt; the Joyners Find and Brilliant Shear Zones. Mineralisation within the Joyners Find Shear Zone is dominated by BIF hosted mineralisation, whilst mineralisation within the Brilliant shear is hosted by quartz reefs and quartz stockworks.The gold mineralisation and anomalies in this ASX release are understood to be related to the Joyners Find Shear zone																																
Drill hole Information	<ul style="list-style-type: none">A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:<ul style="list-style-type: none">easting and northing of the drill hole collarelevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar	<ul style="list-style-type: none">Sampling and assaying techniques are industry-standard. No external audit has been completed																																

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> ● <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	
Data aggregation methods	<ul style="list-style-type: none"> ● <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> ● <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> ● <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> ● WGR has reported raw assays for soil sampling with no further criteria applied ● Not applicable for the reporting of soil sampling results. ● No metal equivalent values are used.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> ● <i>These relationships are particularly important in the reporting of Exploration Results.</i> ● <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> ● <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> ● Not applicable for the reporting of soil sampling results.
Diagrams	<ul style="list-style-type: none"> ● <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> ● Refer to diagrams provided in the body of the report
Balanced reporting	<ul style="list-style-type: none"> ● <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> ● Not applicable to this report. All results are reported either in the text or in the associated appendices. Examples of high-grade mineralisation are labelled as such
Other substantive exploration data	<ul style="list-style-type: none"> ● <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> ● Refer to previous releases made by WGR
Further work	<ul style="list-style-type: none"> ● <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> ● <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> ● Further work is described in the body of the announcement. ● Further work is proposed and is subject to both budgetary constraints and to new information coming to hand which may lead to changes in the proposed work