



ASX RELEASE

23 September 2016

ASX: MGV

Highest Grade Gold to Date at Break of Day

- **RC drilling has intersected the highest grade gold interval to date at Break of Day**
- **Significant results from the latest assays received include:**
 - **6m @ 41.4g/t Au from 157m down hole (16MORC026) in the hanging-wall vein, including;**
 - **3m @ 79.4g/t Au from 159m and;**
 - **1m @ 21.6g/t Au from 195m down hole (16MORC026) in the footwall vein and;**
 - **4m @ 5.3g/t Au from 168m down hole (16MORC023) in the Footwall vein**
- **The hanging-wall and footwall veins are both open to the north and down plunge**
- **Drilling is continuing and further assays are expected**

Musgrave Minerals Ltd ("Musgrave" or "the Company") (ASX: MGV) is pleased to advise that the highest grade gold intersection to date has been received in recent assays from the current reverse circulation ("RC") drilling program at Break of Day on the Cue Project in the Murchison region of Western Australia.

Drill hole 16MORC026 intersected **6m @ 41.4g/t Au** from 157m down hole including **3m @ 79.4g/t Au** from 159m down hole in the projected position of the hanging-wall vein. An additional high grade gold value was received from a four metre composite assay from the interval 168-172m down hole in 16MORC026. Confirmation of this value from one metre split check assays on this interval are awaited. The footwall vein was intersected approximately 30 metres further down hole and returned a high grade intercept of **1m @ 21.6g/t Au** from 195m down hole (*Figures 1,2,4 & 5*). Hole 16MORC026 was drilled 80 metres down plunge of 16MORC022 (*Figure 4*) which assayed 2m @ 12.5g/t Au (see ASX announcement 19 August 2016, "Gold Continues at Break of Day").

The hanging-wall and footwall veins are steepening to the north to sub-vertical (*Figures 2 & 3*). The footwall vein in this location has very limited drilling to date (*Figure 5*) and will be further tested in the current RC drilling program. The hanging-wall vein is open down plunge to the north (*Figure 4*) with drilling also continuing in this area.

Further high grade gold was intersected in the footwall vein in drill hole 16MORC023 returning **4m @ 5.3g/t Au** from 168m down hole (*Figure 3*). This intersection is open both up and down dip with both the hanging-wall and footwall mineralisation showing significant potential to extend down plunge.

Musgrave Managing Director Rob Waugh said, “This is a fantastic result and confirms our interpretation with the plunge of the high grade gold in both the hanging-wall and footwall lodes. The team is delighted with the results and excited by the upside potential at Break of Day. The drilling is continuing and progressing well. We look forward to continuing to update the market as more results come to hand.”

BREAK OF DAY

RC drilling is currently underway at Break of Day. Assay results have now been received for the first four drill holes of the current 5,000 metre, 26 drill hole RC program. The Company has now completed 17 drill holes for over 3,300 metres and is 60% through the drilling program. Assay results will be received in batches over the next five weeks and will be reported as they become available. All results are shown in Table 1.

The mineralisation is interpreted to be steep to moderately dipping twin semi-parallel quartz veins hosting high grade gold mineralisation with minor (1-2%) pyrite, within a basaltic stratigraphic sequence. Sampling was undertaken on one metre intervals in visible quartz lodes and four metre composites outside these zones.

The separation of the footwall and hanging-wall gold veins is varying along strike with the veins also steepening to the north, requiring a number of existing drill holes to be extended at depth to intersect the projected position of the high grade footwall mineralisation. The gold mineralisation is currently open along strike (Figure 1) and down plunge (Figure 4 & 5).

Musgrave’s goal is to delineate a high grade gold resource at Break of Day to underpin studies that will demonstrate a viable path to development.

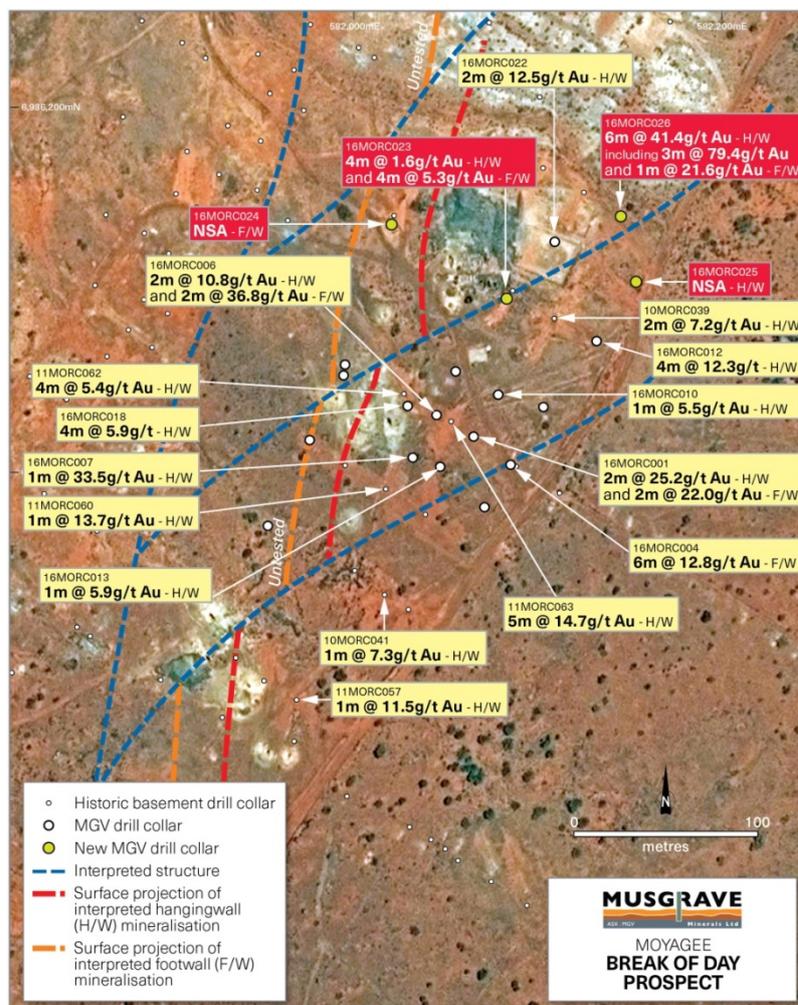


Figure 1: Plan of Break of Day drill hole collar locations showing projected surface trace of mineralisation, interpreted fault offsets and high grade intersections

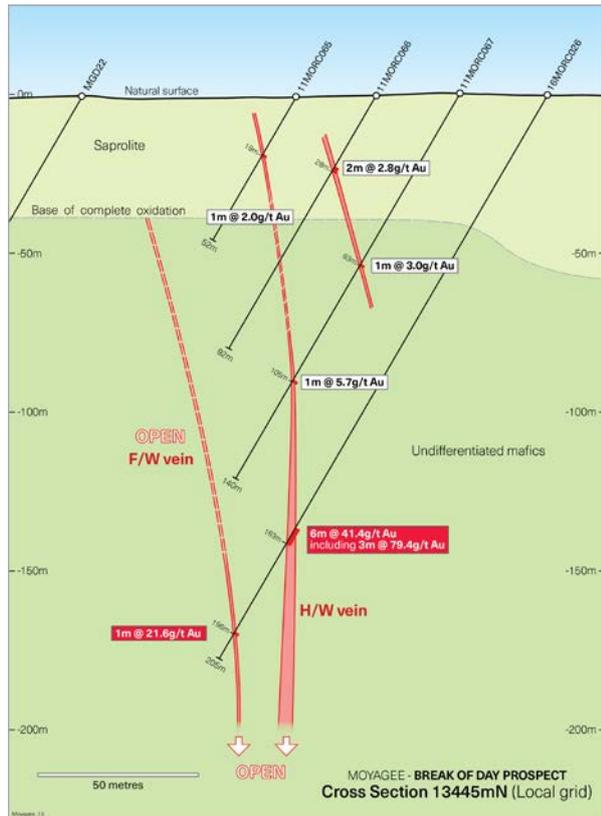


Figure 2: Break of Day cross section 13445mN - local grid (vertical section through mineralisation)

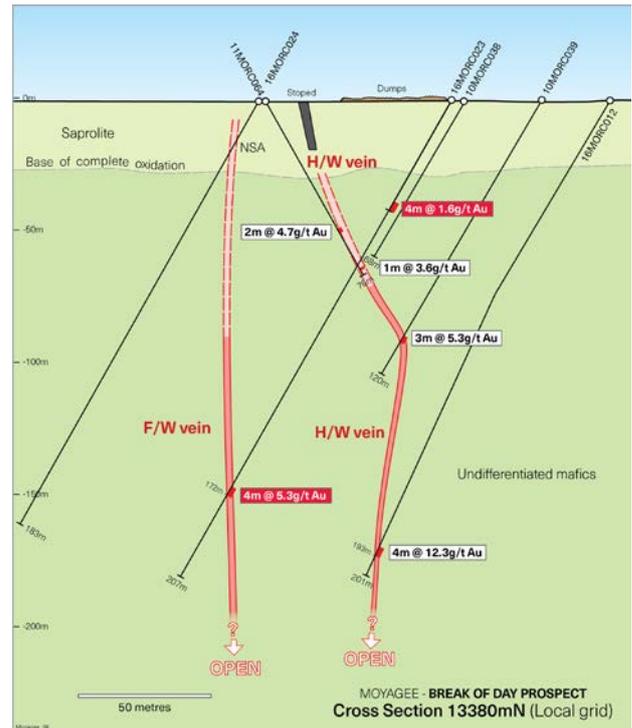


Figure 3: Break of Day cross section 13380mN - local grid (vertical section through mineralisation)

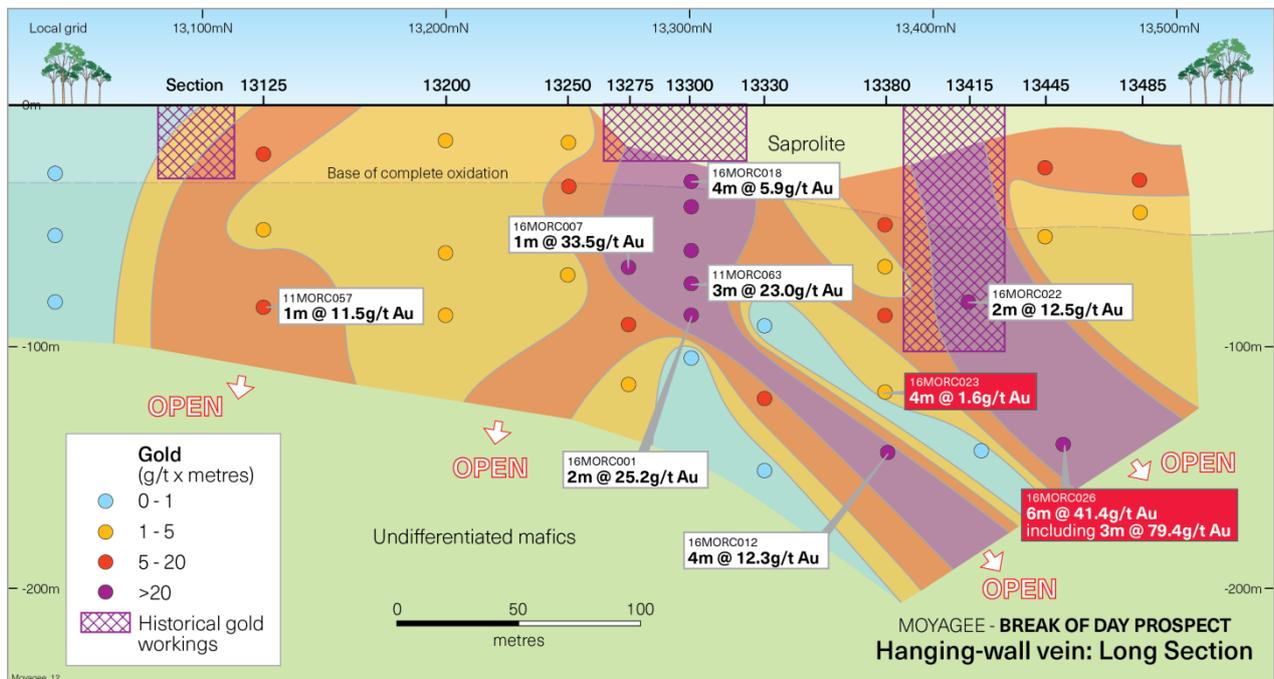


Figure 4: Break of Day long section of hanging-wall gold vein (a long section or longitudinal section is a section along the plane of the vein and in this instance shows gold grade x thickness variability with depth of the hanging-wall vein)

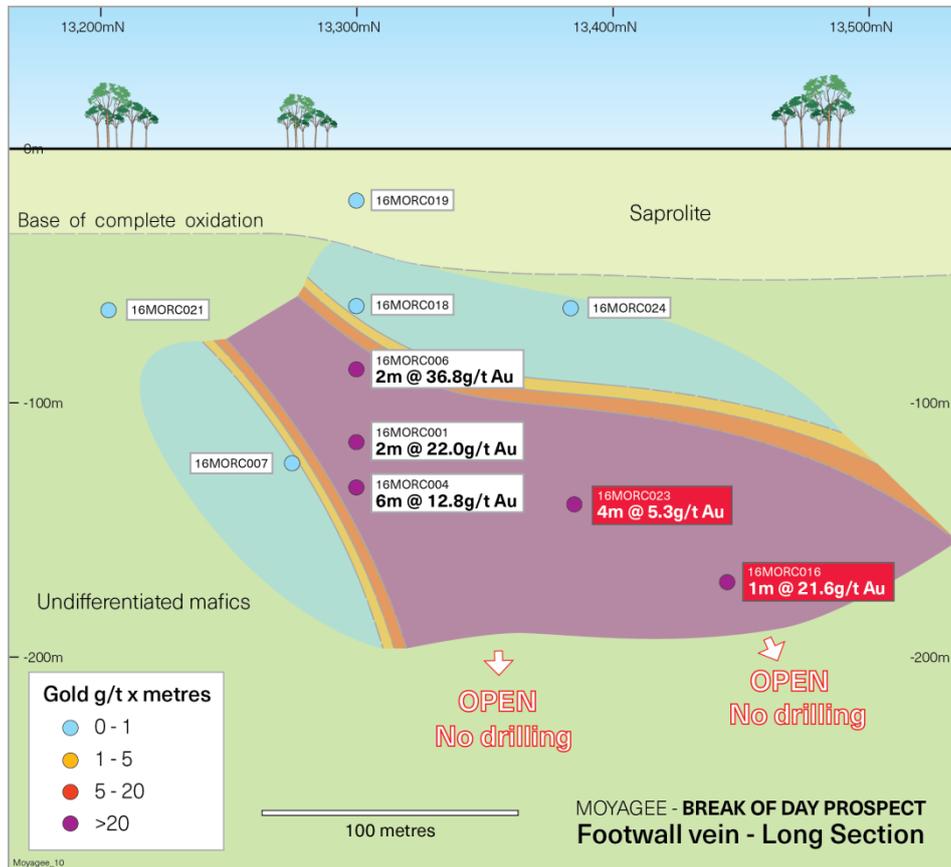


Figure 5: Break of Day long section of footwall gold vein (A long section or longitudinal section is a section along the plane of the vein and in this instance shows gold grade x thickness variability with depth of the footwall vein)

OTHER TARGETS

A down hole electromagnetic (“EM”) survey will commence this week on drill holes at Mt Eelya, Hollandaire East and Hunky Dory (Figure 6) to identify any off-hole conductive response that may reflect base metal massive sulphide mineralisation.

A surface EM survey will commence in mid-October on the Cue Project to identify basement conductors that may reflect massive copper-gold sulphide mineralisation. The planned ground survey will cover up to 15 separate targets identified from the airborne versatile time-domain electromagnetic (“VTEM”) survey flown earlier in 2016.

ABOUT THE CUE PROJECT

The Cue Project (“The Project”) is a Farm-In and Joint Venture Agreement with Silver Lake Resources Limited (“Silver Lake”) (ASX: SLR) where Musgrave can earn up to an 80% interest. The Project consists of the Moyagee Gold and Hollandaire Copper Resources (see ASX announcement 25 November 2015, “Musgrave Secures Advanced Gold and Copper Project”) and surrounding tenure in the highly prospective Murchison province of Western Australia. The Company has met its minimum expenditure commitment for the Cue Project and has commenced the Stage 1 Earn-In to acquire a 60% Joint Venture interest in the Project.

There is significant potential to extend existing mineralisation and also discover new mineralisation within the Project area shown by the recent success at Break of Day.



Enquiries:
Rob Waugh
Managing Director
Musgrave Minerals Limited
+61 8 9324 1061

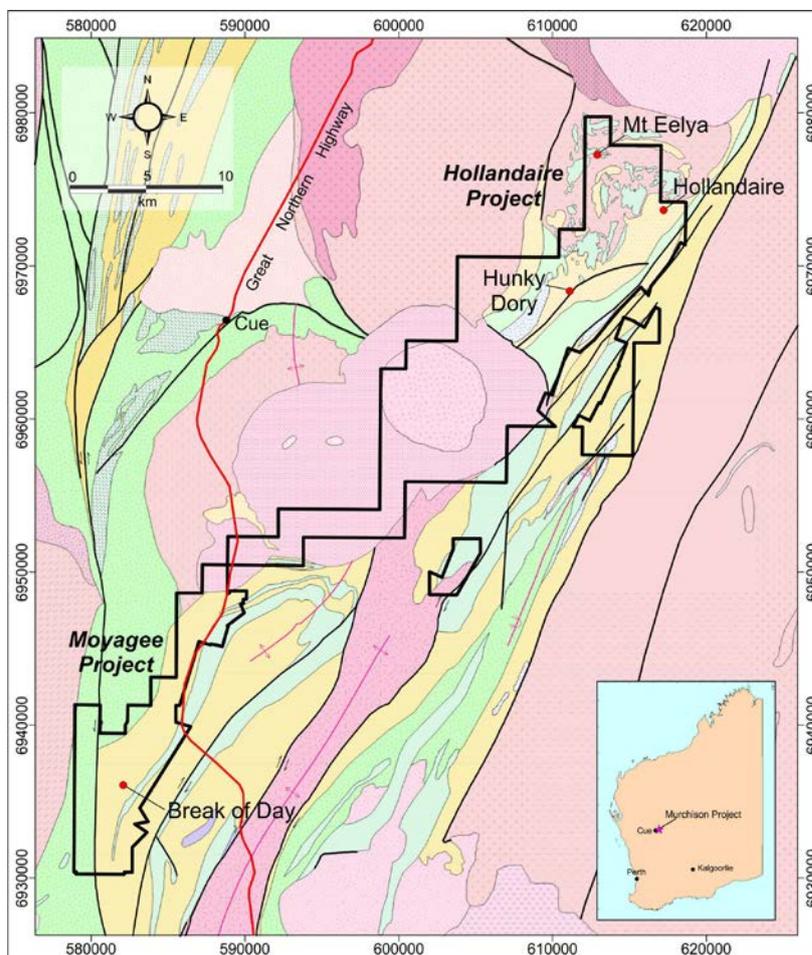


Figure 6: Cue Project location plan

About Musgrave Minerals

Musgrave Minerals Limited is an active Australian gold and base metals explorer. The Cue Project in the Murchison region of Western Australia is an advanced gold and copper project. Musgrave's focus is to increase gold and copper resources through discovery and extensional drilling to underpin studies that will demonstrate a viable path to development in the near term. Musgrave also holds the highly prospective Mamba Ni-Cu sulphide project in the Fraser Range of Western Australia and an active epithermal Ag-Pb-Zn-Cu project in the prospective silver and base metals province of the southern Gawler Craton of South Australia and a large exploration footprint in the Musgrave Province in South Australia. Musgrave has a powerful shareholder base with four mining and exploration companies currently participating as cornerstone investors.

Competent Person's Statement Exploration Results

The information in this report that relates to Exploration Targets and Exploration Results is based on information compiled and/or thoroughly reviewed by Mr Robert Waugh, a Competent Person who is a Fellow of the Australasian Institute of Mining and Metallurgy (AusIMM) and a Member of the Australian Institute of Geoscientists (AIG). Mr Waugh is Managing Director and a full-time employee of Musgrave Minerals Ltd. Mr Waugh has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Waugh consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Table 1(a): Summary of Drill Hole Locations and Significant Assay Intervals

Drill Hole ID	Drill Type	Prospect	Easting (m)	Northing (m)	Azimuth (degrees)	Dip (degrees)	RL (m)	Total Depth (m)	Sample Type	From (m)	Interval (m)	Au (g/t)	Vein
16MORC023	RC	Break of Day	582084	6936095	300	-60	418	207	Composite 4m	44	4	1.6	H/W
									Composite 4m	168	4	5.3	F/W
16MORC024	RC	Break of Day	582020	6936136	300	-60	418	183	NSA (F/W) (Hole drilled west of hanging-wall vein)				
16MORC025	RC	Break of Day	582154	6936104	300	-60	418	246	NSA H/W (Hole not deep enough to intersect footwall vein)				
16MORC026	RC	Break of Day	582146	6936141	300	-60	418	207	Individual 1m	157	6	41.4	H/W
									including	159	3	79.4	H/W
									Individual 1m	195	1	21.6	F/W

Table 1(b): Individual Assay Data for Drill Hole 16MORC026

Drill Hole ID	Sample Number	From (m)	To (m)	Interval (m)	Au (g/t)	Interval
16MORC026	MGV103307	156	157	1	0.0	6m @41.4g/t
	MGV103308	157	158	1	2.1	
	MGV103309	158	159	1	4.3	
	MGV103310	159	160	1	98.0	
	MGV103311	160	161	1	39.8	
	MGV103312	161	162	1	100.4	
	MGV103313	162	163	1	3.6	
	MGV103314	163	164	1	0.3	

Notes to Table 1

1. An accurate dip and strike and the controls on mineralisation are only interpreted and the true width of mineralisation is not yet confirmed although it is likely be 50-90% of the intersection width.
2. At Break of Day composite 4 metre samples outside the gold vein lode systems and one metre individual samples within the vein lodes were submitted for analysis. Composites samples are analysed using a 50g fire assay with ICP-MS (inductively coupled plasma - mass spectrometry) finish gold analysis (0.005ppm detection limit) by Genalysis-Intertek. Individual one metre samples were analysed using 50g fire assay with ICP-MS finish (0.005ppm detection limit).
3. g/t (grams per tonne), ppm (parts per million), ppb (parts per billion), X = below detection limit
4. NSA (No Significant Assay) – No gold assay above 1g/t.
5. H/W = Interpreted hanging-wall vein; F/W = Interpreted footwall vein

---ENDS---



JORC TABLE 1

Section 1 Sampling Techniques and Data

Criteria	Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	Sampling is undertaken using standard industry practices including the use of duplicates and standards at regular intervals. All Reverse circulation (RC) samples are split to 1-3kg in weight through a cyclone splitter. A Thermo Scientific Niton GoldD XL3+ 950 Analyser is available on site to aid geological interpretation. No XRF results are reported.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	All co-ordinates are in UTM grid (GDA94 Z50) and have been either surveyed or measured by hand-held GPS with an accuracy of >±5 metres.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	RC samples were collected as 4m composites for all drill holes. One metre individual samples are immediately submitted for analysis where a high probability of mineralisation occurs (e.g. quartz vein lode or massive sulphide). All one metre samples are split to 1-3kg in weight through a cyclone splitter which is air blasted clean at the end of each 6m rod. Individual samples weigh less than 3kg to ensure total preparation at the laboratory pulverization stage. The sample size is deemed appropriate for the grain size of the material being sampled. Samples are sent to the Genalysis – Intertek laboratory in Maddington. Samples are pulverized to 85% passing -75um and four metre composite samples are analysed using a 50g fire assay with ICP-MS (inductively coupled plasma - mass spectrometry) finish gold analysis (0.005ppm detection limit). Individual one metre gold samples are analysed using a 50g fire assay with ICP-MS finish for gold.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	An RC drilling program was undertaken by Ausdrill with a 5 5/8 inch hammer. A total of 16 RC holes have to date been drilled in this program at Break of Day. A total of 30 RC holes have been drilled by MGV at Break of Day to date. Historically Silver Lake Resources Ltd (SLR) undertook RC drilling at Break of Day with a number of companies intermittently drilling prior to 2008. A combination of historical RAB, aircore, RC and diamond drilling has been utilised by multiple companies over a thirty year period across the broader project area.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	RC bulk sample weights are observed and noted in a field Toughbook computer by MGV field staff.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Drillers use industry appropriate methods to maximise sample recovery and minimise downhole contamination. A cyclone splitter was utilised to split 1-3kg of sample by weight. The splitter is air blasted clean at the end of each 6m rod.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No significant sample loss or bias has been noted.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	All geological, structural and alteration related observations are stored in the database.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging of lithology, structure, alteration, mineralisation, colour and other features of core or RC chips is undertaken on a routine 1m basis. Photography of diamond core is undertaken prior to cutting and sampling.
	<i>The total length and percentage of the relevant intersections logged.</i>	All drill holes are logged in full on completion.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	No diamond drilling was undertaken during this program.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	RC samples are routinely cyclone split and kept dry by the use of pressurised air. No wet sampling occurred.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Drill sample preparation and base metal and precious metal analysis is undertaken by a registered laboratory (Genalysis – Intertek). Sample preparation by dry pulverisation to 85% passing 75 micron.

	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Field QC procedures involve the use of certified reference standards (1:50), duplicates (~1:30) and blanks (1:50) at appropriate intervals for early stage exploration programs. High, medium and low gold standards are used.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Sampling is carried out using standard protocols and QAQC procedures as per industry practice. Duplicate samples are inserted (~1:30) and more frequently when in high grade gold veins, and routinely checked against originals.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample sizes are considered appropriate for grain size of sample material to give an accurate indication of gold mineralisation at Break of Day. Sample is collected from full width of sample interval to ensure it is representative of samples lithology.
<i>Quality of assay data and laboratory tests</i>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	One metre individual samples are analysed through potential gold mineralised zones. Analysis is by 50g fire assay with ICP-MS finish for gold. On four metre composite samples, analysis is undertaken by Intertek-Genalysis (a registered laboratory), with 50g fire assay with ICP-MS finish undertaken for gold. Internal certified laboratory QAQC is undertaken including check samples, blanks and internal standards. This methodology is considered appropriate for base metal mineralisation and gold at the exploration phase.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical tools were used to estimate mineral or element percentages. Musgrave utilise a Thermo Scientific Niton GoldD XL3+ 950 Analyser to aid geological interpretation.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	Standards, duplicates, blanks, and repeats are utilised as standard procedure. Certified reference materials that are relevant to the type and style of mineralisation targeted are inserted at regular intervals.
<i>Verification of sampling and assaying</i>	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Samples are verified by the geologist before importing into the main database (Datashed).
	<i>The use of twinned holes.</i>	No twin holes have been drilled by Musgrave Minerals Ltd.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Primary data is collected using a standard set of templates. Geological sample logging is undertaken on one metre intervals for all RC drilling with colour, structure, alteration and lithology recorded for each interval. Data is verified before loading to the database. Geological logging of all samples is undertaken.
	<i>Discuss any adjustment to assay data.</i>	No adjustments or calibrations are made to any assay data reported.
<i>Location of data points</i>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	All maps and locations are in UTM grid (GDA94 Z50) and have been surveyed or measured by hand-held GPS with an accuracy of >±5 metres. Down hole surveys are undertaken using the axis digital clinometer down hole tool in either continuous reading mode or at regular 20m intervals.
	<i>Specification of the grid system used.</i>	Drill hole and sample site co-ordinates are in UTM grid (GDA94 Z50) and converted from local grid references.
	<i>Quality and adequacy of topographic control.</i>	Historical drill hole collars and RL's are surveyed by qualified surveyors in most instances in the resource areas. Hand held GPS is used for exploration drill holes including at Break of Day and Mt Eelya with an accuracy of +5 metres.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i>	Variable drill hole spacings are used to adequately test targets and are determined from geochemical, geophysical and geological data together with historical drilling information. At present at Break of Day a general pattern of 20-40m drill spacings on 25m-50m spaced sections is underway. Historical drill hole spacings at Break of Day are variable although SLR drilled a number of holes at approximately 20m on 50m sections in 2011-12.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	There is a current JORC 2004 mineral resource at Break of Day defined by Silver Lake Resources. The Mineral Resources and Ore Reserve estimate at Break of Day was first prepared and disclosed in accordance with the 2004 Edition of the Australian Code of Reporting of Mineral Resources and Ore Reserves (JORC 2004) and have not have not been updated since to comply with JORC 2012 on the basis that the information had not materially changed since it was last reported. For further details refer to SLR ASX announcement 28 August 2015: "Mineral Resources-Ore Reserves - August 2015".

	<i>Whether sample compositing has been applied.</i>	One metre individual samples routinely split by the drill rig cyclone are undertaken for all RC drill holes but only submitted for analysis where there is a high probability of mineralisation from geological interpretation of the drill samples. Four metre sample compositing has also been undertaken for all drill holes. Composite sampling is undertaken using a stainless steel spear (trowel) at one metre samples and combined in a calico bag.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drilling is designed to cross the mineralisation as close to perpendicular as possible. Most drill holes are designed at a dip of approximately -60 degrees. The mineralisation at Break of Day is interpreted to dip between 60-80 degrees to the east and vertical to the north and at depth. Drill intersections at Break of Day are interpreted to be between 50-90% of the drill intersection width.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	No orientation based sampling bias is known at this time.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	Chain of custody is managed by internal staff. Drill samples are stored on site and transported by a licenced reputable transport company to a registered laboratory in Perth (Genalysis-Intertek at Maddington). When at the laboratory samples are stored in a locked yard before being processed and tracked through preparation and analysis (Lab-Trak system).
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No external audits or reviews of modelling techniques and data have been undertaken.

Section 2 Reporting of Exploration Results

Criteria	Explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Break of Day prospect is located on granted mining lease M21/106 and the primary tenement holder is Silver Lake Resources Ltd. Musgrave minerals commenced a Farm-In and Joint Venture on the project on 24 November 2015 (see MGX ASX announcement 25 November 2015: "Musgrave Secures Advanced Gold and Copper Project". The Mt Eelya prospect is located on granted exploration licence E20/608 and the primary tenement holder is Silver Lake Resources Ltd. The Hollandaire and Hollandaire West deposits are located on E20/699 and the primary tenement holder is Cue Minerals Pty Ltd a 100% subsidiary of Silver Lake Resources Ltd. The Hunky Dory prospect is located on granted mining leases M20/225, M20,245, M20/277 and the primary tenement holder is Silver Lake Resources Ltd. Purple Rain is located on M58/224 and the primary tenement holder is Silver Lake Resources Ltd. The Cue project tenements consist of 39 licences (Lena and Break of Day is M21/106 and Hollandaire E20/699) as outlined in the Farm-In and Joint Venture Agreement. The tenements are subject to standard Native Title heritage agreements and state royalties. Third party royalties are present on some individual tenements.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The tenements are in good standing and no known impediments exist.
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Historical drilling, soil sampling and geophysical surveys have been undertaken in different areas on the tenements intermittently by multiple third parties over a period of more than 30 years. At Break of Day historical exploration and drilling has been undertaken by a number of companies and most recently by Silver Lake Resources Ltd in 2010-11.
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation.</i>	Geology comprises typical Archaean Yilgarn greenstone belt lithologies and granitic intrusives. Two main styles of mineralisation are present, typical Yilgarn Archaean lode gold and volcanic massive sulphide (VMS) base metal and gold mineralisation within the Eelya Felsic Complex.

<i>Drill hole Information</i>	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length.</i>	All relevant historical drill hole information has previously been reported by SLR. All new drill holes completed by MGCV are referenced in this release.
<i>Data aggregation methods</i>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	All significant new drill hole assay data are reported in this release. No cut-off has been applied to any sampling.
	<i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	All significant new drill hole assay data are reported in this release. No cut-off has been applied to any sampling.
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	No metal equivalent values have been reported.
<i>Relationship between mineralisation widths and intercept lengths</i>	<i>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i>	All significant new drill hole assay data are reported in this release. True widths are not known but all drilling is planned close to perpendicular to interpreted targets.
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Diagrams referencing new data can be found in the body of this release. Some diagrams referencing historical data can also be found in the body of this report.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All assays received from Musgrave's drilling are reported in this release.
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	All new meaningful data is reported in this release. All material results from geochemical and geophysical surveys and drilling related to these prospects has been reported or disclosed previously.
<i>Further work</i>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	A range of exploration techniques will be considered to progress exploration including additional surface sampling and drilling.
	<i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Refer to figures in the body of this announcement.