

19 September 2016

Jervois Exploration Update

Assays from KJCD197 confirm a broad zone of high-grade copper mineralisation intersected at Rockface including:

- **9.4m @ 11.53% Cu, 56.6g/t Ag, 0.87g/t Au from 535.4 m (Conductor 3)**
- **8.9m @ 1.00% Cu, 7.3g/t Ag, 0.09g/t Au from 544.8 m**
- **15m @ 7.11% Cu, 29.4g/t Ag, 0.89g/t Au from 558 m (Conductor 5)**

At Rockface, diamond drill hole KJCD197 was designed to test Conductors 3 and 5 that were modelled from downhole electromagnetic (DHEM) surveys acquired on holes KJCD195 and KJCD196 (Figure 2 & Figure 3).

The three zones above, including the intervening 4.3m of low-grade mineralisation gives a combined intersection of;

37.6m @ 5.98% Cu, 27.9g/t Ag, 0.6g/t Au from 535.4 m

Grades of copper, silver and gold are steadily increasing with depth as is the overall width of mineralisation.

The style of mineralisation in KJCD197 is similar to that observed in KJCD195-6, KJCD171 and KJCD182-3. Chalcopyrite occurs as fracture fill within the magnetite host rock, and grades into zones of semi-massive and veined chalcopyrite-pyrite. The magnetite-chalcopyrite mineralisation is located at the sheared contact between a metamorphosed siltstone/mudstone sequence and a footwall meta-sandstone unit. The host rock is a moderately to intensely altered chlorite-garnet-magnetite assemblage.

In KJCD197, a weakly mineralised zone from 530-535.4m preceded the high-grade Conductor 3 zone of mineralisation. A similar weakly mineralised zone extends beyond the high-grade Conductor 5 zone into the footwall from 573-578m. The dominant sulphide in both of these zones is pyrite with minor chalcopyrite.

The first high-grade zone of massive and semi-massive chalcopyrite-pyrite coincides with the modelled location of Conductor 3 and includes;

9.4m @ 11.53% Cu, 56.6g/t Ag, 0.87g/t Au from 535.4 m

When compared to grades for Conductor 3 that were intersected 70m up dip in KJCD195 (10.5m @ 8.76% Cu, 42.9g/t Ag, 0.51g/t Au from 478.4 m) the grades of copper, silver and gold have all recorded significant increases. This is consistent with an observed trend of increasing grade with depth at Rockface.

In the footwall to the high-grade Conductor 3 zone a lower grade zone of copper mineralisation was intersected including;

8.9m @ 1.00% Cu, 7.3g/t Ag, 0.09g/t Au from 544.8 m

From 558m a second zone of high-grade mineralisation was intersected comprising semi-massive, massive and veined chalcopyrite-pyrite mineralisation that coincided with Conductor 5.

This zone includes;

15m @ 7.11% Cu, 29.4g/t Ag, 0.89g/t Au from 558 m

This interval recorded the highest gold grade yet at Rockface of 5.33g/t (567.5-568m, Table 2) and is substantially wider and higher grade than the projected up dip extension to this mineralisation intersected in KJCD195 (5.1m @ 2.66% Cu, 0.39% Zn, 13.8g/t Ag, 0.27g/t Au from 513.6 m).

Results have also been received from KJCD196 that was designed to test the western edge of Conductor 3 at a slightly shallower depth than KJCD195 (Figure 2 & Figure 4). This hole intersected a broad zone of low grade mineralisation in a weakly to moderately altered garnet-magnetite host rock including;

32.4m @ 0.18% Cu, 1.0g/t Ag from 451 m

Modelling of the recent DHEM survey results confirmed that KJCD196 missed, but was close to the western edge of Conductor 3. The survey also confirmed that Conductor 3 broadens and extends to the west approximately 30m below KJCD196. Conductor 5 is also modelled to extend west of KJCD196 with the top edge approximately 55m below KJCD196.

Drilling has now commenced on two additional holes with the first designed to intersect the recently identified Conductor 6. The western edge of Conductor 6 is modelled to be approximately 20m to the east of KJCD197 and has a modelled strike length of 120m with a down dip extent of 110m. The hole will then be extended to test Conductors 3 & 5.

The second hole will be targeted to the west and down dip of KJCD197 to test the increasing strike length of the mineralised zone as modelled by the DHEM.

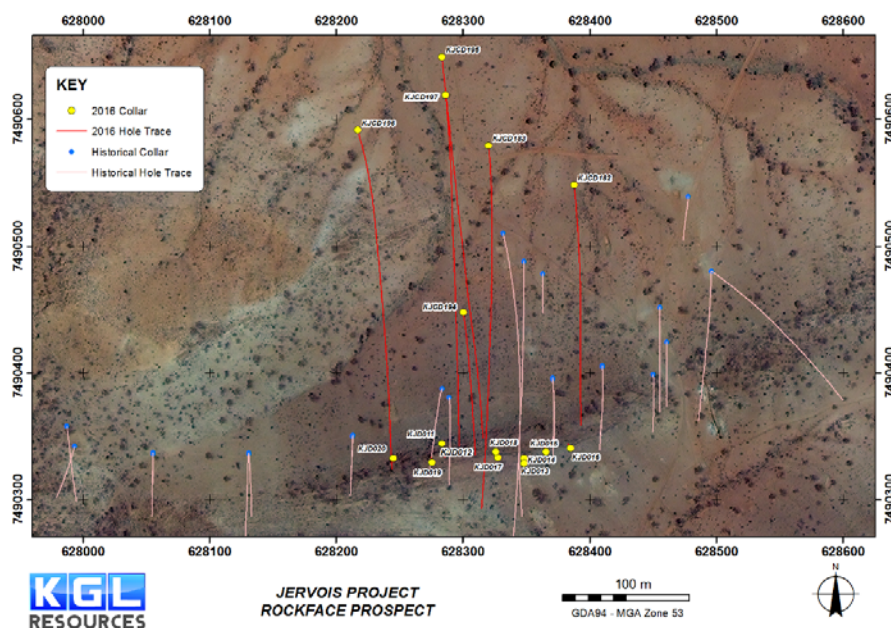


Figure 1 Plan of Rockface drilling



**Figure 2 Rockface-Rockhole long-section
7490360N (section window 160m)**



**Figure 3 Rockface Cross Section 628 315E
(section window 80m)**

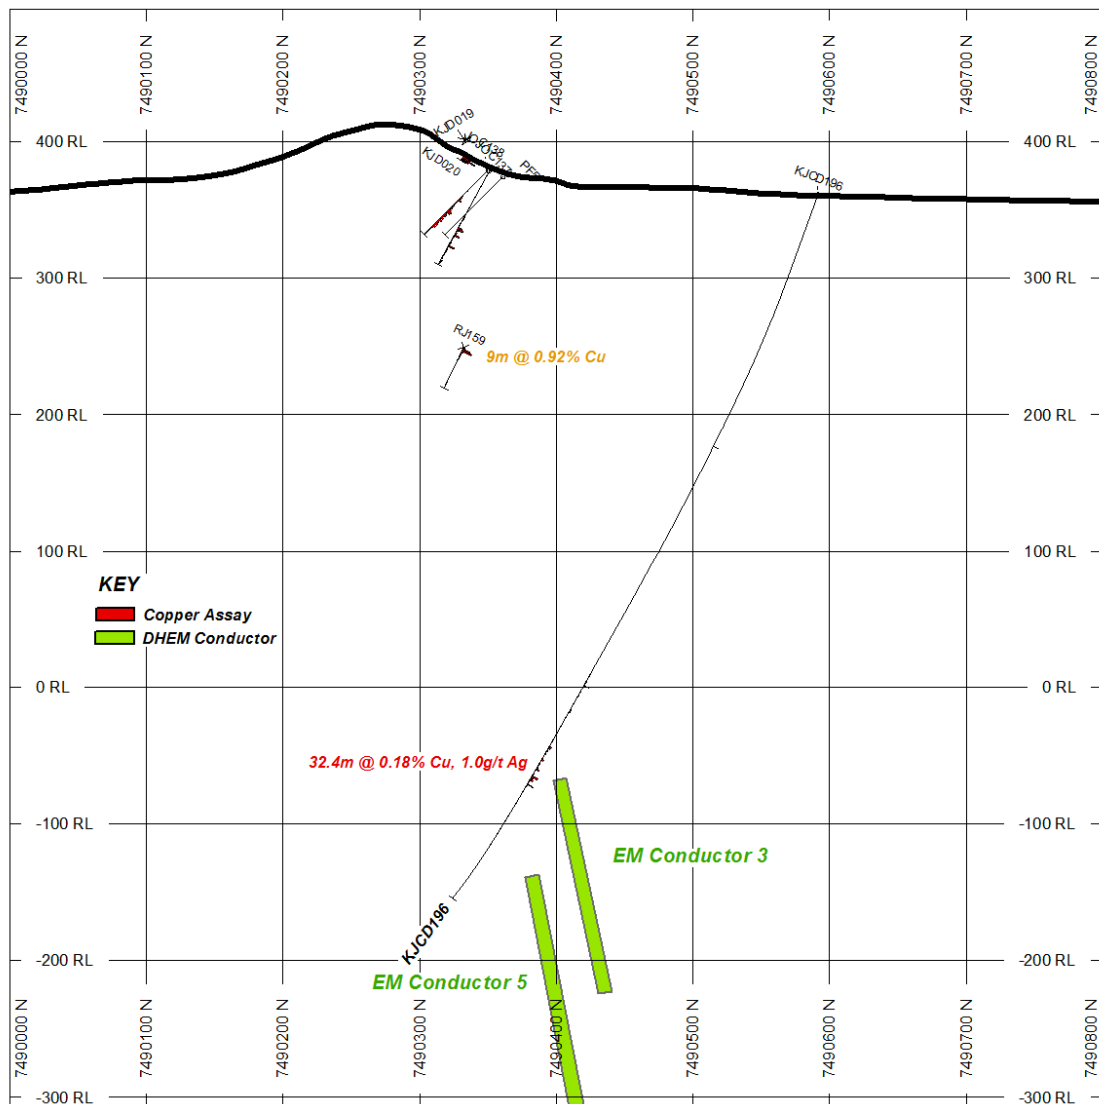


Figure 4 Rockface cross-section 628235E (section window 80m)

For further information contact:

Kylie Anderson
Company Secretary

Phone: (07) 3071 9003

About KGL Resources

KGL Resources Limited is an Australian mineral exploration company focussed on increasing the high-grade Resource at the Jervois Copper-Silver-Gold Project in the Northern Territory and developing it into a multi-metal mine.

Competent Person Statement

The Jervois Exploration data in this report is based on information compiled by Rudy Lennartz, a member of the Australian Institute of Mining and Metallurgy and a full time employee of KGL Resources Limited.

Mr. Lennartz has sufficient experience which is relevant to the style of the mineralisation and the type of deposit under consideration and to the activity to which he is undertaking, to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Lennartz has consented to the inclusion of this information in the form and context in which it appears in this report

The following drill holes were originally reported on the date indicated and using the JORC code specified in the table. Results reported under JORC 2004 have not been updated to comply with JORC 2012 on the basis that the information has not materially changed since it was last reported.

Hole	Date originally Reported	JORC Reported Under
KJCD171	22/10/2015	2012
KJC035	08/11/2013	2004
KJC039	29/05/2014	2012
KJCD182	09/05/2016	2012
KJCD183	26/04/2016	2012
KJCD195	02/08/2016	2012
J9	08/11/2013	2004

Table 1 Table of significant result

Hole ID	Easting (m)	Northing (m)	RL (m)	Dip	Azimuth	BOX ¹ (m)	Total Depth (m)	From (m)	To (m)	Interval (m)	ETW ² (m)	Cu %	Pb %	Zn %	Ag g/t	Au g/t
KJCD196	628217	7490591	361	-69.5	165.2		583	451	483.4	32.4	22.7	0.18	0	0.03	1.0	0.03
KJCD197	628286	7490619	360	-77.5	176.4		669.9	346	346.6	0.6	0.4	0.83	0	0.01	2.7	0.01
								470.4	471	0.6	0.4	0.63	0.03	0.14	13.7	0.01
								535.4	544.8	9.4	6.6	11.53	0.03	0.03	56.6	0.87
								544.8	553.7	8.9	6.2	1	0.02	0.13	7.3	0.09
								558	573	15	10.5	7.11	0.03	0.08	29.4	0.89

¹Base of Oxidisation down hole depth

²Estimated True Width



Figure 5 Mineralised core from KJCD197 (circa 536m) Conductor 3



Figure 6 Mineralised core from KJCD197 (circa 566m) Conductor 5

Table 2 Individual Assays

Hole ID	From m	To m	Interval m	Copper %	Lead %	Zinc %	Silver g/t	Gold g/t
KJCD197	535.4	536	0.6	21.09%	0.00%	0.00%	56.5	0.17
KJCD197	536	537	1	14.05%	0.01%	0.03%	47.7	0.66
KJCD197	537	538	1	9.08%	0.05%	0.03%	41.8	1.02
KJCD197	538	538.8	0.8	9.79%	0.04%	0.03%	43.8	1.63
KJCD197	538.8	539.3	0.5	5.63%	0.03%	0.03%	24.7	0.59
KJCD197	539.3	540	0.7	15.52%	0.04%	0.03%	79.2	0.4
KJCD197	540	541	1	14.24%	0.07%	0.03%	102.2	0.54
KJCD197	541	542	1	12.23%	0.02%	0.03%	74.3	0.9
KJCD197	542	543	1	12.94%	0.04%	0.03%	59.8	1.85
KJCD197	543	543.5	0.5	12.02%	0.04%	0.03%	62.3	0.72
KJCD197	543.5	544	0.5	6.12%	0.03%	0.04%	39.7	0.94
KJCD197	544	544.8	0.8	3.27%	0.01%	0.06%	23.3	0.44
KJCD197	544.8	546	1.2	1.45%	0.00%	0.03%	8.6	0.25
KJCD197	546	547	1	0.23%	0.00%	0.03%	2.2	0.1
KJCD197	547	548	1	0.99%	0.00%	0.03%	5.4	0.02
KJCD197	548	549	1	1.57%	0.01%	0.04%	7.3	0.07
KJCD197	549	550	1	0.95%	0.03%	0.11%	4.3	0.14
KJCD197	550	551	1	1.33%	0.08%	0.19%	14.7	0.05
KJCD197	551	552	1	0.95%	0.06%	0.54%	10.8	0.09
KJCD197	552	553	1	0.74%	0.02%	0.08%	6.6	0.04
KJCD197	553	553.7	0.7	0.60%	0.01%	0.14%	4.7	0.03
KJCD197	553.7	554.3	0.6	0.08%	0.00%	0.07%	1.5	0.005
KJCD197	554.3	555	0.7	0.08%	0.00%	0.04%	1.2	0.005
KJCD197	555	556	1	0.08%	0.00%	0.06%	1.2	0.02
KJCD197	556	557	1	0.34%	0.01%	0.11%	2.5	0.02
KJCD197	557	558	1	0.49%	0.01%	0.19%	3.8	0.02
KJCD197	558	559	1	0.82%	0.02%	0.11%	4.6	0.1
KJCD197	559	560	1	2.40%	0.03%	0.15%	11.4	0.12
KJCD197	560	561	1	1.63%	0.01%	0.19%	10.2	0.1
KJCD197	561	561.8	0.8	1.83%	0.02%	0.06%	9.5	0.12
KJCD197	561.8	563	1.2	5.94%	0.02%	0.06%	33	0.7
KJCD197	563	564	1	10.30%	0.01%	0.02%	53.4	0.7
KJCD197	564	565	1	10.73%	0.01%	0.03%	33.3	1.81
KJCD197	565	565.7	0.7	9.79%	0.03%	0.04%	33.4	0.48
KJCD197	565.7	566.4	0.7	17.11%	0.08%	0.09%	68.6	0.45
KJCD197	566.4	566.7	0.3	3.05%	0.02%	0.07%	11.1	0.16
KJCD197	566.7	567.5	0.8	11.73%	0.07%	0.04%	50.5	2.02
KJCD197	567.5	568	0.5	10.46%	0.08%	0.05%	31.5	5.33
KJCD197	568	569	1	10.61%	0.06%	0.06%	37.1	1.64
KJCD197	569	570	1	11.04%	0.06%	0.09%	38.1	1.94
KJCD197	570	571	1	10.05%	0.03%	0.06%	38.3	0.48
KJCD197	571	572	1	3.01%	0.02%	0.06%	16.2	0.15
KJCD197	572	573	1	3.05%	0.04%	0.09%	20.2	0.46

*Colour coding Red-Orange-Yellow-Green represents High to Low values

1 1 JORC CODE, 2012 EDITION – TABLE 1

1.1 Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Diamond drilling and reverse circulation (RC) drilling were used to obtain samples for geological logging and assaying. RC drill holes are sampled at 1m intervals and split using a cone splitter attached to the cyclone to generate a split of ~3kg. Diamond core was quartered with a diamond saw and generally sampled at 1m intervals with shorter samples at geological contacts. RC samples are routinely scanned with a Niton XRF. Samples assaying greater than 0.1% Cu, Pb or Zn are submitted for analysis at a commercial laboratory.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> RC Drilling was conducted using a reverse circulation rig with a 5.25" face-sampling bit. Diamond drilling was either in NQ2 or HQ3 drill diameters. Metallurgical diamond drilling (JMET holes) were PQ
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> RC samples were not weighed on a regular basis but no sample recovery issues were encountered during the drilling program. Overweight samples (>3kg) were re-split with portable riffle splitter
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All RC and diamond core samples are geologically logged. Core samples are also orientated and logged for geotechnical information.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> RC drill holes are sampled at 1m intervals and split using a cone splitter attached to the cyclone to generate a split of ~3kg. Diamond core was quartered with a diamond saw and generally sampled at 1m intervals with shorter samples at geological contacts. RC sample splits (~3kg) are pulverized to 85% passing 75 microns. Diamond core samples are crushed to 70% passing 2mm and then pulverized to 85% passing 75 microns.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> The QAQC data includes standards, duplicates and laboratory checks. In ore zones Standards are added at a ratio of 1:10 and duplicates and blanks 1:20. Basemetal samples are assayed using a four acid digest with an ICP AES finish. Gold samples are assayed by Aqua Regia with an ICP MS finish. Samples over 1ppm Au are re-assayed by Fire Assay with an AAS finish. An umpire laboratory is used to check ~1% of samples analysed.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Data is validated on entry into the Datashed database. Further validation is conducted when data is imported into Vulcan
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Surface collar surveys were picked up using a Trimble DGPS. Downhole surveys were taken during drilling with a Ranger or Reflex survey tool every 30m with checks conducted with a Gyrosmart gyro and Azimuth Aligner. All drilling is conducted on the MGA 94 Zone 53 grid. All downhole magnetic surveys were converted to MGA 94 grid.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Drilling for Inferred resources has been conducted at a spacing of 50m along strike and 80m within the plane of the mineralized zone. Closer spaced drilling was used for Indicated resources. Shallow oxide RC drilling was conducted on 80m spaced traverses with holes 10m apart
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Holes were drilled perpendicular to the strike of the mineralization a default angle of -60 degrees but holes vary from -45 to -80.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples were stored in sealed polyweave bags on site and transported to the laboratory at regular intervals by KGL staff or a transport contractor.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> The sampling techniques are regularly reviewed.

1.2

1.3 Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Jervois project is within E30242 100% owned by Jinka Minerals and operated by Kentor Minerals (NT), both wholly owned subsidiaries of KGL Resources. The Jervois project is covered by Mineral Claims and an Exploration licence owned by KGL Resources subsidiary Jinka Minerals.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Previous exploration has primarily been conducted by Reward Minerals, MIM and Plenty River.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> EL30242 lies on the Huckitta 1: 250 000 map sheet (SF 53-11). The tenement is located mainly within the Palaeo-Proterozoic Bonya Schist on the northeastern boundary of the Arunta Orogenic Domain. The Arunta Orogenic Domain in the north western part of the tenement is overlain unconformably by Neo-Proterozoic sediments of the Georgina Basin. The copper-lead-zinc mineralisation is interpreted to be stratabound in nature, probably relating to the discharge of base metal-rich fluids in association with

Criteria	JORC Code explanation	Commentary
		volcanism or metamorphism or dewatering of the underlying rocks at a particular time in the geological history of the area.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Refer Table 1, Figures 1, 2, 3, 4
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Table 1 & 2
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> Refer Table 1
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Refer Figures 1, 2, 3 & 4
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Table 1 & 2
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Outcrop mapping of exploration targets using Real time DGPS. Refer Figure 1, 2, 3, 4, 5 & 6
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Refer Figures 1, 2, 3 & 4