



4 November 2021

## HIGH GRADE SILVER AND GOLD IN ANTON VEIN DRILLING

- **Partial results from the first modern exploration drilling at Anton received**
- **VADD005: 1.5m<sup>1</sup> @ 2.62 g/t Au and 376 g/t Ag from 181.3m including 0.5m @ 4.48 g/t Au and 578 g/t Ag from 182.3m**
- **Silver sulphides visible in veining over 5.7 metres from 287.0m depth - assays pending**
- **Drilling continues testing strike length target of over 3.5 kilometres**

The Directors of Prospech Limited ('Prospech' or 'the Company') (ASX: PRS) are pleased to announce that diamond drillhole VADD005 has intersected mineralisation assaying up to 4.48 g/t Au and 578 g/t Ag over 0.5m.

The results from VADD005 demonstrate that previously un-mined and un-drilled high grade gold and silver mineralisation remains to be discovered at Anton demanding further drilling. The Anton drilling campaign has been extended with the next drill hole in progress.

The Anton target, which lies within the Company's 100% owned Hodrusa-Hamre exploration licence, is a large system of epithermal gold and silver of veins, with a known strike length of at least 3.5 kilometres. The Anton structural zone trends further for more than 6.0 kilometres into the Unverzagt and Schopfer exploration targets.


Historical records report mining to a depth of over 500 metres below surface. Drill sites selected by the Company for this initial drill program are shallower targets where historical records indicate that effective mining was prevented by water ingress, which the primitive pumps of the era were not able to manage.

Spoil heap samples which are thought to originate from the Anton structure near the drilling targets are strongly mineralised. The average of assays from 57 grab samples was 3.95 g/t Au and 214 g/t Ag. The peak assays from this group of samples were 52.60 g/t Au and 1,445 g/t Ag.

Below the reported assay results, an additional 5.7 metre wide zone of mineralisation with visible silver and base metal minerals has been logged in VADD005. Samples from this zone have been despatched and assay results are pending.

---

<sup>1</sup> Due to the interpreted moderate dip angle, the drilled width is estimated to be very close to the true width (within 10%).

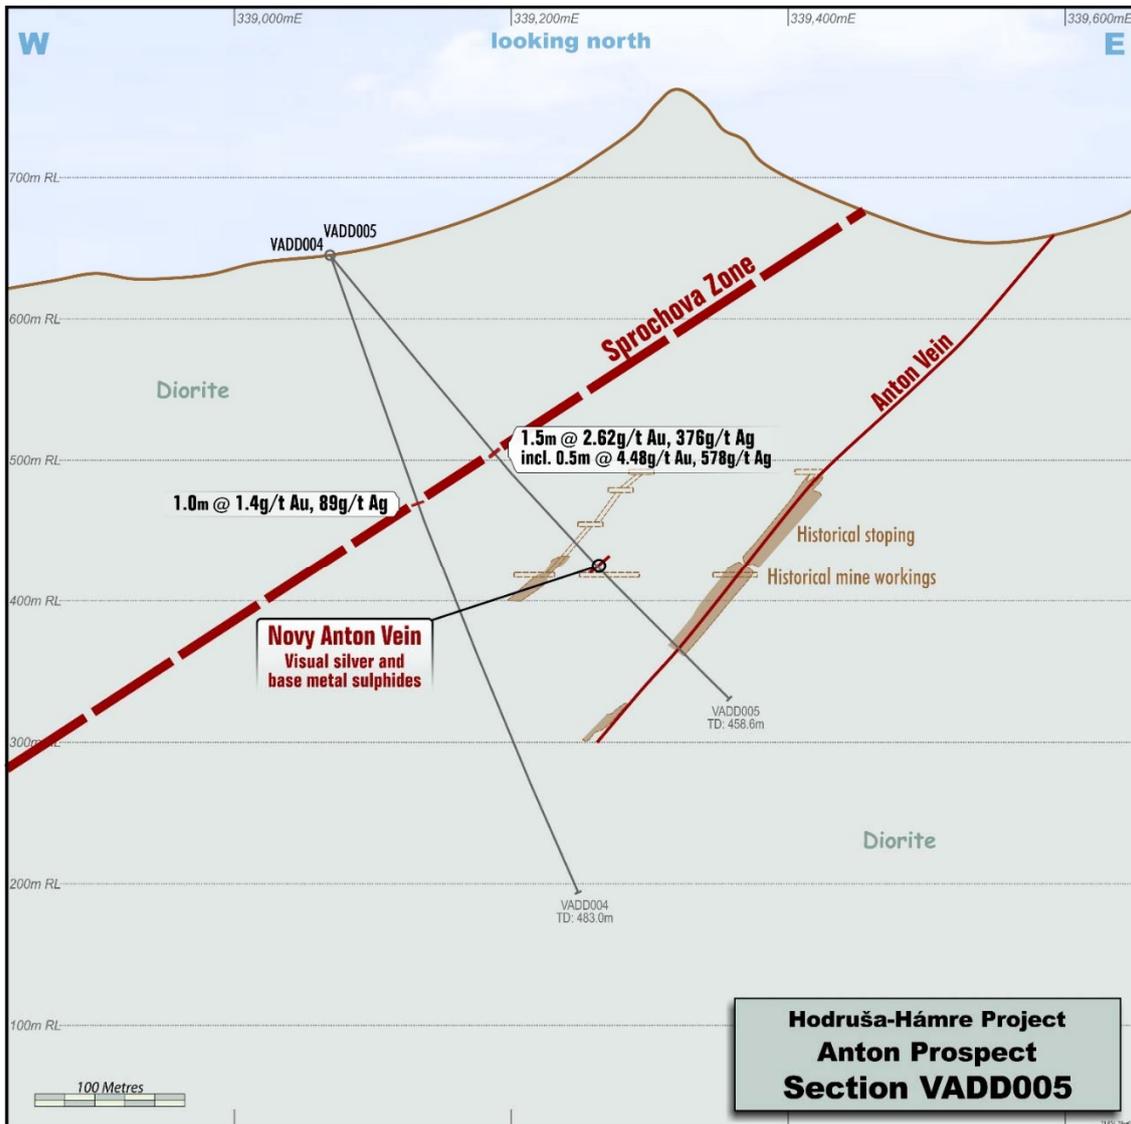

**Cross section of the discoveries made by exploring the extensive Anton vein system.**

A summary of the visual log of visible silver-mineralised zone in VADD005 is reported below:

From (m)	To (m)	Width <sup>1</sup> (m)	Lithology/Minerals	Nature	Estimated Sulphides (%)	Alteration
287.0	289.7	2.7	Diorite, quartz-calcite veinlets, pyrite	Veined	Trace	Illite
289.7	290.0	0.3	Quartz, calcite, sphalerite, galena, Ag-sulphides, pyrite, chalcopyrite	Banded, disseminated	4	Illite
290.0	290.1	0.1	Diorite, pyrite	Disseminated	Trace	Illite
290.1	290.3	0.2	Quartz, calcite, sphalerite, galena, Ag-sulphides, pyrite, chalcopyrite	Disseminated	Trace	Illite
290.3	290.9	0.6	Diorite	Unmineralised	0	Illite
290.9	291.1	0.2	Quartz, calcite, sphalerite, galena, Ag-sulphides, pyrite, chalcopyrite	Disseminated	Trace	Illite
291.1	292.7	1.6	Diorite, quartz-calcite veinlets, pyrite, Base metal sulphides, Ag-sulphides	Disseminated	Trace	Illite, tourmaline

**Visual log of VADD005 visual silver mineral zones and adjacent wall-rock.**

<sup>1</sup> Due to the interpreted moderate dip angle, the drilled width is estimated to be very close to the true width (within 10%).

A071 2592x1944 2021/10/28 09:32:50 Unit: mm Magnification: 184.7 x SZ-51



VADD005 290m Proustite/Pyragyrite

*Using in house micro-photography, a close-up of visible silver in VADD005 core is seen here from c. 290m in VADD005. Assays are pending.*

A069 2592x1944 2021/10/28 09:29:09 Unit: mm Magnification: 184.7 x SZ-51




VADD005 290m Proustite/Pyragyrite, Chalcopyrite

*Half-core samples from c. 290m in VADD005 containing recognisable silver sulfides Proustite/Pyragyrite. Assays are pending.*


Hole	From (m)	To (m)	Width <sup>1</sup> (m)	Au (g/t)	Ag (g/t)
VADD001	31.0	32.0	1.0	1.22	62
and	89.8	91.0	1.2	0.50	43
VADD002	30.0	32.0	2.0	0.70	41
and	45.0	46.0	1.0	0.75	29
VADD003	25.0	26.0	1.0	2.51	100
VADD004	91.6	92.5	0.9	0.74	54
and	182.4	183.4	1.0	1.40	89
and	337.8	338.3	0.5	0.45	54
VADD005	77.7	78.8	1.1	0.83	89
and	154.5	155.1	0.6	0.59	155
and	181.3	182.8	1.5	2.62	376
including	182.3	182.8	0.5	4.48	578

**Anton drilling gold and silver reportable intersections to date.**

<sup>1</sup> Due to the interpreted moderate dip angle, the drilled width is estimated to be very close to the true width (within 10%).

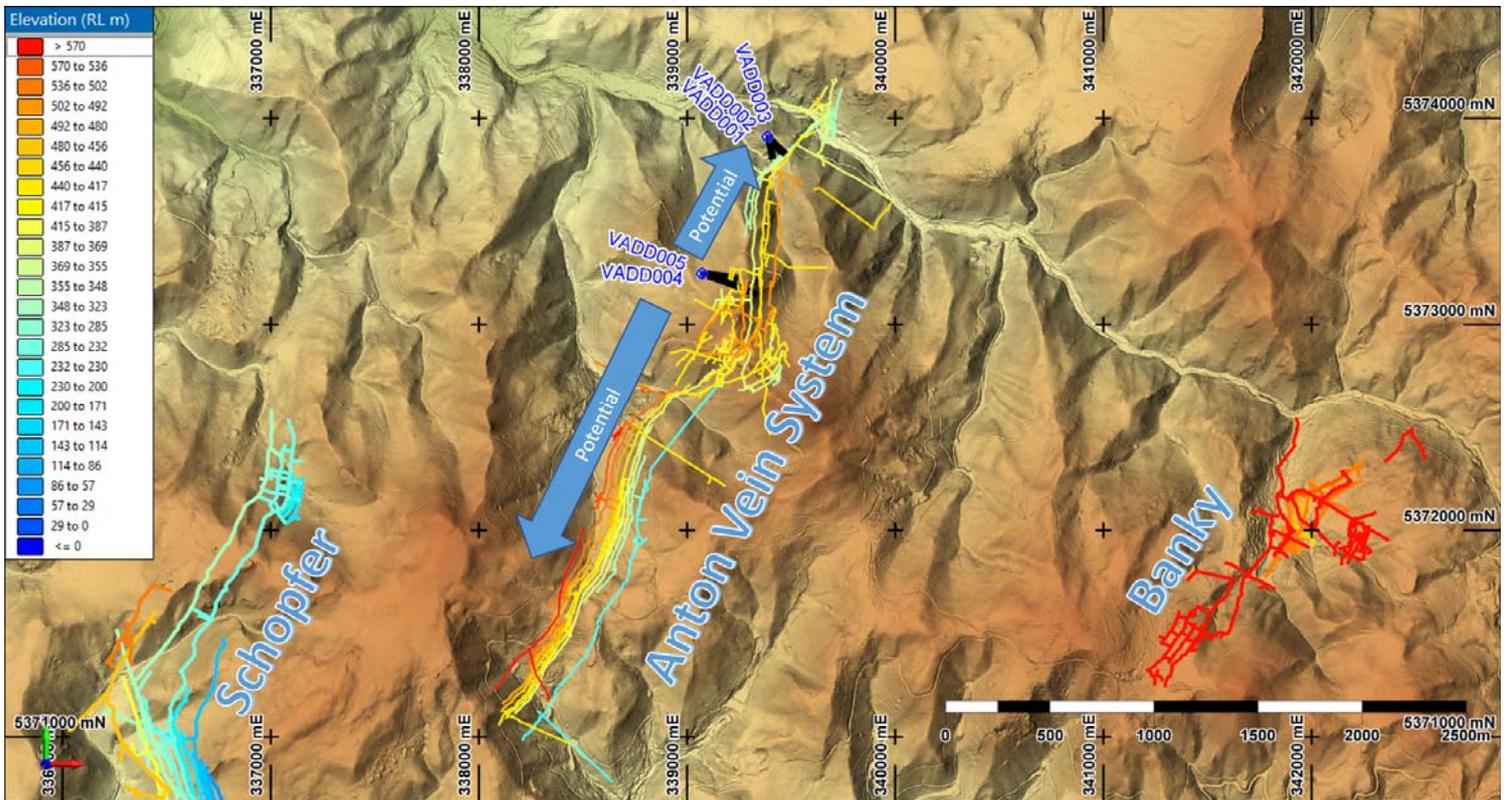

**Map of the extensive, 3.5 kilometre Anton vein system, historical underground mine workings (coloured by RL) and locations of Prospech drilling VADD001 to VADD005.**

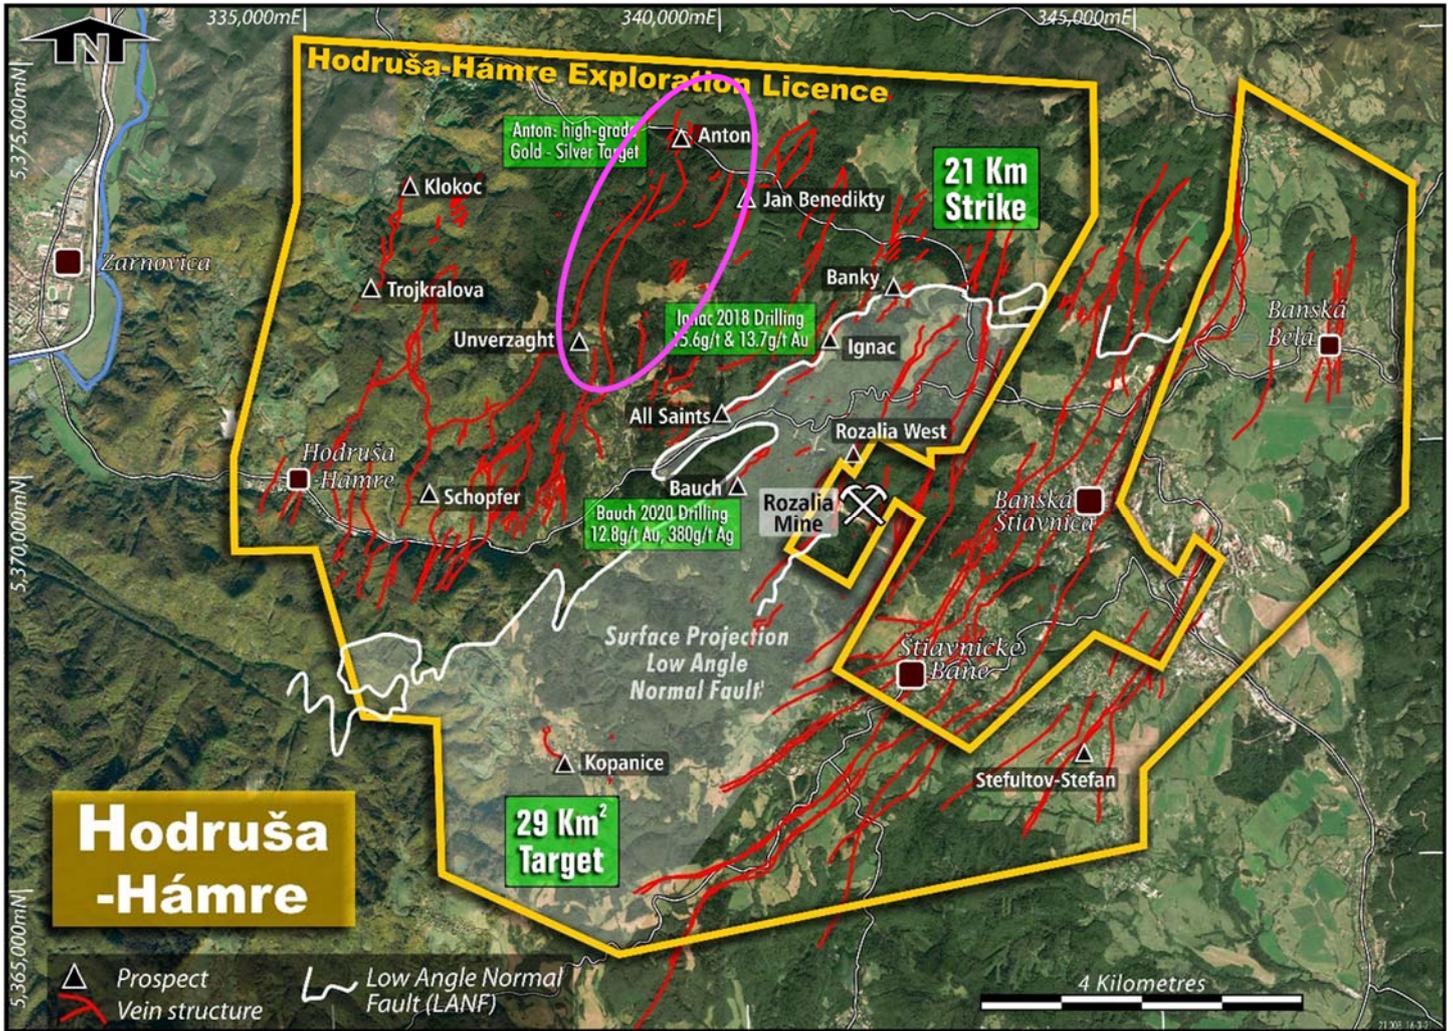

**Location of the 3.5 km Anton gold-silver vein structure (mauve highlight) in the northern portion of the Hodrusa-Hamre exploration licence.**

Prospech Managing Director Jason Beckton comments:

*“We are excited to report the discovery of high grade gold and silver from drilling at Anton. Given this success, the Company has commenced an additional drill hole to test the strike extension of the gold-silver zones. Once drilling is completed, the intention is to move the rig to Cejkov Zemplin for Phase 2 follow-up drilling of encouraging silver intersections reported earlier this year.*

*Assay results are due shortly for the final hole Krakauer vein on the Nova Bana Project licence area.*

*The MIMDAS IP survey exploring the LANF structure on the Hodrusa-Hamre licence is progressing well and should be completed in the next few weeks, weather permitting.”*

This announcement has been approved by the Managing Director, Jason Beckton.

**For further information, please contact:**

Jason Beckton  
 Managing Director  
 Prospech Limited  
 +61 (0)438 888 612

## **Competent Person's Statement**

The information in this Report that relates to Exploration Results is based on information compiled by Mr Jason Beckton, who is a Member of the Australian Institute of Geoscientists. Mr Beckton, who is Managing Director of the Company, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Beckton consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

pjn11009

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Rock chip grab samples were collected from outcrops, spoil heaps and accessible surface and underground workings of quartz veins, and zones of silicification, within Neogene volcanics under the supervision of a qualified geologist.</li> <li>Sample locations were surveyed with a handheld GPS and marked into sample books.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Diamond HQ and NQ drilling.</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Anton prospect has not been drilled previously.</li> </ul>
Logging	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>Rock chips were described in hand specimen and photographs taken for reference.</li> </ul>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>Approximately 1 to 2 Kg of material from each rock chip was sent to the laboratory for analysis.</li> <li>All sampling done under supervision of a qualified geologist.</li> </ul>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld</li> </ul>	<ul style="list-style-type: none"> <li>Samples are stored in a secure location in Companies storage facilities and transported to the ALS laboratory in Romania for sample preparation of fine crush, riffle split and pulverizing of 1kg to 85% &lt; 75µm.</li> <li>Pulps are analysed by ALS Romania using method</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <ul style="list-style-type: none"> <li>• <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></li> </ul>	<p>code ME-ICP61, a 33 element determination using a four acid digestion and 30 gram charge fire assay with AA finish (Au-AA25) for gold. Ore grades are analysed by OG62 – 4 acid digestion method for each element when identified.</p>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>• <i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li>• <i>The use of twinned holes.</i></li> <li>• <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li>• <i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Laboratory provides assay certificates, which are stored electronically both in ALS and Company's servers.</li> <li>• Laboratory CSV files are merged with GPS Location data files using unique sample numbers as the key.</li> <li>• No adjustments made to assay data.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> <li>• <i>Specification of the grid system used.</i></li> <li>• <i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Rock chip samples are located using handheld GPS receivers with accuracy from 10-5m.</li> <li>• UTM projection WGS84 Zone 34N and local grid SJTSK03. Conversion between local and UTM grid is run through national certified webportal.</li> <li>• The topographic control, using handheld GPS, was adequate for the survey.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>• <i>Data spacing for reporting of Exploration Results.</i></li> <li>• <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li>• <i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Reconnaissance sampling of available outcrop.</li> <li>• Results will not be used for resource estimation.</li> <li>• No compositing has been applied.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li>• <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No bias is believed to be introduced by the sampling method.</li> </ul>
Sample security	<ul style="list-style-type: none"> <li>• <i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Samples were delivered to ALS Minerals laboratory in Romania by Prospech trusted contractor and were not left unattended at any time. There were no incident reports from ALS lab on sample receiver cell.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li>• <i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No audits or reviews of the data management system have been carried out.</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li>• <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Prospech Limited, through subsidiaries and contractual rights, holds 100% rights on the Hodrusa-Hamre - Banska Stiavnica, Nova Bana, Rudno, Pukanec and Jasenie tenements.</li> <li>• The laws of Slovakia relating to exploration and mining have various requirements. As the exploration advances specific filings and environmental or other studies may be required. There are ongoing requirements under Slovakian mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Prospech's environmental and permit advisors specifically engaged for such purposes.</li> <li>• The Company is the manager of operations in accordance with generally accepted mining industry standards and practices.</li> </ul>
Exploration done by other parties	<ul style="list-style-type: none"> <li>• <i>Acknowledgment and appraisal of exploration by other parties.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Anciently, the target was silver, the currency of the day, and more recently, during the Communist era, the targets were industrial base metals, copper, lead, zinc and others. As a result, much of the country, including the Company's exploration license areas, has not been subject to modern western exploration methodology or exploitation.</li> </ul>

Criteria	JORC Code explanation	Commentary																														
		<ul style="list-style-type: none"> <li>Slovakia has a known mining history dating to Celtic times and earlier. Tools used by prehistoric miners at Spania Dolina, near Banska Bystrica are dated as early as 2000-1700 BC. Major production of metals (primarily copper and silver) occurred during the medieval period. The second oldest mining institute in the world is located at Banska Stiavnica and the local population is proud of their mining heritage, holding a three day mining festival every year. The mint at nearby Kremnica has operated for over six hundred years and continues to operate today.</li> <li>Communist era base metal and coal production was substantial and smelting of aluminium and nickel (material imported from Hungary and Albania) was carried out. Coal, gold, silver, talc, anhydrite and magnesite (and limestone, dolomite and gravel), bentonite, zeolite and industrial minerals are being mined in Slovakia today. An underground gold mine on a third party mining lease enclosed within the HHBS exploration license, the Rozalia Mine, continues in operation today, trucking a gravity/flotation concentrate to a smelter in Belgium..</li> </ul>																														
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>Located on the western flanks of the Stiavnica Strato Volcano within the Central Slovakian Volcanic Belt, the Nova Bana Exploration Licence covers quartz veins with classically banded, low-sulphidation epithermal textures with sulphidic "ginguro" zones, which are commonly associated with high grades of precious metals. Native gold and silver-sulphide minerals were observed in the hand specimens.</li> </ul>																														
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<table border="1"> <thead> <tr> <th>Hole_ID</th> <th>UTM_East</th> <th>UTM_North</th> <th>RL</th> <th>Max_Depth</th> </tr> </thead> <tbody> <tr> <td>VADD001</td> <td>339386.8</td> <td>5373910</td> <td>506.386</td> <td>300</td> </tr> <tr> <td>VADD002</td> <td>339386.8</td> <td>5373910</td> <td>506.386</td> <td>220.8</td> </tr> <tr> <td>VADD003</td> <td>339386.8</td> <td>5373910</td> <td>506.386</td> <td>282.5</td> </tr> <tr> <td>VADD004</td> <td>339074</td> <td>5373247</td> <td>644.71</td> <td>483</td> </tr> <tr> <td>VADD005</td> <td>339074</td> <td>5373247</td> <td>644.71</td> <td>458.6</td> </tr> </tbody> </table> <p>Drill Hole Survey Information</p>	Hole_ID	UTM_East	UTM_North	RL	Max_Depth	VADD001	339386.8	5373910	506.386	300	VADD002	339386.8	5373910	506.386	220.8	VADD003	339386.8	5373910	506.386	282.5	VADD004	339074	5373247	644.71	483	VADD005	339074	5373247	644.71	458.6
Hole_ID	UTM_East	UTM_North	RL	Max_Depth																												
VADD001	339386.8	5373910	506.386	300																												
VADD002	339386.8	5373910	506.386	220.8																												
VADD003	339386.8	5373910	506.386	282.5																												
VADD004	339074	5373247	644.71	483																												
VADD005	339074	5373247	644.71	458.6																												

Criteria	JORC Code explanation	Commentary																																																																																																																																																																																																								
		<table border="1"> <thead> <tr> <th>Hole_ID</th> <th>Depth</th> <th>Dip</th> <th>MAG_Azimu</th> <th>UTM_Azimuth</th> </tr> </thead> <tbody> <tr><td>VADD001</td><td>0</td><td>-65.26</td><td>128.19</td><td>134.89</td></tr> <tr><td>VADD001</td><td>15</td><td>-65.26</td><td>128.19</td><td>134.89</td></tr> <tr><td>VADD001</td><td>50</td><td>-64.66</td><td>131.12</td><td>137.82</td></tr> <tr><td>VADD001</td><td>100</td><td>-64.95</td><td>132.67</td><td>139.37</td></tr> <tr><td>VADD001</td><td>150</td><td>-64.98</td><td>130.95</td><td>137.65</td></tr> <tr><td>VADD001</td><td>200</td><td>-63.92</td><td>134.34</td><td>141.04</td></tr> <tr><td>VADD001</td><td>250</td><td>-63.28</td><td>135.19</td><td>141.89</td></tr> <tr><td>VADD001</td><td>300</td><td>-63.53</td><td>136.62</td><td>143.32</td></tr> <tr><td>VADD002</td><td>0</td><td>-52</td><td>127.9</td><td>134.6</td></tr> <tr><td>VADD002</td><td>15</td><td>-52</td><td>127.9</td><td>134.6</td></tr> <tr><td>VADD002</td><td>50</td><td>-51.74</td><td>127.74</td><td>134.44</td></tr> <tr><td>VADD002</td><td>100</td><td>-52.03</td><td>126.53</td><td>133.23</td></tr> <tr><td>VADD002</td><td>150</td><td>-51.72</td><td>127.99</td><td>134.69</td></tr> <tr><td>VADD002</td><td>200</td><td>-51.43</td><td>129.03</td><td>135.73</td></tr> <tr><td>VADD002</td><td>220</td><td>-51.6</td><td>129.55</td><td>136.25</td></tr> <tr><td>VADD003</td><td>0</td><td>-65.56</td><td>155.78</td><td>162.48</td></tr> <tr><td>VADD003</td><td>15</td><td>-65.56</td><td>155.78</td><td>162.48</td></tr> <tr><td>VADD003</td><td>100</td><td>-66.59</td><td>159.61</td><td>166.31</td></tr> <tr><td>VADD003</td><td>150</td><td>-66.64</td><td>161.26</td><td>167.96</td></tr> <tr><td>VADD003</td><td>200</td><td>-66.82</td><td>162.55</td><td>169.25</td></tr> <tr><td>VADD004</td><td>0</td><td>-70.92</td><td>88.69</td><td>95.39</td></tr> <tr><td>VADD004</td><td>15</td><td>-70.92</td><td>88.69</td><td>95.39</td></tr> <tr><td>VADD004</td><td>50</td><td>-70.64</td><td>89.47</td><td>96.17</td></tr> <tr><td>VADD004</td><td>100</td><td>-70.69</td><td>89.68</td><td>96.38</td></tr> <tr><td>VADD004</td><td>150</td><td>-70.49</td><td>88.9</td><td>95.6</td></tr> <tr><td>VADD004</td><td>200</td><td>-69.61</td><td>90.29</td><td>96.99</td></tr> <tr><td>VADD004</td><td>250</td><td>-68.61</td><td>92.73</td><td>99.43</td></tr> <tr><td>VADD004</td><td>300</td><td>-68.08</td><td></td><td>99.25</td></tr> <tr><td>VADD004</td><td>350</td><td>-67.69</td><td></td><td>97.35</td></tr> <tr><td>VADD004</td><td>400</td><td>-66.82</td><td></td><td>98.58</td></tr> <tr><td>VADD004</td><td>450</td><td>-66.16</td><td></td><td>97.29</td></tr> <tr><td>VADD004</td><td>483</td><td>-65.77</td><td></td><td>97.62</td></tr> <tr><td>VADD005</td><td>0</td><td>-50.48</td><td></td><td>109.52</td></tr> <tr><td>VADD005</td><td>15</td><td>-50.48</td><td></td><td>109.52</td></tr> <tr><td>VADD005</td><td>30</td><td>-50.94</td><td></td><td>110.25</td></tr> <tr><td>VADD005</td><td>50</td><td>-50.67</td><td></td><td>110.67</td></tr> <tr><td>VADD005</td><td>100</td><td>-50.32</td><td></td><td>109.14</td></tr> <tr><td>VADD005</td><td>150</td><td>-50.33</td><td></td><td>110.32</td></tr> <tr><td>VADD005</td><td>350</td><td>-44.44</td><td>106.21</td><td>112.91</td></tr> </tbody> </table>	Hole_ID	Depth	Dip	MAG_Azimu	UTM_Azimuth	VADD001	0	-65.26	128.19	134.89	VADD001	15	-65.26	128.19	134.89	VADD001	50	-64.66	131.12	137.82	VADD001	100	-64.95	132.67	139.37	VADD001	150	-64.98	130.95	137.65	VADD001	200	-63.92	134.34	141.04	VADD001	250	-63.28	135.19	141.89	VADD001	300	-63.53	136.62	143.32	VADD002	0	-52	127.9	134.6	VADD002	15	-52	127.9	134.6	VADD002	50	-51.74	127.74	134.44	VADD002	100	-52.03	126.53	133.23	VADD002	150	-51.72	127.99	134.69	VADD002	200	-51.43	129.03	135.73	VADD002	220	-51.6	129.55	136.25	VADD003	0	-65.56	155.78	162.48	VADD003	15	-65.56	155.78	162.48	VADD003	100	-66.59	159.61	166.31	VADD003	150	-66.64	161.26	167.96	VADD003	200	-66.82	162.55	169.25	VADD004	0	-70.92	88.69	95.39	VADD004	15	-70.92	88.69	95.39	VADD004	50	-70.64	89.47	96.17	VADD004	100	-70.69	89.68	96.38	VADD004	150	-70.49	88.9	95.6	VADD004	200	-69.61	90.29	96.99	VADD004	250	-68.61	92.73	99.43	VADD004	300	-68.08		99.25	VADD004	350	-67.69		97.35	VADD004	400	-66.82		98.58	VADD004	450	-66.16		97.29	VADD004	483	-65.77		97.62	VADD005	0	-50.48		109.52	VADD005	15	-50.48		109.52	VADD005	30	-50.94		110.25	VADD005	50	-50.67		110.67	VADD005	100	-50.32		109.14	VADD005	150	-50.33		110.32	VADD005	350	-44.44	106.21	112.91
Hole_ID	Depth	Dip	MAG_Azimu	UTM_Azimuth																																																																																																																																																																																																						
VADD001	0	-65.26	128.19	134.89																																																																																																																																																																																																						
VADD001	15	-65.26	128.19	134.89																																																																																																																																																																																																						
VADD001	50	-64.66	131.12	137.82																																																																																																																																																																																																						
VADD001	100	-64.95	132.67	139.37																																																																																																																																																																																																						
VADD001	150	-64.98	130.95	137.65																																																																																																																																																																																																						
VADD001	200	-63.92	134.34	141.04																																																																																																																																																																																																						
VADD001	250	-63.28	135.19	141.89																																																																																																																																																																																																						
VADD001	300	-63.53	136.62	143.32																																																																																																																																																																																																						
VADD002	0	-52	127.9	134.6																																																																																																																																																																																																						
VADD002	15	-52	127.9	134.6																																																																																																																																																																																																						
VADD002	50	-51.74	127.74	134.44																																																																																																																																																																																																						
VADD002	100	-52.03	126.53	133.23																																																																																																																																																																																																						
VADD002	150	-51.72	127.99	134.69																																																																																																																																																																																																						
VADD002	200	-51.43	129.03	135.73																																																																																																																																																																																																						
VADD002	220	-51.6	129.55	136.25																																																																																																																																																																																																						
VADD003	0	-65.56	155.78	162.48																																																																																																																																																																																																						
VADD003	15	-65.56	155.78	162.48																																																																																																																																																																																																						
VADD003	100	-66.59	159.61	166.31																																																																																																																																																																																																						
VADD003	150	-66.64	161.26	167.96																																																																																																																																																																																																						
VADD003	200	-66.82	162.55	169.25																																																																																																																																																																																																						
VADD004	0	-70.92	88.69	95.39																																																																																																																																																																																																						
VADD004	15	-70.92	88.69	95.39																																																																																																																																																																																																						
VADD004	50	-70.64	89.47	96.17																																																																																																																																																																																																						
VADD004	100	-70.69	89.68	96.38																																																																																																																																																																																																						
VADD004	150	-70.49	88.9	95.6																																																																																																																																																																																																						
VADD004	200	-69.61	90.29	96.99																																																																																																																																																																																																						
VADD004	250	-68.61	92.73	99.43																																																																																																																																																																																																						
VADD004	300	-68.08		99.25																																																																																																																																																																																																						
VADD004	350	-67.69		97.35																																																																																																																																																																																																						
VADD004	400	-66.82		98.58																																																																																																																																																																																																						
VADD004	450	-66.16		97.29																																																																																																																																																																																																						
VADD004	483	-65.77		97.62																																																																																																																																																																																																						
VADD005	0	-50.48		109.52																																																																																																																																																																																																						
VADD005	15	-50.48		109.52																																																																																																																																																																																																						
VADD005	30	-50.94		110.25																																																																																																																																																																																																						
VADD005	50	-50.67		110.67																																																																																																																																																																																																						
VADD005	100	-50.32		109.14																																																																																																																																																																																																						
VADD005	150	-50.33		110.32																																																																																																																																																																																																						
VADD005	350	-44.44	106.21	112.91																																																																																																																																																																																																						
Data aggregation methods	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>																																																																																																																																																																																																									
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>Mineralisation is epithermal vein related.</li> </ul>																																																																																																																																																																																																								
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being</li> </ul>	<ul style="list-style-type: none"> <li>The location and results received for both rock chip and drill-core samples are displayed in the attached maps and/or tables. Coordinates are UTM Zone 34N.</li> </ul>																																																																																																																																																																																																								

Criteria	JORC Code explanation	Commentary
	<i>reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>Results for all samples collected in this program are displayed on the attached maps and/or tables.</li> </ul>
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>No metallurgical or bulk density tests were conducted at the project by Prospech.</li> </ul>
<i>Further work</i>	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>Prospech proposes to carry out additional surface sampling and mapping of the Anton vein in preparation for diamond drilling early in the 2021 field season.</li> </ul>