

# ASX Announcement

## Rockface Assay Results

14 February 2022

- Rockface resource development drilling program has been completed
- Final assay results for all 12 drillholes have been received
- All holes intersected reportable copper mineralisation
- Some notable intersections<sup>1</sup> at Rockface include:
  - **KJCD481: 6.28m @ 2.39% Cu**, 20.6 g/t Ag, 0.29 g/t Au from 716.07m  
Including: 0.79m @ 6.54% Cu, 38.3 g/t Ag, 0.12 g/t Au from 716.07m  
And incl.: 0.91m @ 4.00% Cu, 53.2 g/t Ag, 1.09 g/t Au from 719.00m
  - **KJCD481D3: 4.45m @ 18.88% Cu**, 396.8 g/t Ag, 0.42 g/t Au from 725.35m  
Including: 1.51m @ 37.41% Cu, 1,105.5 g/t Ag, 0.59 g/t Au from 725.35m  
And incl.: 1.16m @ 21.98% Cu, 73.1 g/t Ag, 0.41 g/t Au from 728.06m
  - **KJCD481D6: 4.00m @ 19.80% Cu**, 298.6 g/t Ag, 1.10 g/t Au from 698.88m  
Including: 0.74m @ 61.4% Cu, 521.0 g/t Ag, 0.11 g/t Au from 698.88m
  - **KJCD481D7: 2.17m @ 12.81% Cu**, 218.4 g/t Ag, 0.71 g/t Au from 692.00m  
Including: 1.24m @ 21.49% Cu, 374.1 g/t Ag, 1.20 g/t Au from 692.97m
- Rockface North high-grade copper mineralised domain confirmed
- Rockface mineral resource estimation underway

KGL Resources Limited (ASX: KGL) (KGL or the Company) is pleased to report that the recent resource development drilling program of the Rockface deposit was successfully completed on 12th December 2021, and that all final assay results have now been received. Work has commenced on an update to the mineral resource model for Rockface and, together with the already finalised Reward and Bellbird resource estimates, will form the basis for revised and optimised feasibility study mine designs.

Rockface drill intersections above 1% copper cut off are presented in Table 1 below.

Like Reward and Bellbird, Rockface assays broadly confirm the existing mineral resource model and will result in refinements to the geological interpretations. The results also confirm the discovery of a higher-grade domain located near the western margin of the Rockface North lode.

Figure 1 below shows a longitudinal projection of the lower portion of the Rockface North lode, plotting the positions of the relevant copper intercepts.

KGL Managing Director, Mr. Simon Finnis remarked, "The receipt of the final set of assays from Rockface is an important step on the critical path for delivery of the Jervois feasibility study. The results support the overall continuity of the mineralisation and confirm the exciting discovery of a high-grade copper shoot in the west of the deposit. Importantly, the receipt of these assays allows us to immediately move to resource estimation of Rockface which, once completed, will combine with Reward and Bellbird updated resources to inform the mine design, Reserve and feasibility study.

<sup>1</sup> All intersections reported are estimated true thicknesses.

# ASX Announcement

## Rockface Assay Results

“At the present stage of knowledge, the intersection in KJCD481D8, of 3.04% copper (Table 1), in the Rockface Main lode is the deepest confirmed indication of reportable copper at Rockface and the second deepest for the whole of Jervois after a 4.7% Cu intercept in hole KJCD010W1, at Reward Deeps North. “

Hole_ID	Depth_From m	Depth_To m	Downhole Thickness m	Est. True Thickness m	Cu %	Ag g/t	Au g/t	Rockface Deposit Name
KJCD481 including and incl.	716.07	723.00	6.93	6.28	2.39	20.6	0.29	North
	716.07	716.94	0.87	0.79	6.54	38.3	0.12	North
	719.00	720.00	1.00	0.91	4.00	53.2	1.09	North
	752.00	754.00	2.00	1.89	1.40	6.3	0.55	Main
KJCD481D1	724.20	725.37	1.17	1.06	1.03	11.9	0.32	North
KJCD481D2	743.62	747.12	3.50	2.89	1.95	19.3	0.25	North
	829.00	830.00	1.00	0.88	1.65	7.5	0.10	Main
KJCD481D3 Including and incl.	725.35	730.50	5.15	4.45	18.88	396.8	0.42	North
	725.35	727.10	1.75	1.51	37.41	1,105.5	0.59	North
	728.06	729.40	1.34	1.16	21.98	73.1	0.41	North
	784.31	784.94	0.63	0.58	1.03	2.0	0.03	Main
KJCD481D4	752.80	753.72	0.92	0.74	3.62	7.5	6.14	North
	765.44	766.20	0.76	0.61	3.80	89.9	0.26	North
	849.07	850.15	1.08	0.89	1.39	7.0	0.02	Main
KJCD481D5	747.46	749.09	1.63	1.39	4.15	47.4	0.55	North
KJCD481D6 including	698.88	703.45	4.57	4.00	19.80	298.6	1.10	North
	698.88	699.73	0.85	0.74	61.40	521.0	0.11	North
	770.85	772.15	1.30	1.21	2.68	14.9	0.25	Main
KJCD481D7 including	692.00	694.27	2.27	2.17	12.81	218.4	0.71	North
	692.97	694.27	1.30	1.24	21.49	374.1	1.20	North
	759.40	762.45	3.05	2.92	1.31	8.3	0.06	Main
KJCD481D8 including	796.50	799.20	2.70	2.10	3.76	55.1	0.71	North
	796.50	797.51	1.01	0.78	5.95	53.9	0.71	North
	912.80	913.90	1.10	0.80	3.04	18.5	0.16	Main
KJCD481D9	701.00	702.00	1.00	0.88	1.78	7.3	0.01	North
	708.21	709.19	0.98	0.86	3.31	10.3	0.66	North
KJCD487	742.00	743.00	1.00	0.62	1.10	82.3	0.21	North
	769.40	770.29	0.89	0.56	4.26	13.4	0.01	North
	783.40	784.60	1.20	0.75	1.21	5.2	0.14	North
	851.47	852.46	0.99	0.69	2.01	15.8	0.22	Main
KJCD487D1	728.00	730.00	2.00	1.48	1.34	5.6	0.15	North

Table 1: 2021 Rockface drill intercepts (lower cut off Cu ≥ 1%)

# ASX Announcement

## Rockface Assay Results

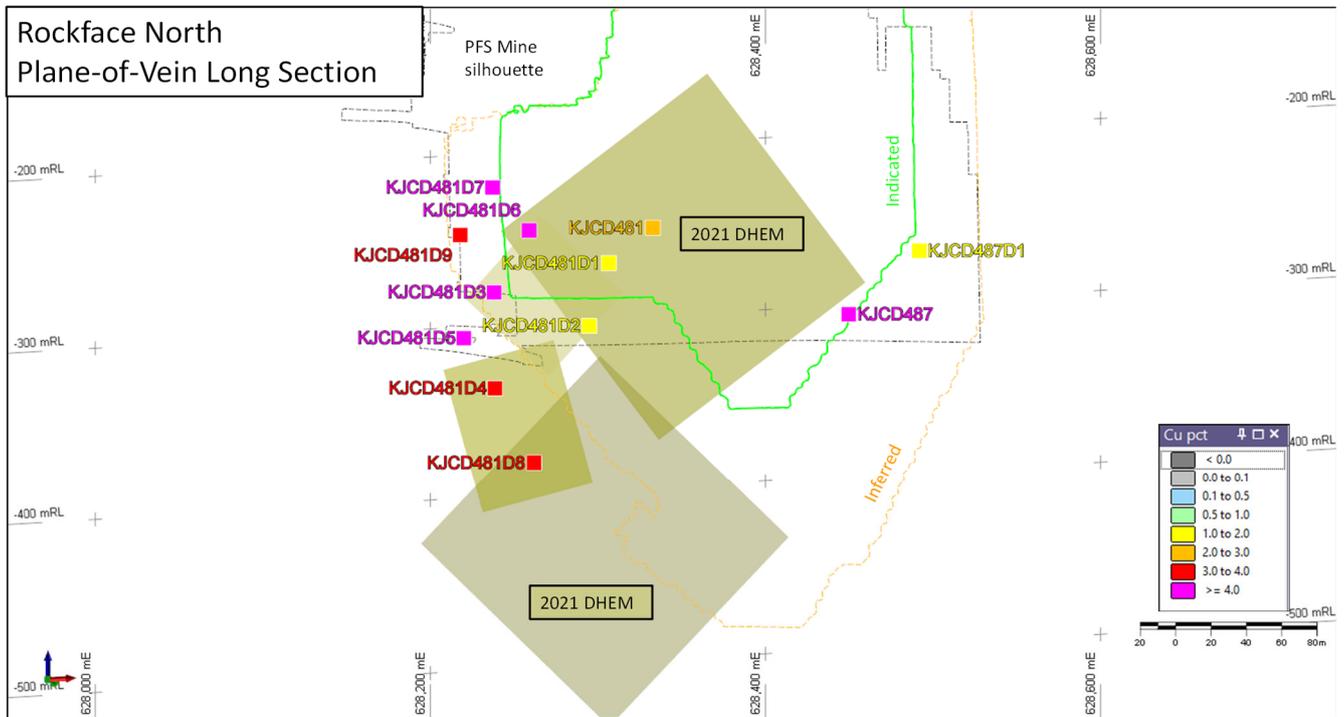


Figure 1: Long Section of Rockface North showing the position of the 2021 drill intersections in relation to the 2020 resource model and PFS mine plan silhouettes. Also shown are the DHEM conductor models interpreted from the DHEM surveys of KJCD481D3 and KJC481D4.

This announcement has been approved by the directors of KGL Resources Limited.

# ASX Announcement

## Rockface Assay Results



Level 5, 167 Eagle Street  
Brisbane QLD 4000  
Australia  
[kglresources.com.au](http://kglresources.com.au)

### Competent Person Statement

The information in this announcement that relates to Exploration Targets and Exploration Results is based on data compiled by John Levings BSc, a Competent Person who is a Fellow of The Australasian Institute of Mining and Metallurgy. Mr Levings is Principal Geologist for the Company. Mr Levings has sufficient experience, which is relevant to the style of mineralisation and type of deposit under consideration and to the activity, which is being undertaking to qualify as a Competent Person as defined in the 2012 Edition of 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Levings consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears.

The following drill holes were originally reported on the date indicated and using the JORC code specified in the table.

Hole		Date originally Reported	JORC Reported Under
KJCD	481D3	11/10/2021	2012
KJCD	481D4	4/11/2021	2012
KJCD	481D5	4/11/2021	2012
KJCD	481D6	10/11/2021	2012
KJCD	481D7	8/12/2021	2012
KJCD	481D8	8/12/2021	2012
KJCD	010W1	15/01/2015	2012

### Forward Looking statements

This release includes certain forward-looking statements. The words "forecast", "estimate", "like", "anticipate", "project", "opinion", "should", "could", "may", "target" and other similar expressions are intended to identify forward looking statements. All statements, other than statements of historical fact, included herein, including without limitation, statements regarding forecast cash flows and potential mineralisation, resources and reserves, exploration results and future expansion plans and development objectives of KGL are forward-looking statements that involve various risks and uncertainties. Although every effort has been made to verify such forward-looking statements, there can be no assurance that such statements will prove to be accurate and actual results and future events could differ materially from those anticipated in such statements. You should therefore not place undue reliance on such forward-looking statements.

Statements regarding plans with respect to the Company's mineral properties may contain forward looking statements. Statements in relation to future matters can only be made where the Company has a reasonable basis for making those statements.

# ASX Announcement

## Rockface Assay Results

### JORC Code, 2012 Edition – Table

## 1.1 Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>At Reward diamond drilling and reverse circulation (RC) drilling were used to obtain samples for geological logging and assaying. The core samples comprised a mixture of sawn HQ quarter core, sawn NQ half core and possibly BQ half core (historical drilling only). Sample lengths are generally 1m, but at times length were adjusted to take into account geological variations. RC sample intervals are predominantly 1m intervals with some 2 and 4m compositing (historical holes only)..</li> <li>RC samples are routinely scanned by KGL Resources with a Niton XRF. Samples assaying greater than 0.1% Cu, Pb or Zn are submitted for analysis at a commercial laboratory.</li> <li>Mineralisation at all deposits is characterized by disseminations, veinlets and large masses of chalcopyrite, associated with magnetite-rich alteration within a psammite. The mineralisation has textures indicative of structural emplacement within specific strata i.e. the mineral appears stratabound.</li> <li>Documentation of the historical drilling (pre-2011) for Reward is variable.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>The KGL and previous Jinka-Minerals RC drilling was conducted using a reverse circulation rig with a 5.25-inch face-sampling bit. Diamond drilling was either in NQ2 or HQ3 drill diameters. Metallurgical diamond drilling (JMET holes) were PQ</li> <li>There is no documentation for the historic drilling techniques.</li> <li>Diamond drilling was generally cored from surface with some of the deeper holes at Rockface and Reward utilizing RC pre-collars.</li> <li>Oriented core has been measured for the recent KGL drilling.</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>The KGL RC samples were not weighed on a regular basis but when completed no sample recovery issues were encountered during the drilling program.</li> <li>Jinka Minerals and KGL split the rare overweight samples (&gt;3kg) for assay. Since overweight samples were rarely reported no sample bias was established between sample recovery and grade.</li> </ul>

# ASX Announcement

## Rockface Assay Results



Level 5, 167 Eagle Street  
Brisbane QLD 4000  
Australia  
[kgresources.com.au](http://kgresources.com.au)

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>Core recovery for recent drilling is &gt;95% with the mineral zones having virtually 100% recovery.</li> <li>No evidence has been found for any relationship between sample recovery and copper grade and there are no biases in the sampling with respect to copper grade and recovery.</li> </ul>
Logging	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>All KGL RC and diamond core samples are geologically logged. Logging in conjunction with multi-element assays is appropriate for mineral resource estimation.</li> <li>Core samples are also orientated and logged for geotechnical information.</li> <li>All logging has been converted to quantitative and qualitative codes in the KGL Access database.</li> <li>All relevant intersections were logged.</li> <li>Paper logs existed for the historical drilling. There is very little historical core available for inspection.</li> </ul>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>The following describes the recent KGL sampling and assaying process: <ul style="list-style-type: none"> <li>RC drill holes are sampled at 1m intervals and split using a cone splitter attached to the cyclone to generate a split of ~3kg;</li> <li>RC sample splits (~3kg) are pulverized to 85% passing 75 microns.</li> <li>Diamond core was quartered with a diamond saw and generally sampled at 1m intervals with samples lengths adjusted at geological contacts;</li> <li>Diamond core samples are crushed to 70% passing 2mm and then pulverized to 85% passing 75 microns.</li> <li>Two quarter core field duplicates were taken for every 20m samples by Jinka Minerals and KGL Resources.</li> <li>All sampling methods and sample sizes are deemed appropriate for mineral resource estimation</li> </ul> </li> <li>Details for the historical sampling are not available.</li> </ul>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>The KGL drilling has QAQC data that includes standards, duplicates and laboratory checks. In ore zones standards are added at a ratio of 1:10 and duplicates and blanks 1:20.</li> <li>Base metal samples are assayed using a four-acid digest with an ICP AES finish. Gold samples are assayed by Aqua Regia with an ICP MS finish. Samples over 1ppm Au are re-assayed by Fire Assay with an AAS finish.</li> <li>There are no details of the historic drill sample assaying or any QAQC.</li> </ul>

# ASX Announcement

## Rockface Assay Results



Level 5, 167 Eagle Street  
Brisbane QLD 4000  
Australia  
[kgresources.com.au](http://kgresources.com.au)

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>All assay methods were deemed appropriate at the time of undertaking.</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>Data is validated on entry into the MS Access database, using Database check queries and Maxwell's DataShed.</li> <li>Further validation is conducted when data is imported into Micromine and Leapfrog Geo software</li> <li>Hole twinning was occasionally conducted at Reward with mixed results. This may be due to inaccuracies with historic hole locations rather than mineral continuity issues.</li> <li>For the resource estimation below detection values were converted to half the lower detection limit.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>For the KGL drilling surface collar surveys were picked up using a Trimble DGPS, with accuracy to 1 cm or better.</li> <li>Downhole surveys were taken during drilling with a Ranger or Reflex survey tool at 30m intervals</li> <li>All drilling by Jinka Minerals and KGL is referenced on the MGA 94 Zone 53 grid. All downhole magnetic surveys were converted to MGA 94 grid.</li> <li>For Reward there are concerns about the accuracy of some of the historic drillhole collars. There are virtually no preserved historic collars for checking.</li> <li>There is no documentation for the downhole survey method for the historic drilling.</li> <li>Topography was mapped using Trimble DGPS and LIDAR</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>Drilling at Rockface was on nominal 50m centres with downhole sampling on 1m intervals.</li> <li>Drilling at Reward was on 25m spaced sections in the upper part of the mineralisation extending to 50m centres with depth and ultimately reaching 100m spacing on the periphery of mineralisation.</li> <li>For Reward shallow oxide RC drilling was conducted on 80m spaced traverses with holes 10m apart.</li> <li>The drill spacing for all areas is appropriate for resource estimation and the relevant classifications applied.</li> <li>A small amount of sample compositing has been applied to some of the near surface historic drilling.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the</li> </ul>	<ul style="list-style-type: none"> <li>Holes were drilled perpendicular to the strike of the mineralization; the default angle is -60 degrees, but holes vary from -45 to -80.</li> </ul>

# ASX Announcement

## Rockface Assay Results

Criteria	JORC Code explanation	Commentary
	<i>orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	<ul style="list-style-type: none"> <li>Drilling orientations are considered appropriate and no obvious sampling bias was detected.</li> </ul>
Sample security	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Samples were stored in sealed polyweave bags on site and transported to the laboratory at regular intervals by KGL staff or a transport contractor.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>The sampling techniques are regularly reviewed internally and by external consultants.</li> </ul>

## 1.2 Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The Jervois Project is within EL25429 and EL28082 100% owned by Jinka Minerals and operated by Kentor Minerals (NT), both wholly owned subsidiaries of KGL Resources.</li> <li>The Jervois Project is covered by Mineral Claims and an Exploration licence owned by KGL Resources subsidiary Jinka Minerals.</li> </ul>
Exploration done by other parties	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Previous exploration has primarily been conducted by Reward Minerals, MIM and Plenty River.</li> </ul>
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>EL25429 and EL28082 lie on the Huckitta 1: 250 000 map sheet (SF 53-11). The tenement is located mainly within the Palaeo-Proterozoic Bonya Schist on the northeastern boundary of the Arunta Orogenic Domain. The Arunta Orogenic Domain in the north western part of the tenement is overlain unconformably by Neo-Proterozoic sediments of the Georgina Basin.</li> <li>The stratabound mineralisation for the project consists of a series of complex, narrow, structurally controlled, sub-vertical sulphide/magnetite-rich deposits hosted by Proterozoic-aged, amphibolite grade metamorphosed sediments of the Arunta Inlier.</li> <li>Mineralisation is characterised by veinlets and disseminations of chalcopyrite in association with magnetite. In the oxide zone which is vertically limited malachite, azurite, chalcocite are the main Cu-minerals.</li> <li>Massive to semi-massive galena in association with sphalerite occur locally in high grade lenses of limited extent with oxide equivalents including cerussite and anglesite in the oxide zone. Generally, these lenses are associated with more carbonate-rich host rocks occurring at Green Parrot, Reward and Bellbird North.</li> </ul>

# ASX Announcement

## Rockface Assay Results

Criteria	JORC Code explanation	Commentary																																																																																											
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:               <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<table border="1"> <thead> <tr> <th>Hold ID</th> <th>Easting</th> <th>Northing</th> <th>RL</th> <th>Azimuth</th> <th>Dip</th> <th>Depth</th> </tr> </thead> <tbody> <tr><td>KJCD481</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>835.0</td></tr> <tr><td>KJCD481D1</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>853.0</td></tr> <tr><td>KJCD481D2</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>868.0</td></tr> <tr><td>KJCD481D3</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>847.0</td></tr> <tr><td>KJCD481D4</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>889.0</td></tr> <tr><td>KJCD481D5</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>859.1</td></tr> <tr><td>KJCD481D6</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>813.5</td></tr> <tr><td>KJCD481D7</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>802.1</td></tr> <tr><td>KJCD481D8</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>937.1</td></tr> <tr><td>KJCD481D9</td><td>628184.18</td><td>7490806.01</td><td>357.12</td><td>144.68</td><td>-75.46</td><td>838.1</td></tr> <tr><td>KJCD487</td><td>628509.51</td><td>7490879.21</td><td>358.6</td><td>168.62</td><td>-74.65</td><td>895.0</td></tr> <tr><td>KJCD487D1</td><td>628509.51</td><td>7490879.21</td><td>358.6</td><td>168.62</td><td>-74.65</td><td>799.0</td></tr> </tbody> </table> <p>For intercept depths please see Tables in the body of the report</p>	Hold ID	Easting	Northing	RL	Azimuth	Dip	Depth	KJCD481	628184.18	7490806.01	357.12	144.68	-75.46	835.0	KJCD481D1	628184.18	7490806.01	357.12	144.68	-75.46	853.0	KJCD481D2	628184.18	7490806.01	357.12	144.68	-75.46	868.0	KJCD481D3	628184.18	7490806.01	357.12	144.68	-75.46	847.0	KJCD481D4	628184.18	7490806.01	357.12	144.68	-75.46	889.0	KJCD481D5	628184.18	7490806.01	357.12	144.68	-75.46	859.1	KJCD481D6	628184.18	7490806.01	357.12	144.68	-75.46	813.5	KJCD481D7	628184.18	7490806.01	357.12	144.68	-75.46	802.1	KJCD481D8	628184.18	7490806.01	357.12	144.68	-75.46	937.1	KJCD481D9	628184.18	7490806.01	357.12	144.68	-75.46	838.1	KJCD487	628509.51	7490879.21	358.6	168.62	-74.65	895.0	KJCD487D1	628509.51	7490879.21	358.6	168.62	-74.65	799.0
Hold ID	Easting	Northing	RL	Azimuth	Dip	Depth																																																																																							
KJCD481	628184.18	7490806.01	357.12	144.68	-75.46	835.0																																																																																							
KJCD481D1	628184.18	7490806.01	357.12	144.68	-75.46	853.0																																																																																							
KJCD481D2	628184.18	7490806.01	357.12	144.68	-75.46	868.0																																																																																							
KJCD481D3	628184.18	7490806.01	357.12	144.68	-75.46	847.0																																																																																							
KJCD481D4	628184.18	7490806.01	357.12	144.68	-75.46	889.0																																																																																							
KJCD481D5	628184.18	7490806.01	357.12	144.68	-75.46	859.1																																																																																							
KJCD481D6	628184.18	7490806.01	357.12	144.68	-75.46	813.5																																																																																							
KJCD481D7	628184.18	7490806.01	357.12	144.68	-75.46	802.1																																																																																							
KJCD481D8	628184.18	7490806.01	357.12	144.68	-75.46	937.1																																																																																							
KJCD481D9	628184.18	7490806.01	357.12	144.68	-75.46	838.1																																																																																							
KJCD487	628509.51	7490879.21	358.6	168.62	-74.65	895.0																																																																																							
KJCD487D1	628509.51	7490879.21	358.6	168.62	-74.65	799.0																																																																																							
Data aggregation methods	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Minimum grade truncation 0.5%Cu for intercepts above 200m RL</li> <li>Minimum grade truncation 1.0%Cu for intercepts below 200m RL</li> <li>Aggregate intercepts use length-weighting</li> <li>No top-cuts are applied nor considered necessary</li> <li>No metal equivalents are used</li> </ul>																																																																																											
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>In the main deposit areas, the geometry of the lodes is well known and is used to estimate true widths, which are quoted in the report</li> </ul>																																																																																											
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>Refer Figure 1 in the report</li> </ul>																																																																																											
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>Results for all holes are reported according to the Data Aggregation Methods stated above</li> </ul>																																																																																											
Other substantive exploration data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>Outcrop mapping of exploration targets using Real time DGPS.</li> <li>IP, Magnetics, Gravity, Downhole EM are all used for targeting</li> <li>Metallurgical studies are well advanced including recovery of the payable metals including Cu, Ag and Au.</li> <li>Deleterious elements such as Pb Zn Bi and F are modelled</li> </ul>																																																																																											
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>The current report relates to infill and mineral resource confirmatory drilling and is ongoing</li> <li>Brownfields and greenfield drilling has also commenced</li> <li>Additional IP and DHEM surveys are planned</li> </ul>																																																																																											