

12 December 2017

JERVOIS COPPER PROJECT

Further high-grade copper, silver and gold discovered at Reward Prospect

-) 9.57m @ 5.11% Cu, 0.4% Pb, 0.31% Zn, 78.5g/t Ag, 2.44g/t Au (Hole KJD220W1)**
-) 8.16m @ 5.03% Cu, 35.9g/t Ag, 3.35g/t Au (Hole KJD223)**
 - o Including 1.12m @ 15.24% Cu, 92.2g/t Ag, 21.52g/t Au.18m**
-) DHEM completed at Reward – enhanced understanding of conductor R1**
-) Extension drilling and DHEM underway at Rockface**

KGL Resources Limited (KGL:ASX) (KGL or the Company) announces the discovery of further high grade copper, silver and gold at the Reward prospect, located at KGL's 100% owned Jervois Copper Project, following receipt of assays from two holes recently drilled at Reward.

The down hole electromagnetic (DHEM) exploration technique used and developed successfully at the Rockface prospect is now being applied and targeting drilling at Reward, 5km to the north-east of Rockface.

KGL Executive Chairman Mr Denis Wood said:

"It is very encouraging to see the Reward prospect shaping up as yet another high-grade zone building on the success we have had at Rockface.

"Every hole in the current drilling programs at both Rockface and Reward has thus far intersected mineralisation.

"All three holes drilled at Reward this year have produced high grade assays.

"The precious metal grades of gold and silver have often been very good at Reward, particularly at the northern end of the resource with individual assays of up to 21.52g/t gold. This further enhances the value of what is already high grade copper mineralisation.

"The two drill rigs currently double shifting at Reward will cease operation in the next few days. Then following a short break, they will recommence early in the new year, as we continue to build on the existing resource and begin testing some of the exciting high priority exploration targets.

"At Rockface, in addition to infill drilling, we are testing some of the depth extensions to the mineralisation in advance of a DHEM survey program that has now commenced."

Reward Prospect Further drilling at the northern end of the Reward copper deposit, guided by the results of DHEM surveying, continues to intersect high grade copper, silver and gold assays.

Assay Results for Hole KJD220W1

Significant mineralisation in KJD220W1, which targeted DHEM Conductors R1 and R3, included:

) **9.57m @ 5.11% Cu, 0.4% Pb, 0.31% Zn, 78.5g/t Ag, 2.44g/t Au from 561.82 m**



Photograph 1. KJD220W1 at Reward zone of massive sulphides at ~564m hole depth, corresponding to Conductor R1.

Table 1 Assays for diamond hole KJD220W1

Hole	Sample No.	From m	To m	Interval m	Copper %	Lead %	Zinc %	Silver g/t	Gold g/t
KJD220W1	502680	560.8	561.82	1.02	0.11	0.01	0.03	1	-0.01
KJD220W1	502682	561.82	562.22	0.4	4.06	0.01	0.04	15.5	0.07
KJD220W1	502683	562.22	563.22	1	0.28	0.03	0.04	5.3	0.01
KJD220W1	502684	563.22	564.32	1.1	2.88	0.06	0.05	27.1	0.47
KJD220W1	502685	564.32	565.08	0.76	9.39	0.13	0.19	76.2	0.68
KJD220W1	502686	565.08	565.61	0.53	10.00	0.19	0.32	111.1	2.54
KJD220W1	502688	565.61	566.4	0.79	3.91	0.03	0.11	26.1	4.47
KJD220W1	502689	566.4	567.3	0.9	3.59	0.02	0.12	15.8	3.22
KJD220W1	502690	567.3	568.14	0.84	5.69	0.13	0.39	52.7	8.71
KJD220W1	502691	568.14	568.9	0.76	10.73	0.44	0.87	120.7	2
KJD220W1	502692	568.9	569.56	0.66	8.18	2.27	0.60	313	6.46
KJD220W1	502694	569.56	570.6	1.04	3.35	0.19	0.44	30.5	0.26
KJD220W1	502695	570.6	571.39	0.79	4.12	1.68	0.65	233.4	1.44
KJD220W1	502696	571.39	572	0.61	0.12	0.04	0.05	3.9	0.04

High values (orange/red), medium values (yellow), low values (green)

Assay Results for Hole KJD223

KJD223 was designed to test conductor R6, coincident with the bottom edge of conductor R1. High grades of copper and precious metals were intersected including one interval that assayed 21.52g/t gold. Significant mineralisation included:

) **8.16m @ 5.03% Cu, 35.9g/t Ag, 3.35g/t Au from 691.44 m**

Including 1.12m @ 15.24% Cu, 92.2g/t Ag, 21.52g/t Au from 696.18 m



Photograph 2. KJD223 at Reward Prospect - Chalcopyrite in banded and brecciated magnetite circa. 692-698.5m, corresponding to Conductor R6.

Table 2 Assays for diamond hole KJD223

Hole	Sample No.	From m	To m	Interval m	Copper %	Lead %	Zinc %	Silver g/t	Gold g/t
KJD223	502856	691.44	692.07	0.63	0.64	0.03	0.06	7.2	0.15
KJD223	502857	692.07	692.5	0.43	2.05	0.05	0.05	25.3	0.33
KJD223	502859	692.5	693.4	0.9	4.02	0.05	0.06	32.8	0.48
KJD223	502860	693.4	694.3	0.9	5.83	0.17	0.08	51.3	0.85
KJD223	502861	694.3	695.3	1	5.46	0.05	0.05	38.9	0.26
KJD223	502862	695.3	696.18	0.88	5.34	0.06	0.04	35.3	0.23
KJD223	502863	696.18	697.3	1.12	15.24	0.12	0.09	92.2	21.52
KJD223	502865	697.3	698	0.7	2.62	0.03	0.34	18.4	1.56
KJD223	502866	698	698.7	0.7	1.09	0.07	0.03	12.6	0.19
KJD223	502867	698.7	699	0.3	0.41	0.03	0.10	4.6	0.12
KJD223	502856	699	699.6	0.6	1.51	0.03	0.05	8.7	0.18

Down Hole Electromagnetics

Results from the recently completed DHEM survey at Reward enhanced the company's understanding of the existing R1 conductor. (Refer Figure 2)

The DHEM confirmed the size of conductor R1 although the southern edge of the plate has reduced while the top edge has extended further up dip. Two small higher conductive zones are also now included, one above KJD223 and the second immediately north of KJD220W1 along strike and coincident with Conductor R3.

The DHEM has commenced at Rockface and results will be released when they become available.

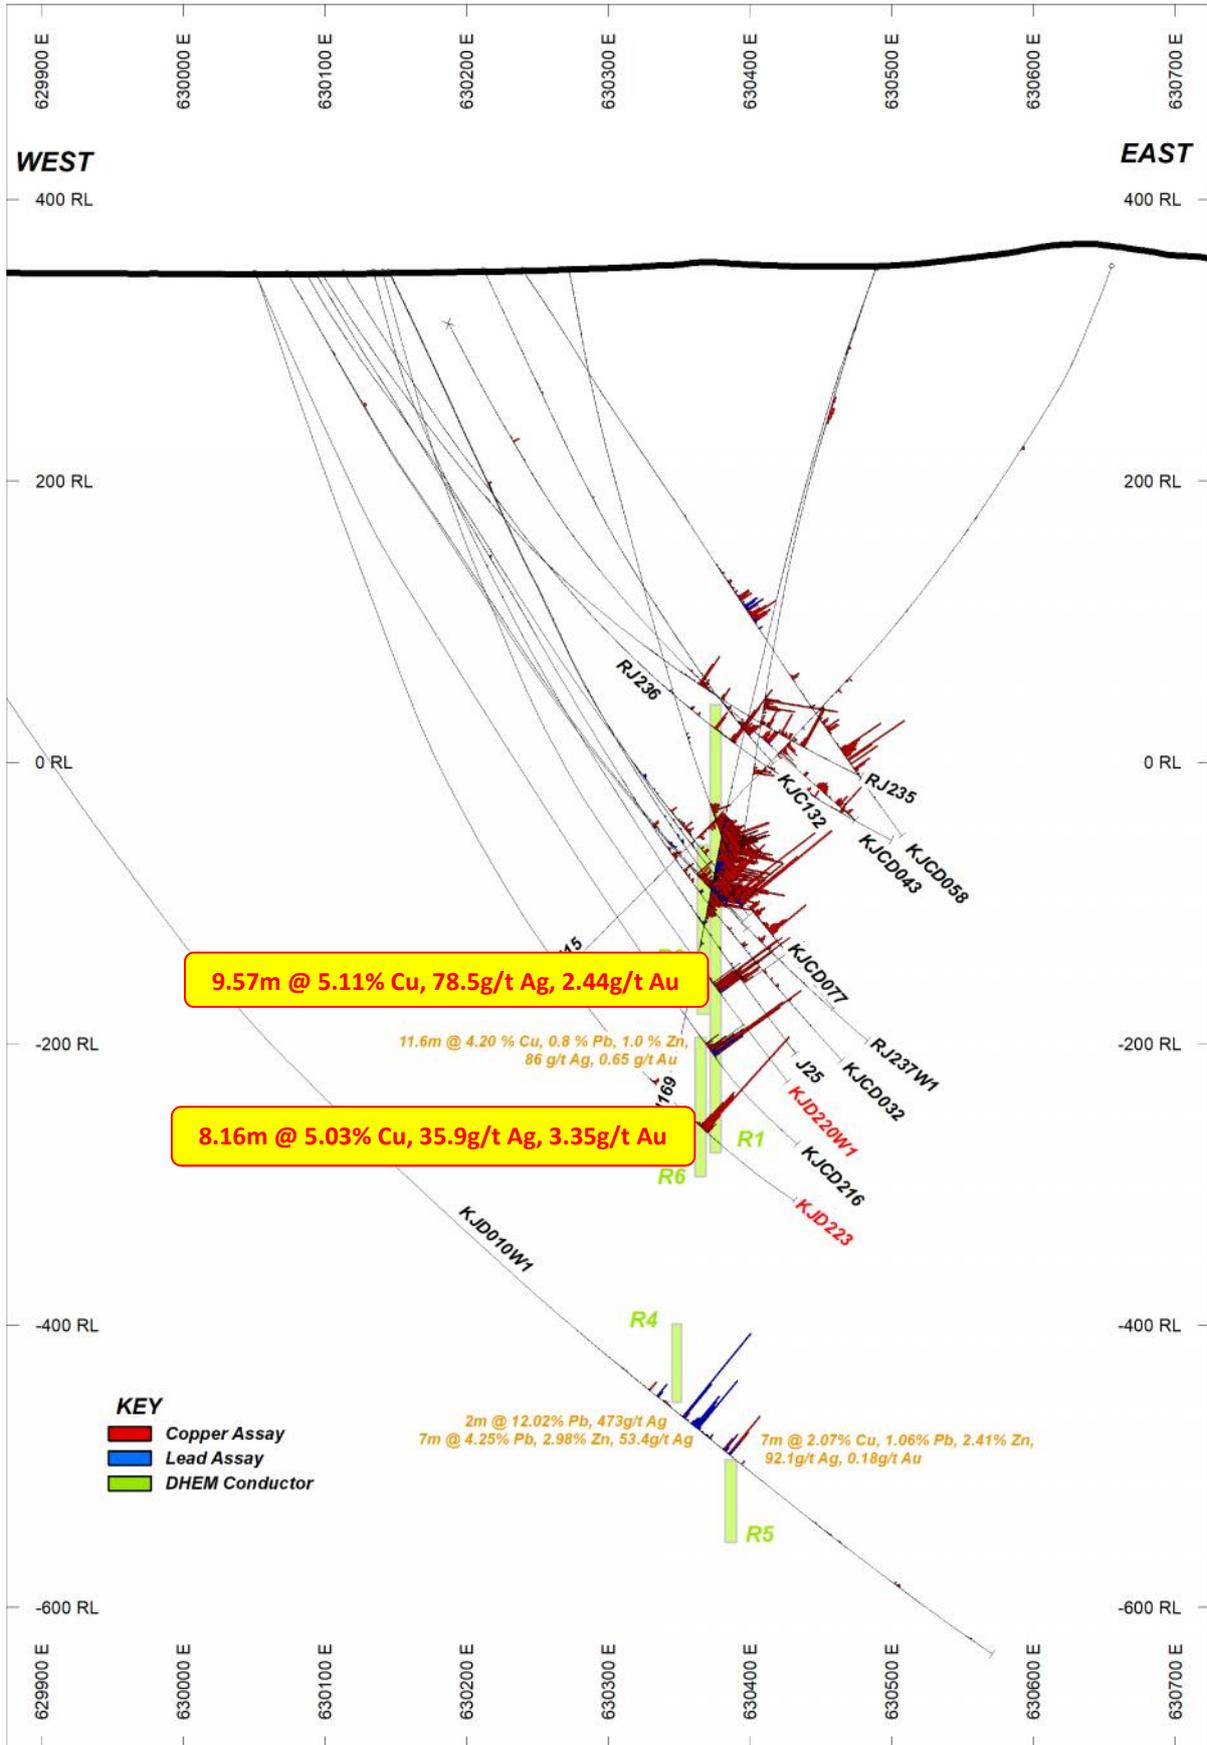


Figure 1 Reward cross-section 7495275N

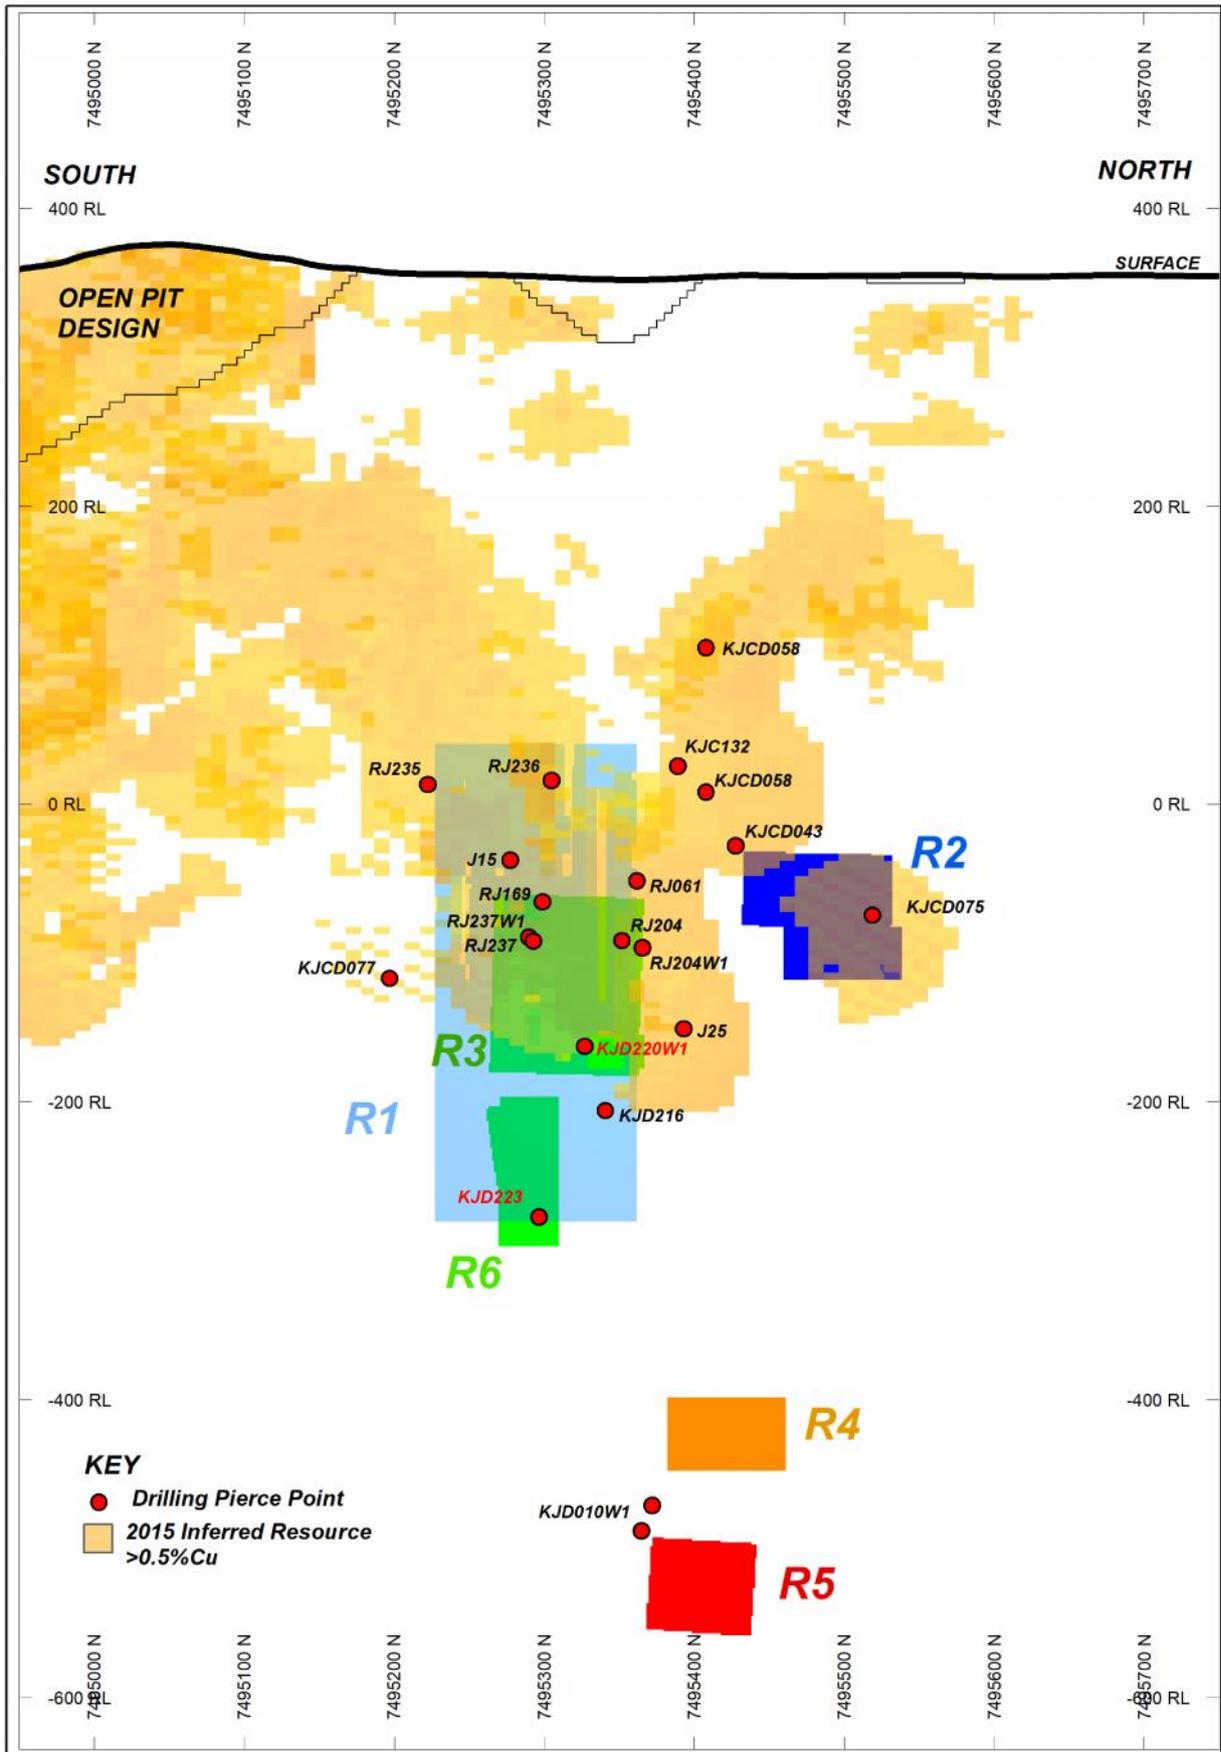


Figure 2 Reward Long section

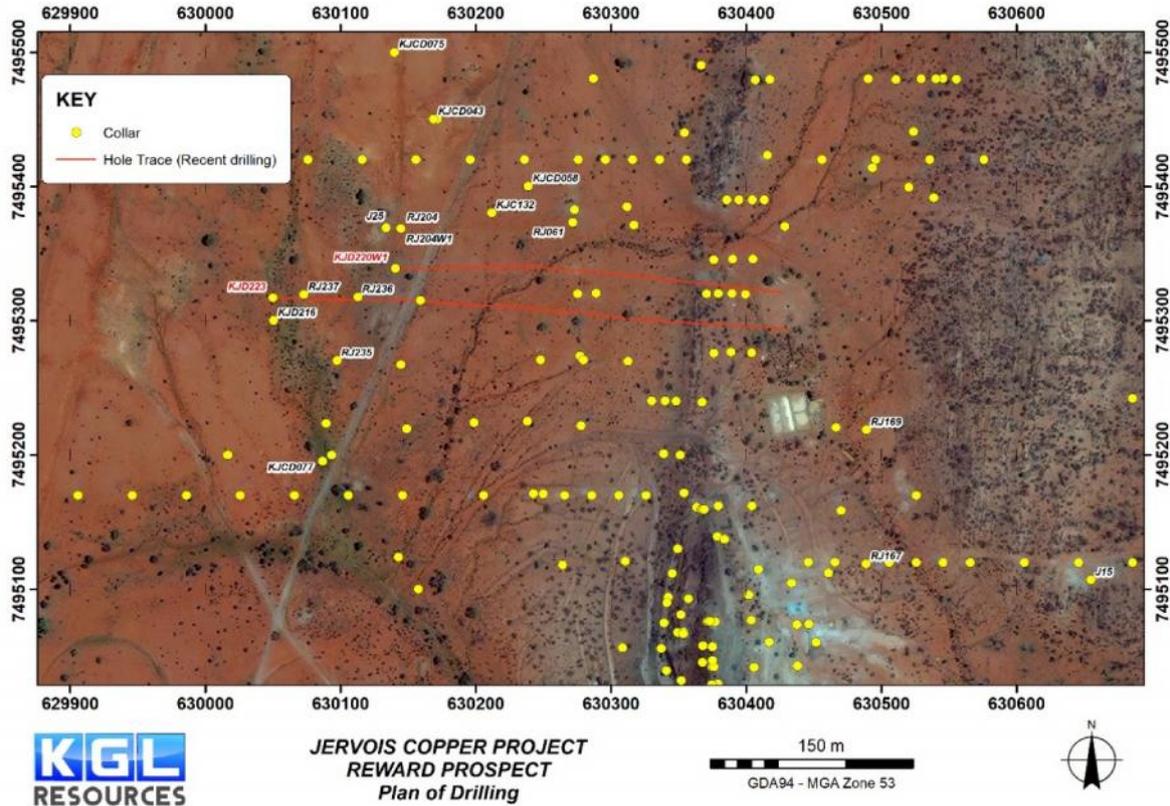


Figure 3 Plan view of Drilling at Reward Prospect

Table 3 Reward North significant results

HoleID	Interval	C	ETW (m)	RL (m)	SG (t/m ³)
J15	11m @ 4.73% Cu, 1.84g/t Au from 512	R1	8.7	-35.5	-
RJ236	3.7m @ 4.68% Cu, 54g/t Ag, 1.96g/t Au from 433 m		3.0	15.6	3.29
KJCD043	7m @ 1.36% Cu, 25g/t Ag, 0.5g/t Au from 413	-	5.6	17.2	2.96
	7m @ 1.28%Cu, 20.1g/t Ag, 0.06g/t Au from 483m	-	5.6	-29	3.04
RJ061	22.4m @ 2.84% Cu from 408 m		7.7	-43.3	-
KJCD075	7m @ 5.07% Pb, 0.29% Zn, 106.6g/t Ag from 498m	R2	5.2	-73.6	3.54
RJ169	72m @ 3.27% Cu, 51.3g/t Ag, 1.16g/t Au from 414m	R1	16	-40.6	3.33
RJ237	23.6m @ 1.82% Cu, 23.9g/t Ag, 0.27g/t Au from 521.7	R1	16.1	-81.8	-
RJ237W1	25m @ 1.74%Cu, 35.9g/t Ag, 0.82g/t Au from 518m	R1	17	-79.9	3.29
RJ204	8m @ 4.8% Cu, 62.1g/t Ag, 0.35g/t Au from 502m	R1	5.0	-94	3.30
RJ204W1	9.05m @ 4.9%Cu, 66.2g/t Ag, 1.22g/t Au from 509m	R1	5.8	-95.8	3.20
J25	3.64m @ 2.79% Cu from 570.4 m	-	2.2	-154	-
KJD220W1	9.57m @ 5.11% Cu, 0.4% Pb, 0.31% Zn, 78.5g/t Ag, 2.44g/t Au from 561.82 m	R1R3	5.8	-156.9	3.21
KJD216	11.63m @ 4.2% Cu, 0.81% Pb, 1.07% Zn, 86g/t Ag, 0.65g/t Au from 636.1 m	R1	7.0	-200	3.24
KJD223	8.16m @ 5.03% Cu, 35.9g/t Ag, 3.35g/t Au from 691.44 m	R6	6.1	-258.4	3.36
KJD010W1	2m @ 12.02% Pb, 473g/t Ag from 1062m		1.6	-465.3	3.87
	7m @ 4.25% Pb, 2.98% Zn, 53.4g/t Ag from 1070m		5.6	-470.2	3.11
	7m @ 2.07% Cu, 1.06% Pb, 2.41% Zn, 92g/t Ag, 0.18g/t Au from 1100m		5.6	-488.7	3.17

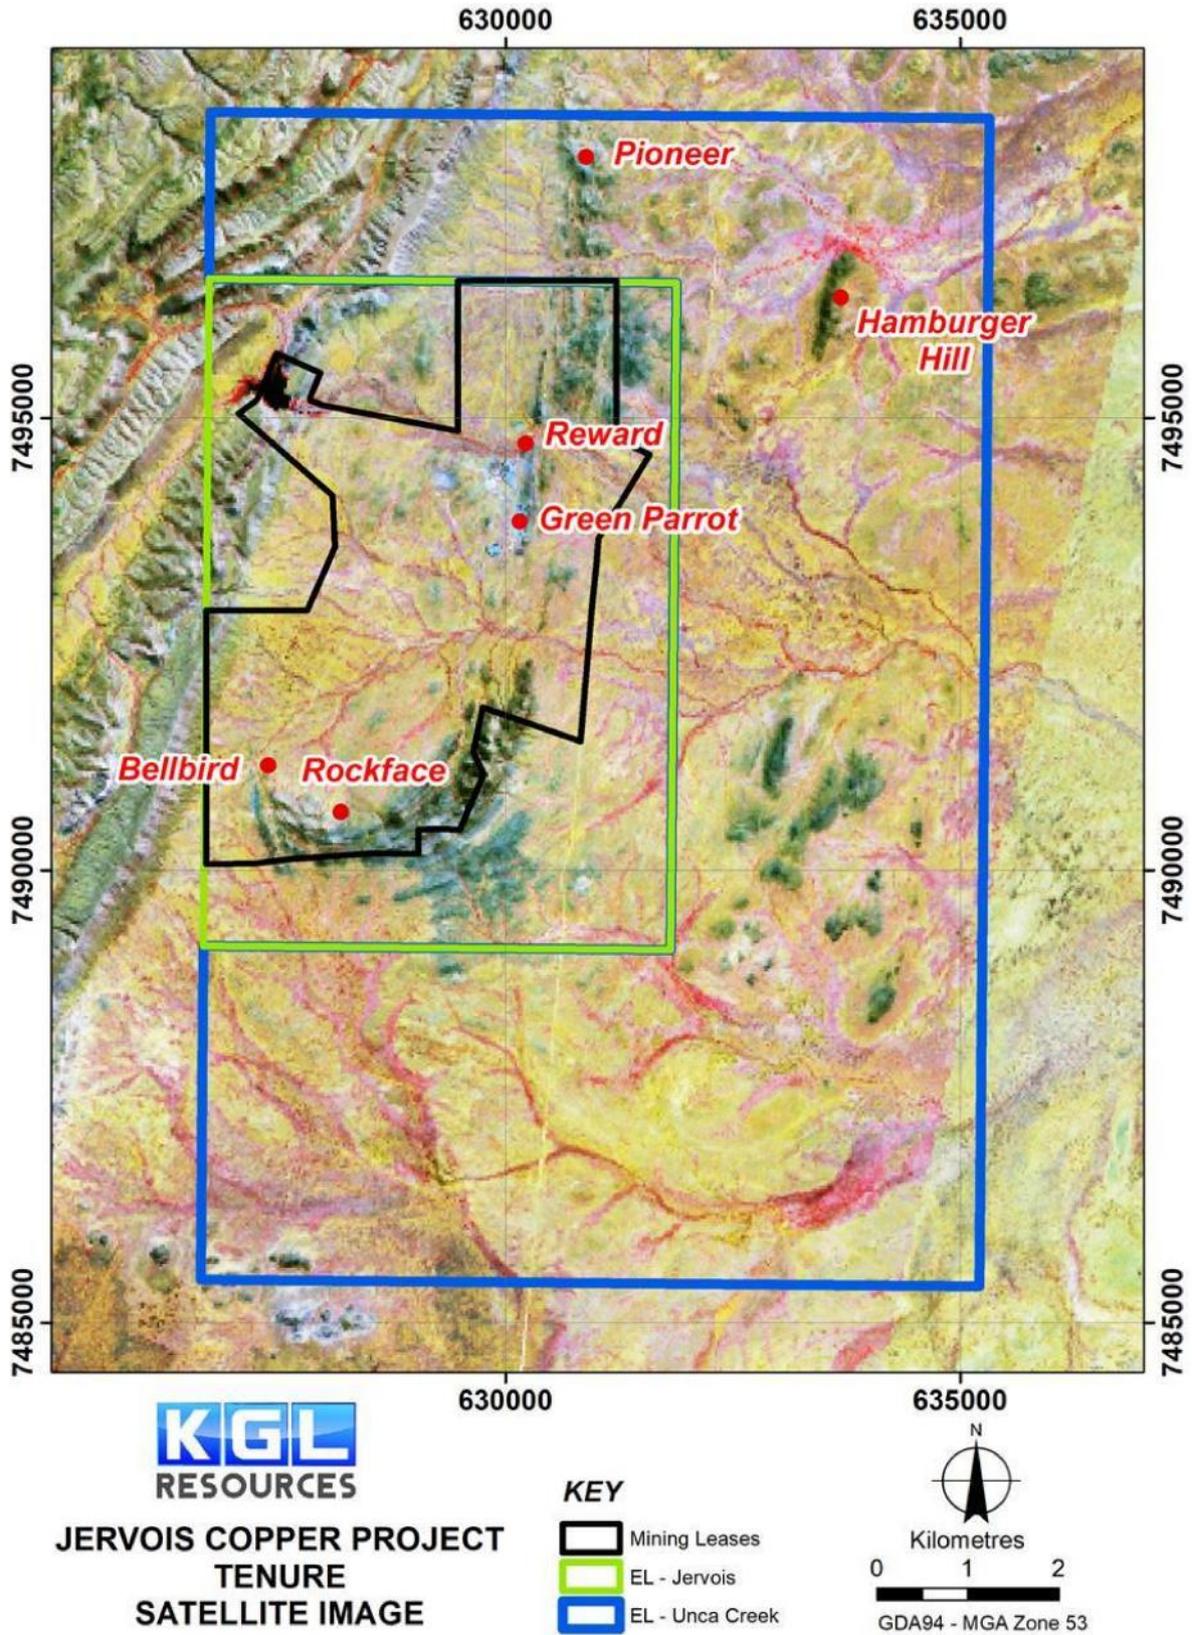


Figure 4 Location Diagram for the Jervois Copper Project

Table 4 Summary of significant results

Hole ID	Easting (m)	Northing (m)	RL (m)	Dip	Azimuth	BOX ¹ (m)	Total Depth (m)	From (m)	To (m)	Interval (m)	ETW ¹ (m)	Cu %	Pb %	Zn %	Ag g/t	Au g/t
KJD220W1	630139.8	7495339.2	348.9	-75.47	89.9	n/a	625	561.82	571.39	9.57	5.8	5.11	0.4	0.31	78.5	2.44
KJD223	630048.1	7495317.1	348.1	-60.98	91.7	n/a	777.4	647.0	648.73	1.73	1.2	0.76	0.03	0.11	5.5	0.1
								691.44	699.6	8.16	6.1	5.03	0.07	0.09	35.9	3.35
							Including	696.18	697.3	1.12	0.8	15.24	0.12	0.09	92.2	21.52

¹Base of Oxidisation down hole depth²Estimated True Width

For further information, contact:

Ms Kylie Anderson
 Company Secretary
 Phone: 07 3071 9003

About KGL Resources

KGL Resources Limited is an Australian mineral exploration company focussed on increasing the high-grade resource at the Jervois Copper Project in the Northern Territory and developing it into a multi-metal mine.

Competent Person Statement

The Jervois Exploration data in this report is based on information compiled by Adriaan van Herk, a member of the Australian Institute of Geoscientists, Chief Geologist and a full-time employee of KGL Resources Limited.

Mr. van Herk has sufficient experience which is relevant to the style of the mineralisation and the type of deposit under consideration and to the activity to which he is undertaking, to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. van Herk has consented to the inclusion of this information in the form and context in which it appears in this report.

The following drill holes were originally reported on the date indicated and using the JORC code specified in the table. Results reported under JORC 2004 have not been updated to comply with JORC 2012 on the basis that the information has not materially changed since it was last reported.

Hole	Date originally Reported	JORC Reported Under
J15	17/05/2011	2004
RJ236	02/10/2012	2004
KJCD043	20/03/2014	2012
RJ061	17/05/2011	2004
KJCD075	29/07/2014	2012
RJ169	20/10/2015	2012
RJ237	02/10/2012	2004
RJ237W1	02/10/2012	2004
RJ204	16/08/2012	2004
RJ204W1	16/08/2012	2004
J25	17/05/2011	2004
KJD010W1	15/01/2015	2012
KJCD171	22/10/2015	2012
KJCD183	26/04/2016	2012
KJCD195	02/08/2016	2012
KJCD197	19/09/2016	2012
KJCD201	09/02/2017	2012
KJCD203	09/02/2017	2012
KJCD210	29/06/2017	2012
KJCD211	29/06/2017	2012
J9	08/11/2013	2004
KJCD205	22/03/2017	2012
KJCD208	30/06/2017	2012
KJCD210	30/06/2017	2012
KJCD171	20/10/2015	2012
KJCD183	26/04/2016	2012
KJCD203	09/02/2017	2012
KJCD195	02/08/2016	2012
KJCD197	19/09/2016	2012
J9	17/05/2011	2004
KJCD207	17/05/2017	2012
KJCD182	09/05/2016	2012
KJCD198	10/11/2016	2012
KJCD201	09/02/2017	2012
KJCD203	09/02/2017	2012

1 JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none">) Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.) Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.) Aspects of the determination of mineralisation that are Material to the Public Report.) In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none">) Diamond drilling and reverse circulation (RC) drilling were used to obtain samples for geological logging and assaying.) RC drill holes are sampled at 1m intervals and split using a cone splitter attached to the cyclone to generate a split of ~3kg.) Diamond core was quartered with a diamond saw and generally sampled at 1m intervals with shorter samples at geological contacts.) Field duplicate samples were taken to determine representivity of the primary sample.) RC samples are routinely scanned with a Niton XRF. Samples assaying greater than 0.1% Cu, Pb or Zn are submitted for analysis at a commercial laboratory.
Drilling techniques	<ul style="list-style-type: none">) Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none">) RC drilling was conducted using a reverse circulation rig with a 5.25" face-sampling bit. Diamond drilling was either in NQ2 or HQ3 drill diameters. Metallurgical diamond drilling (JMET holes) were PQ
Drill sample recovery	<ul style="list-style-type: none">) Method of recording and assessing core and chip sample recoveries and results assessed.) Measures taken to maximise sample recovery and ensure representative nature of the samples.) Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none">) Diamond core recoveries are determined by orientating core and measuring the recovered core between drill intervals provided by the drilling company. Any core loss is recorded as a percentage of the interval.) At the start of each RC drill program the bulk sample residue (drill cuttings) for 2-3 holes were weighed and compared to the theoretical weight of sample based on the interval length (1m) and the bit diameter. The ratio between the split and the bulk residue is calculated to ensure the split is representative applying Gy's sample theory (~1:15).) Drill rigs with high air pressure and CFM are utilised to ensure samples are dry and sample recovery is maximised.) Drill intervals with suspected sample loss are recorded on the drill log.) RC holes are twinned with diamond holes to determine if there is a sampling bias from loss of fines.
Logging	<ul style="list-style-type: none">) Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.) Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.) The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none">) All RC and diamond core samples are geologically logged with fields including lithology, alteration, mineralisation and structural fabric.) Representative samples of core were submitted for petrology and a logging atlas created to standardize geological logging.) Diamond core is orientated and logged for geotechnical information including recovery, RQD and structural fabric.) RC drilling is logged in 1m intervals.) Diamond core is logged in intervals based on the lithology, alteration and

Criteria	JORC Code explanation	Commentary
		mineralisation.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none">) If core, whether cut or sawn and whether quarter, half or all core taken.) If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.) For all sample types, the nature, quality and appropriateness of the sample preparation technique.) Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.) Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.) Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none">) RC drill holes are sampled at 1m intervals and split using a cone splitter attached to the cyclone to generate a split of ~3kg.) Diamond core was quartered with a diamond saw and generally sampled at 1m intervals with shorter samples at geological contacts.) RC sample splits (~3kg) are pulverized to 85% passing 75 microns.) Diamond core samples are crushed to 70% passing 2mm and then pulverized to 85% passing 75 microns.) Sample preparation has been designed to ensure compliance with Gy's sample theory.) RC duplicates are collected as an additional split from the cone splitter on the drill rig.) Diamond core duplicates are a second interval of quarter core.
Quality of assay data and laboratory tests	<ul style="list-style-type: none">) The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.) For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.) Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none">) The QA/QC procedure includes standards, blanks, duplicates and laboratory checks. In ore zones Standards are added at a ratio of 1:10 and duplicates and blanks 1:20.) Basemetal samples are assayed using a four acid (total) digest with an ICP AES finish. Gold samples are assayed by Aqua Regia with an ICP MS finish. Samples over 1ppm Au are re-assayed by Fire Assay with an AAS finish.) An umpire laboratory is used to check ~1% of samples analysed.) QA/QC data is assessed on a monthly basis to assess precision and accuracy of sample assays. Variances in the assay value of standards of greater than 10% (~3 standard deviations) triggers reanalysis of the sample batch.) XRF analyses are only used to prescan samples. Samples with greater than 0.1% Cu, Pb or Zn are then submitted for analysis at a commercial laboratory.
Verification of sampling and assaying	<ul style="list-style-type: none">) The verification of significant intersections by either independent or alternative company personnel.) The use of twinned holes.) Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.) Discuss any adjustment to assay data. 	<ul style="list-style-type: none">) Data is validated on entry into the Datashed database using the Logchief data acquisition software.) Further validation is conducted by a geologist when data is imported into Vulcan.) Validation of drill results at each resource was aided by twinning selected holes with variances investigated to determine the source of sampling or assaying error.
Location of data points	<ul style="list-style-type: none">) Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.) Specification of the grid system used.) Quality and adequacy of topographic control. 	<ul style="list-style-type: none">) Surface collar surveys were picked up using a Trimble DGPS.) A selection of drill collars were periodically checked by a surveyor.) Downhole surveys were taken during drilling with a Reflex MEMS gyro or a Reflex EZ gyro.) All drilling is conducted on the GDA94 MGA Zone 53 grid. All downhole surveys were converted to GDA94 MGA Z53 grid.) A DTM has been generated from a close spaced grid of sample points using a DGPS. Additional sample points have been added in areas with steep or rugged

Criteria	JORC Code explanation	Commentary
		topography.
<i>Data spacing and distribution</i>	<p>) <i>Data spacing for reporting of Exploration Results.</i></p> <p>) <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p>) <i>Whether sample compositing has been applied.</i></p>	<p>) Drilling for Inferred resources has been conducted at a spacing of 50m along strike and 80m within the plane of the mineralized zone. Closer spaced 50m by 40m drilling was used for Indicated resources.</p> <p>) Shallow oxide RC drilling was conducted on 80m spaced traverses with holes 10m apart</p>
<i>Orientation of data in relation to geological structure</i>	<p>) <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p>) <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<p>) Holes were drilled perpendicular to the strike of the mineralization at a default angle of -60 degrees but holes vary from -45 to -80.</p> <p>) The orientation of drill holes relative to the mineralised structures is not thought to have generated any significant sample bias.</p>
<i>Sample security</i>	<p>) <i>The measures taken to ensure sample security.</i></p>	<p>) Samples were stored in sealed polyweave bags on site and transported to the laboratory at regular intervals by KGL staff or a transport contractor.</p>
<i>Audits or reviews</i>	<p>) <i>The results of any audits or reviews of sampling techniques and data.</i></p>	<p>) The sampling techniques are regularly reviewed.</p>

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<p>) <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p>) <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<p>) The Jervois project is within EL25429 and EL28082 100% owned by Jinka Minerals and operated by Kentor Minerals (NT), both wholly owned subsidiaries of KGL Resources.</p> <p>) The Jervois project is covered by Mining Leases and two Exploration licences owned by KGL Resources subsidiary Jinka Minerals.</p>
<i>Exploration done by other parties</i>	<p>) <i>Acknowledgment and appraisal of exploration by other parties.</i></p>	<p>) Previous exploration has primarily been conducted by Reward Minerals, MIM and Plenty River.</p>
<i>Geology</i>	<p>) <i>Deposit type, geological setting and style of mineralisation.</i></p>	<p>) EL25429 and EL28082 lie on the Huckitta 1: 250 000 map sheet (SF 53-11). The tenement is located mainly within the Palaeo-Proterozoic Bonya Schist on the north-eastern boundary of the Arunta Orogenic Domain. The Arunta Orogenic Domain in the north western part of the tenement is overlain unconformably by Neo-Proterozoic sediments of the Georgina Basin.</p> <p>) The copper-lead-zinc mineralisation is interpreted to be stratabound in nature, probably relating to the discharge of base metal-rich fluids in association with volcanism or metamorphism or dewatering of the underlying rocks at a particular time in the geological history of the area.</p> <p>) The copper mineralisation is interpreted to be a later structurally controlled,</p>

Criteria	JORC Code explanation	Commentary
		mineralising event(s)
Drill hole Information	<p>) A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> o easting and northing of the drill hole collar o elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar o dip and azimuth of the hole o down hole length and interception depth o hole length. <p>) If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>) Refer Table 3
Data aggregation methods	<p>) In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>) Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>) The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>) Refer Tables 1 & 2
Relationship between mineralisation widths and intercept lengths	<p>) These relationships are particularly important in the reporting of Exploration Results.</p> <p>) If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p> <p>) If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</p>) Refer Tables 3&4
Diagrams	<p>) Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>) Refer Figures 1-4
Balanced reporting	<p>) Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</p>) Refer Table1, 2,3 &4
Other substantive exploration data	<p>) Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</p>) Refer Figures 1-4 Photograph 1-2
Further work	<p>) The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</p> <p>) Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</p>) Refer Figures 1 - 4