

Strong Lithium and Tantalum Results from Extensional Drilling at Bald Hill

19 April 2017

Tawana Resources NL (“Tawana” or the “Company”) and Alliance Mineral Assets Limited (SGX: AMAL) are pleased to announce that extensional step-out drilling at the Bald Hill project, Western Australia has intercepted the most significant lithium and tantalum results to date. These exceptional results are extensions to the initial Resource estimation which is expected to be completed by the end of April 2017 along with the Feasibility Study.

Highlights

- Significant lithium intercepts. Best results include:
 - 35m at 1.35% Li₂O from 71m, including 10m at 1.62% Li₂O, 6m at 1.61% Li₂O and 6m at 1.75% Li₂O in LRC0247;
 - 28m at 1.34% Li₂O and 343ppm Ta₂O₅ from 92m including 12m at 2.06% Li₂O and 464ppm Ta₂O₅ in LRC0226;
 - 12m at 1.16% Li₂O from 95m and 11m at 1.96% Li₂O from 131m including 5m at 3.14% Li₂O in LRC0237 (also see tantalum intercepts below)
 - 26m at 1.13% Li₂O and 309ppm Ta₂O₅ from 17m including 5m at 1.99% Li₂O in LRC0187; and
 - 12m at 1.64% Li₂O and 219ppm Ta₂O₅ from 85m in LRC0229.
- Significant tantalum pentoxide intercepts included:
 - 4m at 14,782ppm (14.78kg/t) Ta₂O₅ and 9,974ppm Nb₂O₅ from 78m in LRC0237;
 - 8m at 2,468ppm Ta₂O₅ from 27m including 2m 7,022ppm (7.02kg/t) Ta₂O₅ and 0.82% Li₂O in LRC0317;
 - 4m at 1,246ppm Ta₂O₅ from 47m including 1m at 4,211ppm Ta₂O₅ in LRC0318;
 - 11m at 729ppm Ta₂O₅ and 1.72% Li₂O from 134m in LRC0222; and
 - 6m at 976ppm Ta₂O₅ and 1.63% Li₂O from 154m in LRC0224.
- Resource work currently underway to facilitate starter pit design and mine scheduling. These results are outside the starter pit design and are expected to significantly increase the initial Resource.
- Increasing to five drill rigs as the extent of the spodumene pegmatites continues to expand.
- Recent drill hole (LRC0348) in the eastern extent of known mineralisation intercepted 78.6m of pegmatite including 57m of very high grade spodumene, assays are pending however visually it is the most significant hole drilled at Bald Hill to date with logged estimated spodumene contents ranging from 15 to 45% averaging about 30%.

Tawana Resources Managing Director Mark Calderwood stated: “Recent significant drill intercepts from step-out drilling has shown the Bald Hill pegmatites are displaying unusually strong zonation, evidenced by spectacularly rich spodumene and tantalum mineralisation. This level of zonation is the preserve of the most complex pegmatite fields (such as Greenbushes and Wodgina) and has prompted the increase in the number of drill rigs. Tawana and AMAL are working towards commencement of commissioning of the spodumene plant this year, and recommencement of processing of tantalum through the existing processing facility”

Recent Drilling²

A further 115 resource and sterilisation RC drill holes totalling 13,652m were completed between 20 February 2017 and 31 March 2017. Assays have been received for 133 holes since the 3 March, 2017 update. Recent intercepts are summarised in Tables 1 and 2 in Appendix A.

Recent high grade lithium intercepts include¹:

- 35m at 1.35% Li₂O from 71m, including 10m at 1.62% Li₂O, 6m at 1.61% Li₂O and 6m at 1.75% Li₂O in LRC0247;
- 12m at 1.16% Li₂O from 95m and 11m at 1.96% Li₂O from 131m including 5m at 3.14% Li₂O in LRC0237;
- 12m at 1.64% Li₂O and 219ppm Ta₂O₅ from 85m in LRC0229;
- 15m at 1.40% Li₂O from 116m in LRC0220;
- 12m at 1.59% Li₂O from surface comprising backfill in LRC0272;
- 17m at 1.54% Li₂O from 121m in LRC0219; and
- 15m at 1.33% Li₂O from 57m including 9m 1.89% Li₂O in LRC0244.

Notable high grade lithium and tantalum intercepts included:

- 28m at 1.34% Li₂O and 343ppm Ta₂O₅ from 92m including 12m at 2.06% Li₂O and 464ppm Ta₂O₅ in LRC0226;
- 26m at 1.13% Li₂O and 309ppm Ta₂O₅ from 17m including 5m at 1.99% Li₂O in LRC0187;
- 11m at 1.72% Li₂O and 729ppm Ta₂O₅ from 134m in LRC0222;
- 6m at 1.63% Li₂O and 976ppm Ta₂O₅ from 154m in LRC0224; and
- 15m at 1.12% Li₂O and 299ppm Ta₂O₅ from 69m in LRC0310.

Notable high grade tantalum intercepts included:

- 4m at **14,782ppm** Ta₂O₅ including 2m at **27,174ppm** (27.17kg/t) Ta₂O₅ and 9,974ppm Nb₂O₅ from 78m in LRC0237;
- 8m at **2,468ppm** Ta₂O₅ from 27m including 2m 7,022ppm (7.02kg/t) Ta₂O₅ and 0.82% Li₂O in LRC0317;
- 4m at 1,246ppm Ta₂O₅ from 47m including 1m at 4,211ppm Ta₂O₅ in LRC0318;
- 5m at 742ppm Ta₂O₅ from 87m in LRC0166;
- 7m at 662ppm Ta₂O₅ from 177m including 2m at 1,053ppm Ta₂O₅ in LRC0245; and
- 2m at 1,308ppm Ta₂O₅ from 55m in LRC0322.

Recent drill hole (LRC0348) in the eastern extent of known mineralisation intercepted 78.6m of pegmatite from 147.4m, including 57m of very high grade spodumene from 160m, assays are pending however visually it is the most significant hole drilled at Bald Hill to date with spodumene logged as the most abundant mineral with a logged range from 15-45% with an average of about 30% spodumene. Extensional drill hole LRC0405 intercepted 45m of pegmatite containing high spodumene, assays are pending.

¹ The true width of pegmatites are generally considered 80-95% of the intercept width. Only pegmatite intercepts of 1m or more in width are included.
Only intercepts of 0.3% Li₂O or 150ppm Ta₂O₅ considered significant.

² These intersections are also repeated in the highlights section on the cover page.

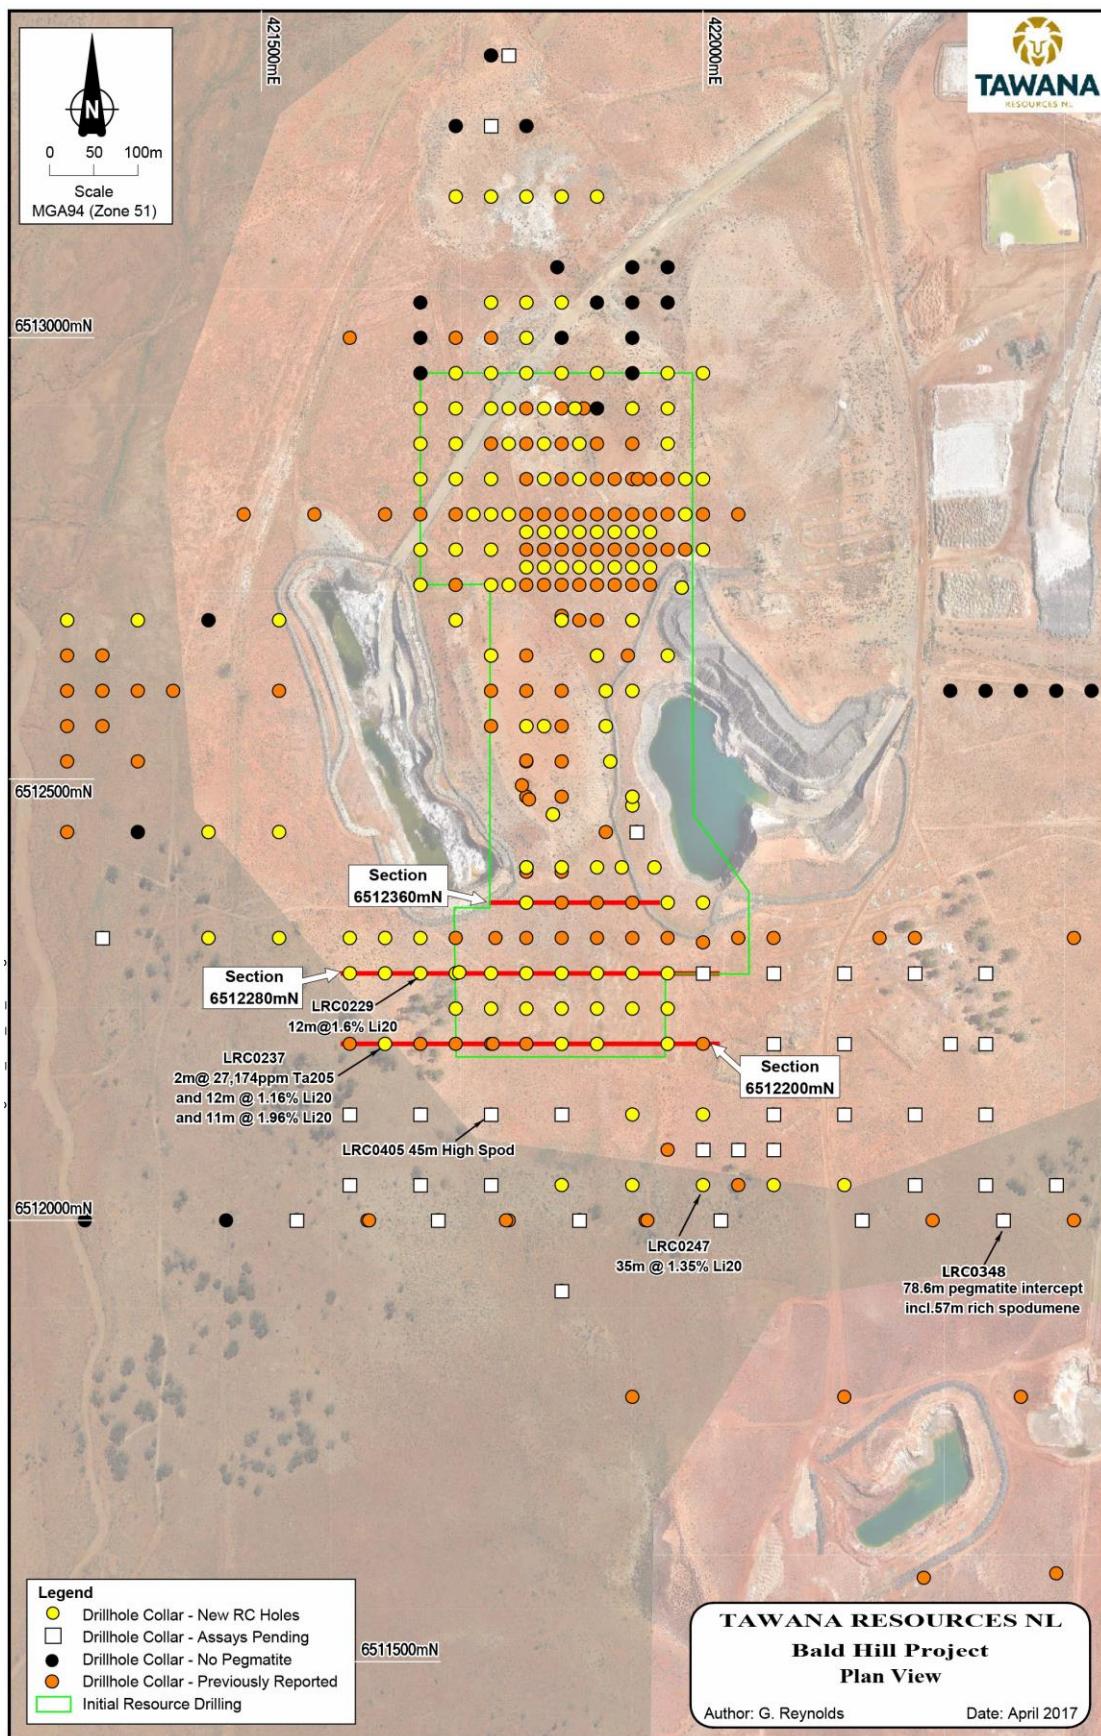


Figure 1 | Bald Hill Project Plan View



Drawn: CAD Resources ~ Tel 9246 3242 ~ URL www.cadresources.com.au ~ Rev: E ~ A4 ~ CAD Ref g2499_Sect_6512360.dwg

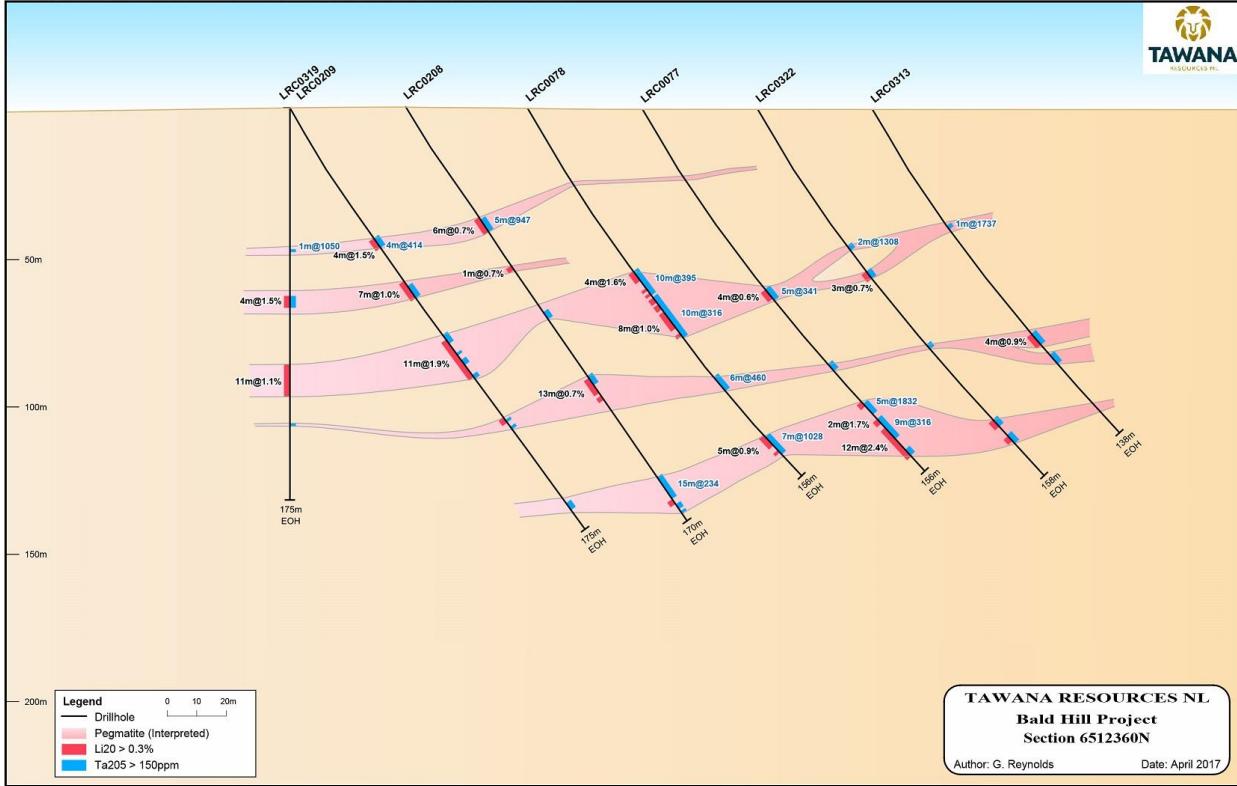


Figure 2 | Section 6512360N

Drawn: CAD Resources ~ Tel 9246 3242 ~ URL www.cadresources.com.au ~ Rev: B ~ A4 ~ CAD Ref g2499_Sect_6512280.dwg

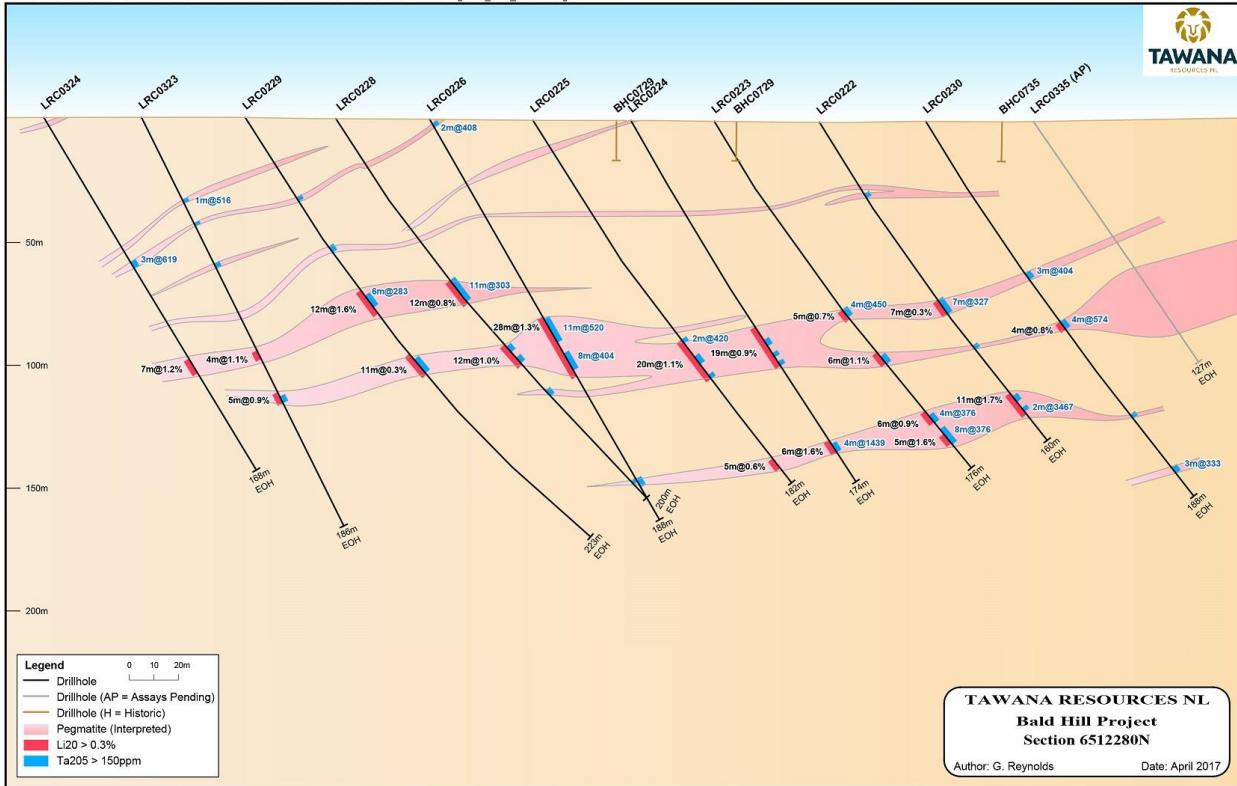


Figure 3 | Section 6512280N

Drawn: CAD Resources ~ Tel 9246 3242 ~ URL www.cadresources.com.au ~ Rev: H ~ A4 ~ CAD Ref g2499_Sect_6512200.dgn

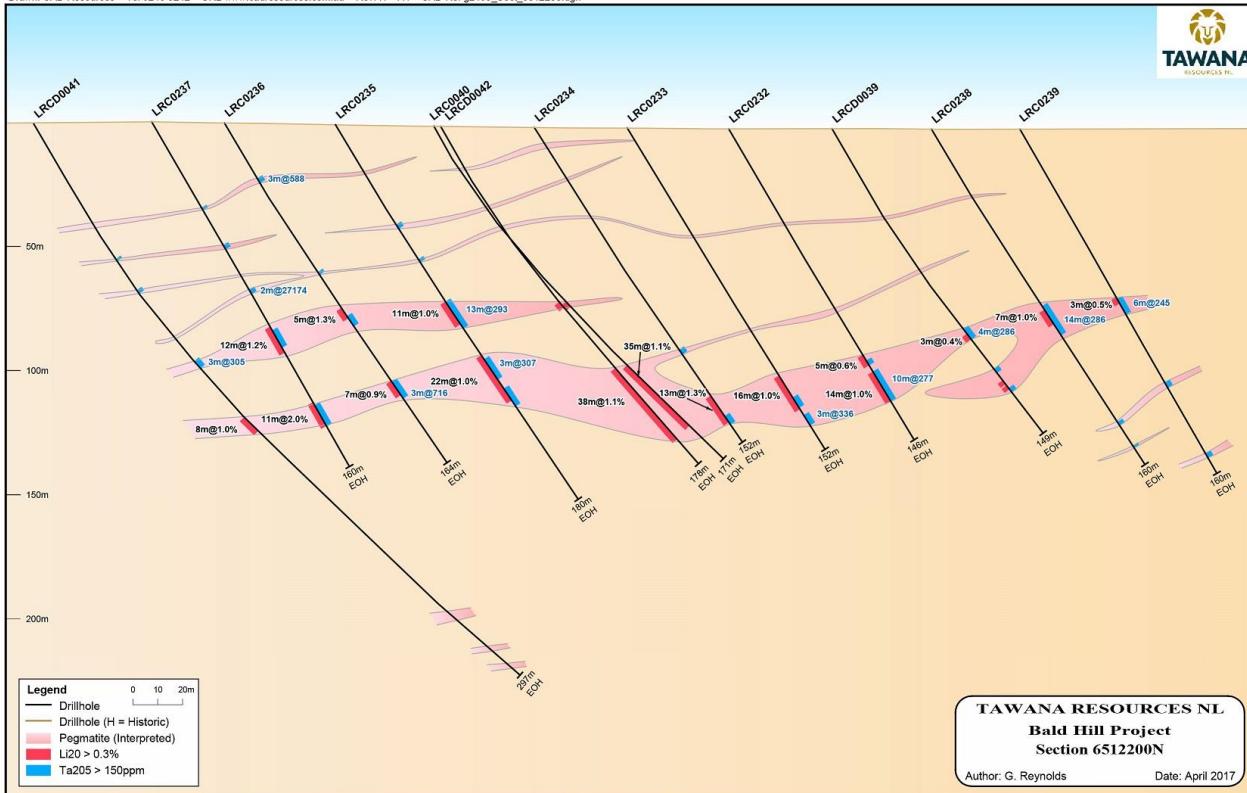


Figure 4 | Section 6512200N

Bald Hill Project (AMAL 100%, TAW Earning 50%)

The Bald Hill project (Project) area is located 50km south east of Kambalda in the Eastern Goldfields of Western Australia. It is located approximately 75km south east of the Mt Marion Lithium project and is adjacent to Tawana's Cowan Lithium project. The Project, owned by Alliance Mineral Assets Limited (AMAL), includes a permitted tantalum (pegmatite) mine, processing facility and associated infrastructure.

Through Tawana's 100% owned subsidiary Lithco No. 2 Pty Ltd, Tawana entered into a Farm-In Agreement on 23 February 2017 with Alliance Mineral Assets Limited ("AMAL") with respect to AMAL's Bald Hill project in Western Australia for the purpose of joint exploration and exploitation of lithium and other minerals.

The commercial terms require Tawana:

- to spend, by 31 December 2017 (or such later date as may be agreed between the parties), a minimum of \$7.5 million on exploration, evaluation and feasibility ("Expenditure Commitment"); and
- to spend, \$12.5 million in capital expenditure required for upgrading and converting the plant for processing ore derived from the Project, infrastructure costs, pre-stripping activities and other expenditures including operating costs ("Capital Expenditure") by 31 December 2019.

Upon completion of the Expenditure Commitment, Tawana shall be entitled to 50% of all rights to lithium

minerals from the tenements comprising the Project (“Tenements”). AMAL and Lithco had on 10 April 2017 entered into a lithium rights joint venture agreement.

Upon completion of the Expenditure Commitment and Capital Expenditure, Tawana will be entitled to a 50% interest in the Project (being all minerals from the tenements and the processing plant and infrastructure at Bald Hill). The portfolio of mineral tenements, comprising mining leases, exploration licences, prospecting licences, miscellaneous licences, a general-purpose lease, and a retention lease are in good standing.

Feasibility Study

The Companies are in the advanced stages of completing a feasibility study with the metallurgical and process engineering aspects of the study essentially completed and the detailed mining engineering is underway. Product off-take pricing and prepayment negotiations are also in an advanced stage.

Cashflow modelling will be completed when the key areas of the study are completed. However, Tawana and AMAL have given go-ahead for the commencement of detailed design and final long lead item equipment selection.

Competent Persons Statement

The information in this news release that relates to Exploration Results is based on and fairly represents information and supporting documentation compiled by Mr Mark Calderwood and Mr Gareth Reynolds, both employees of Tawana Resources NL (“Tawana”). Mr Calderwood is a member of The Australasian Institute of Mining and Metallurgy and Mr Reynolds is a member of the Australian Institute of Geoscientists. Mr Calderwood and Mr Reynolds have sufficient experience relevant to the style of mineralisation under consideration and to the activity which they are undertaking to qualify as a Competent Person as defined in the 2012 edition of the “Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves”. Mr Calderwood and Mr Reynolds consent to the inclusion in this report of the matters based on their information in the form and context in which it appears. Mr Calderwood and Mr Reynolds meet the requirements to act as a Qualified Person (as defined in the SGX Catalist rules).

Mr Calderwood is a significant shareholder in Tawana. Mr Calderwood and Tawana do not consider these to constitute a potential conflict of interest to his role as Competent Person. Mr Calderwood is not aware of any other relationship with Tawana which could constitute a potential for a conflict of interest.

Mr Reynolds is an employee of Tawana. Mr Reynolds is not aware of any other relationship with Tawana which could constitute a potential for a conflict of interest.

Forward Looking Statement

This report may contain certain forward looking statements and projections regarding estimated, resources and reserves; planned production and operating costs profiles; planned capital requirements; and planned strategies and corporate objectives. Such forward looking statements/projections are estimates for discussion purposes only and should not be relied upon as representation or warranty, express or implied, of Tawana Resources NL and/or Alliance Mineral Assets Limited. They are not guarantees of future performance and involve known and unknown risks, uncertainties and other factors many of which are beyond the control of Tawana Resources NL and/or Alliance Mineral Assets Limited. The forward looking statements/projections are inherently uncertain and may therefore differ materially from results ultimately achieved.

Tawana Resources NL and/or Alliance Mineral Assets Limited does not make any representations and provides no warranties concerning the accuracy of the projections, and disclaims any obligation to update or revise any forward looking statements/projects based on new information, future events or otherwise except to the extent required by applicable laws. While the information contained in this report has been prepared in good faith, neither Tawana Resources NL and/or Alliance Mineral Assets Limited or any of their directors, officers, agents, employees or advisors give any representation or warranty, express or implied, as to the fairness, accuracy, completeness or correctness of the information, opinions and conclusions contained in this presentation. Accordingly, to the maximum extent permitted by law, none of Tawana Resources NL and/or Alliance Mineral Assets Limited, their directors, employees or agents, advisers, nor any other person accepts any liability whether direct or indirect, express or limited, contractual, tortious, statutory or otherwise, in respect of, the accuracy or completeness of the information or for any of the opinions contained in this announcement or for any errors, omissions or misstatements or for any loss, howsoever arising, from the use of this announcement.

Appendix A

Table 1 | Drill Summary, Deeper Extensional Holes with Pegmatite Intercepts

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
LRC0097	421,281	6,512,679	282.3	90	90	-60	RC	52 74	61 80	9 6	Li, Ta Li, Ta
LRC0098	421,363	6,512,679	282.9	96	90	-60	RC	59 76 81	64 78 85	5 2 4	Li barren Li, Ta
LRC0100	421,519	6,512,680	284.7	90	90	-60	RC	28	32	4	Ta
LRC0216	421,920	6,512,241	280.4	143	90	-60	RC	91 107 134	99 110 140	8 3 6	Li, Ta Li, Ta Li, Ta
LRC0217	421,880	6,512,239	280.2	187	90	-60	RC	104 154	121 162	17 8	Li, Ta Li, Ta
LRC0218	421,839	6,512,241	280.6	199	90	-60	RC	46 108 112 174	48 110 141 189	2 2 29 15	Li Ta Li, Ta Li, Ta
LRC0269	421,857	6,512,840	292.5	49	90	-60	RC	11 32 37	12 33 39	1 1 2	barren Ta Ta
LRC0270	421,818	6,512,840	291.7	41	90	-60	RC	0 21	8 34	8 13	barren Li, Ta
LRC0271	421,858	6,512,881	292.9	40	90	-60	RC	24 27	26 34	2 7	Li Li, Ta
LRC0272	421,821	6,512,880	292.7	34	90	-60	RC	20 27	25 29	5 2	Li, Ta Ta
LRC0273	421,783	6,512,881	291.2	33	90	-60	RC	21	26	5	Li, Ta
LRC0274	421,852	6,512,920	293.9	41	90	-60	RC	13	25	12	Li, Ta
LRC0275	421,821	6,512,920	292.5	27	90	-60	RC	7	16	9	Li, Ta
LRC0276	421,781	6,512,919	291.5	31	90	-60	RC	12 21	15 24	3 3	Li, Ta Li, Ta
LRC0277	422,000	6,512,960	298.4	40	90	-60	RC	29	33	4	Ta
LRC0151	421,518	6,512,441	283.1	123	90	-60	RC	62 82 117	67 84 118	5 2 1	Li, Ta barren barren
LRC0220	421,757	6,512,238	281.7	206	90	-60	RC	83 115 149 189 193	87 136 150 190 197	4 21 1 1 4	Li, Ta Li, Ta Ta barren Ta
LRC0221	421,720	6,512,238	282.2	208	90	-60	RC	25 82 114	27 99 145	2 17 31	Ta Li, Ta Li, Ta
LRC0222	421,918	6,512,281	281.5	160	90	-60	RC	30 34 87 110 134	32 36 94 112 151	2 2 7 2 17	barren Ta Li, Ta Ta Li, Ta
LRC0270	421,818	6,512,840	291.7	41	90	-60	RC	0	8	8	barren
LRC0271	421,858	6,512,881	292.9	40	90	-60	RC	0 8	3 16	3 8	barren barren
LRC0272	421,821	6,512,880	292.7	34	90	-60	RC	0	12	12	backfill
LRC0278	421,792	6,513,000	293.4	30	90	-60	RC	7 14	12 15	5 1	Li, Ta barren
LRC0279	421,841	6,513,041	292.9	40	90	-60	RC	32	33	1	barren
LRC0281	421,759	6,513,041	290.3	40	90	-60	RC	11	13	2	Ta

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
LRC0282	421,759	6,512,841	290.3	60	90	-60	RC	33	45	12	Li, Ta
LRC0283	421,716	6,512,841	289.9	60	90	-60	RC	11 36	16 42	5 6	Ta Li, Ta
LRC0284	421,678	6,512,841	288.8	80	90	-60	RC	17 24 61	19 26 68	2 2 7	barren barren Li, Ta
LRC0152	421,437	6,512,440	282.1	126	90	-60	RC	79 102 106	88 103 107	9 1 1	Li, Ta barren barren
LRC0153	421,958	6,512,961	296.2	60	90	-60	RC	21	22	1	Ta
LRC0155	421,878	6,512,960	295.4	60	90	-60	RC	15 27	16 30	1 3	barren Ta
LRC0223	421,875	6,512,282	281.7	176	90	-60	RC	41 62 74 93 100 115 146	42 63 75 97 103 122 165	1 1 1 4 3 7 19	barren barren barren Li, Ta Li Li, Ta Li, Ta
LRC0224	421,841	6,512,281	282.3	174	90	-60	RC	0 43 74 93 96 98 121 125 154	2 45 76 94 97 120 124 126 160	2 2 2 1 1 22 3 1 6	barren barren Ta Li Li Li, Ta barren barren Li, Ta
LRC0225	421,801	6,512,280	282.2	182	90	-60	RC	12 44 84 102 108 169	15 46 86 104 128 176	3 2 2 2 20 7	barren barren Li, Ta Li, Ta Li, Ta Li, Ta
LRC0285	421,760	6,512,801	289.9	80	90	-60	RC	35 39 47	38 40 53	3 1 6	Li, Ta Li Li, Ta
LRC0286	421,678	6,512,802	288.5	80	90	-60	RC	21 29 33 60	22 30 35 72	1 1 2 12	Ta barren Ta Li, Ta
LRC0287	421,761	6,512,760	289.5	70	90	-60	RC	51 62	54 64	3 2	Li Ta
LRC0288	421,760	6,512,722	289.1	80	90	-60	RC	60	70	10	Li, Ta
LRC0289	421,779	6,512,721	289.3	71	90	-60	RC	58	62	4	Li, Ta
LRC0156	421,839	6,512,960	295.1	60	90	-60	RC	49	50	1	barren
LRC0157	421,799	6,512,961	293.4	60	90	-60	RC	9 13 56	12 17 57	3 4 1	Li barren barren
LRC0158	421,719	6,512,960	290.1	60	90	-60	RC	27	32	5	Li,Ta
LRC0160	421,959	6,512,920	296.4	40	90	-60	RC	7	10	3	Ta
LRC0161	421,919	6,512,920	295.7	48	90	-60	RC	11 34	12 38	1 4	barren Li,Ta
LRC0163	421,757	6,512,919	291.3	40	90	-60	RC	1 7 22	3 8 28	2 1 6	barren barren Li
LRC0226	421,759	6,512,280	282.5	188	90	-60	RC	2 30 43	4 31 44	2 1 1	Ta Ta barren

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
								45	46	1	barren
								79	81	2	Li,Ta
								92	121	29	Li,Ta
								127	130	3	Ta
								136	137	1	Ta
								174	179	5	Ta
LRC0227	421,718	6,512,280	283.1	79	90	-60	RC	22	25	3	barren
								36	37	1	barren
								59	60	1	Ta
LRC0290	421,723	6,512,761	288.9	84	90	-60	RC	44	50	6	Li,Ta
								63	72	9	Li,Ta
LRC0291	421,685	6,512,761	288.3	97	90	-60	RC	40	47	7	Li,Ta
								68	85	17	Li,Ta
LRC0292	422,000	6,512,840	297.1	65	90	-60	RC	49	53	4	Ta
LRC0165	421,719	6,512,880	290.0	60	90	-60	RC	29	38	9	Li, Ta
LRC0166	421,679	6,512,881	288.9	102	90	-60	RC	13	15	2	Ta
								22	23	1	barren
								32	33	1	barren
								36	37	1	Ta
								85	93	8	ta
LRC0219	421,801	6,512,240	281.1	211	90	-60	RC	33	35	2	barren
								48	49	1	barren
								88	89	1	Ta
								89	91	2	
								104	105	1	Ta
								121	141	20	Li, Ta
								191	196	5	Li, Ta
LRC0228	421,721	6,512,280	283.0	200	90	-60	RC	22	25	3	barren
								53	55	2	barren
								60	61	1	barren
								81	94	13	Li, Ta
								115	127	12	Li, Ta
								140	142	2	Ta
								154	155	1	barren
								191	194	3	Ta
LRC0229	421,684	6,512,279	283.5	223	90	-60	RC	22	23	1	barren
								23	25	2	Ta
								39	41	2	barren
								62	67	5	Ta
								84	99	15	Li, Ta
								114	116	2	Li, Ta
								118	129	11	Li, Ta
LRC0293	421,697	6,512,718	288.2	96	90	-60	RC	43	52	9	Li, Ta
								72	80	8	Li, Ta
								85	86	1	barren
LRC0294	421,980	6,512,799	296.3	65	90	-60	RC	18	19	1	barren
								24	27	3	Ta
								48	55	7	Li, Ta
								58	60	2	Ta
LRC0295	422,001	6,512,760	297.3	86	90	-60	RC	26	27	1	Ta
								64	66	2	Ta
								74	77	3	Ta
LRC0296	421,879	6,512,640	290.5	66	270	-60	RC	9	10	1	barren
								47	59	12	Li, Ta
LRC0167	421,958	6,512,879	296.4	54	90	-60	RC	0	5	5	Ta
								38	49	11	Li, Ta
LRC0168	421,718	6,512,919	289.9	60	90	-60	RC	34	38	4	Li
LRC0169	421,680	6,512,918	289.1	78	90	-60	RC	2	8	6	barren
								19	20	1	barren

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
								33	35	2	Ta
LRC0170	421,779	6,512,801	290.4	54	90	-60	RC	41	49	8	Li, Ta
LRC0297	421,890	6,512,600	290.2	70	90	-60	RC	38 60	46 62	8 2	Li, Ta
LRC0298	421,920	6,512,604	291.0	60	90	-60	RC	27 50	36 51	9 1	Li, Ta Ta
LRC0299	421,960	6,512,640	292.9	71	90	-60	RC	12 50	15 65	3 15	Ta Li, Ta
LRC0300	421,963	6,512,722	295.4	55	0	-90	RC	7 41	9 49	2 8	Ta Li, Ta
LRC0301	421,974	6,512,723	296.2	76	90	-60	RC	0 60	8 68	8 8	Ta Li, Ta
LRC0302	421,722	6,512,680	292.8	90	90	-60	RC	0 24 60 74 77	7 26 65 76 83	7 2 5 2 6	barren barren Li, Ta Li Li, Ta
LRC0171	421,739	6,512,801	289.5	72	90	-60	RC	41 57	53 60	12 3	Li, Ta Ta
LRC0172	421,979	6,512,840	296.2	60	90	-60	RC	47	53	6	Ta
LRC0173	421,757	6,512,638	296.2	90	0	-90	RC	11 23 57 63 74	13 25 62 64 80	2 2 5 1 6	barren Ta Li, Ta barren Li, Ta
LRC0174	421,820	6,512,559	296.6	84	90	-60	RC	12 38 61	13 40 77	1 2 16	barren barren Li, Ta
LRC0230	421,962	6,512,280	281.9	188	90	-60	RC	34 74 98 146	36 77 103 148	2 3 5 2	barren Ta Li, Ta Ta
LRC0231	421,959	6,512,240	280.6	141	90	-60	RC	79 87 100	81 92 103	2 5 3	Ta Li, Ta Li, Ta
LRC0232	421,878	6,512,200	279.9	146	90	-60	RC	27 44 83 106	28 45 87 128	1 1 4 22	barren barren barren Li, Ta
LRC0233	421,837	6,512,201	280.1	152	90	-60	RC	5 9 51 94 104 115	6 10 53 97 105 142	1 1 2 3 1 27	barren barren Ta Li barren Li, Ta
LRC0306	421,921	6,512,681	292.4	60	90	-60	RC	16 48	19 55	3 7	Ta Li, Ta
LRC0307	421,840	6,512,680	290.2	66	0	-90	RC	42 52	44 54	2 2	barren barren
LRC0308	421,881	6,512,639	290.5	50	0	-90	RC	6 34	7 42	1 8	barren Li, Ta
LRC0175	421,798	6,512,559	296.5	120	0	-90	RC	24 67 80 101 106	25 75 88 102 111	1 8 8 1 5	Ta Li, Ta Li, Ta barren Li
LRC0234	421,800	6,512,200	280.2	152	90	-60	RC	6 20 24	12 21 25	6 1 1	Ta barren barren

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
								42	43	1	barren
								108	110	2	Ta
								128	144	16	Li, Ta
LRC0235	421,719	6,512,198	281.5	180	90	-60	RC	22	23	1	barren
								47	49	2	Ta
								64	65	1	Ta
								84	97	13	Li, Ta
								103	136	33	Li, Ta
								144	146	2	barren
								151	152	1	barren
LRC0236	421,675	6,512,197	282.1	164	90	-60	RC	26	28	2	Ta
								70	72	2	Ta
								87	100	13	Li, Ta
								116	118	2	Li
								123	134	11	Li, Ta
								153	154	1	barren
LRC0237	421,645	6,512,198	282.5	160	90	-60	RC	39	41	2	Ta
LRC0311	421,901	6,512,560	290.1	78	0	-90	RC	5	6	1	Ta
								49	57	8	Li, Ta
LRC0312	421,903	6,512,560	290.1	78	90	-60	RC	4	5	1	barren
								55	60	5	Li, Ta
LRC0177	421,894	6,512,520	289.0	90	0	-90	RC	58	69	11	Li, Ta
								75	76	1	barren
								4	5	1	Ta
LRC0178	421,919	6,512,468	287.5	138	0	-90	RC	25	26	1	Ta
								53	59	6	Li, Ta
								60	64	4	Li
								74	76	2	barren
								99	101	2	Ta
								107	108	1	barren
								109	111	2	barren
								112	114	2	barren
								120	127	7	Ta
LRC0237	421,645	6,512,198	282.5	160	90	-60	RC	57	59	2	Ta
								71	72	1	barren
								78	80	2	Ta
								94	110	16	Li, Ta
								131	143	12	Li, Ta
LRC0238	421,960	6,512,199	279.5	91	90	-60	RC	31	32	1	barren
								139	141	2	Ta
								150	152	2	Ta
LRC0309	421,832	6,512,461	295.5	186	0	-90	RC	44	49	5	Li, Ta
								73	82	9	Li, Ta
								93	95	2	Ta
								98	100	2	barren
								108	112	4	Ta
								138	140	2	barren
								149	151	2	Ta
								168	171	3	Ta
								173	174	1	barren
LRC0310	421,828	6,512,460	295.4	144	90	-60	RC	23	24	1	Ta
								40	41	1	barren
								44	45	1	barren
								68	90	22	Li, Ta
								92	94	2	Li, Ta
								131	134	3	Ta
LRC0182	421,800	6,513,041	291.3	162	90	-60	RC	0	5	5	barren
								93	94	1	barren
								133	134	1	barren

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
								152	153	1	Ta
LRC0239	421,995	6,512,199	280.3	160	90	-60	RC	34 78 118 122 151	35 88 121 123 154	1 10 3 1 3	barren Li, Ta Ta Ta Ta
LRC0313	422,002	6,512,359	284.4	138	90	-60	RC	5 45 90 102 123	6 49 101 110 124	1 4 11 8 1	Ta Li, Ta Li, Ta barren barren
LRC0314	421,907	6,512,399	285.2	156	90	-60	RC	23 70 108 123	25 77 111 143	2 7 3 20	barren Li, Ta barren Ta
LRC0183	421,938	6,512,739	294.5	48	90	-60	RC	2 9	3 10	1 1	barren Ta
LRC0184	421,921	6,512,739	293.9	72	90	-60	RC	11 38	13 58	2 20	Li, Ta Li, Ta
LRC0185	421,900	6,512,739	292.9	60	90	-60	RC	0 11 39	2 14 50	2 3 11	Ta Ta Li, Ta
LRC0186	421,878	6,512,740	292.1	60	90	-60	RC	20 43	21 53	1 10	Ta Li, Ta
LRC0240	421,999	6,512,119	279.0	168	90	-60	RC	63 87 149 162	66 113 152 164	3 26 3 2	Ta Li Ta Ta
LRC0315	421,880	6,512,398	286.1	138	0	-60	RC	14 49 59 113 122	15 56 79 120 124	1 7 20 7 2	barren Li, Ta Li, Ta Li, Ta Ta
LRC0316	421,840	6,512,401	286.2	138	0	-60	RC	10 43 75 100 109	11 54 80 104 115	1 11 5 4 6	Ta Li, Ta Li, Ta Li, Ta Li
LRC0317	421,799	6,512,400	286.1	162	0	-90	RC	2 8 37 63 94 106	4 9 45 71 102 107	2 1 8 8 8 1	barren barren Li, Ta Li, Ta Li, Ta barren
LRC0164	421,772	6,512,967	292.7	60	90	-60	RC	4 13	6 15	2 2	barren Ta
LRC0187	421,858	6,512,739	291.6	60	90	-60	RC	17 47 49 53	43 48 50 54	26 1 1 1	Li, Ta Li barren Li, Ta
LRC0188	421,839	6,512,739	290.9	54	90	-60	RC	28 41	37 43	9 2	Li, Ta barren
LRC0189	421,820	6,512,739	290.5	54	90	-60	RC	35	44	9	Li, Ta
LRC0241	421,921	6,512,481	288.0	100	90	-60	RC	2 28 36 52 85	4 29 37 58 86	2 1 1 6 1	Ta barren Ta Li, Ta barren
LRC0242	421,928	6,512,439	286.4	132	0	-90	RC	1	2	1	Ta

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
								23	26	3	Ta
								42	43	1	barren
								55	63	8	Li, Ta
								80	82	2	barren
								93	96	3	Ta
								112	122	10	Li, Ta
LRC0318	421,800	6,512,402	286.1	139	360	-60	RC	1	3	2	barren
								24	25	1	Ta
								27	28	1	barren
								47	51	4	Li, Ta
								75	82	7	Li, Ta
								86	88	2	barren
								108	114	6	Li
								125	126	1	Ta
LRC0190	421,797	6,512,739	289.9	60	90	-60	RC	40	50	10	Li, Ta
LRC0191	421,942	6,512,785	295.1	90	90	-60	RC	1	3	2	Ta
								38	41	3	Ta
								76	82	6	Li, Ta
								84	85	1	barren
LRC0192	421,922	6,512,785	294.4	66	90	-60	RC	0	7	7	barren
								10	13	3	barren
								31	40	9	Li, Ta
								52	59	7	Ta
LRC0193	421,900	6,512,785	293.3	66	90	-60	RC	5	6	1	barren
								9	11	2	barren
								28	31	3	Li, Ta
								33	40	7	Li, Ta
								48	54	6	Li, Ta
LRC0194	421,883	6,512,785	292.8	60	90	-60	RC	0	1	1	barren
								19	20	1	barren
								33	47	14	Li, Ta
LRC0195	421,861	6,512,785	292.1	60	90	-60	RC	21	22	1	barren
								35	48	13	Li, Ta
LRC0196	421,842	6,512,784	291.5	54	90	-60	RC	22	41	19	Li, Ta
LRC0197	421,820	6,512,783	291.0	48	90	-60	RC	0	1	1	barren
								29	37	8	Li, Ta
LRC0198	421,799	6,512,781	290.4	60	90	-60	RC	24	25	1	barren
								27	28	1	barren
								40	48	8	Li, Ta
								49	50	1	barren
LRC0319	421,800	6,512,362	284.8	133	0	-90	RC	7	9	2	Ta
								22	23	1	barren
								47	51	4	Ta
								62	71	9	Li, Ta
								76	78	2	Ta
								80	81	1	barren
								86	98	12	Li, Ta
								107	109	2	Ta
LRC0244	421,893	6,512,437	286.8	156	0	-90	RC	24	26	2	barren
								53	54	1	barren
								57	75	18	Li, Ta
								103	108	5	Li, Ta
								125	130	5	Li, Ta
								132	135	3	Li, Ta
								136	137	1	barren
LRC0245	421,919	6,512,119	278.8	211	90	-60	RC	1	2	1	barren
								12	13	1	barren
								53	54	1	barren
								60	62	2	barren

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
								79	80	1	barren
								105	109	4	Ta
								117	121	4	Ta
								162	168	6	Li, Ta
								172	173	1	Li
								177	184	7	Ta
								198	202	4	Ta
								205	207	2	barren
LRC0320	421,817	6,512,396	286.0	193	270	-60	RC	10	11	1	barren
								24	26	2	barren
								28	29	1	barren
								63	72	9	Li, Ta
								85	86	1	barren
								91	106	15	Li, Ta
								108	110	2	Li, Ta
								134	141	7	Li, Ta
LRC0321	421,946	6,512,399	285.0	158	90	-60	RC	6	7	1	barren
								31	33	2	barren
								53	55	2	barren
								62	70	8	Li, Ta
								83	84	1	barren
								98	104	6	Ta
								126	145	19	Li, Ta
LRC0199	421,880	6,513,160	291.2	120	90	-60	RC	0	15	15	Tailings
								18	22	4	barren
								27	31	4	Ta
								35	36	1	barren
								48	49	1	barren
LRC0247	422,001	6,512,038	277.6	229	90	-60	RC	6	8	2	barren
								50	59	9	Li, Ta
								64	107	43	Li
								134	139	5	Li, Ta
								165	166	1	barren
								190	193	3	barren
								198	200	2	Ta
								219	226	7	Li, Ta
LRC0322	421,966	6,512,359	284.1	158	90	-60	RC	9	10	1	barren
								11	12	1	barren
								31	33	2	barren
								35	37	2	barren
								50	57	7	Ta
								64	71	7	Li, Ta
								98	100	2	Ta
								101	102	1	barren
								104	105	1	barren
								131	146	15	Li, Ta
LRC0323	421,641	6,512,279	283.5	186	90	-60	RC	12	14	2	barren
								37	40	3	Ta
								49	51	2	barren
								67	69	2	Ta
								80	81	1	barren
								82	84	2	barren
								85	86	1	barren
								89	93	4	Ta
								105	112	7	Li, Ta
								124	131	7	Li, Ta
								133	134	1	barren
								158	159	1	barren
LRC0200	421,845	6,513,160	290.6	30	90	-60	RC	0	23	23	Tailings

Hole ID	Easting m	Northing m	RL m	Depth m	Azm	Dec.	Type	From m	To m	Width m	Pegmatite Type
LRC0248	422,079	6,512,040	277.6	211	90	-60	RC	40	50	10	Li, Ta
								87	99	12	Li, Ta
								146	149	3	Ta
								164	166	2	barren
								197	203	6	Ta
LRC0324	421,602	6,512,279	283.3	168	90	-60	RC	0	4	4	barren
								33	34	1	Ta
								62	65	3	Ta
								69	72	3	Ta
								85	86	1	barren
								97	99	2	Ta
								108	109	1	barren
								113	123	10	Li
								126	127	1	barren
								128	129	1	barren
LRC0325	421,680	6,512,322	284.2	151	90	-60	RC	2	3	1	barren
								22	25	3	Ta
								38	39	1	Ta
								39	40	1	barren
								60	64	4	Ta
								65	66	1	barren
								80	82	2	Ta
								89	90	1	barren
								95	112	17	Li, Ta
								125	131	6	barren
								137	139	2	barren
								144	145	1	barren
LRC0326	421,640	6,512,323	284.0	163	90	-60	RC	2	3	1	barren
								12	13	1	barren
								29	33	4	Ta
								42	45	3	Ta
								67	69	2	barren
								88	91	3	Ta
								105	119	14	Li, Ta
								134	135	1	barren
								147	149	2	barren

Notes 1) The true width of pegmatites are generally considered 80-95% of the intercept width.
 2) Only pegmatite intercepts of 1m or more in width are included.

Table 2 | Notable Lithium and Tantalum Intercepts

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
LRC0097	54	59	5	1.05	112	89	102
	55	57	2	1.58	90	100	118
	74	79	5	1.24	70	84	156
	76	79	3	1.65	90	97	136
LRC0098	60	64	4	0.81	87	54	201
	60	61	1	2.13	54	57	301
	81	82	1	0.09	239	100	95
	83	85	2	0.38	67	47	141
LRC0100	28	31	3	0.06	248	76	124
LRC0216	91	98	7	1.28	336	143	155
	91	95	4	1.50	406	172	169
	98	99	1	0.23	154	100	152
	107	110	3	0.35	205	90	100
	136	140	4	1.48	262	136	128
LRC0217	104	119	15	0.95	182	104	114
	112	119	7	1.41	174	116	89
	119	120	1	0.17	266	114	90
	155	158	3	1.25	280	139	100
	160	161	1	0.08	167	72	29
	161	162	1	1.83	138	50	170
LRC0218	46	48	2	0.47	49	47	85
	108	110	2	0.07	294	112	81
	113	120	7	0.67	216	143	94
	117	119	2	1.25	190	147	91
	123	139	16	0.67	181	119	108
	125	130	5	1.01	200	123	89
	139	141	2	0.14	235	119	104
	174	181	7	1.33	106	62	155
	176	177	1	3.27	24	7	284
	178	180	2	1.77	189	76	137
	184	185	1	0.39	107	43	141
	185	186	1	0.05	198	64	75
LRC0269	32	33	1	0.07	175	64	169
	37	38	1	0.05	159	57	94
LRC0270	22	23	1	0.06	190	64	131
	25	30	5	1.43	154	82	135
LRC0271	25	26	1	0.37	11	21	151
	27	34	7	1.19	195	80	184
	29	34	5	1.48	189	79	215
LRC0272	20	28	8	0.69	300	107	184
	21	22	1	1.56	245	79	188
LRC0273	22	26	4	0.55	375	172	286
	24	25	1	1.15	719	315	190
LRC0274	14	25	11	0.95	206	77	239
	15	20	5	1.73	177	83	226
LRC0275	8	16	8	0.58	189	76	150
	8	9	1	1.37	153	79	322
	11	12	1	1.35	183	93	164
LRC0276	12	15	3	0.88	303	132	207
	12	13	1	2.10	440	172	241
	21	23	2	1.07	222	129	207
	21	22	1	2.01	284	193	223
LRC0277	29	33	4	0.10	553	109	587
LRC0151	62	66	4	0.95	149	69	135

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
incl	64	66	2	1.49	198	90	124
	66	67	1	0.06	247	100	58
LRC0220	83	87	4	0.57	308	87	84
incl	84	86	2	1.07	333	107	105
incl	116	131	15	1.40	115	96	116
incl	124	126	2	2.26	100	93	88
incl	134	136	2	0.04	231	143	75
incl	149	150	1	0.22	208	50	109
incl	193	197	4	0.05	559	106	129
incl	195	196	1	0.03	1,071	179	122
LRC0221	25	27	2	0.08	344	119	154
incl	82	99	17	0.78	312	116	124
incl	88	92	4	2.17	306	142	203
incl	114	123	9	1.29	237	109	174
incl	115	121	6	1.69	255	119	187
incl	126	142	16	0.64	142	97	131
incl	127	129	2	1.51	181	147	103
and	131	132	1	1.16	83	50	241
and	140	141	1	1.03	256	114	152
and	144	145	1	0.02	276	122	57
LRC0222	34	35	1	0.09	161	79	221
incl	87	94	7	0.29	327	132	198
incl	110	112	2	0.11	264	122	104
incl	134	145	11	1.72	729	574	166
and	140	143	3	3.79	33	21	236
and	143	145	2	1.40	3,467	2,819	145
and	147	148	1	0.02	308	143	145
LRC0272	0	12	12	1.59	127	49	151
incl	4	5	1	5.83	22	7	161
and	5	6	1	4.10	28	14	151
LRC0278	8	11	3	0.71	154	67	198
	11	12	1	0.20	162	79	223
LRC0281	12	13	1	0.02	420	79	1026
LRC0282	33	34	1	0.17	167	79	137
incl	34	36	2	0.79	118	72	71
incl	39	43	4	0.65	205	64	278
incl	40	41	1	1.26	112	72	117
LRC0283	13	15	2	0.11	179	83	2608
	37	40	3	0.64	97	46	93
LRC0284	61	62	1	0.12	239	36	197
incl	62	67	5	1.06	64	49	222
incl	66	67	1	1.62	56	36	475
incl	67	68	1	0.11	167	43	187
LRC0152	80	82	2	0.01	528	269	57
	82	83	1	1.37	148	129	53
LRC0153	21	22	1	0.11	946	143	305
LRC0155	27	28	1	0.02	402	93	187
LRC0223	93	97	4	0.75	450	192	176
incl	93	94	1	1.20	602	258	188
incl	102	103	1	0.31	5	-7	-1
incl	116	122	6	1.06	164	136	85
incl	146	152	6	0.90	276	126	151
incl	147	148	1	0.32	563	243	141
and	150	152	2	1.88	228	104	149
and	154	155	1	0.04	175	64	98

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
incl	156	161	5	1.55	259	120	160
	161	162	1	0.04	203	79	79
	163	165	2	0.51	750	329	113
	164	165	1	0.12	1,216	429	133
LRC0224	74	76	2	0.20	252	93	69
incl	93	94	1	0.31	32	0	116
	96	97	1	0.52	32	29	171
	98	117	19	0.88	141	113	108
	105	115	10	1.25	129	104	118
incl	117	118	1	0.06	359	136	110
	154	160	6	1.63	976	295	168
	158	159	1	0.59	4,448	1,252	335
LRC0225	84	85	1	0.65	70	43	363
incl and	85	86	1	0.20	211	72	71
	102	104	2	0.35	419	165	201
	108	128	20	1.12	141	99	151
	170	174	4	0.52	236	99	98
	170	171	1	1.37	159	114	169
	174	175	1	1.09	120	107	140
LRC0285	35	37	2	0.23	394	136	203
incl	37	38	1	0.74	17	14	386
	39	40	1	0.41	16	7	209
	47	49	2	0.78	276	157	126
	48	49	1	1.50	166	93	100
	50	52	2	0.64	145	76	165
LRC0286	21	22	1	0.06	151	64	145
	34	35	1	0.05	204	114	193
	60	61	1	0.10	413	86	355
	61	67	6	1.59	198	127	173
	69	70	1	0.03	359	57	140
LRC0287	51	54	3	0.87	68	31	132
	62	64	2	0.24	209	36	305
LRC0288	60	68	8	1.36	113	82	222
	68	70	2	0.27	385	72	291
LRC0289	58	59	1	0.50	77	36	250
	60	61	1	0.07	223	86	67
	62	63	1	0.34	23	21	161
LRC0157	9	12	3	1.06	86	47	175
LRC0158	27	29	2	0.04	355	165	286
	29	30	1	1.36	139	93	173
LRC0160	8	9	1	0.08	198	50	137
LRC0161	34	38	4	0.31	449	120	413
incl	34	35	1	1.07	344	172	359
LRC0163	23	26	3	1.42	133	76	133
incl	23	24	1	2.57	149	93	237
LRC0226	2	4	2	0.05	408	72	104
incl and	30	31	1	0.08	366	50	114
	79	80	1	0.07	422	114	60
	80	81	1	0.37	103	50	161
	92	120	28	1.34	343	173	192
	94	106	12	2.06	464	209	297
	94	95	1	4.09	190	79	536
	101	102	1	2.09	2,856	1,052	449
and	120	121	1	0.16	175	86	113
	128	130	2	0.13	526	205	94

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
	136	137	1	0.29	205	93	217
	175	179	4	0.08	268	87	67
LRC0227	59	60	1	0.16	216	79	183
LRC0290	44	50	6	0.60	103	72	96
incl	47	48	1	1.56	93	43	131
	49	50	1	0.31	43	36	72
incl	64	67	3	1.37	236	129	521
	65	66	1	2.11	200	207	357
incl	68	69	1	0.52	78	86	231
	70	71	1	0.93	134	64	268
LRC0291	41	45	4	0.61	243	135	107
incl	44	45	1	1.21	179	64	176
	69	70	1	0.16	274	50	259
incl	70	79	9	1.19	86	57	160
	71	72	1	2.19	32	14	215
incl	79	81	2	0.14	380	93	390
LRC0292	49	51	2	0.06	333	97	174
LRC0165	33	36	3	1.74	230	76	136
incl	34	35	1	1.42	100	21	119
	35	36	1	3.10	521	179	231
LRC0166	13	14	1	0.03	274	64	70
incl	36	37	1	0.08	551	86	267
	87	92	5	0.03	742	64	654
incl	90	91	1	0.02	1,110		929
LRC0219	88	90	2	0.14	275	114	96
incl	104	105	1	0.36	164	72	157
	121	138	17	1.54	150	96	135
incl	125	126	1	3.37	221	136	216
	138	141	3	0.17	214	133	75
incl	192	196	4	0.42	434	129	145
	192	193	1	1.28	516	150	217
LRC0228	81	82	1	0.04	194	72	85
incl	82	94	12	0.84	275	116	133
	85	89	4	1.23	248	137	104
incl	115	116	1	0.14	402	165	131
	116	127	11	1.03	216	114	142
incl	118	125	7	1.28	215	126	157
	141	142		0.10	275	72	96
incl	191	193	2	0.13	327	83	169
LRC0229	23	24	1	0.03	344	79	121
incl	63	64	1	0.02	363	122	50
	84	85	1	0.06	192	114	57
incl	85	97	12	1.64	219	113	137
	91	96	5	2.15	266	132	198
incl	114	115	1	0.34	10	14	86
	115	116	1	0.16	193	72	74
incl	118	119	1	0.45	16	14	124
	119	128	9	0.26	216	116	135
incl	128	129	1	0.44	10	14	76
LRC0293	43	49	6	1.13	144	76	175
incl	43	47	4	1.57	160	83	198
	72	75	3	1.29	117	83	245
incl	77	78	1	0.32	205	64	102
LRC0294	24	27	3	0.13	389	96	387
incl	48	55	7	0.17	279	73	216
	58	60	2	0.11	488	190	133

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
LRC0295	26	27	1	0.06	974	229	640
	64	66	2	0.11	510	64	211
	74	76	2	0.07	529	69	202
LRC0296	48	56	8	1.24	201	96	170
	56	57	1	0.15	236	72	152
LRC0167	4	5	1	0.10	150	29	424
	38	39	1	1.67	129	43	234
	40	43	3	0.70	155	64	208
	43	44	1	0.16	193	64	113
	46	48	2	0.08	153	54	192
LRC0168	34	36	2	0.78	149	62	447
LRC0169	33	34	1	0.09	189	29	109
LRC0170	41	42	1	0.08	243	50	1225
	42	48	6	1.16	169	63	250
	incl	42	46	4	1.53	169	63
LRC0297	38	45	7	0.90	323	102	178
	40	43	3	1.98	385	122	249
	44	45	1	0.16	166	72	127
	60	62	2	0.35	299	100	150
LRC0298	27	36	9	0.71	254	83	169
	29	31	2	1.76	374	114	196
	50	51	1	0.08	232	36	79
LRC0299	13	14	1	0.19	151	72	197
	50	51	1	0.05	173	72	151
	51	52	1	1.00	143	72	284
	52	64	12	0.62	277	80	168
	incl	54	60	6	1.03	311	84
LRC0300	7	8	1	0.11	523	100	3824
	41	49	8	0.73	256	70	212
	incl	47	48	1	1.61	410	100
LRC0301	0	1	1	0.07	374	50	211
	60	68	8	0.67	351	90	234
	incl	60	62	2	1.26	263	86
	and	65	66	1	1.64	346	107
LRC0302	61	62	1	0.54	123	79	89
	62	65	3	0.10	381	90	222
	74	81	7	1.48	117	57	314
	81	82	1	0.25	205	86	104
LRC0171	41	46	5	0.79	180	107	212
	57	59	2	0.14	319	72	176
LRC0172	48	51	3	0.14	320	57	164
LRC0173	24	25	1	0.08	173	21	103
	57	60	3	0.97	249	93	122
	75	79	4	0.92	251	90	226
	incl	75	77	2	1.40	251	100
LRC0174	62	74	12	0.71	479	222	169
	incl	62	68	6	1.33	481	253
LRC0230	74	77	3	0.12	404	129	145
	98	102	4	0.83	574	142	244
	incl	98	99	1	0.69	1,043	193
	and	99	100	1	1.46	712	136
	146	147	1	0.09	170	72	103
LRC0231	80	81	1	0.13	158	50	83
	87	91	4	0.90	228	114	127
	incl	88	90	2	1.33	232	140
	91	92	1	0.20	188	72	157

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
	101	103	2	0.23	322	83	95
LRC0232	106	111	5	0.59	131	106	117
	107	108	1	1.29	167	79	242
	110	111	1	0.31	98	114	71
	114	128	14	0.98	245	114	150
	incl and	114	116	2	1.53	153	122
	119	124	5	1.47	235	107	188
LRC0233	51	52	1	0.05	176	64	72
	94	96	2	0.34	78	36	306
	115	131	16	0.97	161	114	118
	134	137	3	0.13	227	153	137
	138	141	3	0.37	336	126	122
LRC0306	16	18	2	0.05	221	69	114
	48	49	1	1.26	127	50	248
	49	54	5	0.18	311	69	152
LRC0308	34	39	5	0.99	141	62	296
	36	38	2	1.69	143	76	237
	39	42	3	0.18	327	76	193
LRC0175	85	87	2	0.48	829	197	288
	incl	86	87	1	0.12	1,148	172
	108	110	2	0.99	104	86	95
LRC0234	9	10	1	0.14	175	43	161
	108	110	2	0.09	278	129	129
	128	141	13	1.31	131	104	140
	incl	129	138	9	1.60	132	110
	141	143	2	0.20	277	169	110
LRC0235	48	49	1	0.09	328	114	67
	64	65	1	0.15	151	43	62
	84	86	2	1.26	317	93	113
	87	95	8	0.97	287	96	119
	incl	87	93	6	1.14	329	106
	95	97	2	0.20	268	90	107
	103	104	1	0.45	59	29	127
	109	131	22	0.97	190	113	127
	incl and	110	111	1	2.55	93	50
	and	117	119	2	1.75	129	119
LRC0236	121	129	8	1.16	205	109	119
	131	135	4	0.12	252	112	108
	26	28	2	0.09	728	250	335
	71	72	1	0.11	303	72	70
	88	89	1	0.08	260	86	41
incl	89	94	5	1.28	194	82	103
	94	100	6	0.54	276	140	215
	97	100	3	0.93	273	140	160
	117	118	1	0.33	49	21	103
	123	130	7	0.87	382	183	113
incl	123	124	1	0.42	1,107	458	124
	and	124	126	2	1.30	521	222
	130	132	2	0.10	228	86	63
	133	134	1	0.40	38	21	100
	LRC0237	40	41	1	0.13	176	50
LRC0311	5	6	1	0.09	187	36	1981
	50	56	6	1.76	230	79	180
	51	56	5	2.05	259	87	175
	56	57	1	0.20	234	100	107

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
LRC0312	55	60	5	0.54	348	123	209
LRC0177	60	65	5	1.46	108	56	150
	65	69	4	0.08	333	109	103
LRC0178	4	5	1	0.16	181	21	174
	25	26	1	0.07	214	43	6479
	53	57	4	1.18	206	76	183
	57	58	1	0.07	392	122	90
	62	63	1	0.32	11	29	287
	99	101	2	0.16	169	76	146
	120	127	7	0.11	415	130	94
LRC0237	57	58	1	0.17	175	57	104
	78	82	4	0.15	14,782	5427	367
	78	80	2	0.08	27,174	9,974	612
	94	95	1	0.11	242	93	84
	95	107	12	1.16	213	113	132
	107	110	3	0.20	179	86	95
	131	142	11	1.96	224	133	163
incl and	132	139	7	2.74	244	150	174
	133	138	5	3.14	222	145	187
LRC0238	139	141	2	0.11	321	76	93
	151	152	1	0.06	375	100	80
LRC0309	44	49	5	0.27	288	137	311
	74	78	4	0.91	152	83	114
	80	81	1	0.06	482	114	100
	93	95	2	0.13	216	143	109
	108	110	2	0.07	162	90	79
	149	151	2	0.09	261	57	157
	168	169	1	0.14	656	358	226
LRC0310	69	84	15	1.12	299	104	155
	84	85	1	0.26	230	79	74
	87	88	1	0.75	111	36	307
	89	90	1	0.44	82	29	147
	92	94	2	0.64	157	50	258
	131	134	3	0.10	357	74	118
LRC0182	152	153	1	0.03	303	50	267
LRC0239	78	79	1	0.54	20	21	116
	79	85	6	0.17	245	139	117
	84	85	1	0.05	199	107	86
	118	119	1	0.06	518	122	131
	120	121	1	0.13	158	50	145
	122	123	1	0.13	162	29	76
	151	153	2	0.04	527	97	116
LRC0313	5	6	1	0.03	338	50	133
incl and	45	49	4	0.72	719	255	142
	46	47	1	2.02	538	229	129
	47	48	1	0.09	1,737	622	129
	92	96	4	0.86	370	200	105
	97	100	3	0.04	344	79	295
LRC0314	70	77	7	0.52	336	99	119
incl	71	72	1	1.05	112	100	62
	127	128	1	0.16	226	122	89
	132	133	1	0.28	176	79	123
LRC0183	9	10	1	0.06	625	100	259
LRC0184	11	12	1	0.16	322	122	311

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm	
incl	12	13	1	0.33	34	14	182	
	38	58	20	0.42	202	50	185	
	41	43	2	1.32	195	47	355	
	52	53	1	1.36	147	72	145	
LRC0185	0	1	1	0.13	154	29	110	
	11	14	3	0.11	196	53	114	
	39	48	9	0.60	230	80	179	
	39	41	2	1.54	330	122	371	
LRC0186	20	21	1	0.08	482	129	136	
	43	53	10	0.83	174	73	131	
	46	51	5	1.37	172	73	161	
LRC0240	90	97	7	1.03	87	59	94	
	91	93	2	1.75	124	83	124	
	103	110	7	0.83	55	60	50	
	104	108	4	1.12	63	64	52	
	151	152	1	0.15	324	86	86	
	163	164	1	0.10	260	36	89	
LRC0315	49	56	7	0.56	111	44	146	
	51	52	1	1.16	363	157	91	
	59	79	20	0.68	181	66	166	
	66	67	1	2.64	120	64	254	
	113	114	1	0.10	153	36	95	
	115	118	3	0.65	70	57	83	
	118	120	2	0.19	408	76	108	
	123	124	1	0.18	281	57	94	
LRC0316	10	11	1	0.03	455	36	96	
	44	45	1	0.80	57	14	126	
	49	50	1	0.03	182	29	76	
	77	80	3	0.40	215	100	140	
	77	78	1	1.07	156	100	226	
	100	102	2	0.46	127	36	96	
	111	112	1	0.33	48	50	67	
	113	114	1	0.84	104	72	131	
LRC0317	37	45	8	0.32	2,468	747	409	
	38	39	1	0.10	4,488	1138	489	
	and	39	40	1	1.55	9,556	2833	884
	and	41	42	1	0.17	2,100	737	231
	and	43	44	1	0.07	1,617	501	457
		63	66	3	0.28	230	133	1121
		67	68	1	0.57	65	57	80
		69	71	2	0.44	72	43	85
		94	100	6	1.10	71	59	118
	incl	94	96	2	1.43	126	112	168
	and	98	100	2	1.59	68	54	136
		100	101	1	0.18	160	100	203
LRC0164	13	14	1	0.12	236	72	185	
LRC0187	17	43	26	1.13	309	122	160	
	17	22	5	1.28	440	179	181	
	and	25	30	5	1.99	286	136	146
	and	34	36	2	2.09	249	93	199
LRC0188	29	34	5	1.69	573	187	255	
	incl	29	33	4	2.03	649	209	294
	and	31	32	1	1.92	1,585	522	348

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
	34	35	1	0.19	347	179	141
LRC0189	36	42	6	1.45	168	97	152
	43	44	1	0.24	209	79	142
LRC0241	2	3	1	0.13	225	43	107
	36	37	1	0.16	188	43	100
	52	53	1	0.46	32	14	179
	53	58	5	0.51	217	77	291
LRC0242	1	2	1	0.09	181	36	32
	25	26	1	0.14	416	129	#####
	55	60	5	1.76	243	79	197
	55	58	3	2.34	132	52	254
	60	62	2	0.17	301	108	71
	62	63	1	0.31	107	43	163
	94	96	2	0.13	233	93	147
	112	113	1	0.34	11	7	145
	116	117	1	0.76	147	43	86
	118	122	4	0.16	590	240	445
incl	119	120	1	0.09	1044	386	170
LRC0318	24	25	1	0.10	166	50	93
	47	51	4	0.48	1246	404	249
	48	49	1	0.42	4,211	1359	338
	75	76	1	0.13	168	43	337
	76	78	2	1.14	128	83	164
	81	82	1	0.30	32	29	177
LRC0190	109	114	5	0.69	187	127	161
	125	126	1	0.12	239	64	235
	42	43	1	0.05	568	329	279
incl	43	48	5	1.58	150	107	206
	43	46	3	2.26	175	124	255
LRC0191	1	2	1	0.03	568	72	936
	38	41	3	0.18	471	129	244
	38	39	1	0.27	911	258	234
	76	81	5	0.20	586	184	331
LRC0192	31	40	9	0.44	377	107	265
	32	34	2	1.50	656	215	432
	52	59	7	0.04	408	156	306
LRC0193	28	31	3	0.61	263	71	205
	29	30	1	1.16	219	64	232
	34	40	6	0.63	446	147	272
	34	35	1	0.74	951	279	283
	35	36	1	1.29	387	107	215
	48	51	3	0.21	259	93	193
LRC0194	35	37	2	0.20	259	104	255
	38	46	8	0.76	182	79	208
	40	42	2	1.85	197	97	314
LRC0195	35	36	1	0.05	217	122	170
	36	43	7	1.04	236	123	172
	41	43	2	1.80	128	72	259
	43	48	5	0.06	253	109	130
LRC0196	22	23	1	0.09	168	50	126
	26	31	5	0.15	383	133	161
	32	40	8	0.92	194	86	100
	35	37	2	2.19	238	136	107
LRC0197	29	34	5	0.79	116	56	137
	31	32	1	1.85	133	50	140
	35	36	1	0.05	171	72	86
LRC0198	40	41	1	0.39	44	21	149

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm
	41	44	3	0.24	194	74	134
	45	46	1	0.54	78	50	102
LRC0319	7	8	1	0.08	737	143	179
	47	50	3	0.14	632	272	261
	48	49	1	0.06	1,050	479	306
	64	66	2	0.76	90	68	69
	66	68	2	0.14	210	79	139
	69	70	1	0.24	255	129	193
	70	71	1	0.33	38	29	100
	76	77	1	0.21	212	43	90
	87	98	11	1.10	184	124	261
	incl	92	96	4	1.85	146	118
	107	108	1	0.07	210	100	91
LRC0244	57	72	15	1.33	172	81	151
	incl	58	67	9	1.89	192	96
	73	74	1	0.14	454	143	178
	incl	104	108	4	1.00	117	74
	104	106	2	1.44	48	76	76
	125	130	5	0.61	145	72	123
	132	133	1	0.51	67	29	352
	133	134	1	0.21	441	129	230
LRC0245	106	108	2	0.02	302	104	133
	118	120	2	0.02	354	100	133
	163	167	4	0.15	293	120	132
	172	173	1	0.41	120	43	212
	177	184	7	0.09	662	228	95
	incl	181	183	2	0.04	1053	401
	198	201	3	0.11	359	86	101
LRC0320	65	72	7	1.86	298	125	191
	incl	66	67	1	2.23	442	258
	and	70	71	1	5.35	481	143
	91	106	15	0.66	266	154	185
	108	109	1	0.24	161	64	127
	109	110	1	0.37	78	43	147
	134	138	4	0.73	286	186	145
	140	141	1	0.31	23	29	135
LRC0321	62	70	8	0.52	271	97	231
	incl	67	68	1	1.74	336	122
	99	100	1	0.10	415	57	124
	126	133	7	1.50	76	56	116
	incl	127	128	1	2.19	227	100
	and	129	132	3	2.33	63	57
	134	135	1	0.13	199	122	810
	136	137	1	0.39	68	50	306
LRC0199	0	14	14	0.51	117	40	140
	27	30	3	0.03	403	102	438
LRC0247	50	57	7	0.39	314	113	149
	57	58	1	0.33	39	29	74
	66	69	3	0.08	170	81	66
	71	106	35	1.35	60	51	79
	incl	73	83	10	1.62	50	63
	and	88	94	6	1.61	74	47
	99	105	6	1.75	94	62	81
	135	139	4	0.40	202	63	94
	198	199	1	0.04	289	122	107
	219	222	3	0.40	103	67	106
	224	225	1	0.26	293	422	157
	225	226	1	0.66	13	21	184

Hole ID	From m	To m	Interval m	Li ₂ O %	Ta ₂ O ₅ ppm	Nb ₂ O ₅ ppm	SnO ₂ ppm	
LRC0322	55	57	2	0.14	1308	236	220	
	56	57	1	0.16	2,020	329	237	
	65	68	3	0.71	281	81	283	
	68	69	1	0.13	375	107	151	
	98	100	2	0.07	443	101	131	
	132	134	2	0.73	348	136	321	
	138	141	3	0.24	234	93	181	
LRC0323	38	39	1	0.02	516	107	117	
	68	69	1	0.06	243	50	51	
	90	92	2	0.23	200	79	245	
	107	111	4	1.13	146	95	162	
	110	111	1	2.31	132	107	278	
	125	130	5	0.93	172	93	177	
	129	130	1	1.59	400	150	123	
LRC0200	0	12	12	0.50	125	49	150	
	17	18	1	0.34	71	29	93	
	19	22	3	0.06	439	102	161	
LRC0248	40	49	9	0.57	392	163	123	
	44	48	4	1.19	325	188	120	
	89	91	2	0.28	185	83	59	
	91	95	4	0.77	53	47	60	
	96	97	1	0.18	291	93	109	
	146	148	2	0.06	576	150	291	
	197	202	5	0.05	302	73	101	
LRC0324	33	34	1	0.18	241	72	226	
	63	64	1	0.03	458	143	113	
	69	72	3	0.08	619	286	315	
	97	98	1	0.12	263	57	90	
	115	122	7	1.23	86	75	118	
LRC0325	23	24	1	0.11	415	79	210	
	38	39	1	0.09	161	36	789	
	61	62	1	0.07	182	50	94	
	81	82	1	0.10	966	265	150	
	96	112	16	1.11	273	112	151	
	98	106	8	1.62	254	130	165	
	and	110	111	1	0.17	1,353	207	298
	126	127	1	0.17	151	72	160	
	127	128	1	0.74	72	57	90	
LRC0326	129	131	2	0.16	201	82	97	
	32	33	1	0.08	313	50	138	
	42	44	2	0.05	243	86	152	
	89	90	1	0.02	431	122	103	
	105	106	1	1.09	142	172	117	
	108	109	1	0.02	171	72	60	
	109	118	9	1.43	135	79	165	
incl	109	115	6	1.79	136	88	193	

Notes

- 1) Only intercepts of 0.3% Li₂O or 150ppm Ta₂O₅ considered significant.
- 2) No significant intercepts in holes LRC0156, LRC0279 and LRC0307
- 3) LRC0199 and LRC0200 returned significant intercepts from tailings
- 4) LRC0272 returned significant intercept from backfilled material
- 5) LRC0235 86-87m assays pending

Appendix B

Section 1 Sampling Techniques and Data

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<p>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</p> <p>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</p> <p>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</p>	<p>Reverse Circulation Drilling, 1m samples collected</p> <p>Diamond drilling, ½ core nominally 2m crushed to 10mm</p> <p>Samples jaw crushed and riffle split to 2-2.5kg for pulverizing to 80% passing 75 microns.</p> <p>Prepared samples are fused with sodium peroxide and digested in dilute hydrochloric acid. The resultant solution is analysed by ICP, by Nagrom Laboratory.</p> <p>Certified standards. Field duplicates submitted at irregular intervals at the rate of approximately 1:25.</p>
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	<p>RC and Diamond drilling conducted in line with general industry standards.</p> <p>All diamond drill holes and approx. 98% of RC drill holes are angled. Approx. 2% of RC drill holes are vertical</p> <p>Diamond core has been oriented where possible</p>
Drill sample recovery	<p>Method of recording and assessing core and chip sample recoveries and results assessed.</p> <p>Measures taken to maximise sample recovery and ensure representative nature of the samples.</p> <p>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</p>	<p>Chip recovery or weights for RC drilling were not conducted.</p> <p>Each metre of drill sample recovery and moisture content is visually estimated and recorded.</p> <p>Opportunity for sample bias is considered negligible for dry samples.</p>
Logging	<p>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</p> <p>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography</p> <p>The total length and percentage of the relevant intersections logged.</p>	<p>Geological logs exist for all drill holes with lithological codes via an established reference legend.</p> <p>Drill holes have been geologically logged in their entirety. Where logging was detailed the subjective indications of spodumene content</p> <p>Assays have generally only been submitted through and adjacent to the pegmatites.</p>

Criteria	JORC Code Explanation	Commentary
Sub-sampling techniques and sample preparation	<p>If core, whether cut or sawn and whether quarter, half or all core taken.</p> <p>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</p> <p>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</p> <p>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</p> <p>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</p> <p>Whether sample sizes are appropriate to the grain size of the material being sampled.</p>	<p>RC samples were collected at 1m intervals and riffle or cone split on-site to produce a subsample less than 5kg.</p> <p>The RC drilling samples are considered robust for sampling the spodumene and tantalite mineralisation.</p> <p>Most samples were dry.</p> <p>Sampling is in line with general industry sampling practices.</p> <p>Field duplicates, laboratory standards and laboratory repeats are used to monitor analyses.</p> <p>Sample size is considered appropriate.</p>
Quality of assay data and laboratory tests	<p>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</p> <p>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</p> <p>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</p>	<p>The assay technique is considered to be robust as the method used (see above) offers total dissolution of the sample and is useful for mineral matrices that may resist acid digestions.</p> <p>Standards and duplicates were submitted in varying frequency throughout the exploration campaign and internal laboratory standards, duplicates and replicates are used for verification</p>
Verification of sampling and assaying	<p>The verification of significant intersections by either independent or alternative company personnel.</p> <p>The use of twinned holes.</p> <p>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</p> <p>Discuss any adjustment to assay data.</p>	<p>Twinning of holes undertaken to date show good continuity</p> <p>The Ta and Li assays show a marked correlation with the pegmatite intersections via elevated downhole grades.</p> <p>Drill logs exist for all holes as electronic files and/or hardcopy (all 2017 logging has been input directly to field logging computers).</p> <p>Digital log sheets have been created with inbuilt validations to reduce potential for data entry errors.</p> <p>All drilling data has been loaded to a database and validated prior to use.</p>
Location of data points	<p>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</p> <p>Specification of the grid system used.</p> <p>Quality and adequacy of topographic control.</p>	<p>Collar coordinates are currently only approximate and considered accurate to within 4m measured using hand held GPS. Accurate surveying using RTK DGPS is currently being undertaken on site. Hole collars have been preserved until completion of survey.</p>

Criteria	JORC Code Explanation	Commentary
Data spacing and distribution	<p>Data spacing for reporting of Exploration Results.</p> <p>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</p> <p>Whether sample compositing has been applied.</p>	<p>Drilling has been conducted on a 40m x 40m grid, with a 140m x 80m area drilled out at 20m x 20m.</p> <p>The spacing of holes is considered of sufficient density to provide an ‘Indicated’ or ‘Inferred’ Mineral Resource estimation and classification.</p> <p>There has been no sample compositing.</p>
Orientation of data in relation to geological structure	<p>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</p> <p>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</p>	<p>The majority of drilling is angled. Some vertical holes have been drilled in areas where access is limited.</p> <p>The lithium tantalite-bearing pegmatites are generally flat to shallowly dipping in nature. The true width of pegmatites are generally considered 80-95% of the intercept width, with minimal opportunity for sample bias.</p>
Sample security	The measures taken to ensure sample security.	The RC samples are taken from the rig by experienced personal and stored securely and transport to the laboratory by a registered courier and handed over by signature.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits have been undertaken to date.

Section 2 Reporting of Exploration Results

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</p>	The portfolio of mineral tenements, comprising mining leases, exploration licences, prospecting licences, miscellaneous licences, a general-purpose lease, and a retention lease are in good standing.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<p>Alluvial tantalite has been mined periodically from the early 1970s.</p> <p>Gwalia Consolidated Limited undertook exploration for tantalite-bearing pegmatites from 1983-1998. Work included mapping, costeanning, and several phases of drilling using RAB, RC, and diamond methods. The work identified mineral resources that were considered uneconomic at the time.</p> <p>Haddington entered agreement to develop the resource and mining</p> <ul style="list-style-type: none"> • commenced in 2001 and continued until 2005. • Haddington continued with exploration until 2009. <p>Living Waters acquired the project in 2009 and continued with limited exploration to the north of the main pit area.</p>

Criteria	Explanation	Commentary
Geology	Deposit type, geological setting and style of mineralisation.	<p>The Bald Hill area is underlain by generally north-striking, steeply dipping Archaean metasediments (schists and greywackes) and granitoids.</p> <p>Felsic porphyries and pegmatite sheets and veins have intruded the Archaean rocks. Generally, the pegmatites cross cut the regional foliation, occurring as gently dipping sheets and as steeply dipping veins.</p> <p>The pegmatites vary in width and are generally comprised quartz-albite- muscovite-spodumene in varying amounts. Late-stage albitisation in the central part of the main outcrop area has resulted in fine- grained, banded, sugary pegmatites with visible fine-grained, disseminated tantalite. A thin hornfels characterised by needle hornblende crystals is often observed in adjacent country rocks to the pegmatite.</p> <p>Intrusives. Tantalite generally occurs as fine disseminated crystals commonly associated with fine-grained albite zones, or as coarse crystals associated with cleavelandite.</p> <p>Weathering of the pegmatites yields secondary mineralised accumulations in alluvial/eluvial deposits.</p>
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<p>Only results for drill holes that have intercepted lithium and or tantalum pegmatites of 1m or more in width that have been assayed for lithium have been included in the release.</p> <p>All drill hole details are contained in Table 2 and 3 of the release.</p>
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p>	<p>No cutting to intercept grades has been undertaken.</p> <p>Assays are report as pure elements such as Li, Ta, Nb, Sn and converted to oxides using atomic formulas.</p> <p>Reported intervals in Table 1 and 3 represent the aggregation of the intercepts containing samples of at least 0.3% Li₂O and/or 150ppm Ta₂O₅, lower grade zones are included adjacent to higher grade zones where the grade varies significantly from the average of the entire width of the mineralised pegmatite. Only lithium, tin, niobium and tantalum oxide results are tabled, other potential by-products are currently considered to be insignificant in economic importance.</p>

Criteria	Explanation	Commentary
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported</p> <p>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</p>	<p>The majority of drilling is angled. Some vertical holes have been drilled in areas where access is limited.</p> <p>The lithium tantalite-bearing pegmatites are generally flat to shallowly dipping in nature. The true width of pegmatites are generally considered 85-95% of the intercept width, with minimal opportunity for sample bias.</p>
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Drilling locations are shown on figure 1 of the release.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Results for all drill holes that have intercepted lithium pegmatites that have been assayed for lithium have been included in the release.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No metallurgical test work is referred to in this announcement.
Further work	<p>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</p> <p>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</p>	Further RC and diamond drilling is warranted at the various deposits to explore for additional resources and improve the understanding of the current resources prior to mining.