



Further thick lithium intercepts from ongoing Resource definition drilling at Buldania

Maiden Mineral Resource Estimate due October 2019

HIGHLIGHTS

- Latest intersections from ongoing RC drill program include:

25m @ 1.1% Li₂O from 181m (BDRC0120), including:

- 9m @ 1.8% Li₂O from 196m

23m @ 1.0% Li₂O from 114m (BDR0135), including:

- 6m @ 1.4% Li₂O from 124m

15m @ 1.3% Li₂O from 165m (BDRC0140), including:

- 10m @ 1.5% Li₂O from 169m

(True widths 80-100% of down-hole widths listed above)

- These intersections build on the strong results reported previously which included:

30m @ 1.4% Li₂O from 9m (BDDD0003), including:

- 9m @ 1.6% Li₂O from 9m

58m @ 1.2% Li₂O from 39m (BDRC0015), including:

- 16m @ 1.7% Li₂O from 44m

35m @ 1.2% from 35m (BDRC0056), including:

- 18m @ 1.7% Li₂O from 51m

39m @ 1.6% Li₂O from 9m (BDRC0090), including:

- 13m @ 2.1% Li₂O from 21m

42m @ 1.0% Li₂O from 155m (BDRC0106), including:

- 14m @ 1.4% Li₂O from 173m

(See ASX releases dated 26th March 2018, 19th September 2018, 1st November 2018, 20th November 2018 and 22nd July 2019)

- Latest assays confirm down-dip extensions of previous mineralised intersections, with further drilling planned to the south-east to test strike continuity.
- Mineralised system defined over >1.4km and remains open both along strike and at depth.
- New data will be incorporated into the preparation of a maiden Mineral Resource Estimate (MRE).
- Lithium mineralisation at Buldania is hosted by multiple stacked, shallow-dipping spodumene-rich pegmatites.

Following its ASX release of 22nd July, Liontown Resources Limited (ASX: LTR) is pleased to advise that it has received further encouraging assay results from the ongoing Reverse Circulation (RC) resource drilling program at its 100%-owned Buldania Lithium Project in WA's Norseman region.

Buldania is Liontown's second WA lithium project, which is being advanced alongside its flagship Kathleen Valley Project where the Company recently reported a substantial resource increase (ASX Release, 9th July 2019) and is progressing a Pre-Feasibility Study.

The latest drilling at Buldania has extended the previously defined mineralisation at the main Anna pegmatite to the south-east and east for a continuous strike length of at least 1.4km, with the system remaining open (**Figures 1 and 2**).

The mineralisation is hosted by multiple, stacked, sub-parallel pegmatite lenses which vary from ~5-25m in thickness. In places, the pegmatites merge to form zones >50m thick.

RC drilling re-commenced in June 2019 and to date 56 holes (BDRC0097-0152) have been drilled for 10,109m. Since acquiring the Buldania Project in late 2017, Liontown has drilled a total of 159 holes for 20,936.5m, including three diamond core holes for 548.5m. Refer to Appendices 1 to 3 for a full listing of significant drill statistics.

All of the latest results come from the Anna pegmatite with a further 6-8 RC holes for an additional 1,500-2,000m of drilling planned at the prospect. Once complete, data will be used to prepare a maiden MRE.

Additional RC holes (BDRC144-0151/702m) have also been drilled into the NW Pegmatite target area located 5-10km north-west of Anna with assays pending for all holes. Initial assays from this area (see ASX release dated 22nd July 2019) have confirmed the potential for significant lithium mineralisation, with better intersections including **5m @ 1.2% Li₂O** from 20m in BDRC0104 and **6m @ 1.5% Li₂O** from 54m in BDRC0105 (see ASX release dated 22nd July 2019).

The Buldania Project is located ~30km east of Norseman (~600km east of Perth) in southern Western Australia and is part of a large, ~600km², strategic land position owned by Liontown. The project is in the southern part of the Eastern Goldfields Province, a region well-known for hosting large lithium deposits including the Mt Marion and Bald Hill mines (**Figure 3**).



DAVID RICHARDS

Managing Director

29th July 2019

The Information in this report that relates to Exploration Results is based on and fairly represents information and supporting documentation prepared by Mr David Richards, who is a Competent Person and a member of the Australasian Institute of Geoscientists (AIG). Mr Richards is a full-time employee of the company; and

Mr Richards has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Richards consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

This announcement contains forward-looking statements which involve a number of risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialise, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

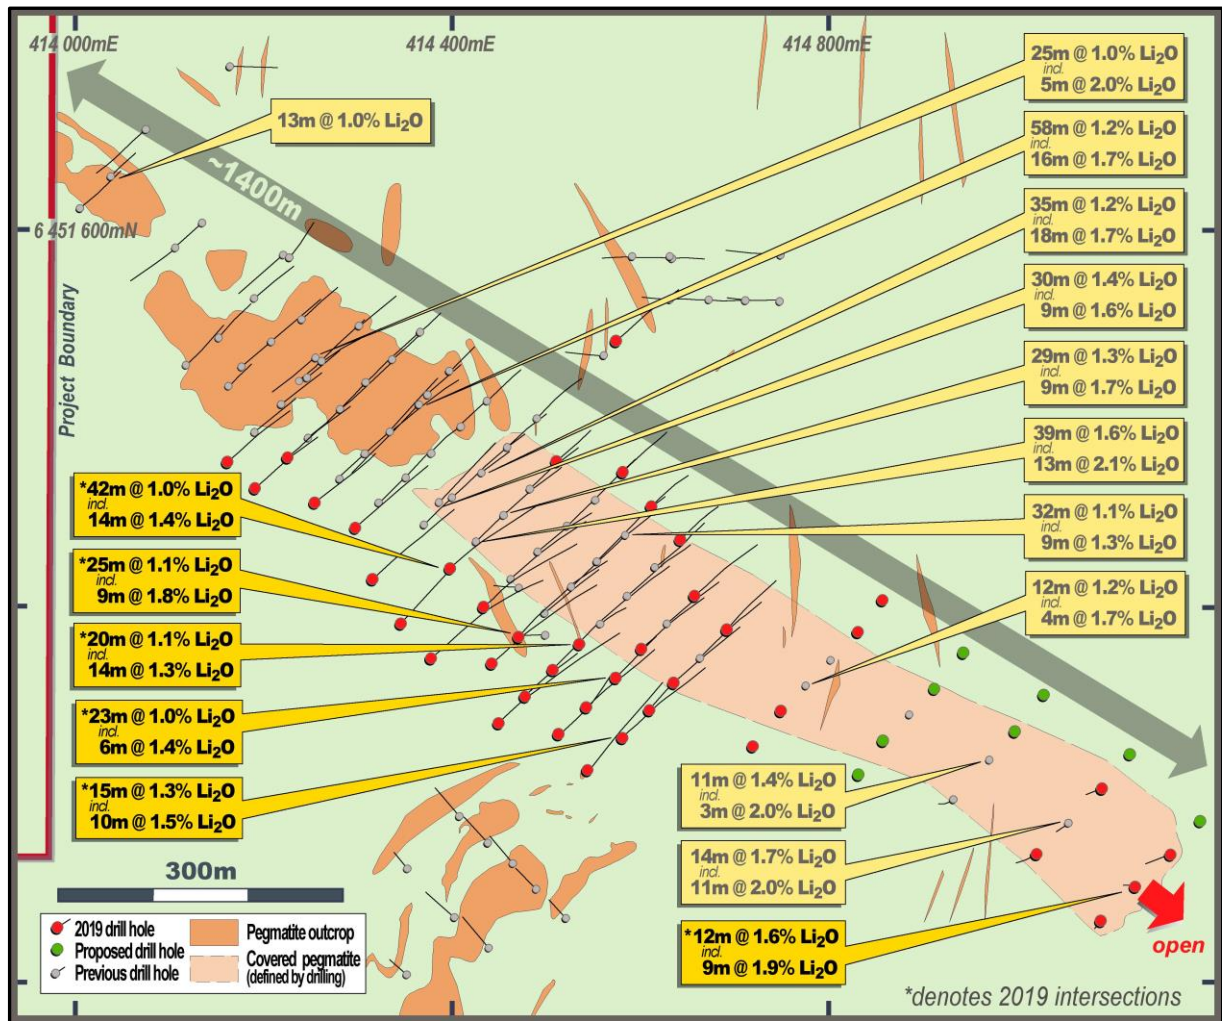


Figure 1: Anna Pegmatite – Drill hole plan showing better lithium intersections.

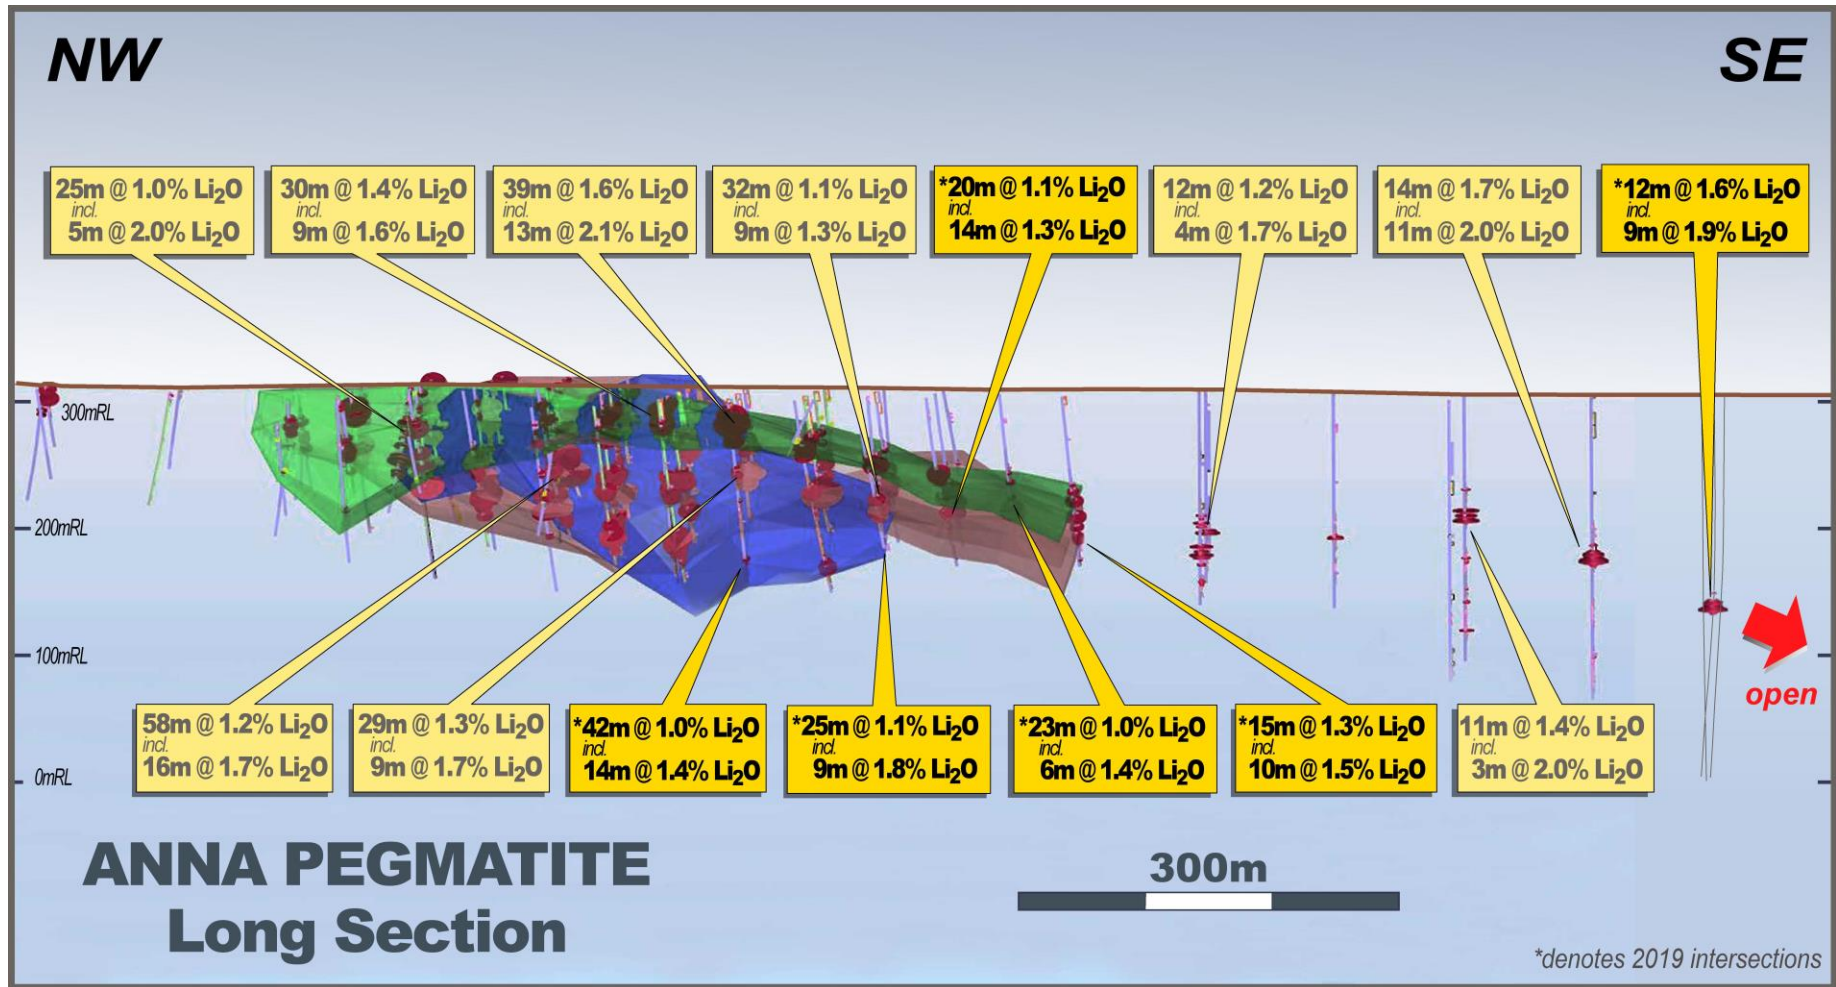


Figure 2: Anna Pegmatite – Long section looking northeast showing better lithium intersections.

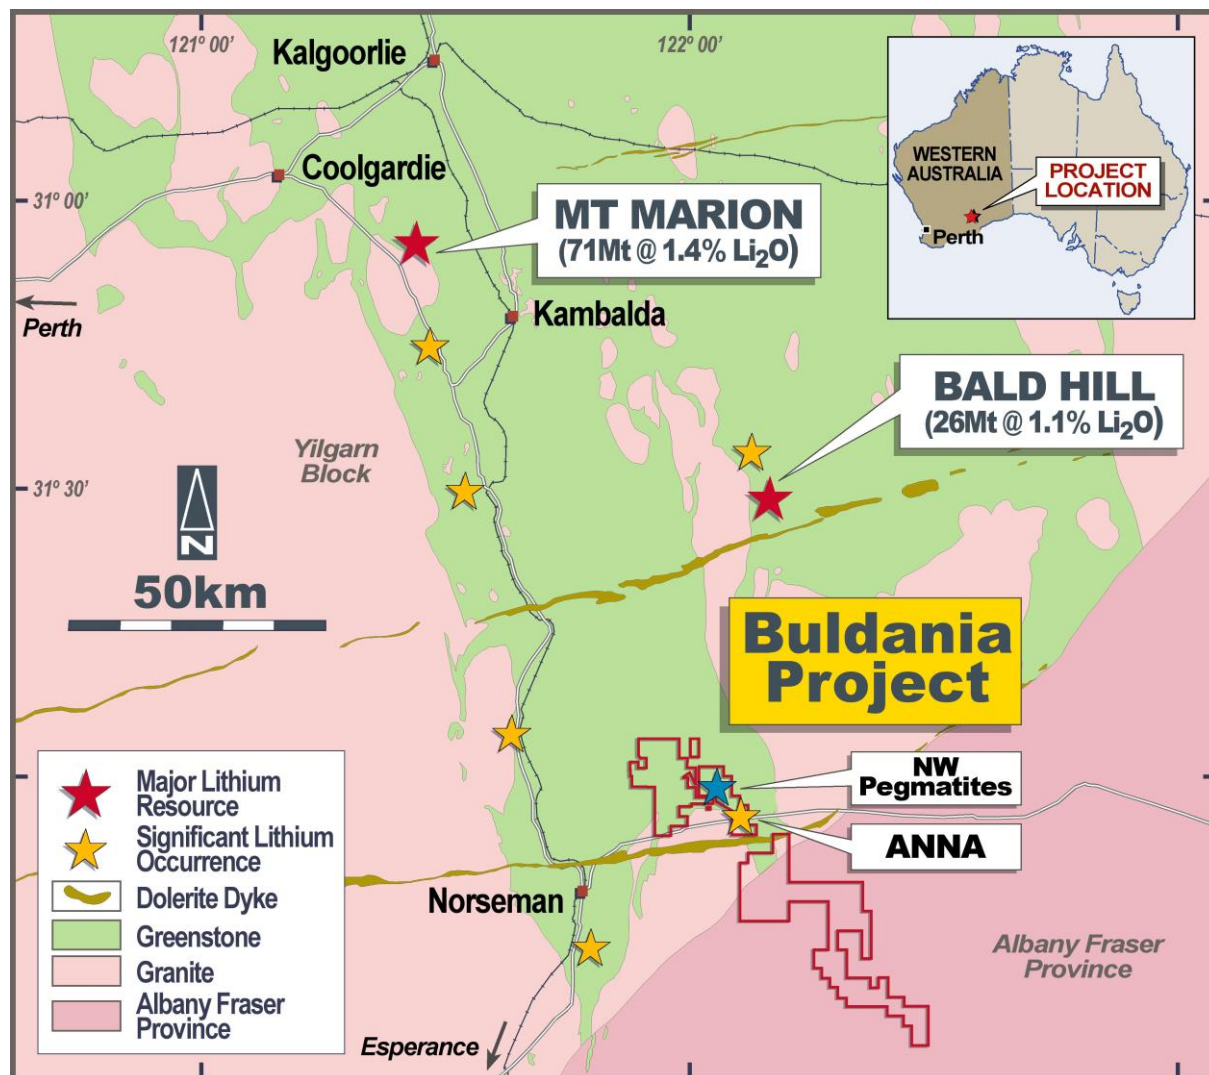


Figure 3: Buldania Project – Location plan, regional geology and lithium occurrences.

Appendix 1 – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0003	Anna	414218	6451415	327	-59	52	100	28	44	16	1.2	81
								incl. 9m @ 1.4% Li2O and 106ppm Ta2O5 from 30m				
								and 2m @ 1.5% Li2O and 40ppm Ta2O5 from 41m				
								62	66	4	1.1	233
								incl. 1m @ 2% Li2O and 347ppm Ta2O5 from 63m				
								75	78	3	1.9	132
								97	100	3	1.8	82
BDRC0004	Anna	414244	6451442	327	-60	51	100	22	25	3	0.6	7
								29	30	1	0.5	38
								32	37	5	0.9	45
								incl. 2m @ 1.2% Li2O and 43ppm Ta2O5 from 33m				
								39	42	3	1.1	64
								70	82	12	1.2	65
								incl. 8m @ 1.6% Li2O and 60ppm Ta2O5 from 72m				
BDRC0011	Anna	414190	6451389	331	-58	52	100	95	100	5	0.6	59
								incl. 1m @ 1.4% Li2O and 48ppm Ta2O5 from 98m				
								84	87	3	0.1	192
								7	9	2	1	36
								16	41	25	1.2	48
								incl. 11m @ 1.8% Li2O and 42ppm Ta2O5 from 21m				
								51	61	10	1	53
BDRC0012	Anna	414259	6451464	327	-59	57	140	incl. 2m @ 2% Li2O and 51ppm Ta2O5 from 53m				
								79	84	5	0.7	38
								86	88	2	1	73
								99	107	8	0.9	38
								incl. 2m @ 1.5% Li2O and 33ppm Ta2O5 from 99m				
								incl. 1m @ 1.7% Li2O and 66ppm Ta2O5 from 103m				
								109	11	2	0.5	15
BDRC0013	Anna	414301	6451497	320	-58	54	100	1	6	5	1.2	64
								incl. 2m @ 2.3% Li2O and 45ppm Ta2O5 from 1m				
								46	48	2	1.3	64
								13	32	19	0.7	174
								incl. 2m @ 1.3% Li2O and 219ppm Ta2O5 from 16m				
								35	37	2	1.1	34
								39	45	6	0.4	69
BDRC0014	Anna	414306	6451362	329	-58	50	166	60	63	3	1.3	111
								incl. 2m @ 1.6% Li2O and 91ppm Ta2O5 from 60m				
								84	98	14	0.9	68
								incl. 4m @ 1.6% Li2O and 81ppm Ta2O5 from 85m				
								114	116	2	1.2	61
								incl. 1m @ 1.9% Li2O and 95ppm Ta2O5 from 115m				
								124	154	30	0.8	46
BDRC0015	Anna	414347	6451390	329	-58	56	130	incl. 5m @ 1.5% Li2O and 65ppm Ta2O5 from 128m				
								and 1m @ 1.5% Li2O and 38ppm Ta2O5 from 144m				
								and 1m @ 1.3% Li2O and 61ppm Ta2O5 from 148m				
								7	13	6	0.9	52
								incl. 3m @ 1.2% Li2O and 36ppm Ta2O5 from 8m				
								15	17	2	0.6	1
								23	24	1	0.5	1
BDRC0015	Anna	414347	6451390	329	-58	56	130	39	97	58	1.2	36
								incl. 3m @ 1.8% Li2O and 25ppm Ta2O5 from 39m				
								and 16m @ 1.7% Li2O and 32ppm Ta2O5 from 44m				
								and 8m @ 1.5% Li2O and 35ppm Ta2O5 from 70m				
								and 1m @ 1.9% Li2O and 40ppm Ta2O5 from 81m				
								and 3m @ 2% Li2O and 31ppm Ta2O5 from 93m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0016	Anna	414373	6451427	322	-58	47	104	6	42	36	1	34
								incl. 3m @ 2% Li2O and 31ppm Ta2O5 from 12m				
								and 6m @ 1.7% Li2O and 33ppm Ta2O5 from 29m				
								and 1m @ 1.8% Li2O and 19ppm Ta2O5 from 40m				
								60	61	1	0.6	17
BDRC0017	Anna	414398	6451451	322	-59	47	70	82	83	1	1.7	52
								0	3	3	0.7	54
								18	33	15	1.2	44
								incl. 4m @ 2.1% Li2O and 35ppm Ta2O5 from 19m				
								and 3m @ 1.5% Li2O and 33ppm Ta2O5 from 26m				
BDRC0018	Anna	414150	6451480	320	-60	44	100	and 1m @ 1.5% Li2O and 61ppm Ta2O5 from 31m				
								54	56	2	1.1	87
								16	21	5	0.7	54
								23	35	12	0.8	69
								incl. 3m @ 1.3% Li2O and 76ppm Ta2O5 from 24m				
BDRC0019	Anna	414190	6451528	320	-59	49	100	and 1m @ 1.3% Li2O and 96ppm Ta2O5 from 32m				
								42	45	3	0.5	42
								30	33	3	0.8	74
								42	50	8	0.7	49
								incl. 2m @ 1.2% Li2O and 46ppm Ta2O5 from 43m				
BDRC0020	Anna	414005	6451623	330	-55	49	100	55	61	6	0.7	62
								58	59	1	1.3	38
BDRC0021	Anna	414035	6451658	329	-53	230	70	No significant assays				
								9	22	13	1	92
								incl. 1m @ 1.8% Li2O and 89ppm Ta2O5 from 10m				
								incl. 3m @ 1.3% Li2O and 121ppm Ta2O5 from 14m				
BDRC0022	Anna	414074	6451708	323	-53	230	117	incl. 2m @ 1.8% Li2O and 65ppm Ta2O5 from 20m				
BDRC0023	Anna	414226	6451571	314	-62	37	100	33	39	6	0.7	43
								No significant assays				
BDRC0024	Anna	414255	6451464	321	-58	236	110	14	17	3	0.7	42
								26	46	20	0.8	61
								incl. 5m @ 1.4% Li2O and 101ppm Ta2O5 from 30m				
								51	53	2	1.7	158
								61	70	9	1.5	62
								incl. 7m @ 1.8% Li2O and 62ppm Ta2O5 from 61m				
								73	79	6	1	51
BDRC0025	Anna	414366	6451414	323	-45	227	148	incl. 2m @ 1.3% Li2O and 91ppm Ta2O5 from 73m				
								33	36	3	0.6	1
BDRC0036	Anna	414117	6451457	337	-58	46	112	110	115	5	0.7	92
								No significant assays				
BDRC0037	Anna	414281	6451336	329	-60	47	200	18	22	4	0	173
								39	43	4	0.6	18
								43	50	7	0	187
								49	55	6	1	47
								76	86	10	0	175
								81	83	2	0.6	278
								85	99	2	0.6	99
								98	111	13	0.8	76
								incl. 2m @ 1.8% Li2O and 28ppm Ta2O5 from 106m				
								119	123	4	1.7	64
								incl. 3m @ 2.1% Li2O and 62ppm Ta2O5 from 120m				
								143	147	4	0.6	28

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0038	Anna	414366	6451492	316	-61	46	60	0	6	6	1.4	28
								incl. 4m @ 1.9% Li2O and 28ppm Ta2O5 from 1m				
BDRC0039	Anna	414336	6451463	320	-60	47	100	0	14	14	0.6	34
								63	65	2	0.7	123
BDRC0040	Anna	414308	6451438	324	-61	45	120	8	49	41	1	32
								incl. 7m @ 1.8% Li2O and 41ppm Ta2O5 from 19m and 14m @ 1.4% Li2O and 43ppm Ta2O5 from 27m				
								52	57	5	0.6	31
								62	66	4	0.5	35
								77	87	10	0.6	42
BDRC0041	Anna	414281	6451410	327	-60	48	160	12	18	6	0.6	11
								58	62	4	0.7	44
								64	66	2	0.8	38
								69	72	3	0.8	92
								88	115	27	1.2	45
								incl. 13m @ 1.5% Li2O and 39ppm Ta2O5 from 95m				
								111	115	4	1.5	66
BDRC0042	Anna	414247	6451379	326	-58	49	160	53	56	3	0.2	271
								67	93	26	1	49
								incl. 6m @ 1.5% Li2O and 44ppm Ta2O5 from 67m and 5m @ 1.4% Li2O and 60ppm Ta2O5 from 75m				
								102	121	19	1.2	69
								incl. 4m @ 1.7% Li2O and 61ppm Ta2O5 from 106m and 2m @ 2.5% Li2O and 34ppm Ta2O5 from 112m and 4m @ 1.5% Li2O and 54ppm Ta2O5 from 117m				
								18	130	2	1.1	29
								incl. 1m @ 1.7% Li2O and 38ppm Ta2O5 from 129m				
BDRC0043	Anna	414438	6451418	322	-61	47	100	10	18	8	1	37
								incl. 4m @ 1.5% Li2O and 45ppm Ta2O5 from 10m				
								36	47	11	0.9	30
								incl. 1m @ 1.5% Li2O and 24ppm Ta2O5 from 37m and 1m @ 1.8% Li2O and 39ppm Ta2O5 from 43m				
BDRC0047	Anna	414747	6451574	303	-61	273	118	No significant assays				
BDRC0048	Anna	414710	6451525	303	-59	270	118					
BDRC0049	Anna	414413	6451393	322	-59	45	100	19	39	20	0.7	35
								incl. 4m @ 1.3% Li2O and 42ppm Ta2O5 from 26m and 1m @ 1.6% Li2O and 24ppm Ta2O5 from 35m				
								45	50	5	0.9	41
BDRC0050	Anna	414378	6451363	328	-60	47	136	17	29	12	1.1	57
								incl. 6m @ 1.5% Li2O and 63ppm Ta2O5 from 17m and 2m @ 1.2% Li2O and 43ppm Ta2O5 from 26m				
								35	39	4	0.5	5
								54	58	4	0.4	49
								66	72	6	0.6	49
								83	92	9	0.8	27
								incl. 1m @ 1.5% Li2O and 22ppm Ta2O5 from 84m and 2m @ 1.2% Li2O and 32ppm Ta2O5 from 87m				
								96	109	13	1.3	40
								incl. 8m @ 1.7% Li2O and 33ppm Ta2O5 from 100m				
BDRC0051	Anna	414351	6451339	329	-60	44	178	22	32	10	1.3	33
								incl. 4m @ 1.7% Li2O and 27ppm Ta2O5 from 22m and 3m @ 1.5% Li2O and 36ppm Ta2O5 from 28m				
								38	41	3	0.8	44
								43	52	9	1.2	35
								incl. 2m @ 2.4% Li2O and 19ppm Ta2O5 from 43m				
								78	92	14	1.3	64
								incl. 10m @ 1.6% Li2O and 61ppm Ta2O5 from 78m				
								112	115	3	0.6	4
								123	140	17	1.1	52
								incl. 6m @ 1.6% Li2O and 51ppm Ta2O5 from 124m and 2m @ 1.4% Li2O and 35ppm Ta2O5 from 138m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0052	Anna	414322	6451310	330	-59	47	180	32	36	4	0.6	38
								99	107	8	1.4	54
								incl. 3m @ 2.1% Li2O and 34ppm Ta2O5 from 99m and 2m @ 1.8% Li2O and 77ppm Ta2O5 from 104m				
								137	138	1	1.7	46
								146	155	9	1.8	53
								158	169	9	0.8	49
BDRC0053	Anna	414106	6451580	320	-56	231	100	No significant assays				
BDRC0054	Anna	414460	6451370	319	-61	49	118	16	20	4	0.8	1
								24	37	13	1.3	51
								incl. 3m @ 1.6% Li2O and 55ppm Ta2O5 from 24m and 6m @ 1.5% Li2O and 49ppm Ta2O5 from 28m				
								59	68	9	1	37
								incl. 5m @ 1.3% Li2O and 54ppm Ta2O5 from 62m				
								94	98	4	1.3	54
BDRC0055	Anna	414488	6451399	318	-58	45	112	incl. 2m @ 1.7% Li2O and 53ppm Ta2O5 from 96m				
								22	25	3	1.6	48
BDRC0056	Anna	414432	6451342	325	-58	48	118	incl. 2m @ 2% Li2O and 38ppm Ta2O5 from 22m				
								35	70	35	1.2	40
								incl. 5m @ 1.6% Li2O and 63ppm Ta2O5 from 42m and 18m @ 1.7% Li2O and 33ppm Ta2O5 from 51m				
BDRC0057	Anna	414401	6451311	326	-58	50	153	103	105	2	0.9	65
								1	10	9	0.8	72
								incl. 2m @ 1.7% Li2O and 44ppm Ta2O5 from 6m				
								46	48	2	1.2	65
								incl. 1m @ 1.5% Li2O and 38ppm Ta2O5 from 47m				
								51	53	2	0.6	3
								75	101	26	1	39
								incl. 9m @ 1.8% Li2O and 41ppm Ta2O5 from 83m				
								108	113	5	0.7	41
								117	125	8	1.3	41
BDRC0058	Anna	414371	6451284	326	-60	45	190	incl. 4m @ 1.8% Li2O and 47ppm Ta2O5 from 118m				
								127	128	1	1	42
								22	23	1	0.9	55
								28	36	8	0.8	64
								incl. 1m @ 1.3% Li2O and 72ppm Ta2O5 from 28m and 2m @ 1.3% Li2O and 72ppm Ta2O5 from 31m				
								92	104	12	1.1	64
								incl. 6m @ 1.5% Li2O and 47ppm Ta2O5 from 92m and 1m @ 1.8% Li2O and 85ppm Ta2O5 from 102m				
								136	159	23	1.4	54
								incl. 18m @ 1.5% Li2O and 57ppm Ta2O5 from 137m				
								162	163	1	1.1	17
BDRC0059	Anna	414549	6451317	314	-58	44	118	168	171	3	0.8	83
								No significant assays				
BDRC0060	Anna	414521	6451288	316	-57	45	136	44	45	1	1.1	89
								55	56	1	1.1	74
								63	84	21	1	43
								incl. 2m @ 1.6% Li2O and 61ppm Ta2O5 from 67m and 5m @ 1.7% Li2O and 29ppm Ta2O5 from 76m				
								88	95	7	0.7	37
								incl. 1m @ 1.5% Li2O and 66ppm Ta2O5 from 92m				
BDRC0061	Anna	414491	6451258	317	-59	50	143	104	108	4	0.7	36
								41	45	4	1.2	62
								48	53	5	0.6	14
								82	108	26	1.1	35
								incl. 5m @ 1.5% Li2O and 38ppm Ta2O5 from 87m and 8m @ 1.8% Li2O and 32ppm Ta2O5 from 94m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0062	Anna	414462	6451228	320	-59	49	196	41	43	2	0.5	72
								45	58	13	1.1	53
								incl. 1m @ 2% Li2O and 18ppm Ta2O5 from 47m and 3m @ 1.6% Li2O and 76ppm Ta2O5 from 55m				
								87	100	13	1.1	69
								incl. 9m @ 1.4% Li2O and 72ppm Ta2O5 from 91m				
								108	118	10	0.5	24
								158	160	2	0.4	7
								164	166	2	0.9	48
								incl. 1m @ 1.2% Li2O and 57ppm Ta2O5 from 165m				
								170	172	2	1.2	30
								incl. 1m @ 1.9% Li2O and 29ppm Ta2O5 from 170m				
								174	176	2	1.4	53
								incl. 1m @ 1.8% Li2O and 27ppm Ta2O5 from 174m				
								10	12	2	0.8	59
BDRC0063	Anna	414240	6451506	317	-60	48	100	19	23	4	0.4	57
								27	29	2	0.6	58
								35	38	2	0.7	80
								11	29	18	1.1	40
BDRC0064	Anna	414208	6451482	323	-61	48	140	incl. 1m @ 3.1% Li2O and 31ppm Ta2O5 from 14m and 5m @ 1.9% Li2O and 36ppm Ta2O5 from 17m and 1m @ 2.2% Li2O and 93ppm Ta2O5 from 28m				
								50	55	5	1.7	64
								64	74	10	0.9	63
								incl. 5m @ 1.2% Li2O and 66ppm Ta2O5 from 68m				
								8	9	1	0.9	56
BDRC0065	Anna	414176	6451455	325	-57	47	114	12	13	1	0.7	42
								43	45	2	1.1	88
								incl. 1m @ 1.5% Li2O and 79ppm Ta2O5 from 44m				
								49	66	17	0.9	54
								incl. 1m @ 1.3% Li2O and 45ppm Ta2O5 from 51m and 1m @ 1.7% Li2O and 64ppm Ta2O5 from 54m and 1m @ 1.9% Li2O and 53ppm Ta2O5 from 58m and 1m @ 1.5% Li2O and 33ppm Ta2O5 from 64m				
								79	80	1	1.1	51
								40	43	3	0.5	41
								52	54	2	0.9	42
								incl. 1m @ 1.3% Li2O and 44ppm Ta2O5 from 53m				
								No significant assays				
BDRC0067	Anna	414134	6451607	320	-60	231	70					
BDRC0068	Anna	414160	6451435	326	-75	48	142	93	97	4	0.5	99
BDRC0079	Anna	414555	6451251	320	-59	46	154	60	61	1	0.9	131
								75	107	32	1.1	41
								incl. 8m @ 1.4% Li2O and 50ppm Ta2O5 from 76m and 2m @ 1.3% Li2O and 156ppm Ta2O5 from 88m and 9m @ 1.3% Li2O and 42ppm Ta2O5 from 91m and 2m @ 1.5% Li2O and 26ppm Ta2O5 from 103m				
								109	111	2	0.6	51
								123	124	1	0.9	28
								62	75	13	0.9	58
								incl. 2m @ 2.6% Li2O and 74ppm Ta2O5 from 73m				
BDRC0080	Anna	414526	6451223	320	-57	43	166	77	78	1	0.5	117
								82	83	1	0.5	4
								94	96	2	0.5	8
								99	121	22	1.1	51
								incl. 10m @ 1.4% Li2O and 53ppm Ta2O5 from 107m and 2m @ 1.3% Li2O and 44ppm Ta2O5 from 118m				
								123	124	1	0.6	14
								No significant assays				
BDRC0081	Anna	414584	6451275	320	-59	42	112					

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0082	Anna	414497	6451192	317	-59	47	152	59	67	8	0.8	104
								incl. 1m @ 1.1% Li2O and 106ppm Ta2O5 from 59m				
								and 1m @ 1.1% Li2O and 52ppm Ta2O5 from 63m				
								and 1m @ 1.2% Li2O and 136ppm Ta2O5 from 65m				
								71	74	3	0.5	4
								99	106	7	1.2	88
								incl. 5m @ 1.4% Li2O and 100ppm Ta2O5 from 100m				
								111	121	10	1.2	42
								incl. 4m @ 1.7% Li2O and 29ppm Ta2O5 from 113m				
								and 1m @ 1.8% Li2O and 36ppm Ta2O5 from 120m				
BDRC0083	Anna	414585	6451210	317	-60	47	160	91	92	1	0.8	13
								95	108	13	1.3	37
								incl. 8m @ 1.7% Li2O and 36ppm Ta2O5 from 97m				
								112	117	5	1.7	28
								incl. 4m @ 1.9% Li2O and 27ppm Ta2O5 from 112m				
								123	128	5	1.2	41
								incl. 4m @ 1.5% Li2O and 49ppm Ta2O5 from 124m				
BDRC0084	Anna	414555	6451180	321	-58	46	178	75	84	9	1.1	57
								incl. 3m @ 2.1% Li2O and 67ppm Ta2O5 from 78m				
								86	90	4	0.8	60
								incl. 1m @ 1.5% Li2O and 68ppm Ta2O5 from 87m				
								104	107	3	0.8	60
								incl. 1m @ 1.6% Li2O and 61ppm Ta2O5 from 104m				
								110	115	5	0.5	11
								118	132	14	0.6	20
								incl. 1m @ 1.5% Li2O and 17ppm Ta2O5 from 121m				
BDRC0085	Anna	414615	6451241	317	-56	50	120	136	138	2	0.7	22
BDRC0086	Anna	414627	6451181	311	-61	47	154	82	84	2	0.5	59
								80	81	1	0.5	50
								89	90	1	1	28
								104	106	2	0.8	28
								113	123	10	1.6	75
								incl. 4m @ 2.1% Li2O and 26ppm Ta2O5 from 118m				
BDRC0087	Anna	414662	6451145	310	-59	45	172	88	91	3	0.6	49
								96	97	1	1.3	44
								103	109	6	0.8	32
								incl. 2m @ 1.6% Li2O and 40ppm Ta2O5 from 105m				
								119	123	4	1.4	41
								incl. 2m @ 1.9% Li2O and 43ppm Ta2O5 from 121m				
								131	133	2	1.2	41
								incl. 1m @ 1.5% Li2O and 36ppm Ta2O5 from 132m				
								139	147	8	1	40
								incl. 1m @ 1.3% Li2O and 46ppm Ta2O5 from 141m				
								and 1m @ 1.3% Li2O and 47ppm Ta2O5 from 143m				
								and 1m @ 1.2% Li2O and 32ppm Ta2O5 from 146m				
BDRC0088	Anna	414481	6451324	312	-58	46	124	37	40	3	0.6	3
								44	45	1	0.6	25
								47	48	1	0.9	55
								50	53	3	0.9	49
								incl. 1m @ 1.3% Li2O and 38ppm Ta2O5 from 52m				
								55	57	2	1	45
								59	65	6	0.8	25
								incl. 1m @ 1.9% Li2O and 48ppm Ta2O5 from 59m				
								incl. 1m @ 1.3% Li2O and 35ppm Ta2O5 from 62m				
								83	89	6	1.1	22
								incl. 2m @ 2% Li2O and 24ppm Ta2O5 from 84m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0089	Anna	414453	6451296	314	-58	46	142	22	28	6	1.2	84
								incl. 1m @ 1.5% Li2O and 77ppm Ta2O5 from 22m				
								and 2m @ 1.6% Li2O and 69ppm Ta2O5 from 26m				
								54	62	8	0.8	70
								incl. 2m @ 1.2% Li2O and 67ppm Ta2O5 from 59m				
								66	95	29	1.3	31
								incl. 9m @ 1.7% Li2O and 37ppm Ta2O5 from 74m				
								and 8m @ 1.8% Li2O and 28ppm Ta2O5 from 85m				
BDRC0090	Anna	414424	6451268	316	-60	45	186	9	48	39	1.6	35
								incl. 6m @ 2.1% Li2O and 37ppm Ta2O5 from 12m				
								and 13m @ 2.1% Li2O and 28ppm Ta2O5 from 21m				
								and 2m @ 1.9% Li2O and 28ppm Ta2O5 from 37m				
								68	70	2	0.6	1
								73	78	5	0.6	66
								incl. 1m @ 1.1% Li2O and 69ppm Ta2O5 from 73m				
								81	82	1	0.7	66
BDRC0091	Anna	414801	6451142	308	-89	57	160	85	87	2	0.5	0.5
								162	167	5	0.5	37
								117	121	4	1.5	46
BDRC0092	Anna	414884	6451084	305	-90	17	178	incl. 1m @ 1.9% Li2O and 58ppm Ta2O5 from 118m				
								and 1m @ 2.5% Li2O and 44ppm Ta2O5 from 120m				
BDRC0093	Anna	414970	6451035	303	-89	29	220	119	123	4	0.9	33
								incl. 2m @ 1.6% Li2O and 39ppm Ta2O5 from 121m				
								81	84	3	0.6	71
								99	110	11	1.4	43
								incl. 2m @ 2.1% Li2O and 44ppm Ta2O5 from 99m				
								and 1m @ 2.2% Li2O and 57ppm Ta2O5 from 103m				
								and 3m @ 2.0% Li2O and 36ppm Ta2O5 from 106m				
								137	142	5	0.5	46
BDRC0094	Anna	414775	6451115	309	-89	116	172	171	174	3	0.6	96
								195	197	2	1	32
								incl. 1m @ 1.5% Li2O and 27ppm Ta2O5 from 195m				
								100	104	4	0.6	21
								incl. 1m @ 1.1% Li2O and 45ppm Ta2O5 from 100m				
								106	110	4	1	45
								incl. 1m @ 1.7% Li2O and 45ppm Ta2O5 from 106m				
								124	136	12	1.2	46
BDRC0095	Anna	414055	6450968	302	-88	68	250	incl. 2m @ 1.8% Li2O and 48ppm Ta2O5 from 124m				
								and 4m @ 1.7% Li2O and 40ppm Ta2O5 from 131m				
								139	141	2	0.9	10
BDRC0096	Anna	414931	6450993	304	-89	195	226	151	157	6	0.6	37
								125	127	2	0.7	70
BDRC0106	Anna	414396	6451239	320	-60	50	208	130	144	14	1.7	28
								incl. 11m @ 2.0% Li2O and 28ppm Ta2O5 from 131m				
								No significant assays				
								105	107	2	0.9	69
								142	144	2	0.5	56
BDRC0107	Anna	414433	6451199	320	-60	48	220	147	149	2	0.5	95
								155	197	42	1.0	61
								incl. 14m @ 1.4% Li2O and 52ppm Ta2O5 from 173m				
								108	117	9	0.5	65
								121	123	2	0.7	47
								168	205	37	0.7	52
								incl. 14m @ 1.4% Li2O and 62ppm Ta2O5 from 184m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0108	Anna	414159	6451352	330	-60	48	172	94	101	7	0.8	142
								incl. 1m @ 1.8% Li2O and 125ppm Ta2O5 from 98m				
BDRC0109	Anna	414224	6451357	321	-66	47	160	117	128	11	0.6	43
								135	139	4	0.4	68
BDRC0110	Anna	414190	6451323	326	-58	47	160	113	120	7	0.7	59
								incl. 1m @ 1.3% Li2O and 110ppm Ta2O5 from 114m				
								and 1m @ 1.4% Li2O and 185ppm Ta2O5 from 117m				
BDRC0111	Anna	414252	6451308	329	-59	53	172	No significant assays				
BDRC0112	Anna	414294	6451281	330	-59	49	200	164	169	5	1.4	38
								incl. 4m @ 1.6% Li2O and 38ppm Ta2O5 from 165m				
BDRC0113	Anna	414314	6451228	324	-60	50	200	No significant assays				
BDRC0114	Anna	414572	6451480	307	-60	47	100					
BDRC0115	Anna	414509	6451352	312	-60	48	100	51	58	7	0.9	49
								incl. 1m @ 1.4% Li2O and 59ppm Ta2O5 from 51m				
								and 1m @ 1.5% Li2O and 23ppm Ta2O5 from 55m				
								60	65	5	0.4	34
BDRC0116	Anna	414579	6451341	309	-59	46	124	11	19	8	0.9	58
								incl. 3m @ 1.4% Li2O and 52ppm Ta2O5 from 13m				
BDRC0117	Anna	414376	6451143	324	-63	46	220	No significant assays				
BDRC0117A							300					
BDRC0118	Anna	414344	6451180	325	-62	43	200					
BDRC0118A							300					
BDRC0119	Anna	414610	6451303	310	-60	45	100	32	39	7	0.6	44
								incl. 1m @ 1.1% Li2O and 64ppm Ta2O5 from 37m				
BDRC0120	Anna	414470	6451166	319	-61	43	150	23	25	2	1	27
								62	74	12	0.7	38
								incl. 1m @ 2% Li2O and 61ppm Ta2O5 from 64m				
BDRC0121	Anna	414441	6451138	322	-62	45	160	No significant assays				
BDRC0122	Anna	414643	6451269	311	-61	43	100	42	48	6	0.4	42
BDRC0123	Anna	414533	6451159	317	-63	43	178	62	72	10	0.8	69
								incl. 4m @ 1.1% Li2O and 68ppm Ta2O5 from 66m				
								107	127	20	1.1	59
								incl. 14m @ 1.3% Li2O and 66ppm Ta2O5 from 108m				
								149	162	13	1	28
								incl. 5m @ 1.9% Li2O and 24ppm Ta2O5 from 152m				
								168	171	3	0.4	45
BDRC0124	Anna	414505	6451131	319	-63	43	214	53	57	4	0.4	51
								60	63	3	1.3	34
								65	71	6	1	38
								incl. 2m @ 1.3% Li2O and 25ppm Ta2O5 from 65m				
								74	88	14	0.6	59
								incl. 2m @ 1.6% Li2O and 48ppm Ta2O5 from 77m				
								174	193	19	0.7	44
								incl. 5m @ 1.2% Li2O and 49ppm Ta2O5 from 176m				
								196	205	9	0.6	48
								incl. 2m @ 1.4% Li2O and 128ppm Ta2O5 from 202m				
BDRC0125	Anna	414476	6451103	322	-61	46	142	No significant assays				
BDRC0126	Anna	415089	6451005	301	-89	55	250	138	153	15	1.1	26
								incl. 9m @ 1.5% Li2O and 25ppm Ta2O5 from 140m				
BDRC0127	Anna	414655	6451209	310	-60	48	124	86	91	5	0.8	26
								incl. 1m @ 1.4% Li2O and 30ppm Ta2O5 from 87m				
BDRC0128	Anna	415019	6450935	301	-89	206	250	202	205	3	0.6	34
								incl. 1m @ 1.2% Li2O and 33ppm Ta2O5 from 204m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0129	Anna	414599	6451153	313	-59	48	202	86	89	3	0.5	67
								incl. 1m @ 1% Li2O and 67ppm Ta2O5 from 88m				
								98	101	3	1.1	74
								incl. 2m @ 1.4% Li2O and 76ppm Ta2O5 from 98m				
								114	121	7	0.4	20
								136	155	19	0.9	21
								incl. 8m @ 1.6% Li2O and 19ppm Ta2O5 from 141m				
BDRC0130	Anna	414690	6451173	310	-59	43	150	171	173	2	0.7	67
								No significant assays				
BDRC0131	Anna	415125	6450899	301	-88	14	295	170	182	12	1.6	19
								incl. 9m @ 1.9% Li2O and 17ppm Ta2O5 from 171m				
								222	228	6	1.6	47
								incl. 4m @ 2% Li2O and 50ppm Ta2O5 from 223m				
								265	267	2	1.1	32
								incl. 1m @ 1.4% Li2O and 3ppm Ta2O5 from 223m				
BDRC0132	Anna	415160	6450935	301	-89	23	312	274	275	1	1.3	55
								156	157	1	1	28
								178	191	13	1	29
								incl. 6m @ 1.6% Li2O and 21ppm Ta2O5 from 180m				
BDRC0133	Anna	415089	6450864	301	-89	65	300	No significant assays				
BDRC0134	Anna	414447	6451074	325	-61	47	282					
BDRC0135	Anna	414572	6451123	316	-64	45	222	79	85	6	0.9	59
								incl. 1m @ 1.4% Li2O and 52ppm Ta2O5 from 80m				
								and 2m @ 1.3% Li2O and 56ppm Ta2O5 from 83m				
								114	137	23	1	54
								incl. 1m @ 1.6% Li2O and 53ppm Ta2O5 from 117m				
								and 6m @ 1.4% Li2O and 55ppm Ta2O5 from 124m				
								and 4m @ 1.4% Li2O and 61ppm Ta2O5 from 133m				
								156	173	17	0.8	45
BDRC0136	Anna	414542	6451092	319	-63	47	240	incl. 3m @ 1.6% Li2O and 23ppm Ta2O5 from 161m				
								and 3m @ 1.2% Li2O and 48ppm Ta2O5 from 168m				
								41	44	3	0.5	68
								46	48	2	1.3	48
								63	64	1	1.3	38
								80	86	6	1.4	53
								incl. 4m @ 1.8% Li2O and 40ppm Ta2O5 from 81m				
								89	92	3	0.7	50
BDRC0137	Anna	414512	6451062	315	-64	49	198	104	111	7	1.1	36
								incl. 1m @ 1.9% Li2O and 34ppm Ta2O5 from 105m				
								184	191	7	0.5	15
								incl. 1m @ 1.4% Li2O and 36ppm Ta2O5 from 189m				
								No significant assays				
								115	118	3	0.9	67
BDRC0138	Anna	414634	6451117	315	-55	48	186	150	15	9	1.1	39
								incl. 6m @ 1.4% Li2O and 35ppm Ta2O5 from 150m				
								100	105	5	1.2	64
BDRC0139	Anna	414607	6451088	316	-60	44	150	incl. 3m @ 1.6% Li2O and 60ppm Ta2O5 from 101m				
								123	126	3	0.8	76
								141	149	8	1	21
								incl. 3m @ 1.6% Li2O and 60ppm Ta2O5 from 101m				
BDRC0140	Anna	414579	6451058	316	-60	46	220	90	101	11	0.9	43
								incl. 1m @ 1.8% Li2O and 21ppm Ta2O5 from 93m				
								and 1m @ 1.4% Li2O and 36ppm Ta2O5 from 99m				
								116	121	5	0.5	38
								137	142	5	0.6	22
								150	155	5	0.8	54
								165	180	15	1.3	61
								incl. 10m @ 1.5% Li2O and 53ppm Ta2O5 from 169m				
								186	191	5	1.2	26
								incl. 3m @ 1.6% Li2O and 27ppm Ta2O5 from 186m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDR0141	Anna	414542	6451025	317	-61	41	240	No significant assays				
BDR0142	Anna	414829	6451170	307	-89	323	192					
BDR0143	Anna	414747	6451087	310	-88	238	150	Assays pending				
BDR0152	Anna	414714	6451050	312	-88	167	180					

True widths 80-100% downhole widths**Appendix 2 – Buldania/Anna – Diamond Core Drill hole statistics**

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDDD0001	Anna	414236	6451438	326	-60	43	195.8	35.16	46.08	10.92	1.2	82
								incl. 3m @ 2.3% Li2O and 125ppm Ta2O5 from 40m				
								76	90	14	1.2	82
								incl. 6m @ 1.7% Li2O and 55ppm Ta2O5 from 78m				
								97	100	3	1	73
								incl. 1m @ 1.4% Li2O and 35ppm Ta2O5 from 97m				
BDDD0002	Anna	414332	6451387	329	-60	43	159.6	24.56	29	4.44	0.7	69
								incl. 2.42m @ 1.0% Li2O and 54ppm Ta2O5 from 26.58m				
								31	37	6	0.6	79
								incl. 1m @ 1.2% Li2O and 78ppm Ta2O5 from 32m				
								63.79	72	8.21	0.9	56
								incl. 4m @ 1.5% Li2O and 52ppm Ta2O5 from 66m				
								78.9	88	9.1	1.1	59
								incl. 4.1m @ 1.7% Li2O and 61ppm Ta2O5 from 78.9m				
								and 1m @ 1.3% Li2O and 61ppm Ta2O5 from 87m				
								96	98	2	0.6	44
								101	103	2	2.2	57
								105	110	5	0.8	65
BDDD0003	Anna	414385	6451308	315	-59	44	193.1	incl. 1m @ 1.7% Li2O and 44ppm Ta2O5 from 105m				
								112	116	4	0.5	64
								3	6	3	0.5	45
								9	39	30	1.4	39
								incl. 9m @ 1.6% Li2O and 33ppm Ta2O5 from 9m				
								and 4m @ 1.9% Li2O and 35ppm Ta2O5 from 19m				
								and 3m @ 2.0% Li2O and 27ppm Ta2O5 from 26m				
								and 5m @ 1.6% Li2O and 43ppm Ta2O5 from 32m				
								42	44	2	0.4	57
								47	49	2	0.6	36
								77	83	6	1	82
								incl. 1m @ 1.8% Li2O and 35ppm Ta2O5 from 79m				
								85	95	10	0.8	80
								incl. 1m @ 1.4% Li2O and 51ppm Ta2O5 from 88m				
								and 2m @ 1.5% Li2O and 86ppm Ta2O5 from 90m				
								96	104	8	0.5	44
								140	164	24	1.1	49
								incl. 11m @ 1.5% Li2O and 48ppm Ta2O5 from 143m				
								and 1m @ 1.8% Li2O and 41ppm Ta2O5 from 155m				

True widths 80-100% downhole widths

Appendix 3 – Buldania/NW Pegmatites – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0097	NWP	410275	6454701	255	-61	270	80	14	16	2	0.7	64
BDRC0098	NWP	410297	6454704	255	-71	276	100	29	34	5	0.8	46
								incl. 1m @ 1.9% Li2O and 58ppm Ta2O5 from 32m				
								62	63	2	0.8	39
BDRC0099	NWP	410212	6454705	255	-61	92	100	6	23	17	0.9	82
								incl. 3m @ 1.3% Li2O and 71ppm Ta2O5 from 7m				
								and 1m @ 1.5% Li2O and 75ppm Ta2O5 from 17m				
BDRC0100	NWP	410175	6454703	254	-89	42	124	98	102	4	0.7	59
								incl. 1m @ 1.3% Li2O and 73ppm Ta2O5 from 101m				
								105	109	4	0.3	29
BDRC0101	NWP	410318	6454943	230	-62	273	80	22	28	6	0.7	46
								incl. 1m @ 1.2% Li2O and 61ppm Ta2O5 from 27m				
								42	44	2	0.3	37
BDRC0102	NWP	410358	6454943	233	-61	274	100	46	47	1	1.4	50
								No significant assays				
BDRC0103	NWP	410251	6454947	231	-61	91	100	17	28	11	0.8	37
								incl. 5m @ 1.2% Li2O and 45ppm Ta2O5 from 20m				
BDRC0104	NWP	410391	6455212	211	-61	270	80	50	61	11	1.0	40
								incl. 6m @ 1.5% Li2O and 43ppm Ta2O5 from 54m				
BDRC0105	NWP	410434	6455212	211	-60	269	94	Assays pending				
BDRC0144	NWP	410596	6454575	313	-61	268	60					
BDRC0145	NWP	410635	6454578	320	-62	271	100					
BDRC0146	NWP	410419	6454658	317	-61	270	114					
BDRC0147	NWP	409660	6455213	326	-61	273	80					
BDRC0148	NWP	409700	6455215	324	-62	272	108					
BDRC0149	NWP	408905	6455797	326	-56	271	80					
BDRC0150	NWP	408829	6455802	327	-54	271	80					
BDRC0151	NWP	408890	6456010	327	-59	268	80					

True widths ~90% downhole widths except BDRC0099 which was drilled subparallel to dip

Appendix 4 – Buldania – JORC Code 2012 Table 1 Criteria

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> Rock chip comprise representative 1-3kg chip samples collected across zone being sampled. Sub-surface samples have been collected by reverse circulation (RC) and diamond core drilling techniques (see below). Drill holes are oriented perpendicular to the interpreted strike of the mineralised trend except in rare occasions where limited access necessitates otherwise.
	<p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<ul style="list-style-type: none"> RC samples are collected by the metre from the drill rig cyclone as two 1 m cone split samples in calico bags and a bulk sample in plastic mining bags. The 1 m samples from the cyclone are retained for check analysis. Only samples of pegmatite and adjacent wall rock (~4 m) are collected for assay. HQ diamond core has been sampled in intervals of ~1 m where possible, otherwise intervals less than 1 m have been selected based on geological boundaries. Geological boundaries have not been crossed by sample intervals.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<p>Drilling techniques used comprise:</p> <ul style="list-style-type: none"> Reverse Circulation (RC/5.5”) with a face sampling hammer HQ Diamond Core, standard tube to a depth of ~200-250 m. HQ core was drilled directly from surface for all holes. Core orientation was provided by an ACT REFLEX (ACT II RD) tool.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	<ul style="list-style-type: none"> Sample recoveries are estimated for RC by correlating sample heights in the green mining bag to estimate a recovery for each metre. For diamond core the recovery is measured and recorded for every metre.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	<ul style="list-style-type: none"> RC drill collars are sealed to prevent sample loss and holes are normally drilled dry to prevent poor recoveries and contamination caused by water ingress. Wet intervals are noted in case of unusual results. For diamond core loss, core blocks have been inserted in sections where core loss has occurred. This has then been written on the block and recorded during the logging process and with detailed photography of dry and wet core.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	<ul style="list-style-type: none"> It has been demonstrated that no relationship exists between sample recovery and grade. No grade bias was observed with sample size variation.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	<ul style="list-style-type: none"> All RC drillholes are logged on 1 m intervals and the following observations recorded: <ul style="list-style-type: none"> Recovery, quality (i.e. degree of contamination), wet/dry, hardness, colour, grainsize, texture, mineralogy, lithology,

Criteria	JORC Code explanation	Commentary
		<p>structure type and intensity, pegmatite and vein type and %, lithium mineralogy and %, alteration assemblage, UV fluorescence.</p> <ul style="list-style-type: none"> Diamond core is logged in its entirety as per detailed geological description listed above. Geotechnical logging has been completed for the entire hole.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	<ul style="list-style-type: none"> Logging is quantitative, based on visual field estimates. Diamond core is photographed post metre marking, for the entire length of the hole, two trays at a time, wet and dry.
	<i>The total length and percentage of the relevant intersections logged.</i>	<ul style="list-style-type: none"> Holes are logged in their entirety.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	<ul style="list-style-type: none"> The core has been cut in half and then quartered for sample purposes. Half core has been retained and the second quarter will be used for metallurgical studies. Density measurements have been taken on all quarter core samples using the Archimedes method.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	<ul style="list-style-type: none"> RC samples are collected as rotary split samples. Samples are typically dry.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	<ul style="list-style-type: none"> Sample preparation follows industry best practice standards and is conducted by internationally recognised laboratories; i.e. <ul style="list-style-type: none"> Oven drying, jaw crushing and pulverising so that 80% passes -75 microns.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	<ul style="list-style-type: none"> Duplicates and blanks submitted approximately every 1/20 samples. Standards are submitted every 20 samples or at least once per hole. Cross laboratory checks and blind checks have been used at a rate of 5%.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	<ul style="list-style-type: none"> Measures taken include: <ul style="list-style-type: none"> regular cleaning of cyclones and sampling equipment to prevent contamination industry standard insertion of standards, blanks and duplicate samples Analysis of duplicates (field, laboratory and umpire) identified no issues with sampling representatively. Analysis of results from blanks and standards indicates a high level of accuracy and no issues with contamination (or sample mix-ups).
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	<ul style="list-style-type: none"> Sample size is considered appropriate for the stage of exploration
	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	<ul style="list-style-type: none"> Assaying completed by Nagrom laboratories Perth. Nagrom uses industry standard procedures for rare metals such as Li and Ta. Analytical techniques are total.
Quality of assay data and laboratory tests	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	<ul style="list-style-type: none"> None used.
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	<ul style="list-style-type: none"> Duplicates and blanks submitted approximately every 20 samples. Standards are submitted every 20 samples or at least once per hole.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> Cross laboratory checks and blind checks have been used at a rate of 5%. Analysis of reference blanks, standards and duplicate samples show the data to be of acceptable accuracy and precision for the Mineral Resource estimation and classification applied.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	<ul style="list-style-type: none"> Internal review by alternate company personnel.
	<i>The use of twinned holes.</i>	<ul style="list-style-type: none"> Three diamond holes are twins of existing RC drill holes. Assays compare well with the adjacent RC drill holes.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	<ul style="list-style-type: none"> Drilling and logging data is entered directly into Microsoft Excel spreadsheets onsite while drilling is ongoing. Data is then entered into Access Database and validated before being processed by industry standard software packages such as MapInfo and Micromine. Representative chip samples are collected for later reference.
	<i>Discuss any adjustment to assay data.</i>	<ul style="list-style-type: none"> Li% is converted to Li₂O% by multiplying by 2.15, Ta ppm is converted to Ta₂O₅ ppm by multiplying by 1.22.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	<ul style="list-style-type: none"> All drillholes are initially located using a handheld GPS and subsequently surveyed with DGPS. All RC drillholes have been surveyed by a multi-shot digital downhole camera provided by the drilling contractor. All diamond drillholes have been surveyed with a REFLEX EZI-SHOT (1001) magnetic single shot camera.
	<i>Specification of the grid system used.</i>	<ul style="list-style-type: none"> GDA 94 Zone 51
	<i>Quality and adequacy of topographic control.</i>	<ul style="list-style-type: none"> Initial collar elevations are based on regional topographic dataset and GPS. Drill hole collars are surveyed post drilling with DGPS.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	<ul style="list-style-type: none"> Varies due to initial drill programmes largely designed to test the strike and dip potential of mineralised outcrops. The drill section spacing is 50m to 100m and on-section spacing is generally 40 to 50m.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	<ul style="list-style-type: none"> Geological modelling in progress to determine whether drill hole spacing and distribution is adequate for Mineral Resource estimation.
	<i>Whether sample compositing has been applied.</i>	<ul style="list-style-type: none"> None undertaken.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	<ul style="list-style-type: none"> Drilling is typically oriented perpendicular to the interpreted strike of mineralisation.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	<ul style="list-style-type: none"> Drilling orientation intersects the mineralisation at appropriate angles so as to be mostly unbiased and suitable for resource estimation of the major pegmatite bodies.

Criteria	JORC Code explanation	Commentary
Sample security	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> Sample security is not considered to be a significant risk given the location of the deposit and bulk-nature of mineralisation. Nevertheless, the use of recognised transport providers, sample dispatch procedures directly from the field to the laboratory, and the large number of samples are considered sufficient to ensure appropriate sample security. Company geologist supervises all sampling and subsequent storage in field. The same geologist arranges delivery of samples to Nagrom laboratories in Perth via courier.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> None completed

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	<p>The Buldania Project is located ~600km east of Perth and 30-40km ENE of Norseman in Western Australia. The Project area totals ~67km² and comprises 1 granted exploration licence (EL 63/856), 1 granted prospecting license (PL63/1977) and 1 granted mining lease (M63/647) – the “Tenements”.</p> <p>The Tenements are held by Avoca Resources Pty Ltd which is a wholly owned subsidiary of RNC Minerals Ltd. RNC Minerals acquired Avoca Resources Pty Ltd from Westgold Resources Ltd in 2019</p> <p>Liontown Resources Limited through its wholly owned subsidiary, LRL (Aust) Pty Ltd, acquired the lithium and related metal rights for the Buldania Project in late 2017 by agreeing to:</p> <ul style="list-style-type: none"> Issue 10,000,000 Liontown shares to Westgold (completed); paying ongoing statutory rents and rates for the Tenements while the Agreement is current; and paying Avoca \$2 per tonne of ore mined and 1.5% of the gross sales receipts in respect to any lithium or related metals extracted from the Tenements. <p>Avoca retains the rights to all other metals (excluding lithium and related metals) and has priority access for exploration.</p> <p>The Tenements are covered by the Ngadju Determined Native Title Claim (WCD2014/004). Avoca has an Access Agreement with the Ngadju which will apply to Liontown’s exploration activities.</p>
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	All tenements are in good standing.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Multiple phases of exploration completed for gold and nickel. This has not been reviewed in detail due to

Criteria	JORC Code explanation	Commentary
		<p>Liontown only having the rights to lithium and related metals.</p> <p>There has been no previous exploration for lithium and related metals; however, past explorers have mapped large pegmatite bodies and recorded spodumene mineralisation in a number of places.</p>
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	<p>The Buldania Project contains a series of quartz-feldspar-muscovite-spodumene pegmatites largely hosted in mafic rocks. The Project is located at the southern end of the Norseman- Wiluna Belt within the Archaean Yilgarn Craton close to the boundary with the Proterozoic Albany Fraser Province.</p> <p>The pegmatites are interpreted to be LCT type lithium bearing-pegmatites.</p>
Drillhole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i></p> <ul style="list-style-type: none"> • easting and northing of the drillhole collar • elevation or RL (elevation above sea level in metres) of the drillhole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. 	See Appendix in accompanying report.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	<p>Li₂O intercepts calculated using 0.3% cut off with a maximum 2m internal dilution. Higher grade intervals calculated using 1.0% cut off. No upper cuts applied.</p> <p>Ta₂O₅ values only quoted when lithium intersections reported.</p>
Relationship between mineralisation widths and intercept lengths	<p><i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	For true widths please refer to appendices in accompanying report.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	See figures in accompanying report
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All recent exploration results reported and tabulated.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	All meaningful and material data reported
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	<ul style="list-style-type: none"> • Complete resource definition drilling at Anna; and • Initial drill testing of NW Pegmatite area.