

Liontown on track for maiden Resource at Buldania following receipt of further high-grade lithium assays

Geological modelling well advanced with maiden Mineral Resource Estimate due November 2019

HIGHLIGHTS

- Latest intersections from recently completed RC drill program include:

14m @ 1.7% Li₂O from 45m (BDRC0142), including:

- 2m @ 2.6% Li₂O from 48m and
- 5m @ 2.2% Li₂O from 54m

12m @ 1.5% Li₂O from 77m (BDR0155), including:

- 4m @ 1.9% Li₂O from 79m

19m @ 1.5% Li₂O from 174m (BDRC0160), including:

- 5m @ 1.9% Li₂O from 183m

9m @ 1.4% Li₂O from 122m (BDRC0162), including:

- 4m @ 2.1% Li₂O from 126m

10m @ 1.0% Li₂O from 129m (BDRC0163), including:

- 2m @ 2.2% Li₂O from 136m

9m @ 1.1% Li₂O from 199m (BDRC0168), including:

- 6m @ 1.4% Li₂O from 199m

(True widths 80-100% of down-hole widths listed above)

- >1.4km long mineralised zone remains open both along strike and at depth.
- New data will be incorporated into the preparation of a maiden Mineral Resource Estimate (MRE) due in November 2019.
- The new intersections build on the strong results reported previously, which included:

30m @ 1.4% Li₂O from 9m (BDDD0003), including:

- 9m @ 1.6% Li₂O from 9m

58m @ 1.2% Li₂O from 39m (BDRC0015), including:

- 16m @ 1.7% Li₂O from 44m

35m @ 1.2% from 35m (BDRC0056), including:

- 18m @ 1.7% Li₂O from 51m

39m @ 1.6% Li₂O from 9m (BDRC0090), including:

- 13m @ 2.1% Li₂O from 21m

25m @ 1.1% Li₂O from 181m (BDRC0120), including:

- 9m @ 1.8% Li₂O from 196m

(See ASX releases dated 26th March 2018, 19th September 2018, 1st November 2018, 20th November 2018, 22nd July 2019 and 29th July 2019)

Liontown Resources Limited (ASX: LTR) is pleased to advise that it has received all final assay results from the recently completed Reverse Circulation (RC) resource drilling program at its 100%-owned **Buldanía Lithium Project** in WA's Norseman region (**Figure 1**).

Buldanía is Liontown's second WA lithium project, which is being advanced alongside its flagship Kathleen Valley Project where the Company has recently resumed drilling to grow the existing Mineral Resource (ASX Release, 27th August 2019), currently Australia's 5th largest hard rock lithium deposit.

Since drilling re-commenced at Buldanía in May 2019, 72 additional RC holes have been drilled for 12,613m, with drilling at the Project now totalling 168 RC holes for 23,622m and three diamond core holes for 548.5m.

Drilling has returned significant lithium results at the main Anna prospect over an extended strike length of 1.4km, averaging 150 – 250m in width, in a NW/SE orientation (**Figure 2**).

Recent modelling indicates that the mineralisation is hosted by multiple, stacked, shallow south-east dipping (10-15°), 5 – 25m thick, spodumene-bearing pegmatites which locally merge to form zones >50m thick (**Figure 3**).

Mineralisation remains open along strike, down-dip and, in places, up-dip.

Geological modelling is well advanced and data from all holes completed at Anna will be used to prepare a maiden Mineral Resource Estimate (MRE), which is scheduled for completion in November 2019.

Assays have also been received for all 17 RC holes (BDR0097-0105, BDR0144-0151) drilled into the NW Pegmatite target area, located 5-10km north-west of Anna (**Figure 1**). Assays from this area have confirmed the potential for significant lithium mineralisation, with better intersections including **5m @ 1.2% Li₂O** from 20m in BDR0104 and **6m @ 1.5% Li₂O** from 54m in BDR0105.

Preliminary Metallurgical Test Work

A programme of scoping test work has been completed on ~300kg of mineralised sample collected from three exploration core holes (BDD0001-0003/Appendix 2) drilled in to the north-western, outcropping part of the Anna pegmatite in 2018. The test work was completed at Nagrom Laboratory and supervised by Lycopodium Minerals Pty Ltd.

Comminution testing showed moderate competency, SAG specific energy and abrasion index typical of spodumene-bearing pegmatites. Dense media and flotation test work on shallower samples showed a combined concentrate grade of 6% Li₂O at an estimated recovery of 60%. Further work is required on the deeper pegmatites. This work was preliminary in nature and further testwork and optimisation of the flowsheet is required once representative drill core is available. .

Liontown's Managing Director, David Richards, said the recent RC drilling program had confirmed the quality and potential of the Buldanía Project while generating the data we need to underpin the estimation of a maiden Mineral Resource.

"Buldanía continues to emerge as an attractive asset in an excellent location which complements our flagship project at Kathleen Valley. We are also pleased with the positive initial results from preliminary metallurgical test work, although further drilling will be required to undertake a more comprehensive assessment of processing requirements."

"In the meantime, Resource extension drilling is well underway at Kathleen Valley and we look forward to reporting further results in due course."

A handwritten signature in black ink, appearing to read "David Richards".

DAVID RICHARDS
Managing Director
17th September 2019

The Information in this report that relates to Exploration Results is based on and fairly represents information and supporting documentation prepared by Mr David Richards, who is a Competent Person and a member of the Australasian Institute of Geoscientists (AIG). Mr Richards is a full-time employee of the company and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Richards consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The Information in this report that relates to metallurgical test work for the Buldania Project has been reviewed by Mr Aidan Ryan who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Ryan is an employee of Lycopodium Minerals Pty Ltd and has sufficient experience relevant to the style of processing response and type of deposit under consideration, and to the activities undertaken, to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Ryan consents to the inclusion in the report of a summary based upon his information in the form and context in which it appears.

This announcement contains forward-looking statements which involve a number of risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialise, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

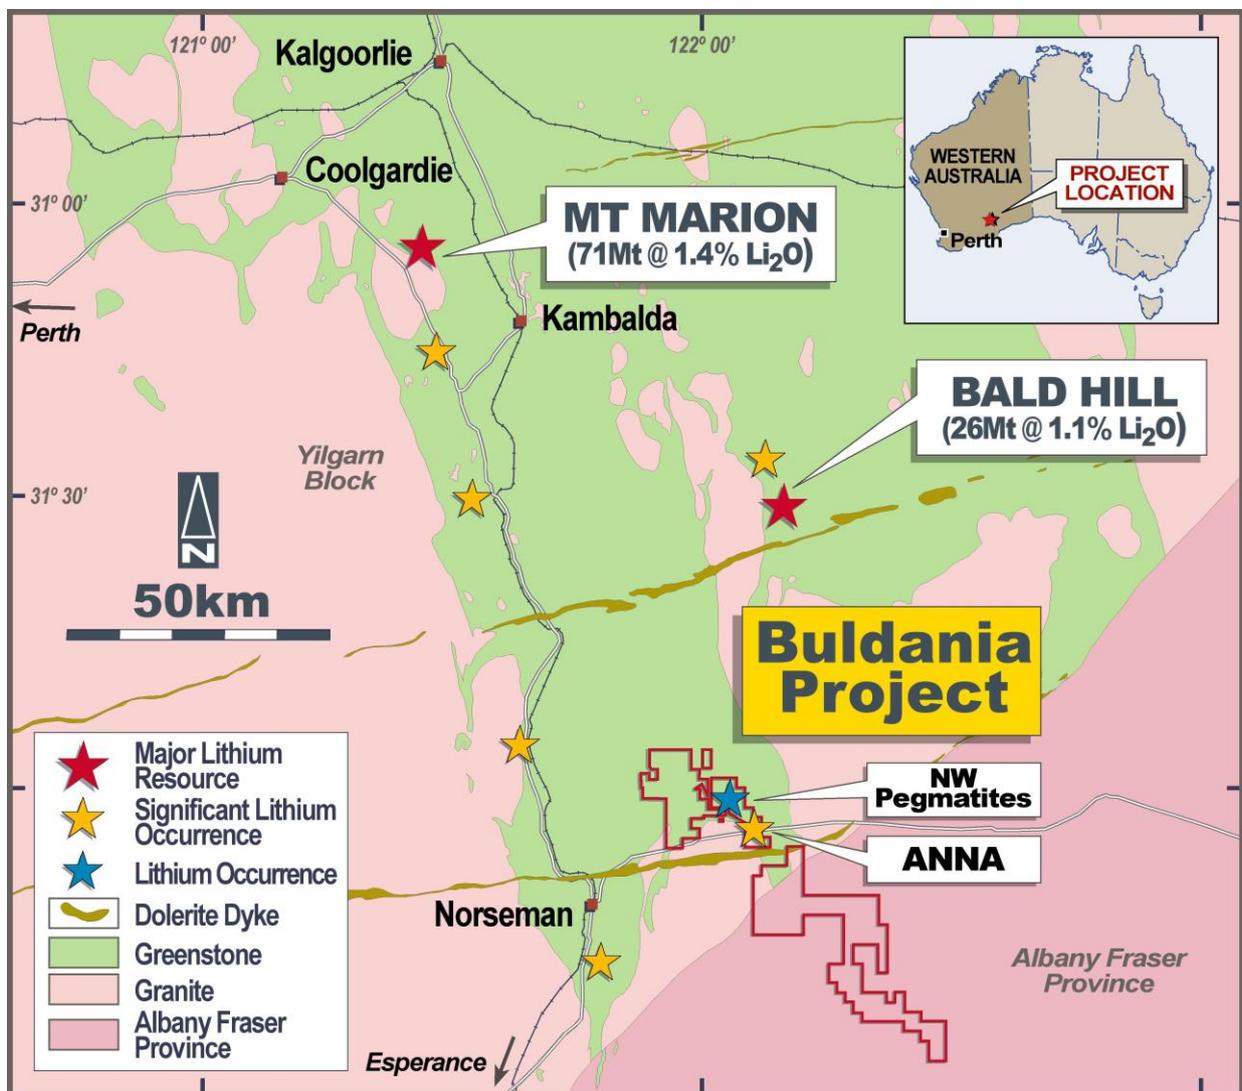


Figure 1: Buldania Project – Location plan, regional geology and lithium occurrences.

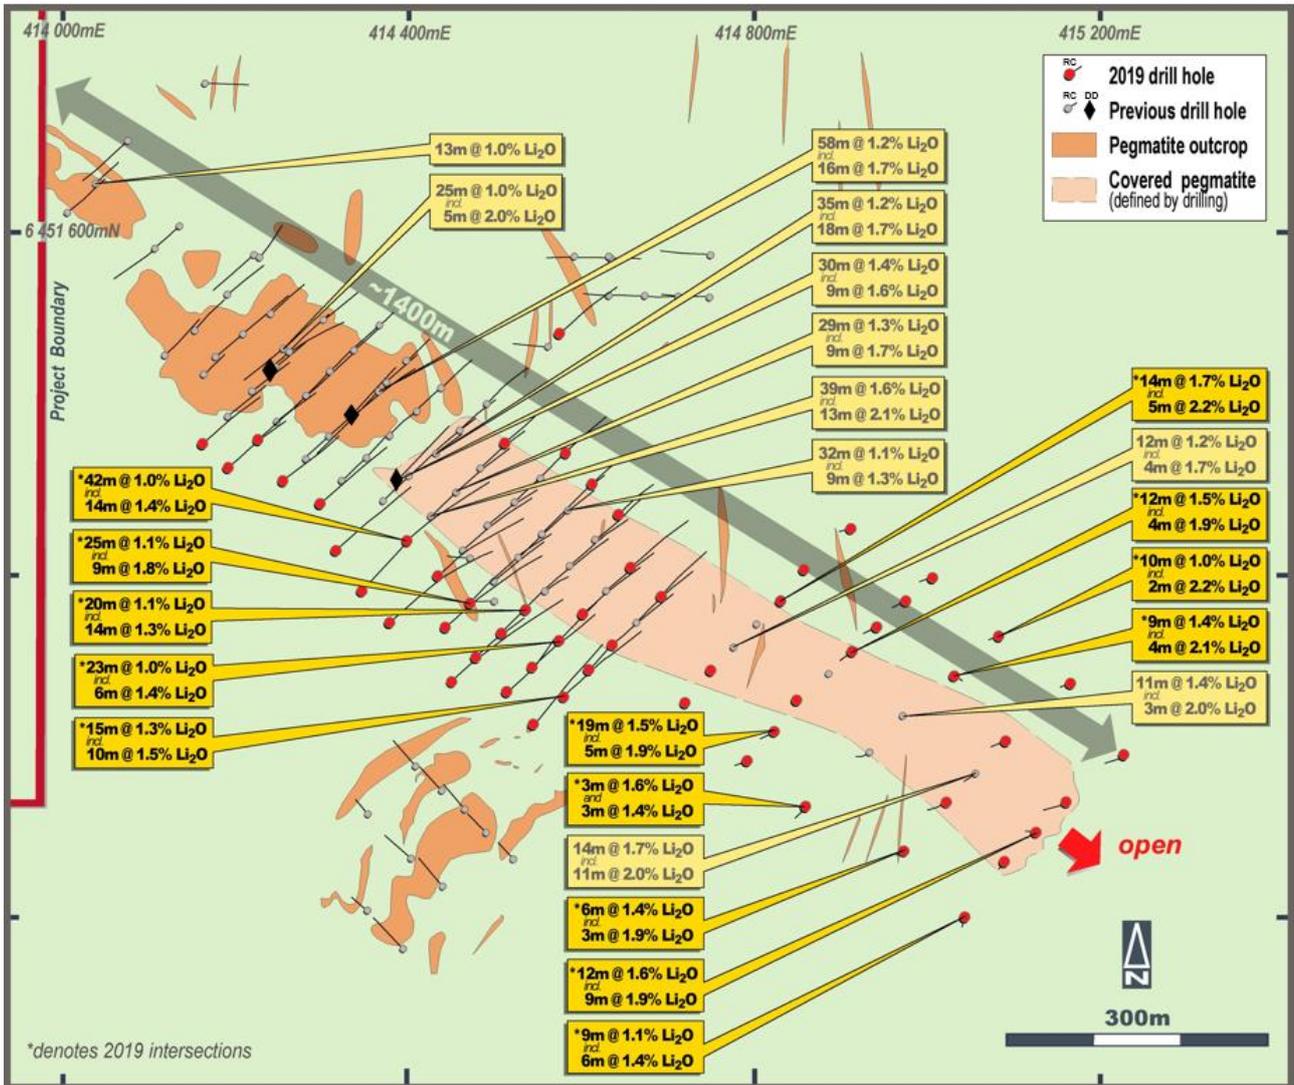


Figure 2: Anna Pegmatite – Drill hole plan showing better lithium intersections.

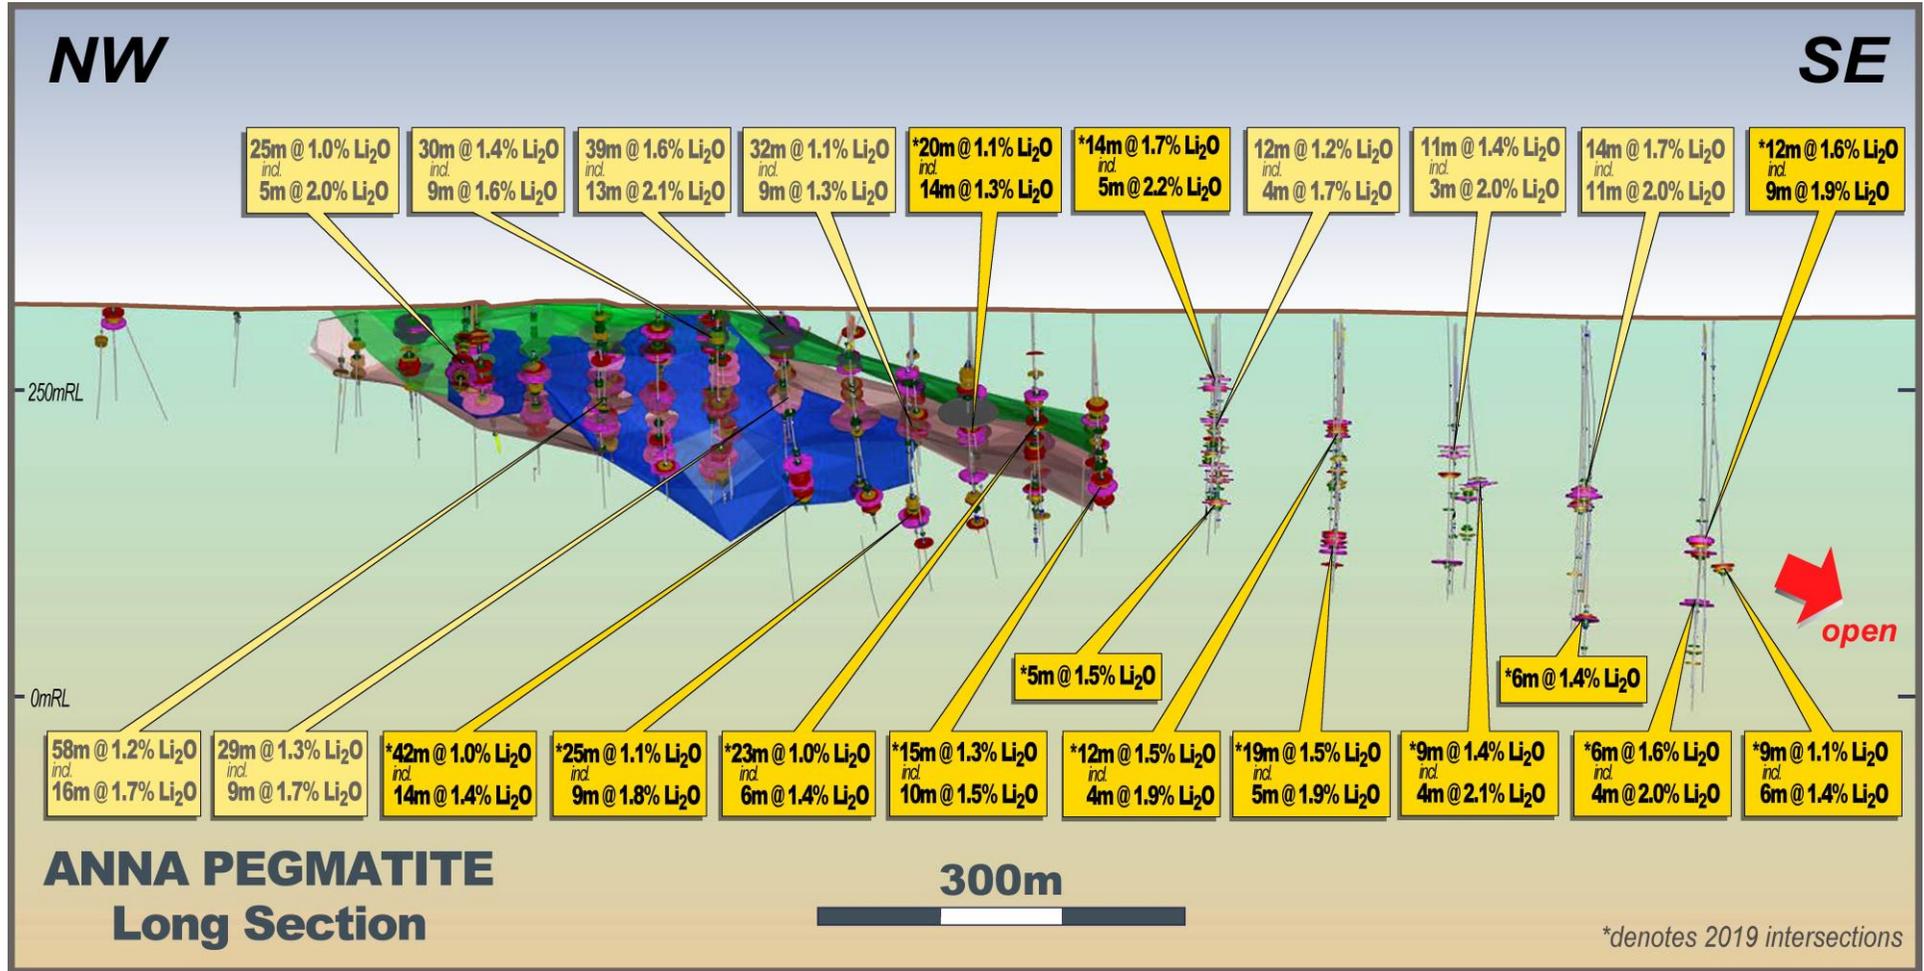


Figure 3: Anna Pegmatite – Long section looking northeast showing better lithium intersections.

Appendix 1 – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results							
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)			
BDR0003	Anna	414218	6451415	327	-59	52	100	28	44	16	1.2	81	incl. 9m @ 1.4% Li2O and 106ppm Ta2O5 from 30m and 2m @ 1.5% Li2O and 40ppm Ta2O5 from 41m		
								62	66	4	1.1	233	incl. 1m @ 2% Li2O and 347ppm Ta2O5 from 63m		
								75	78	3	1.9	132			
								97	100	3	1.8	82			
								22	25	3	0.6	7			
								29	30	1	0.5	38			
								32	37	5	0.9	45			
BDR0004	Anna	414244	6451442	327	-60	51	100	incl. 2m @ 1.2% Li2O and 43ppm Ta2O5 from 33m							
								39	42	3	1.1	64			
								70	82	12	1.2	65	incl. 8m @ 1.6% Li2O and 60ppm Ta2O5 from 72m		
								95	100	5	0.6	59	incl. 1m @ 1.4% Li2O and 48ppm Ta2O5 from 98m		
								84	87	3	0.1	192			
								7	9	2	1	36			
								16	41	25	1.2	48	incl. 11m @ 1.8% Li2O and 42ppm Ta2O5 from 21m		
BDR0012	Anna	414259	6451464	327	-59	57	140	51	61	10	1	53	incl. 2m @ 2% Li2O and 51ppm Ta2O5 from 53m		
								79	84	5	0.7	38			
								86	88	2	1	73			
								99	107	8	0.9	38			
								incl. 2m @ 1.5% Li2O and 33ppm Ta2O5 from 99m							
								incl. 1m @ 1.7% Li2O and 66ppm Ta2O5 from 103m							
								109	11	2	0.5	15			
								1	6	5	1.2	64	incl. 2m @ 2.3% Li2O and 45ppm Ta2O5 from 1m		
BDR0013	Anna	414301	6451497	320	-58	54	100	46	48	2	1.3	64			
								13	32	19	0.7	174	incl. 2m @ 1.3% Li2O and 219ppm Ta2O5 from 16m		
BDR0014	Anna	414306	6451362	329	-58	50	166	35	37	2	1.1	34			
								39	45	6	0.4	69			
								60	63	3	1.3	111			
								incl. 2m @ 1.6% Li2O and 91ppm Ta2O5 from 60m							
								84	98	14	0.9	68	incl. 4m @ 1.6% Li2O and 81ppm Ta2O5 from 85m		
								114	116	2	1.2	61	incl. 1m @ 1.9% Li2O and 95ppm Ta2O5 from 115m		
								124	154	30	0.8	46	incl. 5m @ 1.5% Li2O and 65ppm Ta2O5 from 128m and 1m @ 1.5% Li2O and 38ppm Ta2O5 from 144m and 1m @ 1.3% Li2O and 61ppm Ta2O5 from 148m		
								7	13	6	0.9	52	incl. 3m @ 1.2% Li2O and 36ppm Ta2O5 from 8m		
								15	17	2	0.6	1			
								23	24	1	0.5	1			
BDR0015	Anna	414347	6451390	329	-58	56	130	39	97	58	1.2	36	incl. 3m @ 1.8% Li2O and 25ppm Ta2O5 from 39m and 16m @ 1.7% Li2O and 32ppm Ta2O5 from 44m and 8m @ 1.5% Li2O and 35ppm Ta2O5 from 70m and 1m @ 1.9% Li2O and 40ppm Ta2O5 from 81m and 3m @ 2% Li2O and 31ppm Ta2O5 from 93m		
								incl. 3m @ 1.2% Li2O and 36ppm Ta2O5 from 8m							
								incl. 3m @ 1.8% Li2O and 25ppm Ta2O5 from 39m and 16m @ 1.7% Li2O and 32ppm Ta2O5 from 44m and 8m @ 1.5% Li2O and 35ppm Ta2O5 from 70m and 1m @ 1.9% Li2O and 40ppm Ta2O5 from 81m and 3m @ 2% Li2O and 31ppm Ta2O5 from 93m							
								incl. 3m @ 1.2% Li2O and 36ppm Ta2O5 from 8m							
								incl. 3m @ 1.8% Li2O and 25ppm Ta2O5 from 39m and 16m @ 1.7% Li2O and 32ppm Ta2O5 from 44m and 8m @ 1.5% Li2O and 35ppm Ta2O5 from 70m and 1m @ 1.9% Li2O and 40ppm Ta2O5 from 81m and 3m @ 2% Li2O and 31ppm Ta2O5 from 93m							
								incl. 3m @ 1.2% Li2O and 36ppm Ta2O5 from 8m							
								incl. 3m @ 1.8% Li2O and 25ppm Ta2O5 from 39m and 16m @ 1.7% Li2O and 32ppm Ta2O5 from 44m and 8m @ 1.5% Li2O and 35ppm Ta2O5 from 70m and 1m @ 1.9% Li2O and 40ppm Ta2O5 from 81m and 3m @ 2% Li2O and 31ppm Ta2O5 from 93m							

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0016	Anna	414373	6451427	322	-58	47	104	6	42	36	1	34
								incl. 3m @ 2% Li2O and 31ppm Ta2O5 from 12m and 6m @ 1.7% Li2O and 33ppm Ta2O5 from 29m and 1m @ 1.8% Li2O and 19ppm Ta2O5 from 40m				
								60	61	1	0.6	17
								82	83	1	1.7	52
								0	3	3	0.7	54
BDRC0017	Anna	414398	6451451	322	-59	47	70	18	33	15	1.2	44
								incl. 4m @ 2.1% Li2O and 35ppm Ta2O5 from 19m and 3m @ 1.5% Li2O and 33ppm Ta2O5 from 26m and 1m @ 1.5% Li2O and 61ppm Ta2O5 from 31m				
								54	56	2	1.1	87
								16	21	5	0.7	54
								23	35	12	0.8	69
BDRC0018	Anna	414150	6451480	320	-60	44	100	incl. 3m @ 1.3% Li2O and 76ppm Ta2O5 from 24m and 1m @ 1.3% Li2O and 96ppm Ta2O5 from 32m				
								42	45	3	0.5	42
								30	33	3	0.8	74
BDRC0019	Anna	414190	6451528	320	-59	49	100	42	50	8	0.7	49
								incl. 2m @ 1.2% Li2O and 46ppm Ta2O5 from 43m				
								55	61	6	0.7	62
								58	59	1	1.3	38
BDRC0020	Anna	414005	6451623	330	-55	49	100	No significant assays				
BDRC0021	Anna	414035	6451658	329	-53	230	70	9	22	13	1	92
								incl. 1m @ 1.8% Li2O and 89ppm Ta2O5 from 10m incl. 3m @ 1.3% Li2O and 121ppm Ta2O5 from 14m incl. 2m @ 1.8% Li2O and 65ppm Ta2O5 from 20m				
								33	39	6	0.7	43
BDRC0022	Anna	414074	6451708	323	-53	230	117	33	39	6	0.7	43
BDRC0023	Anna	414226	6451571	314	-62	37	100	No significant assays				
BDRC0024	Anna	414255	6451464	321	-58	236	110	14	17	3	0.7	42
								26	46	20	0.8	61
								incl. 5m @ 1.4% Li2O and 101ppm Ta2O5 from 30m				
								51	53	2	1.7	158
								61	70	9	1.5	62
								incl. 7m @ 1.8% Li2O and 62ppm Ta2O5 from 61m				
BDRC0025	Anna	414366	6451414	323	-45	227	148	73	79	6	1	51
								incl. 2m @ 1.3% Li2O and 91ppm Ta2O5 from 73m				
BDRC0036	Anna	414117	6451457	337	-58	46	112	33	36	3	0.6	1
								No significant assays				
BDRC0037	Anna	414281	6451336	329	-60	47	200	110	115	5	0.7	92
								18	22	4	0	173
								39	43	4	0.6	18
								43	50	7	0	187
								49	55	6	1	47
								76	86	10	0	175
								81	83	2	0.6	278
								85	99	2	0.6	99
								98	111	13	0.8	76
								incl. 2m @ 1.8% Li2O and 28ppm Ta2O5 from 106m				
								119	123	4	1.7	64
incl. 3m @ 2.1% Li2O and 62ppm Ta2O5 from 120m												
143	147	4	0.6	28								

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results									
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)					
BDR0038	Anna	414366	6451492	316	-61	46	60	0	6	6	1.4	28	incl. 4m @ 1.9% Li2O and 28ppm Ta2O5 from 1m				
BDR0039	Anna	414336	6451463	320	-60	47	100	0	14	14	0.6	34	63	65	2	0.7	123
BDR0040	Anna	414308	6451438	324	-61	45	120	8	49	41	1	32	incl. 7m @ 1.8% Li2O and 41ppm Ta2O5 from 19m				
								and 14m @ 1.4% Li2O and 43ppm Ta2O5 from 27m									
								52	57	5	0.6	31	62	66	4	0.5	35
								77	87	10	0.6	42	12	18	6	0.6	11
								58	62	4	0.7	44					
BDR0041	Anna	414281	6451410	327	-60	48	160	64	66	2	0.8	38	69	72	3	0.8	92
								88	115	27	1.2	45	incl. 13m @ 1.5% Li2O and 39ppm Ta2O5 from 95m				
								111	115	4	1.5	66	53	56	3	0.2	271
								67	93	26	1	49	incl. 6m @ 1.5% Li2O and 44ppm Ta2O5 from 67m				
								and 5m @ 1.4% Li2O and 60ppm Ta2O5 from 75m									
BDR0042	Anna	414247	6451379	326	-58	49	160	102	121	19	1.2	69	incl. 4m @ 1.7% Li2O and 61ppm Ta2O5 from 106m				
								and 2m @ 2.5% Li2O and 34ppm Ta2O5 from 112m									
								and 4m @ 1.5% Li2O and 54ppm Ta2O5 from 117m									
								18	130	2	1.1	29	incl. 1m @ 1.7% Li2O and 38ppm Ta2O5 from 129m				
								10	18	8	1	37	incl. 4m @ 1.5% Li2O and 45ppm Ta2O5 from 10m				
								36	47	11	0.9	30	incl. 1m @ 1.5% Li2O and 24ppm Ta2O5 from 37m				
BDR0043	Anna	414438	6451418	322	-61	47	100	and 1m @ 1.8% Li2O and 39ppm Ta2O5 from 43m									
								No significant assays									
BDR0047	Anna	414747	6451574	303	-61	273	118										
BDR0048	Anna	414710	6451525	303	-59	270	118										
BDR0049	Anna	414413	6451393	322	-59	45	100	19	39	20	0.7	35	incl. 4m @ 1.3% Li2O and 42ppm Ta2O5 from 26m				
								and 1m @ 1.6% Li2O and 24ppm Ta2O5 from 35m									
								45	50	5	0.9	41	17	29	12	1.1	57
BDR0050	Anna	414378	6451363	328	-60	47	136	incl. 6m @ 1.5% Li2O and 63ppm Ta2O5 from 17m									
								and 2m @ 1.2% Li2O and 43ppm Ta2O5 from 26m									
								35	39	4	0.5	5	54	58	4	0.4	49
								66	72	6	0.6	49	83	92	9	0.8	27
								incl. 1m @ 1.5% Li2O and 22ppm Ta2O5 from 84m									
								and 2m @ 1.2% Li2O and 32ppm Ta2O5 from 87m									
								96	109	13	1.3	40	incl. 8m @ 1.7% Li2O and 33ppm Ta2O5 from 100m				
								22	32	10	1.3	33	incl. 4m @ 1.7% Li2O and 27ppm Ta2O5 from 22m				
and 3m @ 1.5% Li2O and 36ppm Ta2O5 from 28m																	
BDR0051	Anna	414351	6451339	329	-60	44	178	38	41	3	0.8	44	43	52	9	1.2	35
								incl. 2m @ 2.4% Li2O and 19ppm Ta2O5 from 43m									
								78	92	14	1.3	64	incl. 10m @ 1.6% Li2O and 61ppm Ta2O5 from 78m				
								112	115	3	0.6	4	123	140	17	1.1	52
								incl. 6m @ 1.6% Li2O and 51ppm Ta2O5 from 124m									
								and 2m @ 1.4% Li2O and 35ppm Ta2O5 from 138m									

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results									
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)					
BDR0052	Anna	414322	6451310	330	-59	47	180	32	36	4	0.6	38					
								99	107	8	1.4	54					
								incl. 3m @ 2.1% Li2O and 34ppm Ta2O5 from 99m					and 2m @ 1.8% Li2O and 77ppm Ta2O5 from 104m				
								137	138	1	1.7	46					
								146	155	9	1.8	53					
								158	169	9	0.8	49					
BDR0053	Anna	414106	6451580	320	-56	231	100	No significant assays									
BDR0054	Anna	414460	6451370	319	-61	49	118	16	20	4	0.8	1					
								24	37	13	1.3	51					
								incl. 3m @ 1.6% Li2O and 55ppm Ta2O5 from 24m					and 6m @ 1.5% Li2O and 49ppm Ta2O5 from 28m				
								59	68	9	1	37					
								incl. 5m @ 1.3% Li2O and 54ppm Ta2O5 from 62m									
								94	98	4	1.3	54					
BDR0055	Anna	414488	6451399	318	-58	45	112	22	25	3	1.6	48					
								incl. 2m @ 2% Li2O and 38ppm Ta2O5 from 22m									
BDR0056	Anna	414432	6451342	325	-58	48	118	35	70	35	1.2	40					
								incl. 5m @ 1.6% Li2O and 63ppm Ta2O5 from 42m					and 18m @ 1.7% Li2O and 33ppm Ta2O5 from 51m				
								103	105	2	0.9	65					
								1	10	9	0.8	72					
BDR0057	Anna	414401	6451311	326	-58	50	153	incl. 2m @ 1.7% Li2O and 44ppm Ta2O5 from 6m									
								46	48	2	1.2	65					
								incl. 1m @ 1.5% Li2O and 38ppm Ta2O5 from 47m									
								51	53	2	0.6	3					
								75	101	26	1	39					
								incl. 9m @ 1.8% Li2O and 41ppm Ta2O5 from 83m									
								108	113	5	0.7	41					
								117	125	8	1.3	41					
								incl. 4m @ 1.8% Li2O and 47ppm Ta2O5 from 118m									
								127	128	1	1	42					
BDR0058	Anna	414371	6451284	326	-60	45	190	22	23	1	0.9	55					
								28	36	8	0.8	64					
								incl. 1m @ 1.3% Li2O and 72ppm Ta2O5 from 28m					and 2m @ 1.3% Li2O and 72ppm Ta2O5 from 31m				
								92	104	12	1.1	64					
								incl. 6m @ 1.5% Li2O and 47ppm Ta2O5 from 92m					and 1m @ 1.8% Li2O and 85ppm Ta2O5 from 102m				
								136	159	23	1.4	54					
								incl. 18m @ 1.5% Li2O and 57ppm Ta2O5 from 137m									
								162	163	1	1.1	17					
								168	171	3	0.8	83					
								BDR0059	Anna	414549	6451317	314	-58	44	118	No significant assays	
BDR0060	Anna	414521	6451288	316	-57	45	136	44	45	1	1.1	89					
								55	56	1	1.1	74					
								63	84	21	1	43					
								incl. 2m @ 1.6% Li2O and 61ppm Ta2O5 from 67m					and 5m @ 1.7% Li2O and 29ppm Ta2O5 from 76m				
								88	95	7	0.7	37					
								incl. 1m @ 1.5% Li2O and 66ppm Ta2O5 from 92m									
BDR0061	Anna	414491	6451258	317	-59	50	143	104	108	4	0.7	36					
								41	45	4	1.2	62					
								48	53	5	0.6	14					
								82	108	26	1.1	35					
								incl. 5m @ 1.5% Li2O and 38ppm Ta2O5 from 87m					and 8m @ 1.8% Li2O and 32ppm Ta2O5 from 94m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results									
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)					
BDRC0062	Anna	414462	6451228	320	-59	49	196	41	43	2	0.5	72					
								45	58	13	1.1	53					
								incl. 1m @ 2% Li2O and 18ppm Ta2O5 from 47m					and 3m @ 1.6% Li2O and 76ppm Ta2O5 from 55m				
								87	100	13	1.1	69					
								incl. 9m @ 1.4% Li2O and 72ppm Ta2O5 from 91m									
								108	118	10	0.5	24					
								158	160	2	0.4	7					
								164	166	2	0.9	48					
								incl. 1m @ 1.2% Li2O and 57ppm Ta2O5 from 165m									
								170	172	2	1.2	30					
								incl. 1m @ 1.9% Li2O and 29ppm Ta2O5 from 170m									
								174	176	2	1.4	53					
								incl. 1m @ 1.8% Li2O and 27ppm Ta2O5 from 174m									
								BDRC0063	Anna	414240	6451506	317	-60	48	100	10	12
19	23	4	0.4	57													
27	29	2	0.6	58													
35	38	2	0.7	80													
11	29	18	1.1	40													
BDRC0064	Anna	414208	6451482	323	-61	48	140	incl. 1m @ 3.1% Li2O and 31ppm Ta2O5 from 14m									
								and 5m @ 1.9% Li2O and 36ppm Ta2O5 from 17m									
								and 1m @ 2.2% Li2O and 93ppm Ta2O5 from 28m									
								50	55	5	1.7	64					
								64	74	10	0.9	63					
								incl. 5m @ 1.2% Li2O and 66ppm Ta2O5 from 68m									
BDRC0065	Anna	414176	6451455	325	-57	47	114	8	9	1	0.9	56					
								12	13	1	0.7	42					
								43	45	2	1.1	88					
								incl. 1m @ 1.5% Li2O and 79ppm Ta2O5 from 44m									
								49	66	17	0.9	54					
								incl. 1m @ 1.3% Li2O and 45ppm Ta2O5 from 51m									
								and 1m @ 1.7% Li2O and 64ppm Ta2O5 from 54m									
								and 1m @ 1.9% Li2O and 53ppm Ta2O5 from 58m									
								and 1m @ 1.5% Li2O and 33ppm Ta2O5 from 64m									
								79	80	1	1.1	51					
BDRC0066	Anna	414222	6451575	322	-61	229	128	40	43	3	0.5	41					
								52	54	2	0.9	42					
								incl. 1m @ 1.3% Li2O and 44ppm Ta2O5 from 53m									
BDRC0067	Anna	414134	6451607	320	-60	231	70	No significant assays									
BDRC0068	Anna	414160	6451435	326	-75	48	142	93	97	4	0.5	99					
BDRC0079	Anna	414555	6451251	320	-59	46	154	60	61	1	0.9	131					
								75	107	32	1.1	41					
								incl. 8m @ 1.4% Li2O and 50ppm Ta2O5 from 76m									
								and 2m @ 1.3% Li2O and 156ppm Ta2O5 from 88m									
								and 9m @ 1.3% Li2O and 42ppm Ta2O5 from 91m									
								and 2m @ 1.5% Li2O and 26ppm Ta2O5 from 103m									
								109	111	2	0.6	51					
								123	124	1	0.9	28					
BDRC0080	Anna	414526	6451223	320	-57	43	166	62	75	13	0.9	58					
								incl. 2m @ 2.6% Li2O and 74ppm Ta2O5 from 73m									
								77	78	1	0.5	117					
								82	83	1	0.5	4					
								94	96	2	0.5	8					
								99	121	22	1.1	51					
								incl. 10m @ 1.4% Li2O and 53ppm Ta2O5 from 107m									
								and 2m @ 1.3% Li2O and 44ppm Ta2O5 from 118m									
123	124	1	0.6	14													
BDRC0081	Anna	414584	6451275	320	-59	42	112	No significant assays									

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results							
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)			
BDR0082	Anna	414497	6451192	317	-59	47	152	59	67	8	0.8	104	incl. 1m @ 1.1% Li2O and 106ppm Ta2O5 from 59m and 1m @ 1.1% Li2O and 52ppm Ta2O5 from 63m and 1m @ 1.2% Li2O and 136ppm Ta2O5 from 65m		
								71	74	3	0.5	4			
								99	106	7	1.2	88			
								111	121	10	1.2	42			
								incl. 5m @ 1.4% Li2O and 100ppm Ta2O5 from 100m							
								incl. 4m @ 1.7% Li2O and 29ppm Ta2O5 from 113m and 1m @ 1.8% Li2O and 36ppm Ta2O5 from 120m							
BDR0083	Anna	414585	6451210	317	-60	47	160	91	92	1	0.8	13	incl. 8m @ 1.7% Li2O and 36ppm Ta2O5 from 97m		
								95	108	13	1.3	37			
								112	117	5	1.7	28			
								incl. 4m @ 1.9% Li2O and 27ppm Ta2O5 from 112m							
								123	128	5	1.2	41			
								incl. 4m @ 1.5% Li2O and 49ppm Ta2O5 from 124m							
BDR0084	Anna	414555	6451180	321	-58	46	178	75	84	9	1.1	57	incl. 3m @ 2.1% Li2O and 67ppm Ta2O5 from 78m		
								86	90	4	0.8	60			
								incl. 1m @ 1.5% Li2O and 68ppm Ta2O5 from 87m							
								104	107	3	0.8	60			
								incl. 1m @ 1.6% Li2O and 61ppm Ta2O5 from 104m							
								110	115	5	0.5	11			
								118	132	14	0.6	20			
								incl. 1m @ 1.5% Li2O and 17ppm Ta2O5 from 121m							
BDR0085	Anna	414615	6451241	317	-56	50	120	82	84	2	0.5	59			
BDR0086	Anna	414627	6451181	311	-61	47	154	80	81	1	0.5	50			
								89	90	1	1	28			
								104	106	2	0.8	28			
								113	123	10	1.6	75			
								incl. 4m @ 2.1% Li2O and 26ppm Ta2O5 from 118m							
BDR0087	Anna	414662	6451145	310	-59	45	172	88	91	3	0.6	49			
								96	97	1	1.3	44			
								103	109	6	0.8	32			
								incl. 2m @ 1.6% Li2O and 40ppm Ta2O5 from 105m							
								119	123	4	1.4	41			
								incl. 2m @ 1.9% Li2O and 43ppm Ta2O5 from 121m							
								131	133	2	1.2	41			
								incl. 1m @ 1.5% Li2O and 36ppm Ta2O5 from 132m							
								139	147	8	1	40			
								incl. 1m @ 1.3% Li2O and 46ppm Ta2O5 from 141m and 1m @ 1.3% Li2O and 47ppm Ta2O5 from 143m and 1m @ 1.2% Li2O and 32ppm Ta2O5 from 146m							
BDR0088	Anna	414481	6451324	312	-58	46	124	37	40	3	0.6	3			
								44	45	1	0.6	25			
								47	48	1	0.9	55			
								50	53	3	0.9	49			
								incl. 1m @ 1.3% Li2O and 38ppm Ta2O5 from 52m							
								55	57	2	1	45			
								59	65	6	0.8	25			
								incl. 1m @ 1.9% Li2O and 48ppm Ta2O5 from 59m							
								incl. 1m @ 1.3% Li2O and 35ppm Ta2O5 from 62m							
								83	89	6	1.1	22			
								incl. 2m @ 2% Li2O and 24ppm Ta2O5 from 84m							

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results								
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)				
BDR0089	Anna	414453	6451296	314	-58	46	142	22	28	6	1.2	84	incl. 1m @ 1.5% Li2O and 77ppm Ta2O5 from 22m and 2m @ 1.6% Li2O and 69ppm Ta2O5 from 26m			
								54	62	8	0.8	70	incl. 2m @ 1.2% Li2O and 67ppm Ta2O5 from 59m			
								66	95	29	1.3	31	incl. 9m @ 1.7% Li2O and 37ppm Ta2O5 from 74m and 8m @ 1.8% Li2O and 28ppm Ta2O5 from 85m			
								9	48	39	1.6	35	incl. 6m @ 2.1% Li2O and 37ppm Ta2O5 from 12m and 13m @ 2.1% Li2O and 28ppm Ta2O5 from 21m and 2m @ 1.9% Li2O and 28ppm Ta2O5 from 37m			
								68	70	2	0.6	1				
								73	78	5	0.6	66				
								incl. 1m @ 1.1% Li2O and 69ppm Ta2O5 from 73m		81	82	1	0.7	66		
BDR0090	Anna	414424	6451268	316	-60	45	186	85	87	2	0.5	0.5				
								162	167	5	0.5	37				
								117	121	4	1.5	46				
								incl. 1m @ 1.9% Li2O and 58ppm Ta2O5 from 118m and 1m @ 2.5% Li2O and 44ppm Ta2O5 from 120m		119	123	4	0.9	33		
								incl. 2m @ 1.6% Li2O and 39ppm Ta2O5 from 121m		81	84	3	0.6	71		
								incl. 2m @ 2.1% Li2O and 44ppm Ta2O5 from 99m and 1m @ 2.2% Li2O and 57ppm Ta2O5 from 103m and 3m @ 2.0% Li2O and 36ppm Ta2O5 from 106m		99	110	11	1.4	43		
										137	142	5	0.5	46		
BDR0091	Anna	414801	6451142	308	-89	57	160	incl. 1m @ 1.9% Li2O and 58ppm Ta2O5 from 118m and 1m @ 2.5% Li2O and 44ppm Ta2O5 from 120m								
								incl. 2m @ 1.6% Li2O and 39ppm Ta2O5 from 121m		171	174	3	0.6	96		
										195	197	2	1	32		
								incl. 1m @ 1.5% Li2O and 27ppm Ta2O5 from 195m		100	104	4	0.6	21		
								incl. 1m @ 1.1% Li2O and 45ppm Ta2O5 from 100m		106	110	4	1	45		
								incl. 1m @ 1.7% Li2O and 45ppm Ta2O5 from 106m		124	136	12	1.2	46		
								incl. 2m @ 1.8% Li2O and 48ppm Ta2O5 from 124m and 4m @ 1.7% Li2O and 40ppm Ta2O5 from 131m		139	141	2	0.9	10		
BDR0092	Anna	414884	6451084	305	-90	17	178	151	157	6	0.6	37				
								125	127	2	0.7	70				
								130	144	14	1.7	28				
								incl. 11m @ 2.0% Li2O and 28ppm Ta2O5 from 131m		No significant assays						
BDR0093	Anna	414970	6451035	303	-89	29	220	105	107	2	0.9	69				
								142	144	2	0.5	56				
								147	149	2	0.5	95				
								155	197	42	1.0	61	incl. 14m @ 1.4% Li2O and 52ppm Ta2O5 from 173m			
								108	117	9	0.5	65				
								121	123	2	0.7	47				
								168	205	37	0.7	52	incl. 14m @ 1.4% Li2O and 62ppm Ta2O5 from 184m			
BDR0094	Anna	414775	6451115	309	-89	116	172	No significant assays								
								incl. 1m @ 1.1% Li2O and 45ppm Ta2O5 from 100m		106	110	4	1	45		
								incl. 1m @ 1.7% Li2O and 45ppm Ta2O5 from 106m		124	136	12	1.2	46		
BDR0095	Anna	414055	6450968	302	-88	68	250	incl. 2m @ 1.8% Li2O and 48ppm Ta2O5 from 124m and 4m @ 1.7% Li2O and 40ppm Ta2O5 from 131m								
										139	141	2	0.9	10		
										151	157	6	0.6	37		
BDR0096	Anna	414931	6450993	304	-89	195	226	No significant assays								
								incl. 11m @ 2.0% Li2O and 28ppm Ta2O5 from 131m								
BDR0106	Anna	414396	6451239	320	-60	50	208	105	107	2	0.9	69				
								142	144	2	0.5	56				
								147	149	2	0.5	95				
								155	197	42	1.0	61	incl. 14m @ 1.4% Li2O and 52ppm Ta2O5 from 173m			
BDR0107	Anna	414433	6451199	320	-60	48	220	108	117	9	0.5	65				
								121	123	2	0.7	47				
								168	205	37	0.7	52	incl. 14m @ 1.4% Li2O and 62ppm Ta2O5 from 184m			

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results											
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)							
BDR0108	Anna	414159	6451352	330	-60	48	172	94	101	7	0.8	142	incl. 1m @ 1.8% Li2O and 125ppm Ta2O5 from 98m						
BDR0109	Anna	414224	6451357	321	-66	47	160	117	128	11	0.6	43	135	139	4	0.4	68		
BDR0110	Anna	414190	6451323	326	-58	47	160	113	120	7	0.7	59	incl. 1m @ 1.3% Li2O and 110ppm Ta2O5 from 114m and 1m @ 1.4% Li2O and 185ppm Ta2O5 from 117m						
BDR0111	Anna	414252	6451308	329	-59	53	172	No significant assays											
BDR0112	Anna	414294	6451281	330	-59	49	200	164	169	5	1.4	38	incl. 4m @ 1.6% Li2O and 38ppm Ta2O5 from 165m						
BDR0113	Anna	414314	6451228	324	-60	50	200	No significant assays											
BDR0114	Anna	414572	6451480	307	-60	47	100	No significant assays											
BDR0115	Anna	414509	6451352	312	-60	48	100	51	58	7	0.9	49	incl. 1m @ 1.4% Li2O and 59ppm Ta2O5 from 51m and 1m @ 1.5% Li2O and 23ppm Ta2O5 from 55m						
BDR0116	Anna	414579	6451341	309	-59	46	124	60	65	5	0.4	34	11	19	8	0.9	58	incl. 3m @ 1.4% Li2O and 52ppm Ta2O5 from 13m	
BDR0117	Anna	414376	6451143	324	-63	46	220	No significant assays											
BDR0117A							300												
BDR0118							200												
BDR0118A							300												
BDR0119	Anna	414610	6451303	310	-60	45	100	32	39	7	0.6	44	incl. 1m @ 1.1% Li2O and 64ppm Ta2O5 from 37m						
BDR0120	Anna	414470	6451166	319	-61	43	250	23	25	2	1	27	62	74	12	0.7	38	incl. 1m @ 2% Li2O and 61ppm Ta2O5 from 64m	
BDR0121	Anna	414441	6451138	322	-62	45	160	181	206	25	1.1	122	incl. 9m @ 1.8% Li2O and 68ppm Ta2O5 from 196m						
BDR0122	Anna	414643	6451269	311	-61	43	100	228	229	1	1.6	63	42	48	6	0.4	42		
BDR0123	Anna	414533	6451159	317	-63	43	178	62	72	10	0.8	69	incl. 4m @ 1.1% Li2O and 68ppm Ta2O5 from 66m						
BDR0124	Anna	414505	6451131	319	-63	43	214	107	127	20	1.1	59	incl. 14m @ 1.3% Li2O and 66ppm Ta2O5 from 108m						
BDR0125	Anna	414476	6451103	322	-61	46	142	149	162	13	1	28	incl. 5m @ 1.9% Li2O and 24ppm Ta2O5 from 152m						
BDR0126	Anna	415089	6451005	301	-89	55	250	168	171	3	0.4	45	incl. 2m @ 1.3% Li2O and 25ppm Ta2O5 from 65m						
BDR0127	Anna	414655	6451209	310	-60	48	124	53	57	4	0.4	51	incl. 2m @ 1.6% Li2O and 48ppm Ta2O5 from 77m						
BDR0128	Anna	415019	6450935	301	-89	206	250	60	63	3	1.3	34	incl. 5m @ 1.2% Li2O and 49ppm Ta2O5 from 176m						
								65	71	6	1	38	incl. 2m @ 1.4% Li2O and 128ppm Ta2O5 from 202m						
								74	88	14	0.6	59	No significant assays						
								174	193	19	0.7	44	incl. 9m @ 1.5% Li2O and 25ppm Ta2O5 from 140m						
								196	205	9	0.6	48	incl. 1m @ 1.4% Li2O and 30ppm Ta2O5 from 87m						
								202	205	3	0.6	34	incl. 2m @ 1.4% Li2O and 128ppm Ta2O5 from 202m						
								No significant assays											
								138	153	15	1.1	26	incl. 1m @ 1.2% Li2O and 33ppm Ta2O5 from 204m						

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0129	Anna	414599	6451153	313	-59	48	202	86	89	3	0.5	67
								incl. 1m @ 1% Li2O and 67ppm Ta2O5 from 88m				
								98	101	3	1.1	74
								incl. 2m @ 1.4% Li2O and 76ppm Ta2O5 from 98m				
								114	121	7	0.4	20
								136	155	19	0.9	21
								incl. 8m @ 1.6% Li2O and 19ppm Ta2O5 from 141m				
							171	173	2	0.7	67	
BDRC0130	Anna	414690	6451173	310	-59	43	150	No significant assays				
BDRC0131	Anna	415125	6450899	301	-88	14	295	170	182	12	1.6	19
								incl. 9m @ 1.9% Li2O and 17ppm Ta2O5 from 171m				
								222	228	6	1.6	47
								incl. 4m @ 2% Li2O and 50ppm Ta2O5 from 223m				
								265	267	2	1.1	32
								incl. 1m @ 1.4% Li2O and 3ppm Ta2O5 from 223m				
BDRC0132	Anna	415160	6450935	301	-89	23	312	274	275	1	1.3	55
								156	157	1	1	28
								178	191	13	1	29
incl. 6m @ 1.6% Li2O and 21ppm Ta2O5 from 180m												
BDRC0133	Anna	415089	6450864	301	-89	65	300	No significant assays				
BDRC0134	Anna	414447	6451074	325	-61	47	282	No significant assays				
BDRC0135	Anna	414572	6451123	316	-64	45	222	79	85	6	0.9	59
								incl. 1m @ 1.4% Li2O and 52ppm Ta2O5 from 80m and 2m @ 1.3% Li2O and 56ppm Ta2O5 from 83m				
								114	137	23	1	54
								incl. 1m @ 1.6% Li2O and 53ppm Ta2O5 from 117m and 6m @ 1.4% Li2O and 55ppm Ta2O5 from 124m and 4m @ 1.4% Li2O and 61ppm Ta2O5 from 133m				
								156	173	17	0.8	45
								incl. 3m @ 1.6% Li2O and 23ppm Ta2O5 from 161m and 3m @ 1.2% Li2O and 48ppm Ta2O5 from 168m				
								41	44	3	0.5	68
								46	48	2	1.3	48
BDRC0136	Anna	414542	6451092	319	-63	47	240	63	64	1	1.3	38
								80	86	6	1.4	53
								incl. 4m @ 1.8% Li2O and 40ppm Ta2O5 from 81m				
								89	92	3	0.7	50
								104	111	7	1.1	36
								incl. 1m @ 1.9% Li2O and 34ppm Ta2O5 from 105m				
								184	191	7	0.5	15
								incl. 1m @ 1.4% Li2O and 36ppm Ta2O5 from 189m				
BDRC0137	Anna	414512	6451062	315	-64	49	198	No significant assays				
BDRC0138	Anna	414634	6451117	315	-55	48	186	115	118	3	0.9	67
								150	15	9	1.1	39
								incl. 6m @ 1.4% Li2O and 35ppm Ta2O5 from 150m				
BDRC0139	Anna	414607	6451088	316	-60	44	150	100	105	5	1.2	64
								incl. 3m @ 1.6% Li2O and 60ppm Ta2O5 from 101m				
								123	126	3	0.8	76
								141	149	8	1	21
								incl. 3m @ 1.6% Li2O and 60ppm Ta2O5 from 101m				
BDRC0140	Anna	414579	6451058	316	-60	46	220	90	101	11	0.9	43
								incl. 1m @ 1.8% Li2O and 21ppm Ta2O5 from 93m and 1m @ 1.4% Li2O and 36ppm Ta2O5 from 99m				
								116	121	5	0.5	38
								137	142	5	0.6	22
								150	155	5	0.8	54
								165	180	15	1.3	61
								incl. 10m @ 1.5% Li2O and 53ppm Ta2O5 from 169m				
								186	191	5	1.2	26
								incl. 3m @ 1.6% Li2O and 27ppm Ta2O5 from 186m				

Appendix 1 (cont.) – Buldania/Anna – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0141	Anna	414542	6451025	317	-61	41	240	No significant assays				
BDRC0142	Anna	414829	6451170	307	-89	323	192	45	59	14	1.7	36
								incl. 2m @ 2.6% Li2O and 25ppm Ta2O5 from 48m and 5m @ 2.2% Li2O and 15ppm Ta2O5 from 54m				
								77	80	3	0.8	29
BDRC0143	Anna	414747	6451087	310	-88	238	150	99	115	16	0.9	34
								incl. 2m @ 1.7% Li2O and 59ppm Ta2O5 from 100m and 4m @ 1.4% Li2O and 51ppm Ta2O5 from 111m				
								141	145	4	0.5	13
								147	150	3	0.5	2
BDRC0152	Anna	414714	6451050	312	-88	167	180	145	160	15	0.8	35
								incl. 5m @ 1.5% Li2O and 49ppm Ta2O5 from 152m				
BDRC0153	Anna	414862	6451206	304	-88	195	147	72	100	28	0.9	24
								incl. 1m @ 2.4% Li2O and 13ppm Ta2O5 from 78m and 1m @ 2.3% Li2O and 17ppm Ta2O5 from 80m and 1m @ 1.7% Li2O and 25ppm Ta2O5 from 83m				
BDRC0154	Anna	414907	6451254	303	-89	229	162	99	114	15	0.6	29
BDRC0155	Anna	414909	6451110	304	-88	212	192	77	89	12	1.5	50
								incl. 4m @ 1.9% Li2O and 74ppm Ta2O5 from 79m				
								130	131	1	1.5	28
BDRC0156	Anna	414940	6451140	302	-88	220	180	86	97	11	0.9	42
								incl. 5m @ 1.3% Li2O and 23ppm Ta2O5 from 87m				
BDRC0157	Anna	414972	6451170	301	-88	229	186	108	112	4	0.4	36
								115	132	17	0.7	24
								incl. 2m @ 1.3% Li2O and 21ppm Ta2O5 from 130m				
BDRC0158	Anna	415003	6451198	300	-89	272	198	102	108	6	0.7	24
								incl. 1m @ 1.1% Li2O and 10ppm Ta2O5 from 107m				
								125	126	1	1.3	50
BDRC0159	Anna	414849	6451053	307	-89	206	174	135	140	5	0.5	37
								114	117	3	1.1	55
								incl. 2m @ 1.3% Li2O and 61ppm Ta2O5 from 115m				
BDRC0160	Anna	414822	6451017	309	-88	221	216	174	193	19	1.5	54
								incl. 5m @ 1.9% Li2O and 39ppm Ta2O5 from 183m and 3m @ 1.9% Li2O and 39ppm Ta2O5 from 190m				
BDRC0161	Anna	414782	6450979	309	-89	224	228	No significant assays				
BDRC0162	Anna	415028	6451085	298	-85	131	216	122	131	9	1.4	51
								incl. 4m @ 2.1% Li2O and 17ppm Ta2O5 from 126m				
BDRC0163	Anna	415076	6451134	296	-88	109	211	129	139	10	1.0	32
								incl. 2m @ 2.2% Li2O and 25ppm Ta2O5 from 136m				
								159	163	4	0.7	31
BDRC0164	Anna	414861	6450927	310	-85	201	206	166	168	2	1.1	21
								128	131	3	1.6	72
								157	158	1	1	96
								199	201	3	1.4	25
incl. 1m @ 2.6% Li2O and 23ppm Ta2O5 from 200m												
BDRC0165	Anna	415163	6451079	294	-85	114	222	No significant assays				
BDRC0166	Anna	414961	6450873	304	-86	46	276	12	13	1	0.4	53
								154	155	1	0.5	52
								233	234	1	0.4	32
								240	252	12	0.9	51
								incl. 6m @ 1.4% Li2O and 51ppm Ta2O5 from 240m				
267	269	2	0.5	2								
BDRC0167	Anna	415218	6450987	295	-85	211	204	29	30	1	0.4	25
BDRC0168	Anna	415032	6450802	304	-86	240	216	199	208	9	1.1	58
								incl. 6m @ 1.4% Li2O and 69ppm Ta2O5 from 199m				

True widths 80-100% downhole widths

Appendix 2 – Buldania/Anna – Diamond Core Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.4%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDDD0001	Anna	414236	6451438	326	-60	43	195.8	35.16	46.08	10.92	1.2	82
								incl. 3m @ 2.3% Li2O and 125ppm Ta2O5 from 40m				
								76	90	14	1.2	82
								incl. 6m @ 1.7% Li2O and 55ppm Ta2O5 from 78m				
								97	100	3	1	73
incl. 1m @ 1.4% Li2O and 35ppm Ta2O5 from 97m												
BDDD0002	Anna	414332	6451387	329	-60	43	159.6	24.56	29	4.44	0.7	69
								incl. 2.42m @ 1.0% Li2O and 54ppm Ta2O5 from 26.58m				
								31	37	6	0.6	79
								incl. 1m @ 1.2% Li2O and 78ppm Ta2O5 from 32m				
								63.79	72	8.21	0.9	56
								incl. 4m @ 1.5% Li2O and 52ppm Ta2O5 from 66m				
								78.9	88	9.1	1.1	59
								incl. 4.1m @ 1.7% Li2O and 61ppm Ta2O5 from 78.9m				
								and 1m @ 1.3% Li2O and 61ppm Ta2O5 from 87m				
								96	98	2	0.6	44
								101	103	2	2.2	57
105	110	5	0.8	65								
incl. 1m @ 1.7% Li2O and 44ppm Ta2O5 from 105m												
112	116	4	0.5	64								
BDDD0003	Anna	414385	6451308	315	-59	44	193.1	3	6	3	0.5	45
								9	39	30	1.4	39
								incl. 9m @ 1.6% Li2O and 33ppm Ta2O5 from 9m				
								and 4m @ 1.9% Li2O and 35ppm Ta2O5 from 19m				
								and 3m @ 2.0% Li2O and 27ppm Ta2O5 from 26m				
								and 5m @ 1.6% Li2O and 43ppm Ta2O5 from 32m				
								42	44	2	0.4	57
								47	49	2	0.6	36
								77	83	6	1	82
								incl. 1m @ 1.8% Li2O and 35ppm Ta2O5 from 79m				
								85	95	10	0.8	80
								incl. 1m @ 1.4% Li2O and 51ppm Ta2O5 from 88m				
								and 2m @ 1.5% Li2O and 86ppm Ta2O5 from 90m				
96	104	8	0.5	44								
140	164	24	1.1	49								
incl. 11m @ 1.5% Li2O and 48ppm Ta2O5 from 143m												
and 1m @ 1.8% Li2O and 41ppm Ta2O5 from 155m												

True widths 80-100% downhole widths

Appendix 3 – Buldania/NW Pegmatites – RC Drill hole statistics

Hole_ID	Prospect	East	North	RL	Dip	Azimuth	Depth	Significant Li2O (>0.3%) and Ta2O5 (>50ppm) results				
								From(m)	To(m)	Interval(m)	Li2O (%)	Ta2O5 (ppm)
BDRC0097	NWP	410275	6454701	255	-61	270	80	14	16	2	0.7	64
								29	34	5	0.8	46
BDRC0098	NWP	410297	6454704	255	-71	276	100	incl. 1m @ 1.9% Li2O and 58ppm Ta2O5 from 32m				
								62	63	2	0.8	39
								6	23	17	0.9	82
BDRC0099	NWP	410212	6454705	255	-61	92	100	incl. 3m @ 1.3% Li2O and 71ppm Ta2O5 from 7m and 1m @ 1.5% Li2O and 75ppm Ta2O5 from 17m				
								98	102	4	0.7	59
BDRC0100	NWP	410175	6454703	254	-89	42	124	incl. 1m @ 1.3% Li2O and 73ppm Ta2O5 from 101m				
								105	109	4	0.3	29
BDRC0101	NWP	410318	6454943	230	-62	273	80	22	28	6	0.7	46
								incl. 1m @ 1.2% Li2O and 61ppm Ta2O5 from 27m				
BDRC0102	NWP	410358	6454943	233	-61	274	100	42	44	2	0.3	37
								46	47	1	1.4	50
BDRC0103	NWP	410251	6454947	231	-61	91	100	No significant assays				
BDRC0104	NWP	410391	6455212	211	-61	270	80	17	28	11	0.8	37
								incl. 5m @ 1.2% Li2O and 45ppm Ta2O5 from 20m				
BDRC0105	NWP	410434	6455212	211	-60	269	94	50	61	11	1.0	40
								incl. 6m @ 1.5% Li2O and 43ppm Ta2O5 from 54m				
BDRC0144	NWP	410596	6454575	313	-61	268	60	18	29	11	0.5	52
								incl. 1m @ 1.2% Li2O and 34ppm Ta2O5 from 28m				
BDRC0145	NWP	410635	6454578	320	-62	271	100	53	56	3	0.8	62
BDRC0146	NWP	410419	6454658	317	-61	270	114	17	19	2	0.5	22
BDRC0147	NWP	409660	6455213	326	-61	273	80	31	32	1	0.5	29
BDRC0148	NWP	409700	6455215	324	-62	272	108	No significant assays				
BDRC0149	NWP	408905	6455797	326	-56	271	80	No significant assays				
								25	27	2	0.8	108
BDRC0150	NWP	408829	6455802	327	-54	271	80	incl. 1m @ 1.2% Li2O and 90ppm Ta2O5 from 25m				
								30	31	1	1.0	95
BDRC0151	NWP	408890	6456010	327	-59	268	80	No significant assays				

True widths ~90% of down hole width with exception of BDRC0099 which was drilled sub-parallel to dip.

True widths ~90% downhole widths except BDRC0099 which was drilled subparallel to dip

Appendix 4 – Buldania – JORC Code 2012 Table 1 Criteria

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> Rock chip comprise representative 1-3kg chip samples collected across zone being sampled. Sub-surface samples have been collected by reverse circulation (RC) and diamond core drilling techniques (see below). Drill holes are oriented perpendicular to the interpreted strike of the mineralised trend except in rare occasions where limited access necessitates otherwise.
	<p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<ul style="list-style-type: none"> RC samples are collected by the metre from the drill rig cyclone as two 1 m cone split samples in calico bags and a bulk sample in plastic mining bags. The 1 m samples from the cyclone are retained for check analysis. Only samples of pegmatite and adjacent wall rock (~4 m) are collected for assay. HQ diamond core has been sampled in intervals of ~1 m where possible, otherwise intervals less than 1 m have been selected based on geological boundaries. Geological boundaries have not been crossed by sample intervals.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<p>Drilling techniques used comprise:</p> <ul style="list-style-type: none"> Reverse Circulation (RC/5.5”) with a face sampling hammer HQ Diamond Core, standard tube to a depth of ~200-250 m. HQ core was drilled directly from surface for all holes. Core orientation was provided by an ACT REFLEX (ACT II RD) tool.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	<ul style="list-style-type: none"> Sample recoveries are estimated for RC by correlating sample heights in the green mining bag to estimate a recovery for each metre. For diamond core the recovery is measured and recorded for every metre.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	<ul style="list-style-type: none"> RC drill collars are sealed to prevent sample loss and holes are normally drilled dry to prevent poor recoveries and contamination caused by water ingress. Wet intervals are noted in case of unusual results. For diamond core loss, core blocks have been inserted in sections where core loss has occurred. This has then been written on the block and recorded during the logging process and with detailed photography of dry and wet core.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	<ul style="list-style-type: none"> It has been demonstrated that no relationship exists between sample recovery and grade. No grade bias was observed with sample size variation.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	<ul style="list-style-type: none"> All RC drillholes are logged on 1 m intervals and the following observations recorded: <ul style="list-style-type: none"> Recovery, quality (i.e. degree of contamination), wet/dry, hardness, colour, grainsize, texture, mineralogy, lithology,

Criteria	JORC Code explanation	Commentary
		<p>structure type and intensity, pegmatite and vein type and %, lithium mineralogy and %, alteration assemblage, UV fluorescence.</p> <ul style="list-style-type: none"> Diamond core is logged in its entirety as per detailed geological description listed above. Geotechnical logging has been completed for the entire hole.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	<ul style="list-style-type: none"> Logging is quantitative, based on visual field estimates. Diamond core is photographed post metre marking, for the entire length of the hole, two trays at a time, wet and dry.
	<i>The total length and percentage of the relevant intersections logged.</i>	<ul style="list-style-type: none"> Holes are logged in their entirety.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	<ul style="list-style-type: none"> The core has been cut in half and then quartered for sample purposes. Half core has been retained and the second quarter will be used for metallurgical studies. Density measurements have been taken on all quarter core samples using the Archimedes method.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	<ul style="list-style-type: none"> RC samples are collected as rotary split samples. Samples are typically dry.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	<ul style="list-style-type: none"> Sample preparation follows industry best practice standards and is conducted by internationally recognised laboratories; i.e. <ul style="list-style-type: none"> Oven drying, jaw crushing and pulverising so that 80% passes -75 microns.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	<ul style="list-style-type: none"> Duplicates and blanks submitted approximately every 1/20 samples. Standards are submitted every 20 samples or at least once per hole. Cross laboratory checks and blind checks have been used at a rate of 5%.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	<ul style="list-style-type: none"> Measures taken include: <ul style="list-style-type: none"> regular cleaning of cyclones and sampling equipment to prevent contamination industry standard insertion of standards, blanks and duplicate samples Analysis of duplicates (field, laboratory and umpire) identified no issues with sampling representatively. Analysis of results from blanks and standards indicates a high level of accuracy and no issues with contamination (or sample mix-ups).
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	<ul style="list-style-type: none"> Sample size is considered appropriate for the stage of exploration
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	<ul style="list-style-type: none"> Assaying completed by Nagrom laboratories Perth. Nagrom uses industry standard procedures for rare metals such as Li and Ta. Analytical techniques are total.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	<ul style="list-style-type: none"> None used.
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	<ul style="list-style-type: none"> Duplicates and blanks submitted approximately every 20 samples. Standards are submitted every 20 samples or at least once per hole.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> • Cross laboratory checks and blind checks have been used at a rate of 5%. • Analysis of reference blanks, standards and duplicate samples show the data to be of acceptable accuracy and precision for the Mineral Resource estimation and classification applied.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	<ul style="list-style-type: none"> • Internal review by alternate company personnel.
	<i>The use of twinned holes.</i>	<ul style="list-style-type: none"> • Three diamond holes are twins of existing RC drill holes. Assays compare well with the adjacent RC drill holes.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	<ul style="list-style-type: none"> • Drilling and logging data is entered directly into Microsoft Excel spreadsheets onsite while drilling is ongoing. Data is then entered into Access Database and validated before being processed by industry standard software packages such as MapInfo and Micromine. • Representative chip samples are collected for later reference.
	<i>Discuss any adjustment to assay data.</i>	<ul style="list-style-type: none"> • Li% is converted to Li₂O% by multiplying by 2.15, Ta ppm is converted to Ta₂O₅ ppm by multiplying by 1.22.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	<ul style="list-style-type: none"> • All drillholes are initially located using a handheld GPS and subsequently surveyed with DGPS. • All RC drillholes have been surveyed by a multi-shot digital downhole camera provided by the drilling contractor. • All diamond drillholes have been surveyed with a REFLEX EZI-SHOT (1001) magnetic single shot camera.
	<i>Specification of the grid system used.</i>	<ul style="list-style-type: none"> • GDA 94 Zone 51
	<i>Quality and adequacy of topographic control.</i>	<ul style="list-style-type: none"> • Initial collar elevations are based on regional topographic dataset and GPS. • Drill hole collars are surveyed post drilling with DGPS.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	<ul style="list-style-type: none"> • Varies due to initial drill programmes largely designed to test the strike and dip potential of mineralised outcrops. The drill section spacing is 50m to 100m and on-section spacing is generally 40 to 50m.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	<ul style="list-style-type: none"> • Geological modelling in progress to determine whether drill hole spacing and distribution is adequate for Mineral Resource estimation.
	<i>Whether sample compositing has been applied.</i>	<ul style="list-style-type: none"> • None undertaken.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	<ul style="list-style-type: none"> • Drilling is typically oriented perpendicular to the interpreted strike of mineralisation.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	<ul style="list-style-type: none"> • Drilling orientation intersects the mineralisation at appropriate angles so as to be mostly unbiased and suitable for resource estimation of the major pegmatite bodies.

Criteria	JORC Code explanation	Commentary
Sample security	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> Sample security is not considered to be a significant risk given the location of the deposit and bulk-nature of mineralisation. Nevertheless, the use of recognised transport providers, sample dispatch procedures directly from the field to the laboratory, and the large number of samples are considered sufficient to ensure appropriate sample security. Company geologist supervises all sampling and subsequent storage in field. The same geologist arranges delivery of samples to Nagrom laboratories in Perth via courier.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> None completed

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	<p>The Buldania Project is located ~600km east of Perth and 30-40km ENE of Norseman in Western Australia. The Project area totals ~67km² and comprises 1 granted exploration licence (EL 63/856), 1 granted prospecting license (PL63/1977) and 1 granted mining lease (M63/647) – the “Tenements”.</p> <p>The Tenements are held by Avoca Resources Pty Ltd which is a wholly owned subsidiary of RNC Minerals Ltd. RNC Minerals acquired Avoca Resources Pty Ltd from Westgold Resources Ltd in 2019</p> <p>Liontown Resources Limited through its wholly owned subsidiary, LRL (Aust) Pty Ltd, acquired the lithium and related metal rights for the Buldania Project in late 2017 by agreeing to:</p> <ul style="list-style-type: none"> Issue 10,000,000 Liontown shares to Westgold (completed); paying ongoing statutory rents and rates for the Tenements while the Agreement is current; and paying Avoca \$2 per tonne of ore mined and 1.5% of the gross sales receipts in respect to any lithium or related metals extracted from the Tenements. <p>Avoca retains the rights to all other metals (excluding lithium and related metals) and has priority access for exploration.</p> <p>The Tenements are covered by the Ngadju Determined Native Title Claim (WCD2014/004). Avoca has an Access Agreement with the Ngadju which will apply to Liontown’s exploration activities.</p>
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	All tenements are in good standing.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Multiple phases of exploration completed for gold and nickel. This has not been reviewed in detail due to

Criteria	JORC Code explanation	Commentary
		<p>Liontown only having the rights to lithium and related metals.</p> <p>There has been no previous exploration for lithium and related metals; however, past explorers have mapped large pegmatite bodies and recorded spodumene mineralisation in a number of places.</p>
Geology	<p><i>Deposit type, geological setting and style of mineralisation.</i></p>	<p>The Buldania Project contains a series of quartz-feldspar-muscovite-spodumene pegmatites largely hosted in mafic rocks. The Project is located at the southern end of the Norseman- Wiluna Belt within the Archaean Yilgarn Craton close to the boundary with the Proterozoic Albany Fraser Province.</p> <p>The pegmatites are interpreted to be LCT type lithium bearing-pegmatites.</p>
Drillhole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i></p> <ul style="list-style-type: none"> • <i>easting and northing of the drillhole collar</i> • <i>elevation or RL (elevation above sea level in metres) of the drillhole collar</i> • <i>dip and azimuth of the hole</i> • <i>down hole length and interception depth</i> • <i>hole length.</i> 	<p>See Appendix in accompanying report.</p>
Data aggregation methods	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p>	<p>Li₂O intercepts calculated using 0.3% cut off with a maximum 2m internal dilution. Higher grade intervals calculated using 1.0% cut off. No upper cuts applied.</p> <p>Ta₂O₅ values only quoted when lithium intersections reported.</p>
Relationship between mineralisation widths and intercept lengths	<p><i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	<p>For true widths please refer to appendices in accompanying report.</p>
Diagrams	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></p>	<p>See figures in accompanying report</p>
Balanced reporting	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<p>All recent exploration results reported and tabulated.</p>
Other substantive exploration data	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p>All meaningful and material data reported</p>
Further work	<p><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p>	<p>Prepare Mineral Resource Estimate.</p>