

Strong Gold Results Extend Prospects, Bolstered by Shallow Discovery

Highlights

- Assays from recent drill campaign at Torque's Paris Gold Camp confirm strong gold mineralisation at Paris, HHH and Observation prospects, supporting large Gold Camp concept (2.5km x 1km and open)
- Drilling successfully extended **Paris** gold mineralisation by up to 50m from previous intercepts, best holes being:
 - 16.3m @ 7.95 g/t gold** from 272m, including **4.63m @ 25.62 g/t gold** from 277m in 24PDD001
 - 10.79m @ 3.64 g/t gold** from 144m and **5.26m @ 3.8 g/t gold** from 166.58m within **27.84m @ 2.19 g/t gold** from 144m in 24PRCDD096
 - 9m @ 2.6 g/t gold** from 78m and **3m @ 9.23 g/t gold** from 105m within **48m @ 1.37 g/t gold** from 72m in 24PRC106
 - 6m @ 3.22 g/t gold** from 252m within **18m @ 1.8 g/t gold** from 240m in 24PRC099
 - 8m @ 6.77 g/t gold** from 187m, including **2m @ 26.9 g/t gold** from 192m in 24PRC098
- New shallow discovery made, in the previously untested 1.5km gap between the HHH and Paris pits suggesting the two prospects may be connected. So far, mineralisation is encountered along ~500m, including:
 - 16m @ 4.19 g/t gold** from 66m, including **2m @ 13.12 g/t gold** from 72m and **2m @ 18.91 g/t gold** from 80m in 24HRC087
 - 12m @ 4.29 g/t gold** from 69m, including **3m @ 16.1 g/t gold** from 69m in 24HRC086
 - 12m @ 1.2 g/t gold** from 99m, including **3m @ 2.52 g/t gold** from 99m in 24HRC077
 - 12m @ 1.37 g/t gold** from 72m, including **3m @ 2.68 g/t gold** from 78m in 24HRC076
 - 9m @ 1.01 g/t gold** from 36m, including **3m @ 2.43 g/t gold** from 42m and **6m @ 1.11 g/t gold** from 101m in 24HRC072
- Other significant intersections from this programme include:
 - 6.81m @ 7.59 g/t gold** from 58.29m including **2.12m @ 24.02 g/t gold** from 59.88m in 24ODD002; and **15m @ 1.07 g/t gold** from 69m, including **3m @ 2.00 g/t gold** from 78m in 24ORC052 at **Observation**;
 - 6m @ 4.05 g/t gold** from 94m, including **2m @ 11.48 g/t gold** from 98m in 24PRC118 at **Paris East**;
 - 12m @ 1.24 g/t gold** from 27m, including **3m @ 1.17 g/t gold** from 36m in 24PRC107 at **Paris North**.
- Assays reaffirm pervasive gold occurrences supporting a large Gold Camp concept at Paris. POW submitted for a follow-up drilling phase.

Torque Metals Limited (“**Torque**” “the **Company**”), (ASX: **TOR**) is pleased to announce the discovery of a new zone of shallow gold mineralisation, as well as more high-grade results from the recent drill program at its flagship Paris Gold Project in Western Australia. Results overall significantly enhance the project's potential, with continued support for a geological link along the 2.5km long corridor between the Paris, HHH and Observation prospects.

Torque's Managing Director, Cristian Moreno comments:

*“Drilling at Torque's Paris gold project again unveiled strong gold values across Paris, HHH and Observation prospects. Paris mine mineralisation was extended east, west and up dip, with notable intersections including **16.3m @ 7.95 g/t gold, 27.84m @ 2.19 g/t gold, 48m @ 1.37 g/t gold** from 72m, and **8m @ 6.77 g/t gold**.*

*“Drilling North of the Paris pit revealed shallow gold intervals extending ~500m north-south, signifying a new gold discovery and suggesting a 1.5km connection between HHH and Paris pits. Notable intersections include **16m @ 4.19 g/t gold** from 66m, **12m @ 4.29 g/t gold** from 69m, **12m @ 1.2 g/t gold** from 99m, and **12m @ 1.37 g/t gold** from 72m.*

“Torque's exploration team has clearly identified a new gold enriched zone, leveraging the successful lithostructural model, enhancing results from Paris, HHH, and Observation prospects. Paris' proximity to infrastructure, including nearby processing plants, enhances the value of Torque's 13 pre-native title development-ready Mining Licences in our ~1,200km² tenement holding.

“The immediate focus is on further defining shallow gold lodes and advancing Torque's first mineral resource estimate and maiden gold exploration target.”

Paris Gold Camp – Lithostructural Model

The lithostructural model constructed by Torque's in-house technical team, which represents the integration of geological, structural and geophysical data, proved highly successful in predicting the locations of mineralised zones. This model guides drilling activities by providing a detailed understanding of the subsurface, enabling targeted and efficient exploration (see Figure 1).

Notably, we located gold in model-driven areas, such as the Paris intersection in hole 24PRC106, which revealed **48m @ 1.37 g/t gold** from 72m, including **9m @ 2.6 g/t gold** from 78m and **3m @ 9.23 g/t gold** from 105m (see later discussion). A gold discovery was also made potentially linking Paris and HHH pits with best hole being **16m @ 4.19 g/t gold** from 66m, including **2m @ 13.12 g/t gold** from 72m and **2m @ 18.91 g/t gold** from 80m in 24HRC087. These findings indicate that the gold enriched structures are extending in multiple directions within the Paris gold camp, highlighting the model's effectiveness in uncovering new gold emplacements and guiding our exploration.

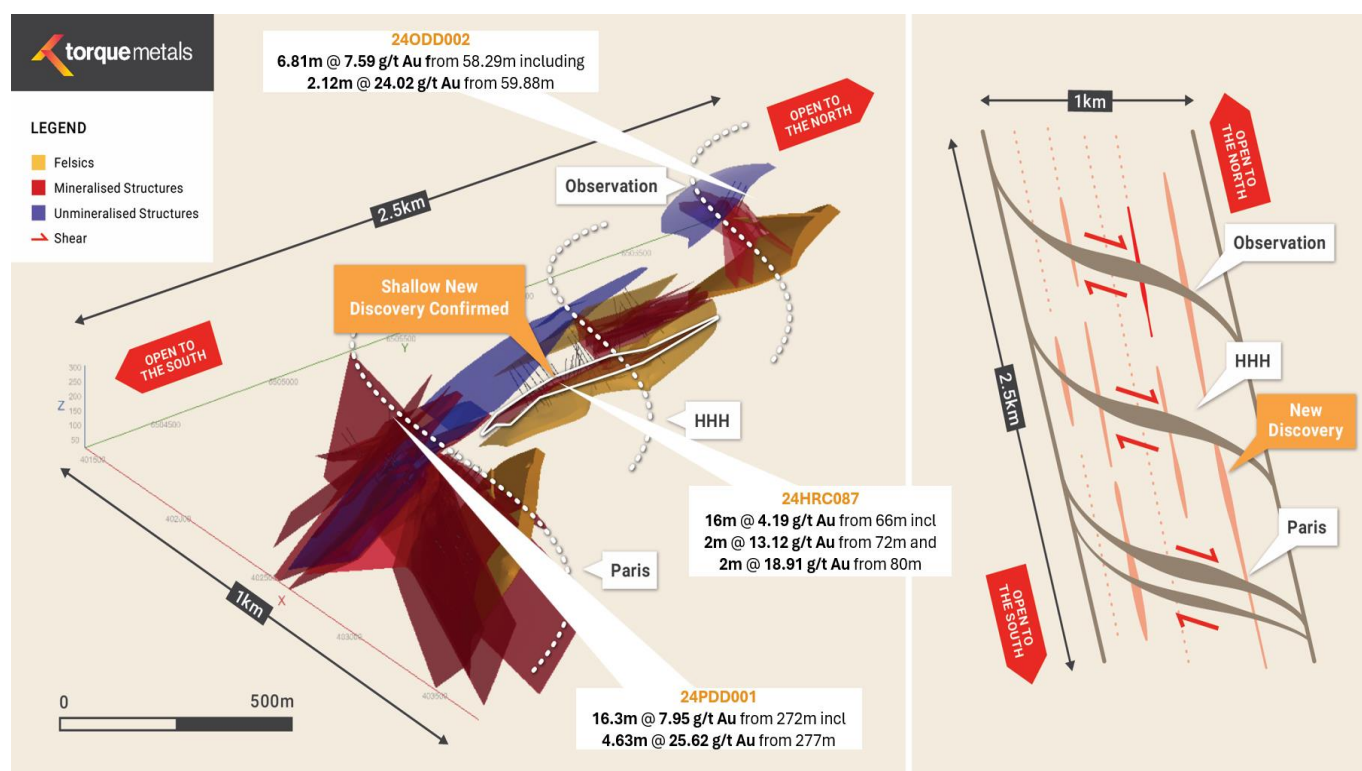


Figure 1 Lithostructural (left) and geological (right) models supporting Torque Metals' exploration activities.

Paris Deposit – Strong gold intersections

Extensional drilling targeted areas west, east and north of the historic Paris pit. The drill program comprised a combination of 27 holes for a total of 4,835.1 metres. Objective was to extend known mineralisation (see Figure 2).

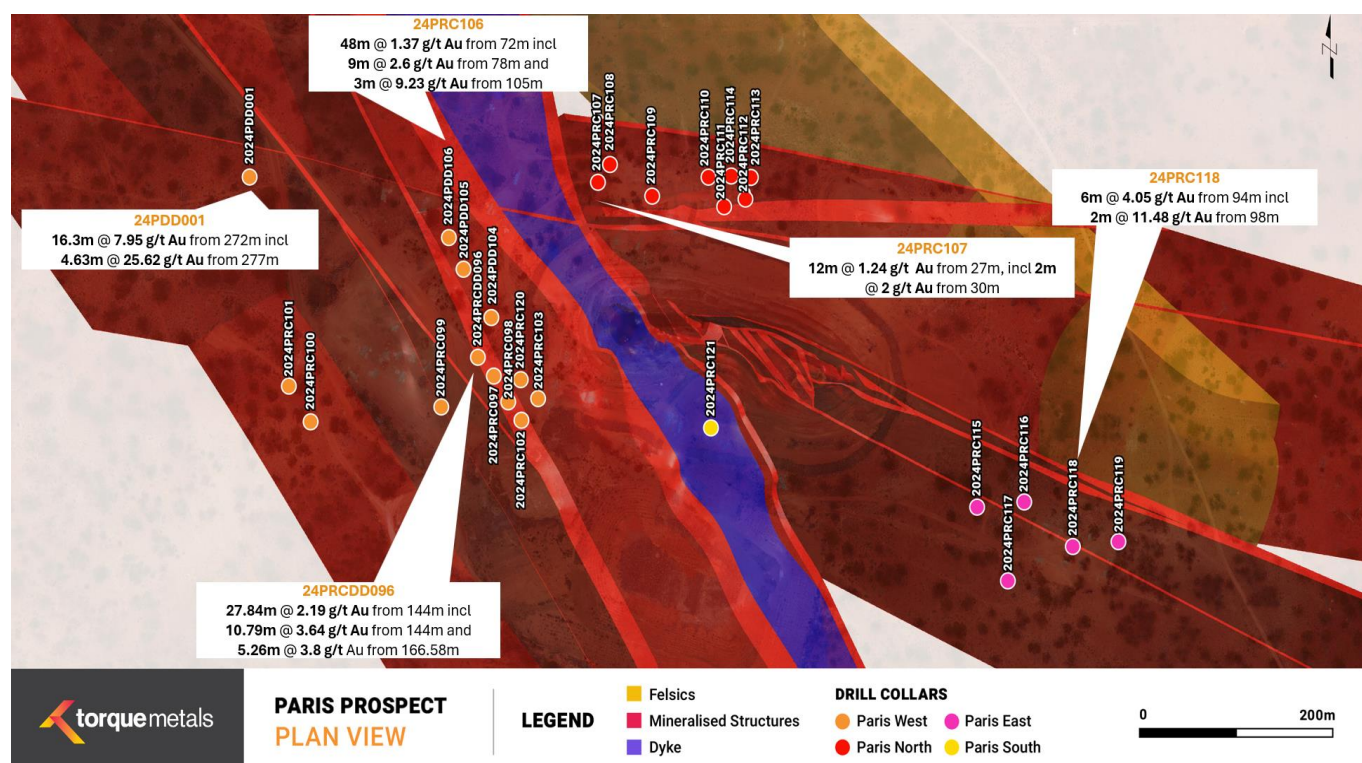


Figure 2 Paris prospect. Plan view. Collar locations along with mineralised structures.

Summary of notable intersections as follows with full assay data in Appendix 1:

- 24PDD001: **16.3m @ 7.95 g/t gold** from 272m, including **4.63m @ 25.62 g/t gold** from 277m
- 24PRCDD096: **27.84m @ 2.19 g/t gold** from 144m, including **10.79m @ 3.64 g/t gold** from 144m and **5.26m @ 3.8 g/t gold** from 166.58m
- 24PRC098: **8m @ 6.77 g/t gold** from 187m, including **2m @ 26.9 g/t gold** from 192m
- 24PRC099: **18m @ 1.8 g/t gold** from 240m, including **6m @ 3.22 g/t gold** from 252m
- 24PRC103: **3m @ 1.4 g/t gold** from 174m
- 24PRC106: **48m @ 1.37 g/t gold** from 72m (~60m vertical depth), including **9m @ 2.6 g/t gold** from 78m and **3m @ 9.23 g/t gold** from 105m
- 24PRC107: **12m @ 1.24 g/t gold** from 27m, including **2m @ 2 g/t gold** from 30m
- 24PRC110: **6m @ 1.64 g/t gold** from 51m
- 24PRC115: **3m @ 1.08 g/t gold** from 99m
- 24PRC118: **6m @ 4.05 g/t gold** from 94m, including **2m @ 11.48 g/t gold** from 98m
- 24PRC120: **6m @ 1 g/t gold** from 171m
- 24PRC121: **3m @ 1.76 g/t gold** from 135m

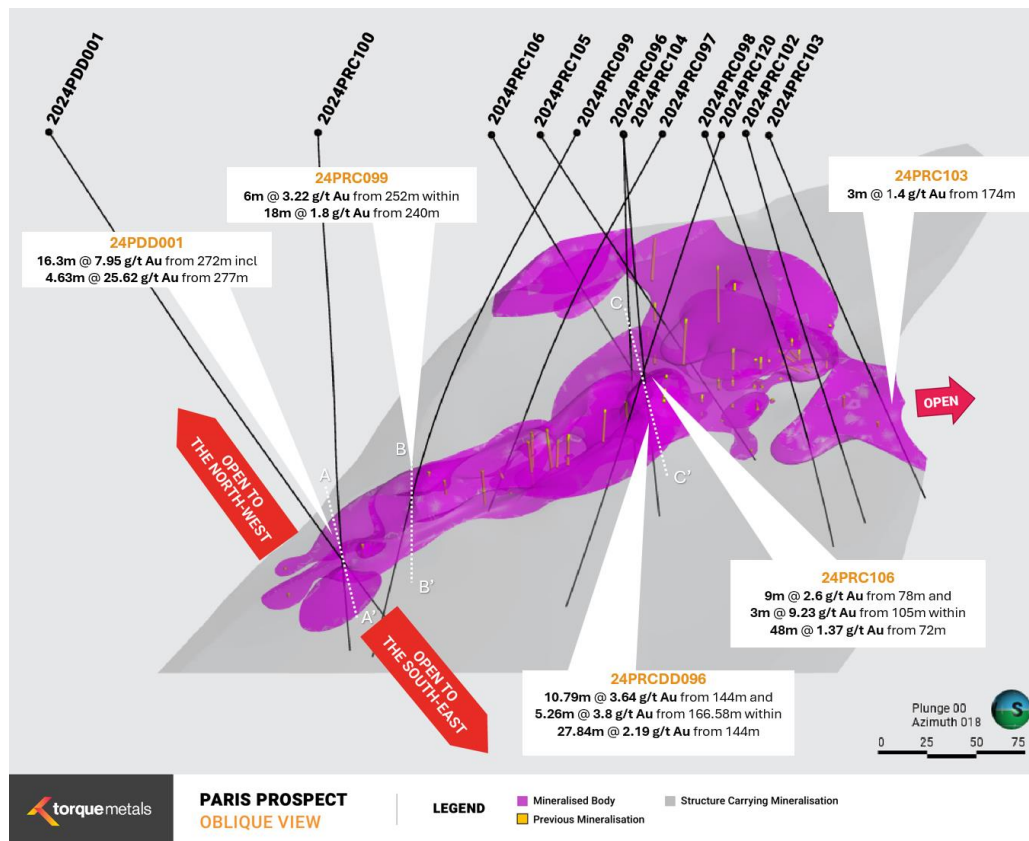


Figure 3 Paris prospect. Oblique view depicting mineralised body extending west of Paris pit.

Torque successfully extended its earlier work: **Paris** gold mineralisation was expanded west of the pit by 50m; and intersected the same structure at a shallower depth as evidenced by Hole 24PRC106, which yielded **48m @ 1.37 g/t gold from 78m**, including **9m @ 2.6 g/t gold from 78m** and **6m @ 4.27 g/t gold from 105m** (Figure 4).

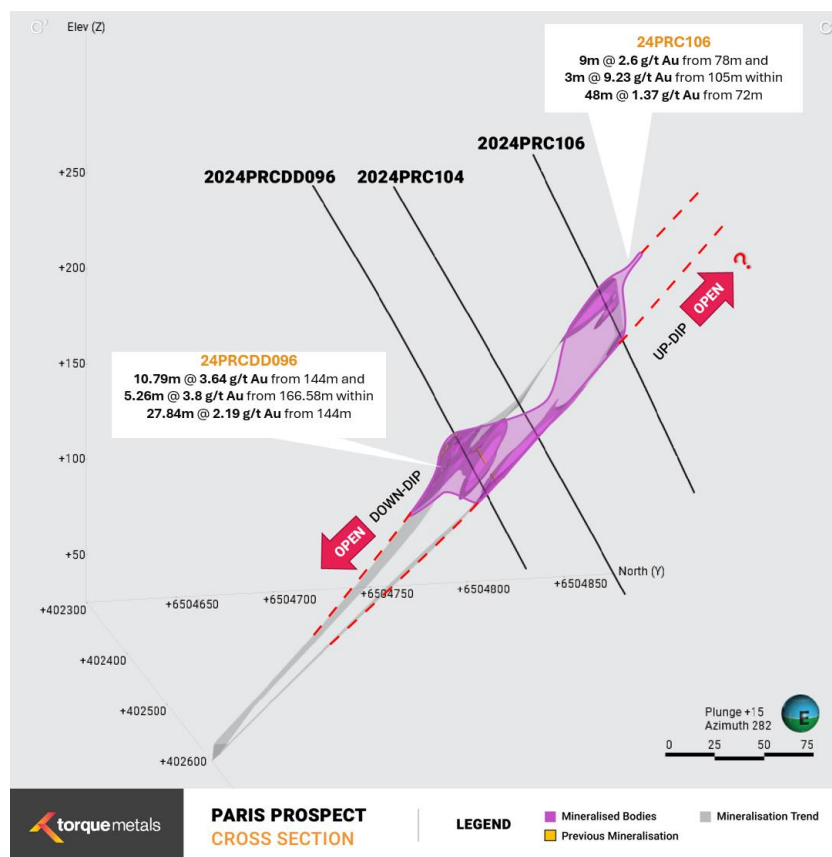


Figure 4 Paris prospect. Cross section. Showing high-grade structure going up dip and remaining open both down and up dip.

This significant finding suggests that the structure is extending up dip and opens substantial opportunities for further exploration. Torque's technical team is optimistic that similar intervals could be intersected in the upcoming drilling programme, thereby enhancing the project's potential (see Figure 3)

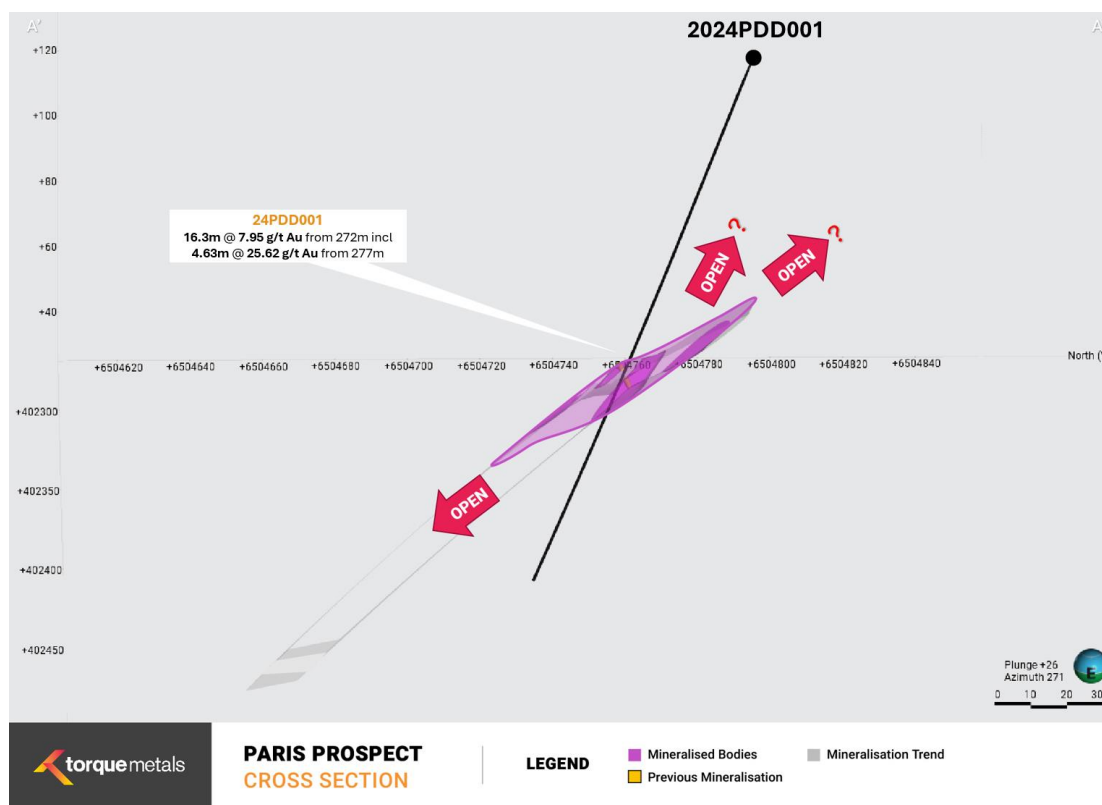


Figure 5 Paris prospect. Cross section. Cross section in hole 24PDD001 showing potential extensions northwest and south east,

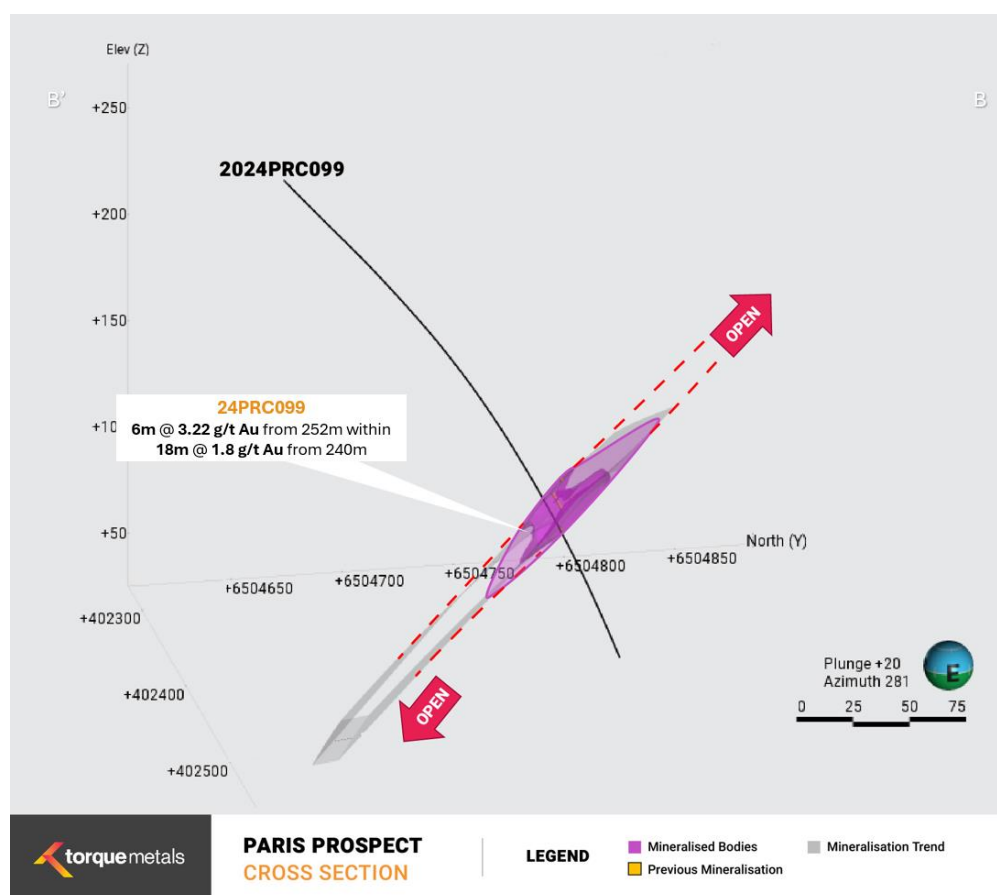


Figure 6 Paris prospect. Cross section. Hole 24PRC099 indicates potential extensions up and down dip.

To the east of Paris pit, holes 24PRC115 and 24PRC118 successfully extended shallow lodes by 30m indicating strong correlation with multiple veins extending westwards (see Figure 7), thereby adding potential scale to the resource in that area (see Figure 8).

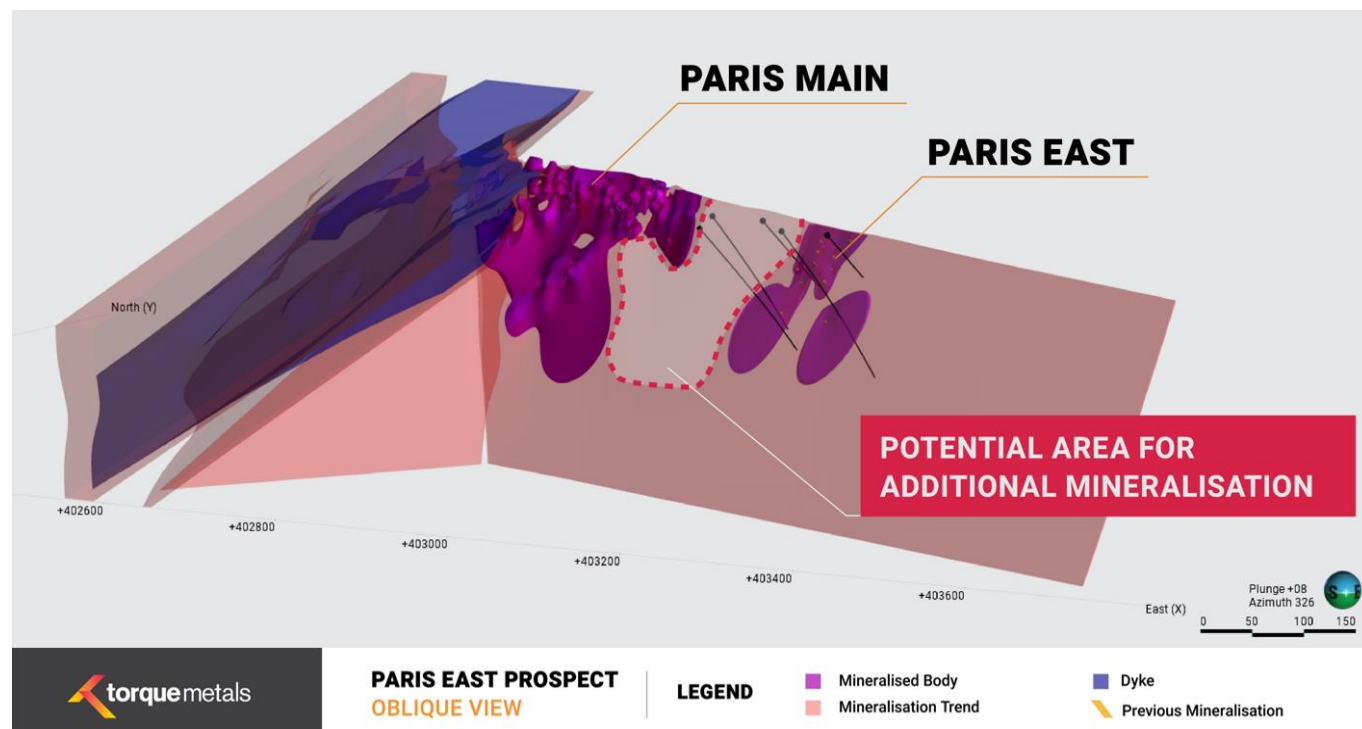


Figure 7 Paris East prospect. Oblique view. Image shows the gap to be explored between the main lode of Paris and Paris East where drilling delivered good gold intersects.


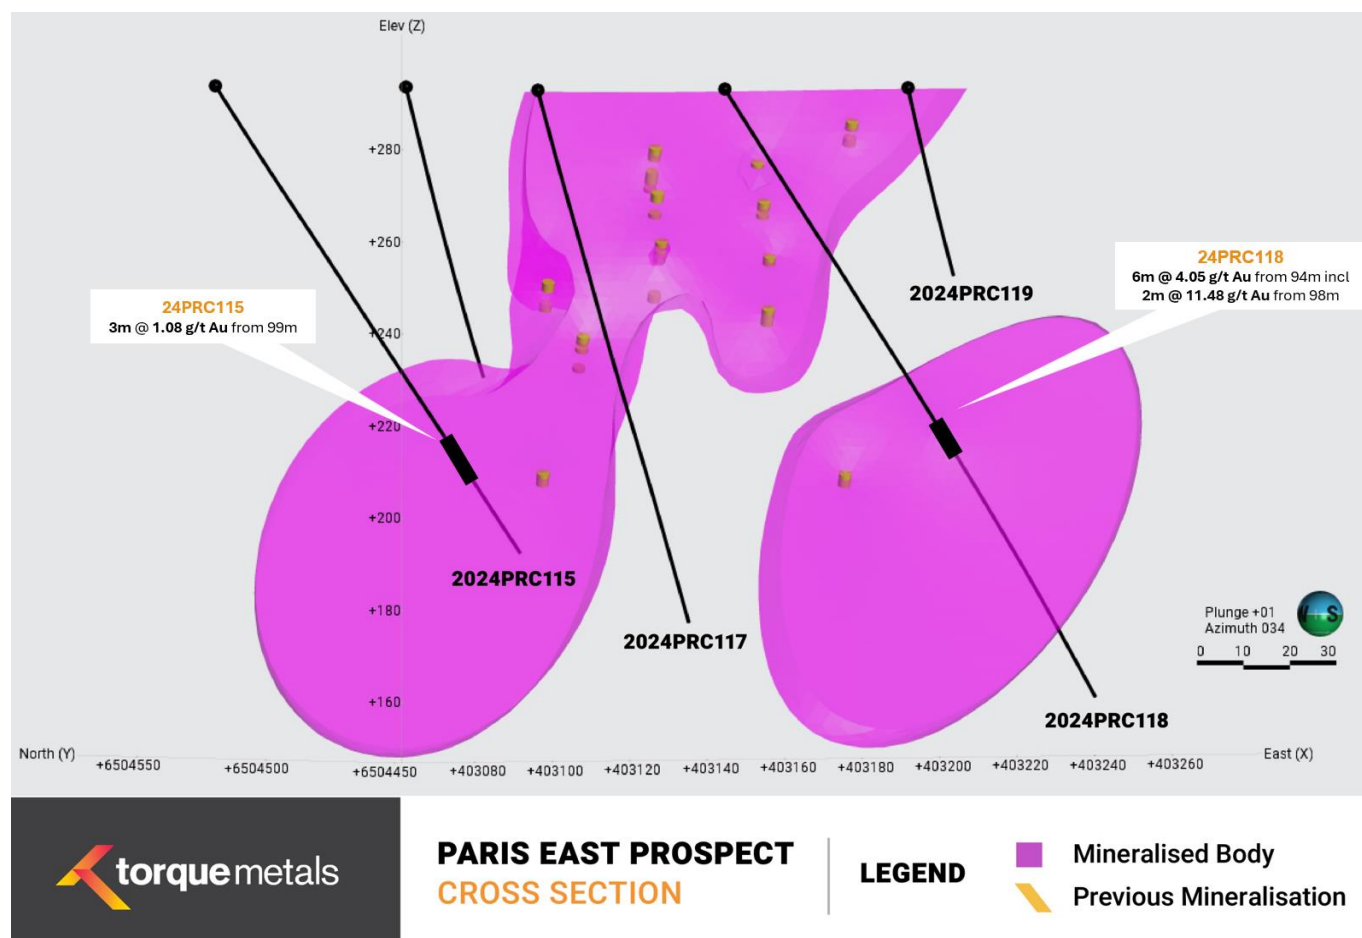


Figure 8 Paris East prospect. Cross section showing recent drilling results.

To the north of Paris pit, holes 24PRC107 and 24PRC110 intersected gold at shallow depth with strongly mineralised intervals such as **12m @ 1.24 g/t gold** from 27m and **6m @ 1.64 g/t gold** from 51m. Paris North could also be the exhibition of Paris underground as hole 24PRC096 is showing strong structural correlations (similar strike of mineralised interval). Further drilling needed to prove this theory (see Figure 9).

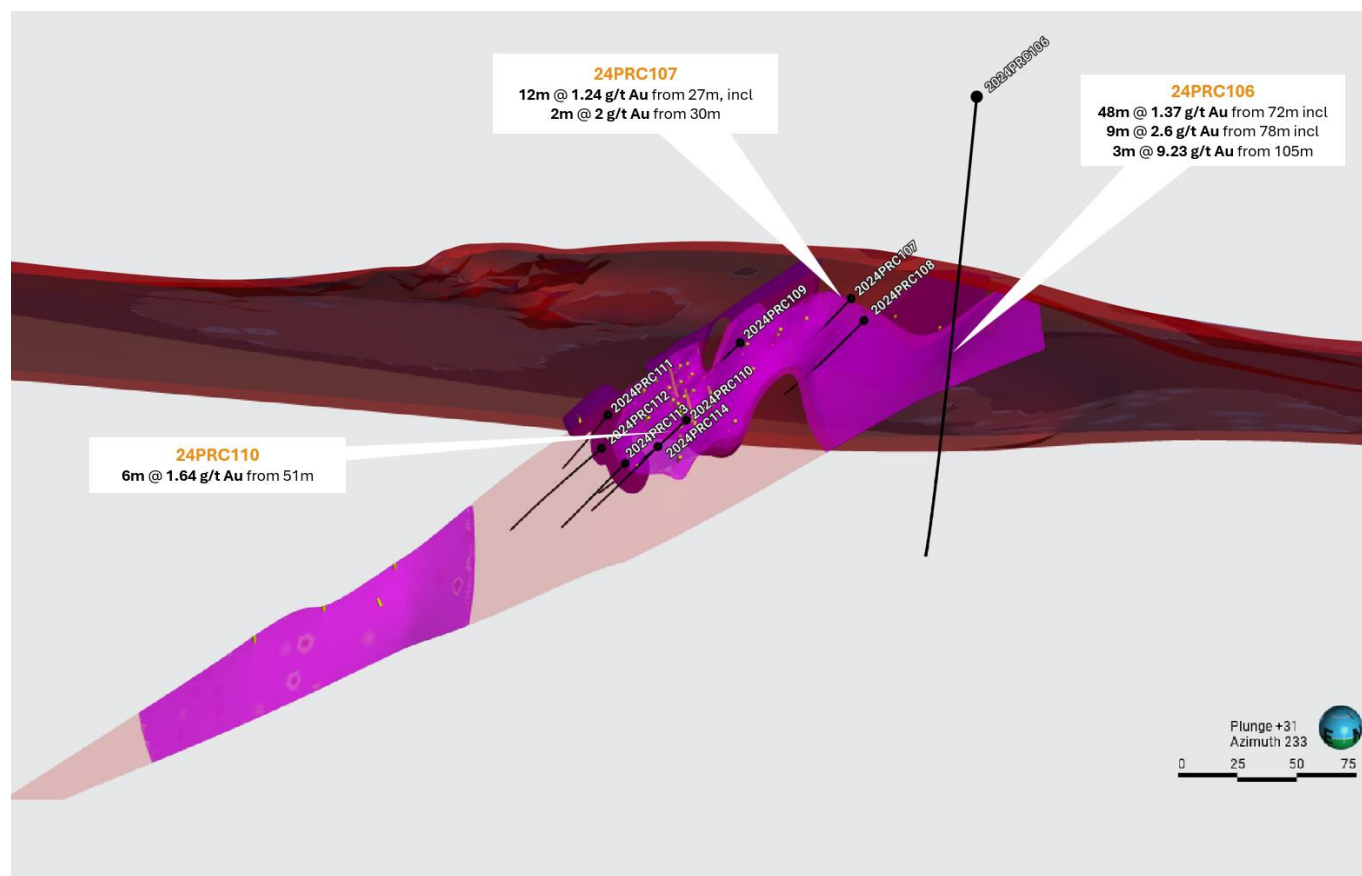

torque metals **PARIS NORTH**
OBLIQUE VIEW

LEGEND

- Mineralised structure trending east-west
- Previous gold hits
- Structure driving the mineralisation
- Mineralised structure going trending north-south

Figure 9 Paris North prospect. Oblique view along with plan view. Image shows the gap to be explored between Paris North and another mineralised body to the east. It also shows a potential connection with hole 24PRC096, thereby the exhibition of the underground mineralisation going up-dip.

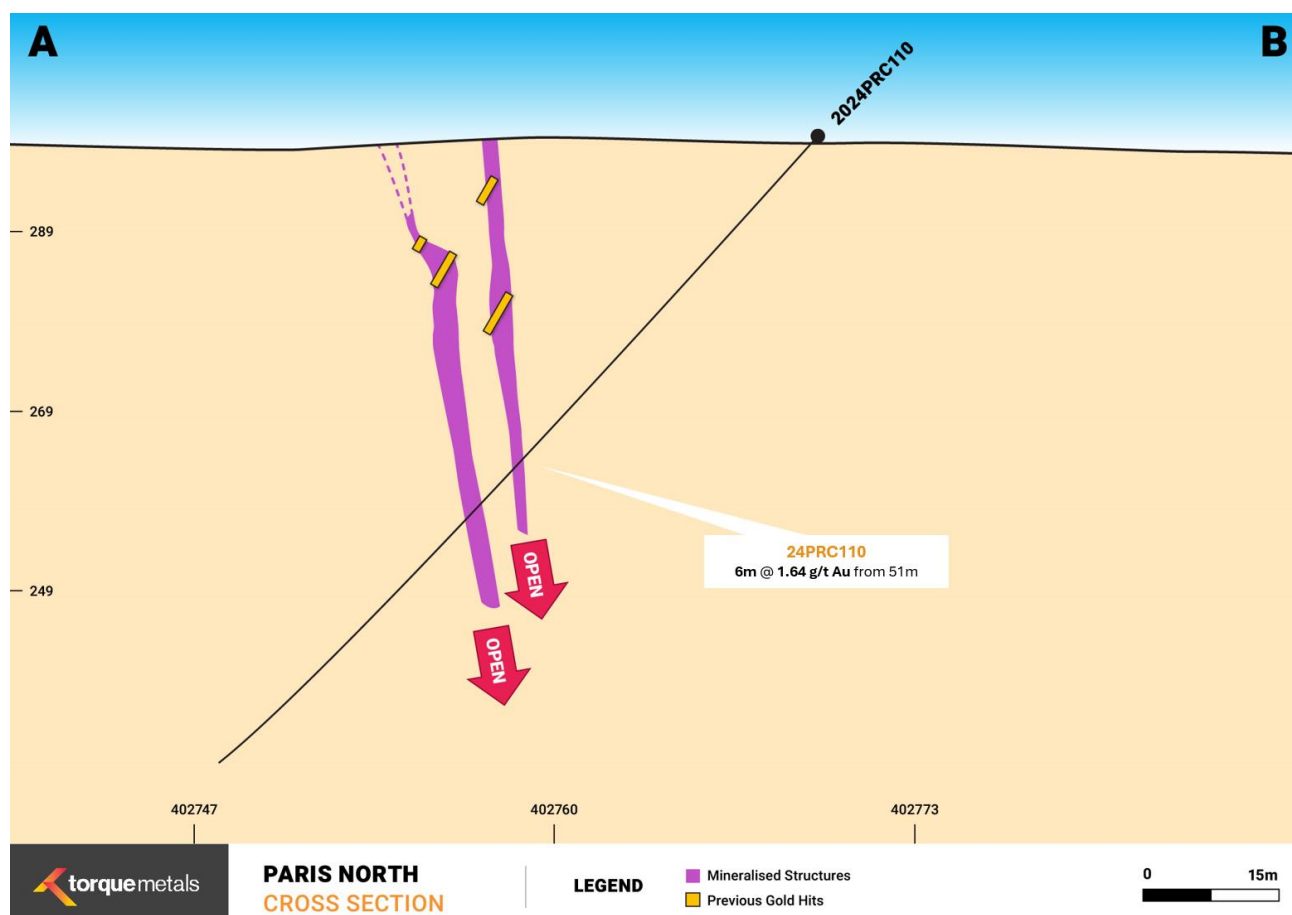


Figure 10 Paris North prospect. Cross section. Cross section in hole 24PRC110 showing intersection and mineralised body.

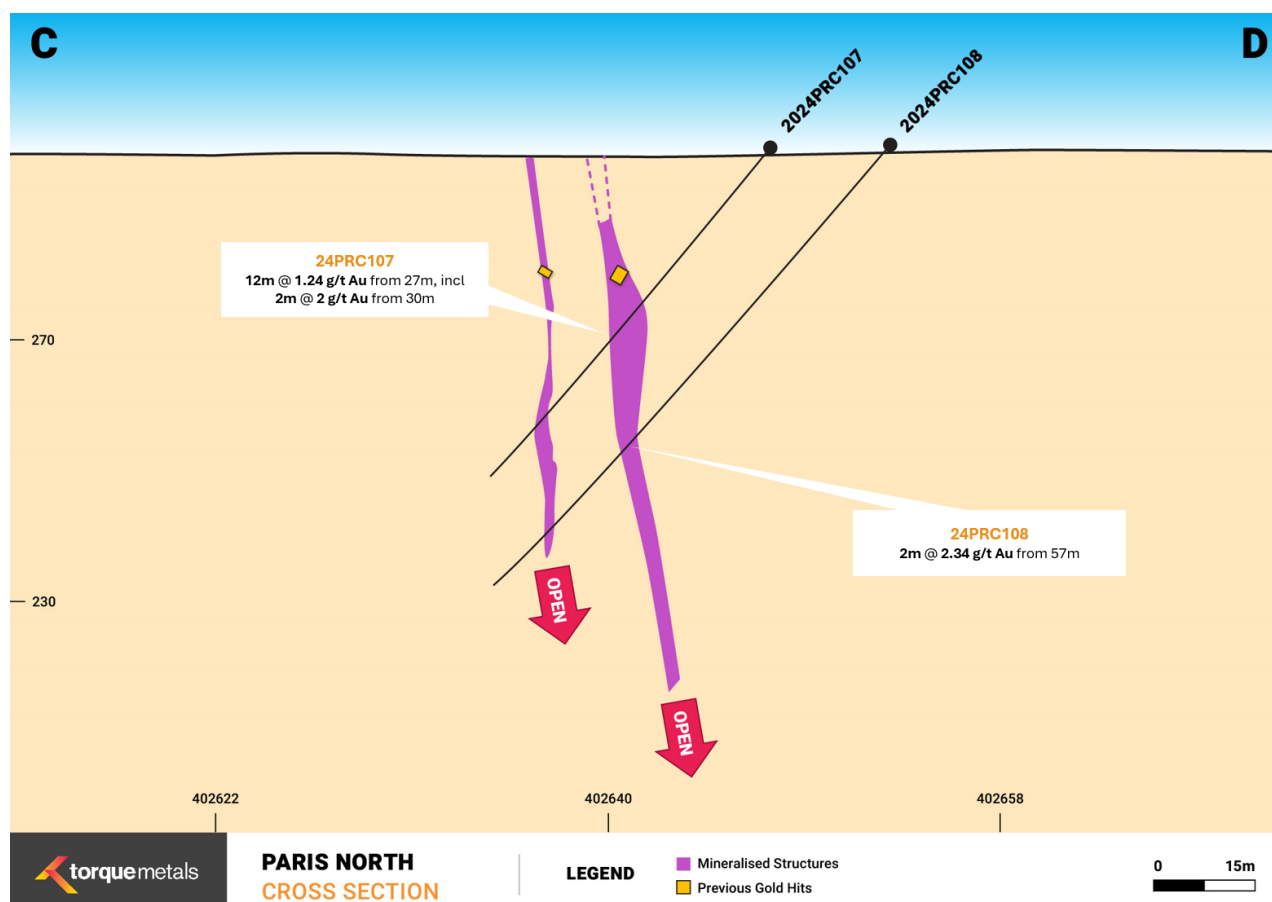


Figure 11 Paris North prospect. Cross section. Cross section in holes 24PRC107 and 24PRC108 showing mineralised body.

Discovery south of HHH pit

Drilling targeted the area between the HHH and Paris pits, where the lithostructural model suggested possible mineralisation. The drilling program in this zone comprised 27 shallow holes for a total of 3,945.6 metres and successfully confirmed the exploration model that is suggestive of a geological connection between the two pits (Figure 12).

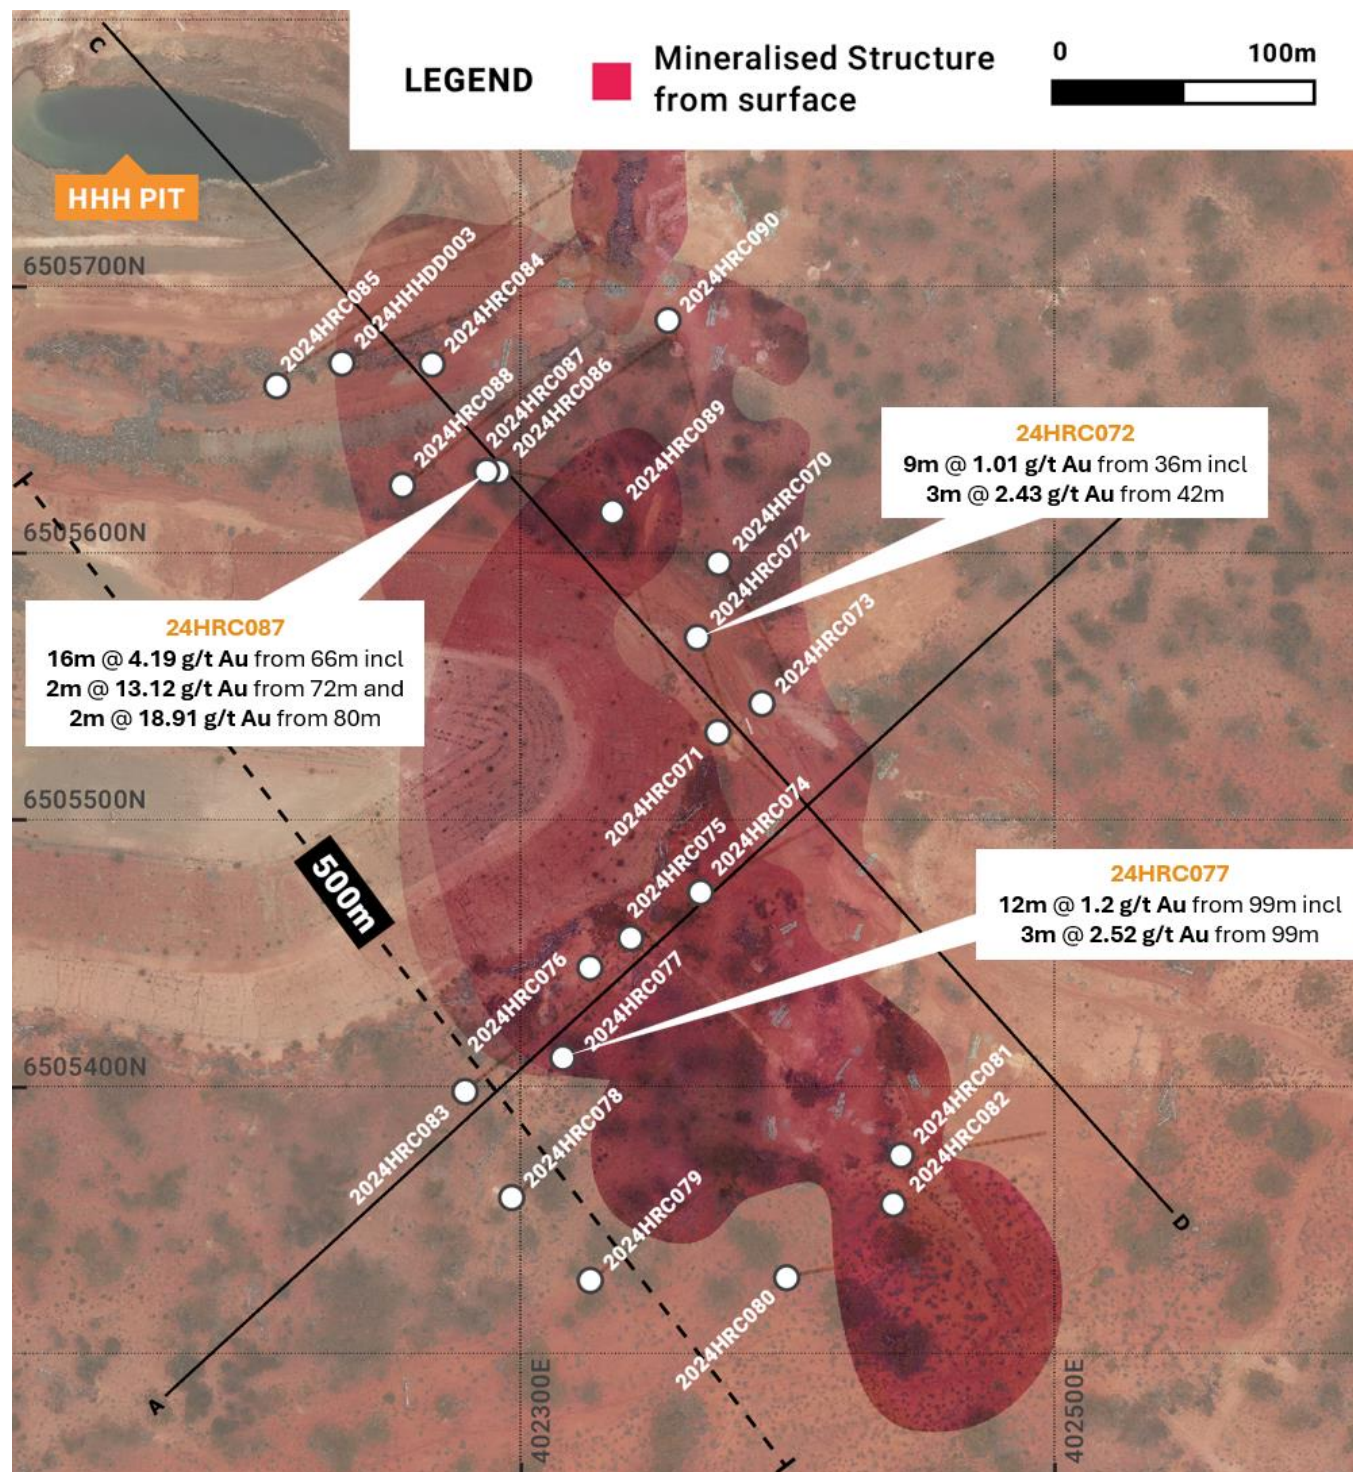


Figure 12 New discovery. Plan view exhibiting the new gold discovery adjacent to HHH pit. For cross section refer to Figures 14 and 15.

RC drilling just south of the HHH pit successfully intersected extensive shallow gold mineralisation along ~500m of north-south strike. Torque's analysis confirms east-west mineralised structures and north-south continuity that evidently may link the Paris and HHH pits (see Figures 13 and 16). These results underscore promising potential for significant resource growth through testing of the as-yet undrilled 900m gap.

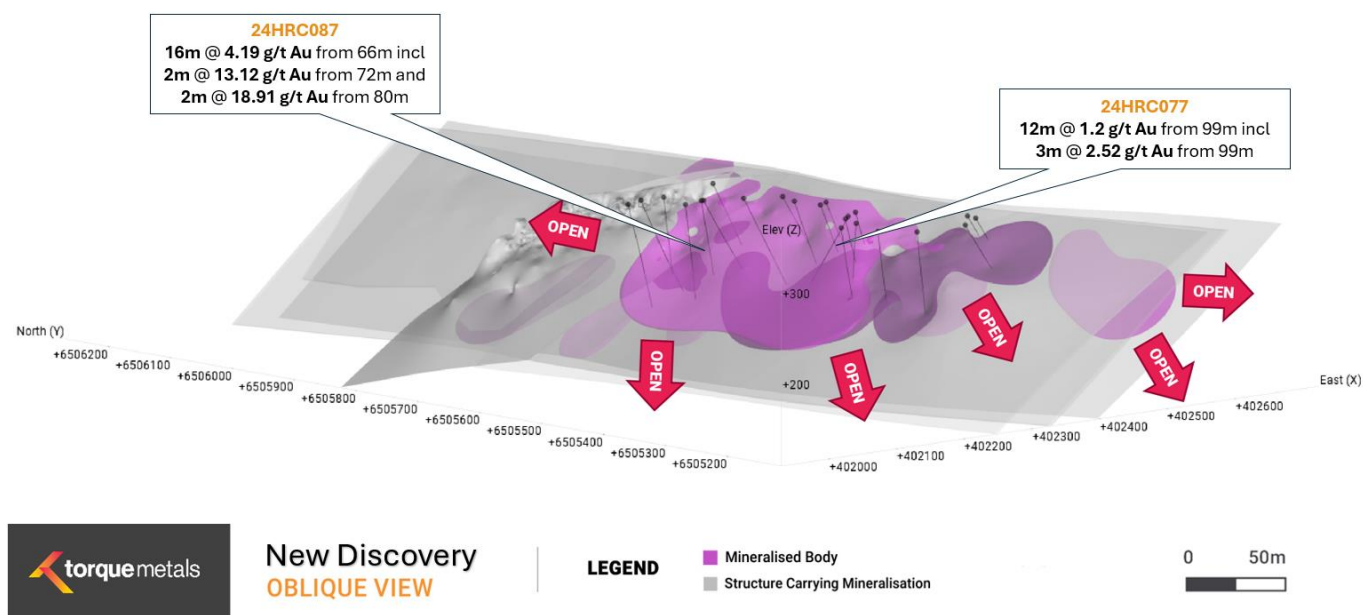


Figure 13 New discovery. Oblique view. Image showing mineralised body open in all directions potentially linking Paris and HHH pits.

Notable intersections include (see full assay data in Appendix 1):

- 24HRC070: 3m @ 1.49 g/t gold from 18m
- 24HRC072: 3m @ 2.43 g/t gold from 42m within a broader zone of 9m @ 1.01 g/t gold from 36m, and 6m @ 1.11 g/t gold from 101m
- 24HRC073: 3m @ 1.11 g/t gold from 63m
- 24HRC075: 3m @ 1.22 g/t gold from 108m
- 24HRC076: 3m @ 2.68 g/t gold from 78m within a broader zone of 12m @ 1.37 g/t gold from 72m
- 24HRC077: 3m @ 2.52 g/t gold from 99m within a broader zone of 12m @ 1.2 g/t gold from 99m
- 24HRC084: 6m @ 1.26 g/t gold from 81m and 6m @ 1.28 g/t gold from 132m and 4m @ 2.43 g/t gold from 151m including 1m @ 9.56 g/t gold from 151m
- 24HRC086: 3m @ 16.1 g/t gold from 69m within a broader zone of 12m @ 4.29 g/t gold from 69m
- 24HRC087: 2m @ 13.12 g/t gold from 72m and 2m @ 18.91 g/t gold from 80m within a broader zone of 16m @ 4.19 g/t gold from 66m
- 24HRC088: 3m @ 1.37 g/t gold from 96m
- 24HRC090: 3m @ 1.03 g/t gold from 18m
- 24HHHDD001: 1.77m @ 2.47 g/t gold from 65.8m and 3.65m @ 1.16 g/t gold from 83.72m

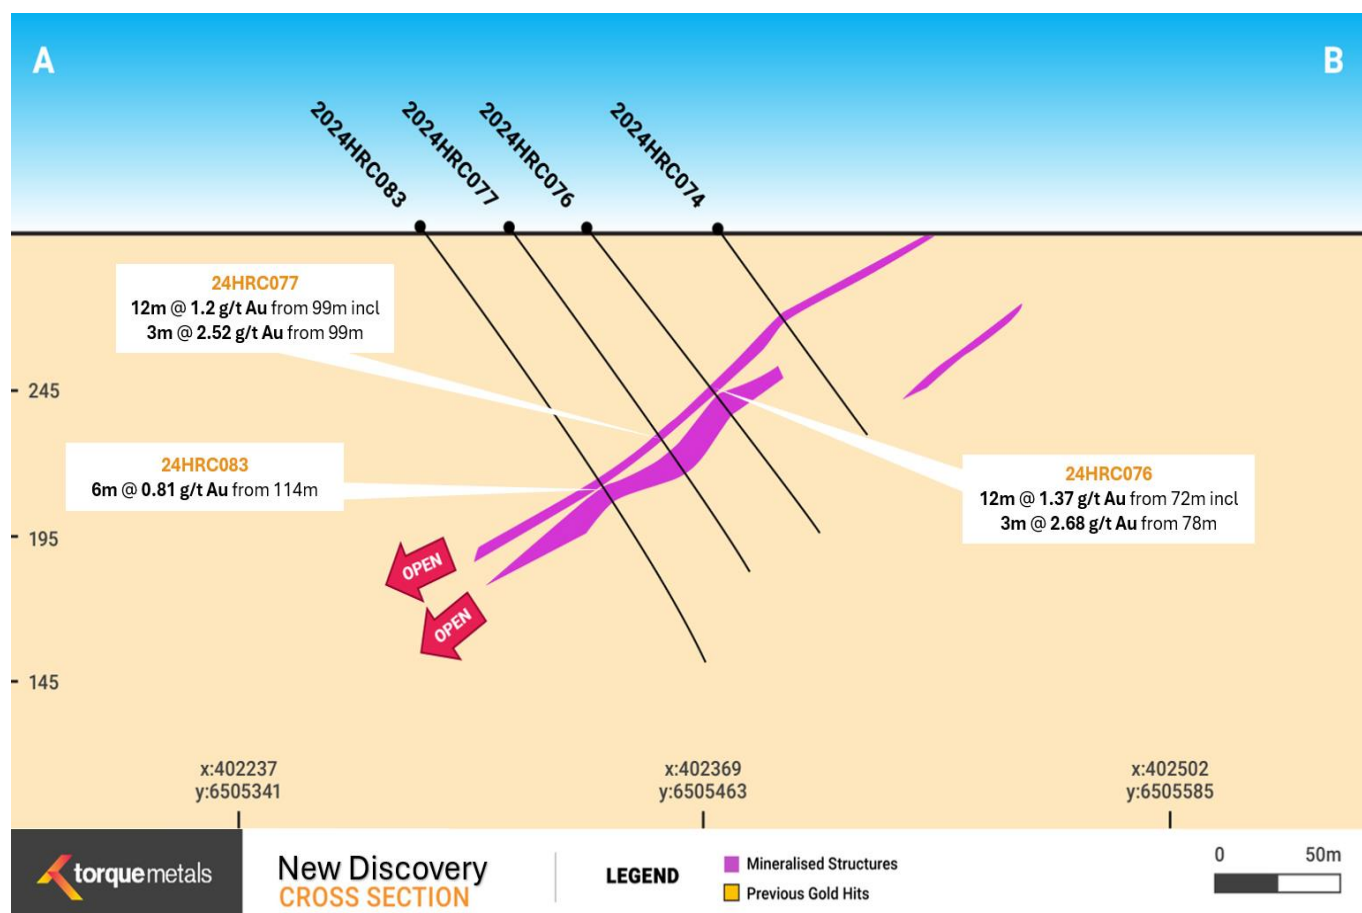


Figure 14 New discovery. Cross section. Image showing continuity in the mineralisation and potential exhibition at surface.

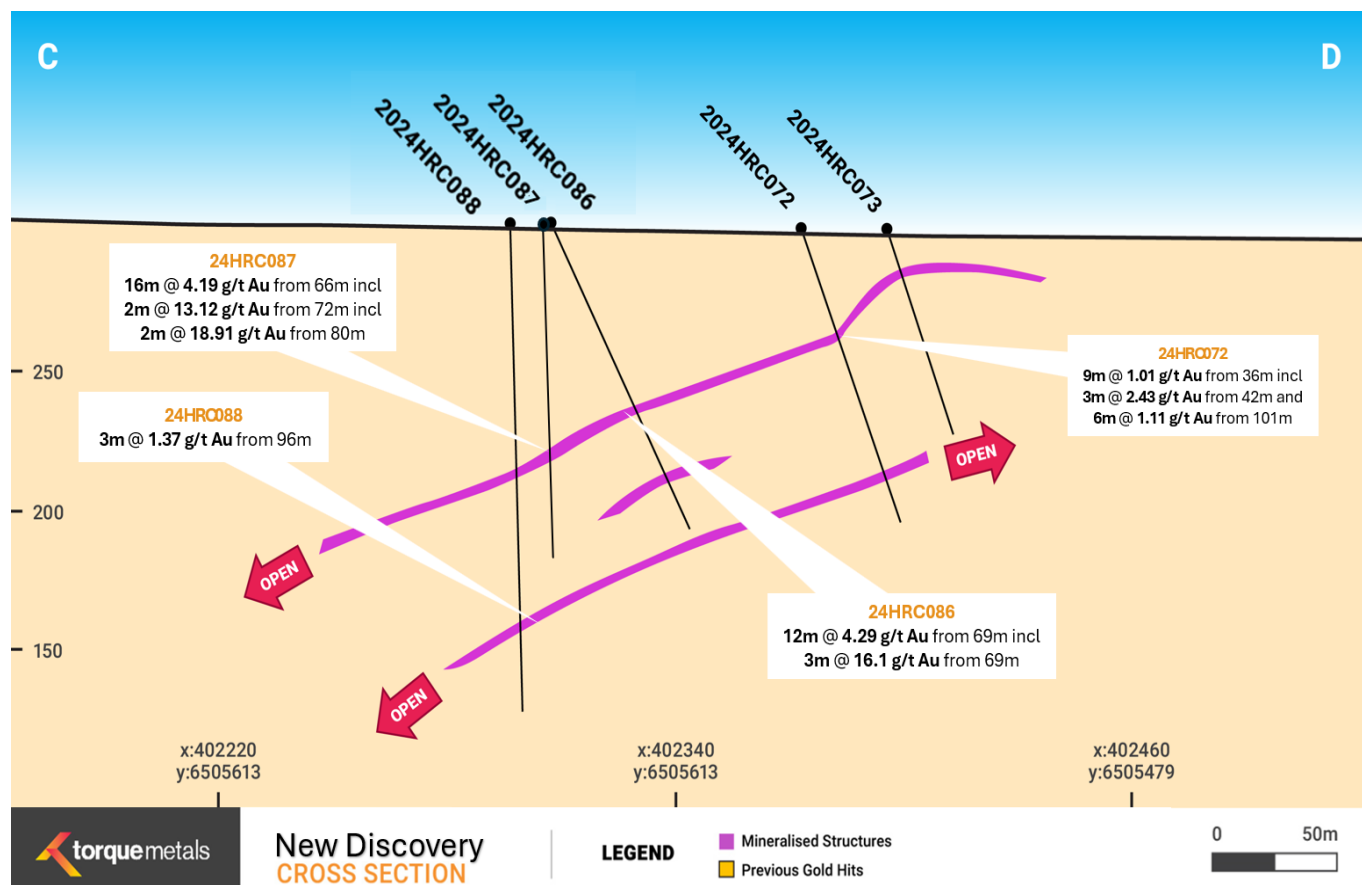


Figure 15 New discovery. Cross section. Image showing continuity in the mineralisation and potential exhibition at surface.

The next phase of Torque's exploration programme focuses on extending the newly identified mineralisation and attempting to connect this with the Paris pit.

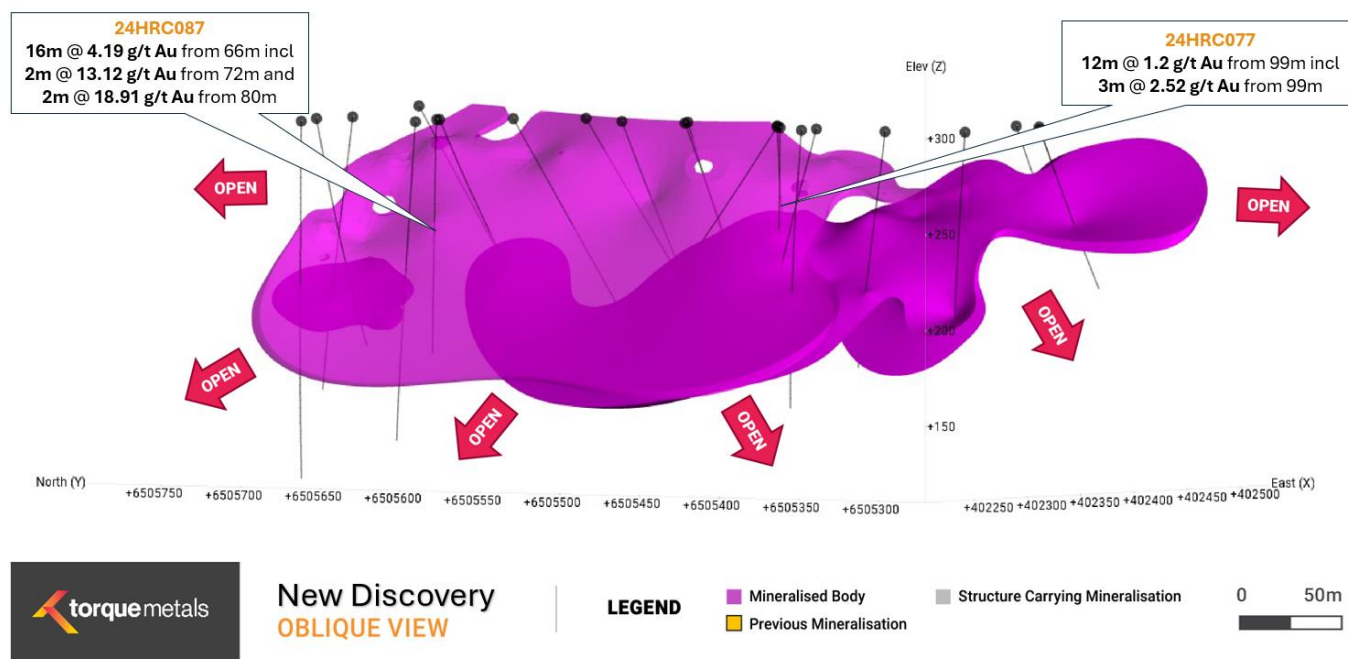


Figure 16 New discovery. Oblique view. Image showing mineralised body open in all directions, potentially linking Paris and HHH pits.

Observation Deposit – Extensional drilling expands gold boundaries

Drilling successfully targeted the areas east and west of the Observation prospect confirming extensions (similar to those intersected at the Paris deposit) remaining open to the east and west. The mineralised body is structurally controlled following the footwall of an unmineralized dyke trending northwest. 6 holes totalling 922.4 metres using a combination of reverse circulation (RC) and diamond drilling methods encountered shallow gold (see Figure 17).

Notable intersections include (see full assay data in Appendix 1):

- 24ORC051: 3m @ **1.08 g/t gold** from 84m
- 24ORC052: 15m @ **1.07 g/t gold** from 69m including 3m @ **2 g/t gold** from 78m
- 24ORC054: 3m @ **2.31 g/t gold** from 60m
- 24ODD002: **6.81m @ 7.59 g/t gold** from 58.29m including **2.12m @ 24.02 g/t gold** from 59.88m
- 24ODD003: 4.4m @ **1.63 g/t gold** from 72.70m including 1m @ **6.47 g/t gold** from 76.06m

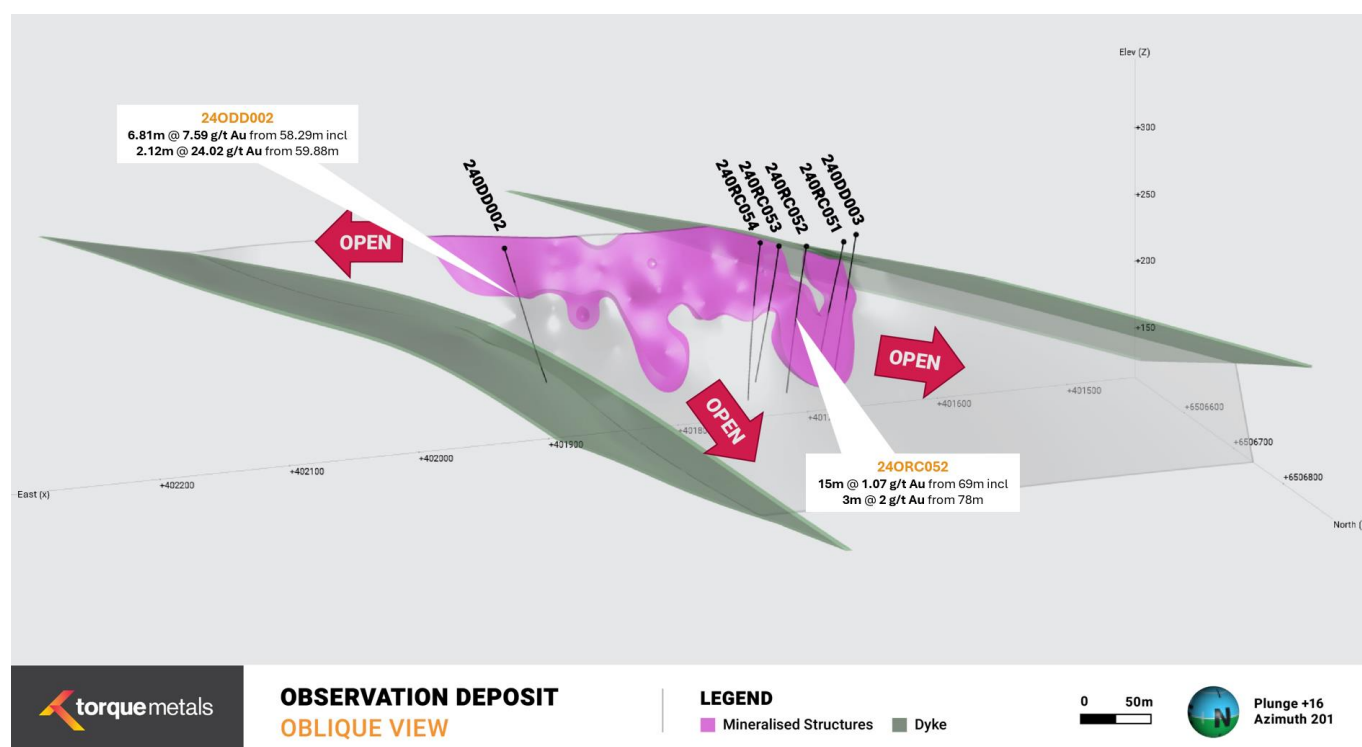


Figure 17 Observation deposit. Oblique view including best gold results.

Drilling program

Torque completed an extensional drilling program of 60 holes totalling 9,703.1 metres, using a combination of reverse circulation (RC) and diamond drilling methods. The expanded data set substantially enhances understanding of mineralisation and contributes to the in-house mineralisation model (see Figure 18).


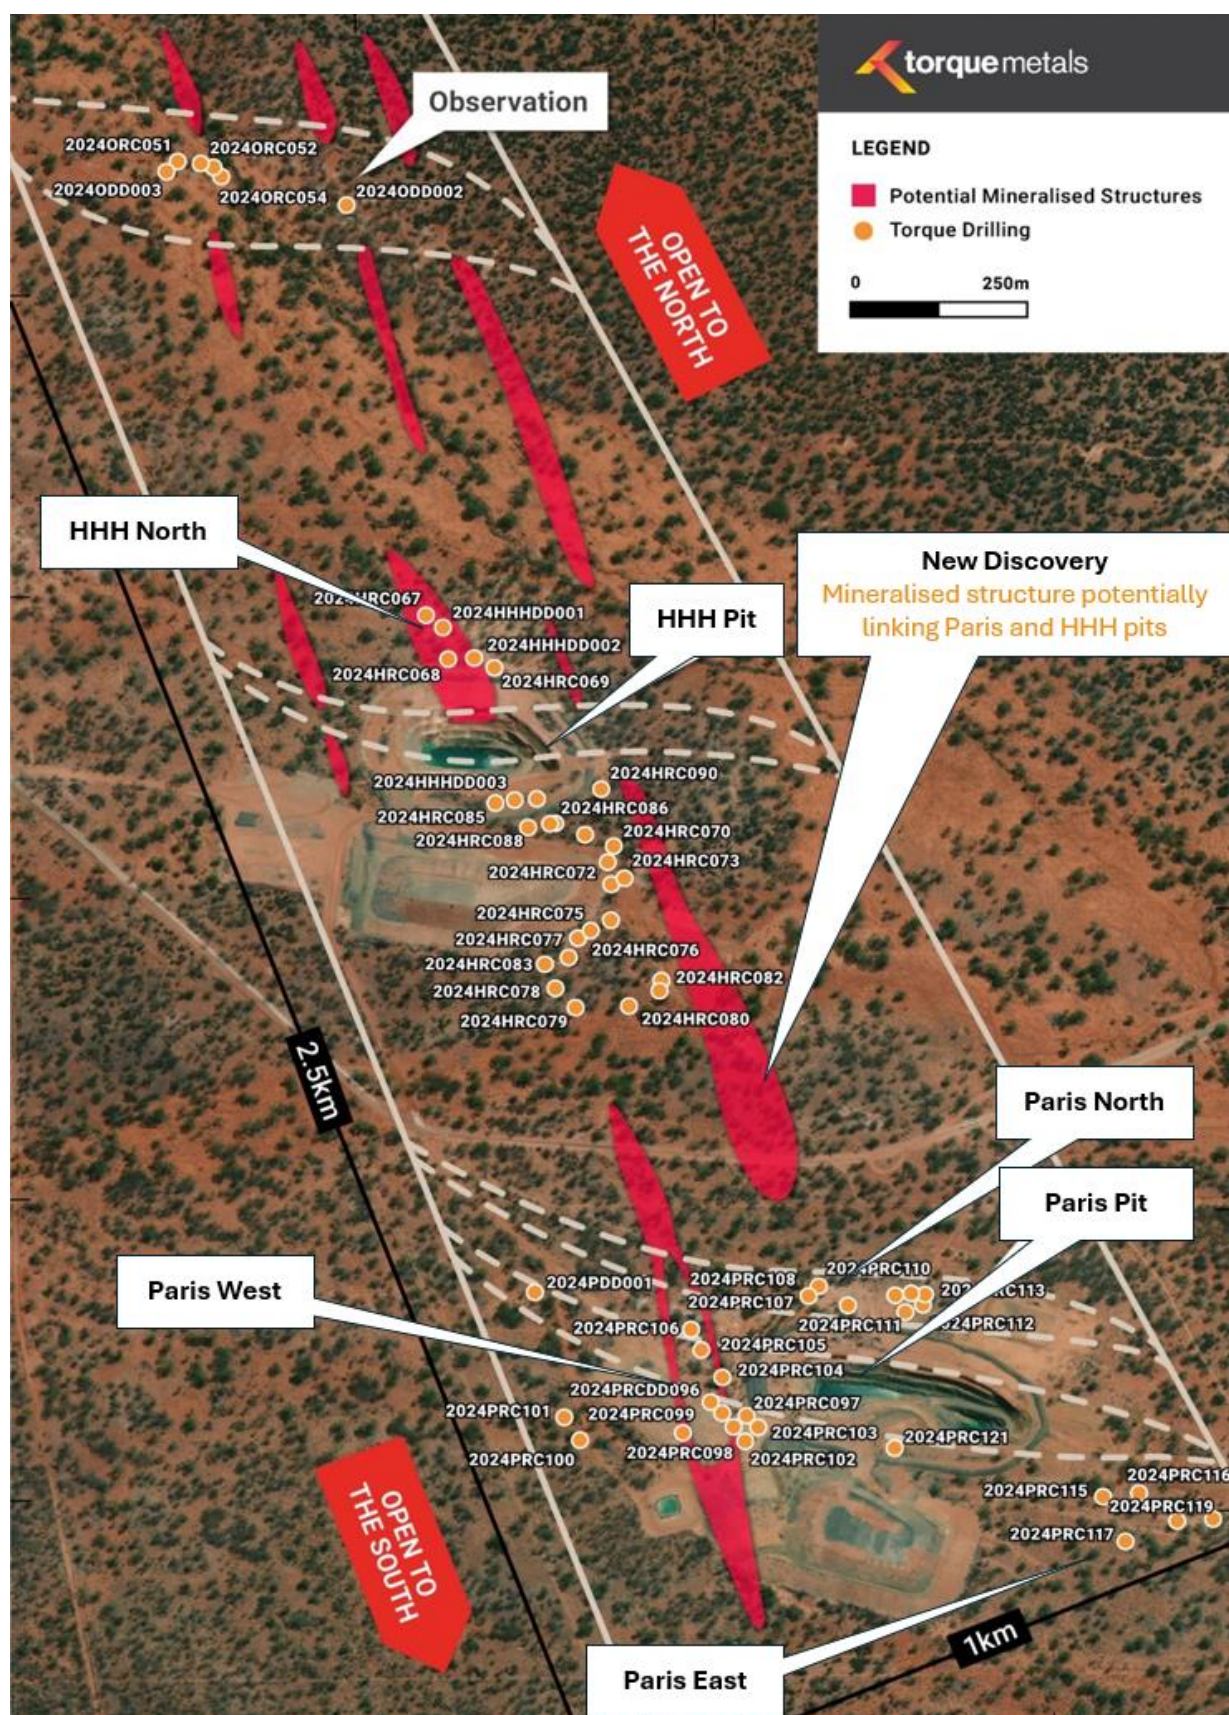


Figure 18 Plan view with geological model and collar locations of all holes completed in the drill program along with mineralised prospects.

Geological model

The Paris Gold Project spans an area of nearly 600 square kilometres, encompassing the Paris Gold Camp covering 2.5 square kilometres, where Torque is focussed on defining its initial resource. This project offers significant potential for expansion, as the mineralised model remains open to both the north and south. Geological continuity suggests that further exploration can extend mineralisation boundaries.

Within the Paris Gold Camp, two distinct styles of mineralisation have been identified. The first style includes early shear-related quartz veins and breccia zones, while the second comprises high-grade, parallel shear-related gold mineralisation trending in a west-east direction. Torque is developing its geological modelling using the interpretation of Sarah Jones, David Douth and Tim Lutter on their paper “The Invincible deposit: Early gold mineralisation truncated by unaltered c.2665 Ma conglomerate, St Ives, Eastern Goldfields, Western Australia”. Torque believes Paris shares multiple structural similarities with Invincible and its cross-cutting veining system of mineralisation (see Figure 19).

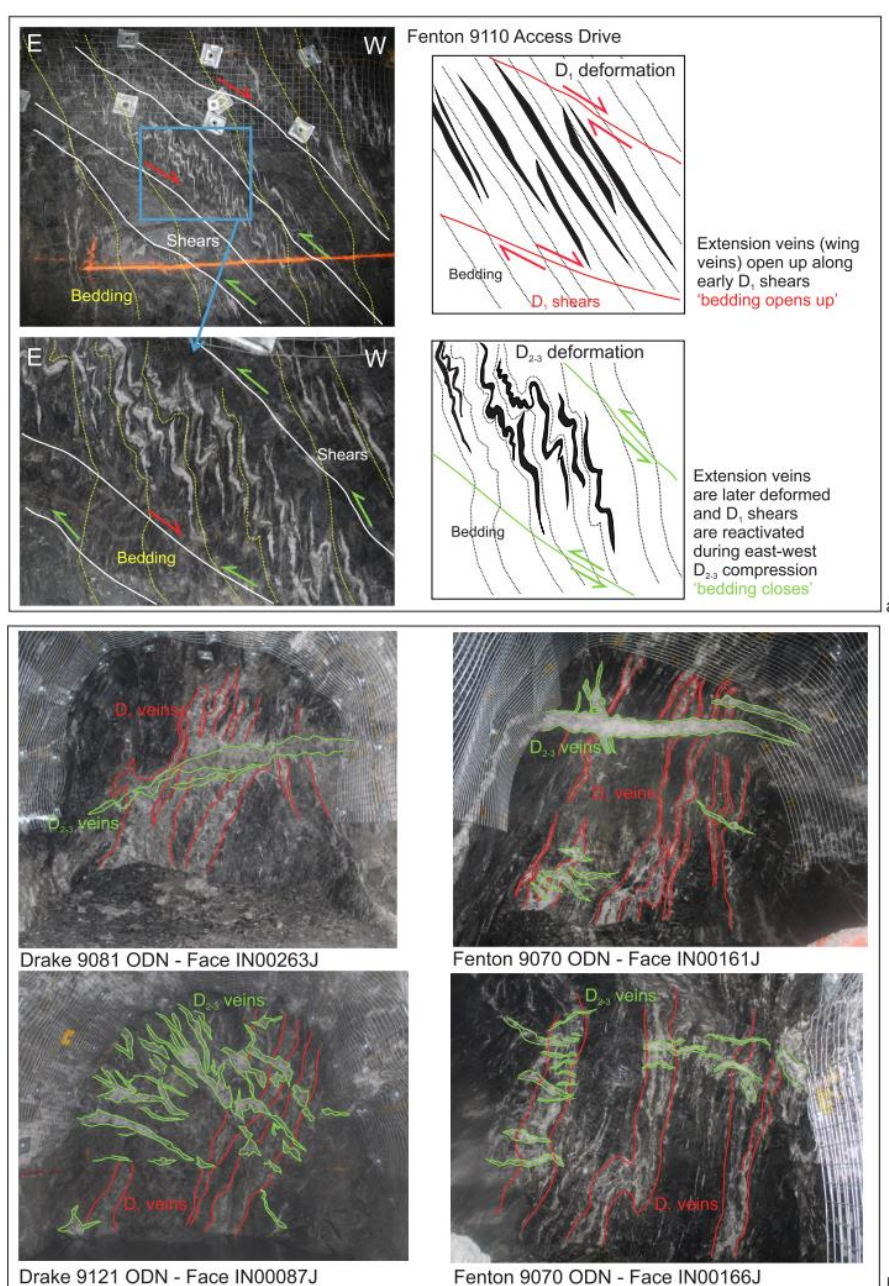

¹ Jones, S., Douth, D., & Lutter, T. (n.d.). The Invincible deposit: Early gold mineralisation truncated by unaltered c. 2665 Ma conglomerate, St Ives, Eastern Goldfields, Western Australia. Gold Fields Ltd, 50 Colin St, West Perth WA6005, Australia; CODES, University of Tasmania, Australia.

Torque Metals' Projects – Upcoming News

Torque is pursuing key milestones in the current year

Paris Gold Project

- Soils campaign on recently acquired tenements
- Follow-up RC and Diamond drill campaign ~10,000m
- Maiden Mineral Resource Estimate
- Maiden Exploration Target

New Dawn Lithium Project

- RC drill campaign
- Soils campaign on recently acquired tenements

About Torque Metals

Torque is an exploration company with a proven discovery methodology, combining drilling results with machine learning algorithms and geological interpretation. Torque's Board and management have successful records and extensive experience in the exploration, development and financing of mining projects in Australia.

Torque's expanded Penzance Exploration Camp² covers ~1200km² of land, including 13 mining licences, 4 prospecting licences and 38 exploration licences³ ~90km Southeast Kalgoorlie in WA (see Figure 20).

Torque is focused on mineral exploration in this well-established mineral province. Torque continues to evaluate and pursue other prospective opportunities in the resources sector in line with a strategy to develop high quality assets.

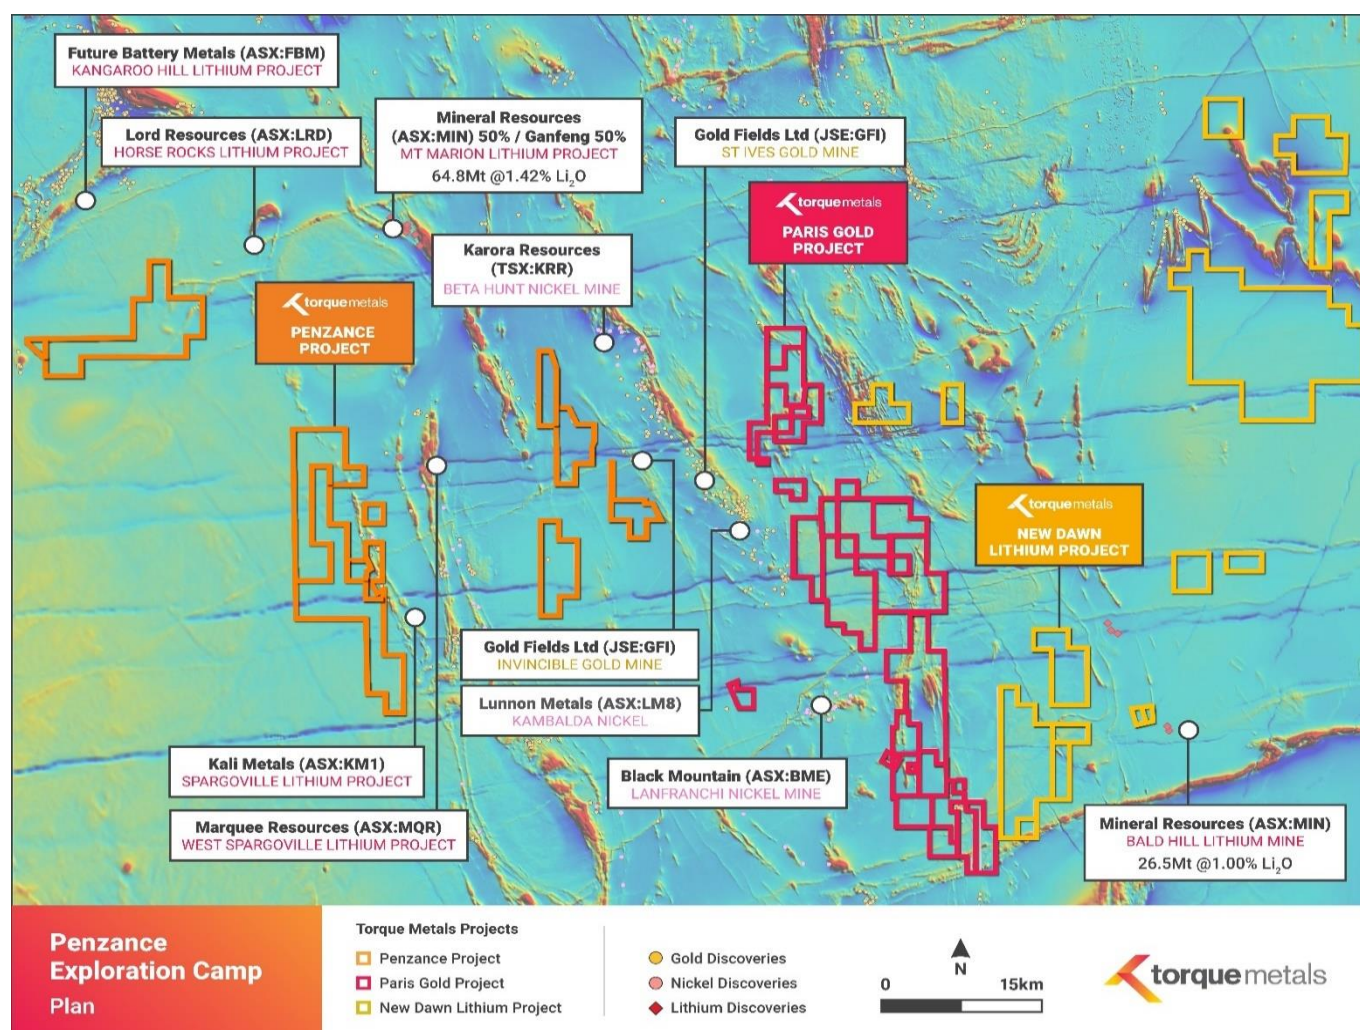


Figure 20 Torque's Exploration Presence.

Competent Person Statement – Exploration Results

Information in this announcement that relates to Exploration Results is based on information compiled by Mr Cristian Moreno, who is a Member of the Australasian Institute of Mining and Metallurgy, Australian Institute of Management as well a Member of the Australian Institute of Company Directors. Mr Moreno is an employee of Torque Metals Limited ("the Company"), is eligible to participate in short and long-term incentive plans in the Company and holds performance rights in the Company as has been previously disclosed to ASX. Mr Moreno has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Moreno consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

² The Penzance Exploration Camp includes the New Dawn Lithium Project and the Paris Project.

³ Upon Torque becoming the registered holder of the tenements under the Option Agreements and the Tenement Applications, subject to the requirements of the Mining Act 1971 (WA).

Forward Looking Statements

This report may contain certain “forward-looking statements” which may not have been based solely on historical facts, but rather may be based on the Company’s current expectations about future events and results. Where the Company expresses or implies an expectation or belief as to future events or results, such expectation or belief is expressed in good faith and believed to have a reasonable basis.

However, forward looking statements are subject to risks, uncertainties, assumptions, and other factors which could cause actual results to differ materially from future results expressed, projected, or implied by such forward-looking statements. Readers should not place undue reliance on forward looking information. The Company does not undertake any obligation to release publicly any revisions to any “forward-looking statement” to reflect events or circumstances after the date of this report, or to reflect the occurrence of unanticipated events, except as may be required under applicable securities laws.

This announcement has been authorised by the Board of Directors of Torque.

For more information contact:

Cristian Moreno

Managing Director

Torque Metals Limited

cristian@torquemetals.com

M: +61 410280809

www.torquemetals.com

APPENDIX 1: Laboratory assay results: Fire Assay 40g charge after 4-acid digest with ICP analysis

Only gold assays ≥ 0.03 ppm (0.03 g/t) are recorded in the following table, except where relevant as part of a longer intercept. All intercepts are presented as down-hole lengths.

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024HRC067	0	3	3	0.05	2024PRC106	72	75	3	0.13
2024HRC067	3	6	3	0.04	2024PRC106	75	78	3	0.04
2024HRC067	6	9	3	0.04	2024PRC106	78	81	3	5.36
2024HRC067	9	12	3	0.01	2024PRC106	81	84	3	1.24
2024HRC067	24	27	3	0.01	2024PRC106	84	87	3	1.21
2024HRC067	27	30	3	0	2024PRC106	87	90	3	0.06
2024HRC067	32	33	1	3.59	2024PRC106	90	93	3	1.89
2024HRC067	33	34	1	0.04	2024PRC106	93	96	3	0.05
2024HRC067	34	35	1	0	2024PRC106	96	99	3	0.04
2024HRC067	35	36	1	0.1	2024PRC106	99	102	3	0.03
2024HRC067	36	39	3	0.02	2024PRC106	102	105	3	1
2024HRC067	45	48	3	0.07	2024PRC106	105	108	3	9.23
2024HRC067	72	75	3	0.02	2024PRC106	108	111	3	0.05
2024HRC067	78	81	3	0.02	2024PRC106	111	114	3	0.04
2024HRC067	81	84	3	1.02	2024PRC106	114	117	3	0.07
2024HRC067	87	88	1	0.1	2024PRC106	117	120	3	1.49
2024HRC067	88	89	1	1.22	2024PRC107	18	21	3	0.27
2024HRC067	89	90	1	0.47	2024PRC107	21	24	3	0.06
2024HRC067	90	91	1	0.58	2024PRC107	24	27	3	0.06
2024HRC067	91	92	1	0.15	2024PRC107	27	28	1	2.19
2024HRC067	92	93	1	0.1	2024PRC107	28	29	1	0.21
2024HRC067	93	94	1	0.02	2024PRC107	29	30	1	0.62
2024HRC067	94	95	1	0.25	2024PRC107	30	31	1	2.83
2024HRC067	95	96	1	0.03	2024PRC107	31	32	1	1.17
2024HRC067	96	99	3	0.05	2024PRC107	32	33	1	0.2
2024HRC068	48	51	3	0.01	2024PRC107	33	34	1	1.44
2024HRC068	51	54	3	0	2024PRC107	34	35	1	1.35
2024HRC068	54	57	3	0.03	2024PRC107	35	36	1	0.56
2024HRC068	57	60	3	0	2024PRC107	36	37	1	1
2024HRC068	60	63	3	0.05	2024PRC107	37	38	1	0.18
2024HRC068	81	84	3	0.05	2024PRC107	38	39	1	3.16
2024HRC068	84	85	1	0.53	2024PRC107	39	40	1	0.15
2024HRC068	85	86	1	0.04	2024PRC107	40	41	1	0.06
2024HRC068	86	87	1	1.57	2024PRC107	41	42	1	0.02
2024HRC068	87	88	1	0.36	2024PRC107	42	43	1	0.02
2024HRC068	88	89	1	1.24	2024PRC107	43	44	1	0.02
2024HRC068	89	90	1	0.08	2024PRC107	44	45	1	0.02
2024HRC068	93	94	1	0.02	2024PRC108	24	27	3	0.07
2024HRC068	94	95	1	0	2024PRC108	27	30	3	0.07
2024HRC068	95	96	1	0.18	2024PRC108	30	33	3	0.08
2024HRC068	99	102	3	0.19	2024PRC108	51	54	3	0.01

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024HRC068	162	163	1	0.08	2024PRC108	55	56	1	0.02
2024HRC068	163	164	1	0	2024PRC108	56	57	1	0.01
2024HRC068	164	165	1	0.05	2024PRC108	57	58	1	4.34
2024HRC069	60	63	3	0.01	2024PRC108	58	59	1	0.35
2024HRC069	63	66	3	0	2024PRC108	59	60	1	0.09
2024HRC069	66	69	3	0.01	2024PRC108	60	61	1	0.01
2024HRC069	69	72	3	0	2024PRC108	70	71	1	0.01
2024HRC069	72	75	3	0.01	2024PRC108	71	72	1	0.01
2024HRC069	75	78	3	0	2024PRC108	72	73	1	0.03
2024HRC069	78	81	3	0.01	2024PRC108	73	74	1	0.32
2024HRC069	111	114	3	0.01	2024PRC108	74	75	1	0.05
2024HRC070	18	21	3	1.49	2024PRC108	75	76	1	0.06
2024HRC070	21	24	3	0.4	2024PRC108	76	77	1	0.03
2024HRC070	24	25	1	0.47	2024PRC109	15	18	3	0.12
2024HRC070	25	26	1	0.22	2024PRC109	18	21	3	0.5
2024HRC070	26	27	1	0.41	2024PRC109	21	24	3	0.19
2024HRC070	27	30	3	0.21	2024PRC109	24	27	3	0.13
2024HRC070	30	33	3	0.05	2024PRC109	27	30	3	0.03
2024HRC071	19	20	1	0.08	2024PRC109	30	33	3	0
2024HRC071	20	21	1	0.08	2024PRC109	33	36	3	0.03
2024HRC071	21	22	1	0.11	2024PRC109	36	39	3	0.12
2024HRC071	22	23	1	0.4	2024PRC109	39	42	3	0.02
2024HRC071	23	24	1	0.28	2024PRC109	42	45	3	0
2024HRC071	24	25	1	0.02	2024PRC109	45	48	3	0.09
2024HRC072	36	39	3	0.26	2024PRC109	54	57	3	0.86
2024HRC072	39	42	3	0.35	2024PRC109	57	60	3	0.11
2024HRC072	42	45	3	2.43	2024PRC110	51	54	3	0.04
2024HRC072	45	48	3	0.13	2024PRC110	54	57	3	3.23
2024HRC072	101	102	1	2.69	2024PRC110	57	58	1	0.12
2024HRC072	102	103	1	2.12	2024PRC110	58	59	1	0.02
2024HRC072	103	104	1	0.76	2024PRC110	59	60	1	0.03
2024HRC072	104	105	1	0.69	2024PRC110	60	61	1	0.1
2024HRC072	105	106	1	0.26	2024PRC110	61	62	1	0.02
2024HRC072	106	107	1	0.12	2024PRC110	62	63	1	0.05
2024HRC072	107	108	1	0.1	2024PRC110	63	64	1	0.78
2024HRC073	8	9	1	0.19	2024PRC110	64	65	1	0.04
2024HRC073	9	10	1	0.29	2024PRC110	65	66	1	0.06
2024HRC073	10	11	1	0.52	2024PRC110	66	67	1	0.08
2024HRC073	11	12	1	0.11	2024PRC110	67	68	1	0.03
2024HRC073	12	13	1	0.04	2024PRC110	68	69	1	0.02
2024HRC073	13	14	1	0.24	2024PRC110	69	70	1	0.02
2024HRC073	14	15	1	0.26	2024PRC110	70	71	1	0.02
2024HRC073	15	16	1	0.26	2024PRC110	71	72	1	0.02
2024HRC073	16	17	1	0.07	2024PRC110	72	75	3	0.89
2024HRC073	17	18	1	0.14	2024PRC110	75	76	1	0.06
2024HRC073	18	19	1	0	2024PRC110	76	77	1	0

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024HRC073	19	20	1	0.04	2024PRC110	77	78	1	0.03
2024HRC073	20	21	1	0	2024PRC110	78	79	1	0.03
2024HRC073	21	22	1	0.07	2024PRC110	79	80	1	0.02
2024HRC073	22	23	1	0.08	2024PRC110	80	81	1	0.1
2024HRC073	23	24	1	0.63	2024PRC113	6	9	3	0.01
2024HRC073	24	25	1	0.03	2024PRC113	9	12	3	0
2024HRC073	25	26	1	0.03	2024PRC113	12	15	3	0
2024HRC073	26	27	1	0.04	2024PRC113	15	18	3	0.03
2024HRC073	63	66	3	1.11	2024PRC113	18	21	3	0.03
2024HRC073	66	69	3	0.06	2024PRC113	21	24	3	0
2024HRC073	69	72	3	0.07	2024PRC113	24	27	3	0
2024HRC074	27	30	3	0.02	2024PRC113	27	30	3	0.03
2024HRC074	30	31	1	0.18	2024PRC113	30	33	3	0
2024HRC074	31	32	1	0.14	2024PRC113	33	36	3	0.03
2024HRC074	32	33	1	0.12	2024PRC115	99	102	3	1.08
2024HRC074	33	34	1	0.29	2024PRC115	102	105	3	0.04
2024HRC074	34	35	1	0.63	2024PRC117	126	129	3	0.13
2024HRC074	35	36	1	0.25	2024PRC117	129	130	1	0.5
2024HRC074	36	39	3	0.54	2024PRC117	130	131	1	0
2024HRC074	39	42	3	0.05	2024PRC117	131	132	1	0.05
2024HRC074	42	45	3	0	2024PRC117	132	133	1	0
2024HRC074	45	48	3	0.03	2024PRC117	133	134	1	0.08
2024HRC074	48	49	1	0	2024PRC117	137	138	1	0.05
2024HRC074	49	50	1	0.02	2024PRC117	138	139	1	0.02
2024HRC074	50	51	1	0.16	2024PRC117	139	140	1	0.21
2024HRC074	51	52	1	1.77	2024PRC117	140	141	1	0.22
2024HRC074	52	53	1	0.04	2024PRC118	84	87	3	0.03
2024HRC075	18	21	3	0.03	2024PRC118	87	90	3	0.03
2024HRC075	21	24	3	0.18	2024PRC118	90	93	3	0
2024HRC075	24	27	3	0.62	2024PRC118	94	95	1	0.08
2024HRC075	27	30	3	0.59	2024PRC118	95	96	1	0.32
2024HRC075	30	33	3	0.14	2024PRC118	96	97	1	0.84
2024HRC075	33	36	3	0.22	2024PRC118	97	98	1	0.13
2024HRC075	57	60	3	0.06	2024PRC118	98	99	1	5.36
2024HRC075	60	63	3	0.02	2024PRC118	99	100	1	17.6
2024HRC075	63	66	3	0.02	2024PRC118	100	101	1	0.07
2024HRC075	66	69	3	0	2024PRC118	101	102	1	0.04
2024HRC075	69	72	3	0.16	2024PRC118	102	103	1	0.03
2024HRC075	75	78	3	0.07	2024PRC120	129	132	3	0.01
2024HRC075	78	79	1	1.11	2024PRC120	132	135	3	0.02
2024HRC075	79	80	1	0.63	2024PRC120	135	138	3	0.01
2024HRC075	80	81	1	0.11	2024PRC120	162	163	1	0.04
2024HRC075	81	82	1	0.12	2024PRC120	163	164	1	0.05
2024HRC075	82	83	1	0.08	2024PRC120	164	165	1	0.09
2024HRC075	88	89	1	0.15	2024PRC120	165	168	3	0.47
2024HRC075	89	90	1	0.16	2024PRC120	168	171	3	0.04

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024HRC075	108	111	3	1.22	2024PRC120	171	174	3	1.6
2024HRC076	72	75	3	0.5	2024PRC120	174	177	3	0.39
2024HRC076	75	78	3	1.1	2024PRC120	195	196	1	0.92
2024HRC076	78	81	3	2.68	2024PRC120	196	197	1	0.06
2024HRC076	81	84	3	1.19	2024PRC120	197	198	1	0.18
2024HRC076	84	87	3	0.12	2024PRC120	198	201	3	0
2024HRC076	87	90	3	0.01	2024PRC120	201	202	1	0.42
2024HRC076	126	129	3	0.21	2024PRC120	202	203	1	0.11
2024HRC076	129	132	3	0.05	2024PRC120	203	204	1	0.14
2024HRC077	84	87	3	0.04	2024PRC120	204	207	3	0.05
2024HRC077	87	90	3	0.02	2024PRC120	207	210	3	0.04
2024HRC077	90	93	3	0.42	2024PRC120	210	213	3	0.01
2024HRC077	93	96	3	0.05	2024PRC120	228	231	3	0.04
2024HRC077	96	99	3	0.04	2024PRC120	231	234	3	0.02
2024HRC077	99	102	3	2.52	2024PRC120	234	237	3	0.01
2024HRC077	102	105	3	0.84	2024PRC120	237	240	3	0.02
2024HRC077	105	108	3	0.25	2024PRC120	240	243	3	0.03
2024HRC077	108	111	3	1.18	2024PRC120	243	246	3	0.03
2024HRC077	132	135	3	0.08	2024PRC120	247	248	1	0.13
2024HRC077	135	138	3	0.17	2024PRC120	248	249	1	0.52
2024HRC078	117	120	3	0.41	2024PRC120	249	250	1	1.57
2024HRC078	120	121	1	0.11	2024PRC120	250	251	1	0.08
2024HRC078	121	122	1	0.02	2024PRC120	251	252	1	0.02
2024HRC078	122	123	1	0.04	2024PRC120	252	253	1	0.07
2024HRC078	123	126	3	0.06	2024PRC120	253	254	1	0.05
2024HRC078	126	129	3	0.09	2024PRC120	254	255	1	0.03
2024HRC078	129	132	3	0.89	2024PRC121	6	9	3	0.06
2024HRC078	132	135	3	0.91	2024PRC121	9	12	3	0.03
2024HRC078	135	138	3	0.93	2024PRC121	12	15	3	0
2024HRC078	138	139	1	0.05	2024PRC121	15	18	3	0.01
2024HRC078	139	140	1	0.05	2024PRC121	18	19	1	0.05
2024HRC078	140	141	1	0.03	2024PRC121	19	20	1	0.04
2024HRC079	78	81	3	0.01	2024PRC121	20	21	1	0.05
2024HRC079	81	84	3	0.08	2024PRC121	21	22	1	0.08
2024HRC079	112	113	1	0.06	2024PRC121	22	23	1	0.16
2024HRC079	113	114	1	0.18	2024PRC121	23	24	1	0.15
2024HRC079	114	115	1	0.07	2024PRC121	24	27	3	0.04
2024HRC079	115	116	1	0.8	2024PRC121	27	28	1	0.11
2024HRC079	116	117	1	0.28	2024PRC121	28	29	1	0.03
2024HRC080	68	69	1	0.74	2024PRC121	29	30	1	0.05
2024HRC080	69	70	1	0.66	2024PRC121	33	36	3	0.01
2024HRC080	70	71	1	0.08	2024PRC121	36	39	3	0
2024HRC080	71	72	1	0.02	2024PRC121	39	42	3	0.02
2024HRC081	30	31	1	0.03	2024PRC121	42	45	3	0
2024HRC081	31	32	1	0.02	2024PRC121	45	48	3	0.02
2024HRC081	32	33	1	0	2024PRC121	48	51	3	0.1

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024HRC081	33	36	3	0.18	2024PRC121	51	54	3	0.02
2024HRC081	36	37	1	0.02	2024PRC121	54	57	3	0.01
2024HRC081	37	38	1	0.03	2024PRC121	129	132	3	0.06
2024HRC081	38	39	1	0	2024PRC121	132	135	3	0
2024HRC081	39	42	3	0.3	2024PRC121	135	138	3	1.76
2024HRC081	42	45	3	0.1	2024PRC121	138	141	3	0.22
2024HRC081	45	46	1	0.03	2024PRC121	141	144	3	0.01
2024HRC081	46	47	1	0	2024PRCDD096	144	147	3	2
2024HRC081	47	48	1	0.03	2024PRCDD096	147	150	3	5.38
2024HRC081	48	49	1	0.15	2024PRCDD096	150	150.6	0.6	0.02
2024HRC081	49	50	1	0.11	2024PRCDD096	150.6	150.96	0.36	0.02
2024HRC081	50	51	1	0.24	2024PRCDD096	150.96	151.55	0.59	0.14
2024HRC081	51	52	1	0.03	2024PRCDD096	151.55	152.15	0.6	2
2024HRC081	52	53	1	0.02	2024PRCDD096	152.15	152.65	0.5	0.05
2024HRC081	64	65	1	0.02	2024PRCDD096	152.65	152.95	0.3	0
2024HRC081	65	66	1	0.04	2024PRCDD096	152.95	153.56	0.61	0.08
2024HRC081	66	67	1	0	2024PRCDD096	153.56	154.19	0.63	0
2024HRC081	67	68	1	0.03	2024PRCDD096	154.19	154.79	0.6	26.3
2024HRC082	30	31	1	0.13	2024PRCDD096	154.79	155.27	0.48	0.1
2024HRC082	31	32	1	0.15	2024PRCDD096	155.27	155.61	0.34	0.74
2024HRC082	32	33	1	0.16	2024PRCDD096	155.61	156.02	0.41	0.12
2024HRC082	33	34	1	1.49	2024PRCDD096	156.02	156.67	0.65	0
2024HRC082	34	35	1	0.59	2024PRCDD096	156.67	157.38	0.71	0
2024HRC082	35	36	1	0.16	2024PRCDD096	157.38	158.02	0.64	0.04
2024HRC083	111	114	3	0.46	2024PRCDD096	158.02	158.72	0.7	0
2024HRC083	114	117	3	0.69	2024PRCDD096	158.72	159.31	0.59	0.01
2024HRC083	117	120	3	0.93	2024PRCDD096	159.31	160	0.69	0
2024HRC083	120	123	3	0.21	2024PRCDD096	160	160.35	0.35	0.06
2024HRC083	123	126	3	0.16	2024PRCDD096	160.35	161	0.65	0.99
2024HRC084	18	19	1	0.09	2024PRCDD096	161	161.5	0.5	0.06
2024HRC084	19	20	1	0.08	2024PRCDD096	161.5	162	0.5	0.1
2024HRC084	20	21	1	0.1	2024PRCDD096	162	162.65	0.65	0.08
2024HRC084	21	24	3	0.14	2024PRCDD096	162.65	163.34	0.69	0
2024HRC084	24	27	3	0.12	2024PRCDD096	163.34	164	0.66	0.14
2024HRC084	27	28	1	0.08	2024PRCDD096	164	164.4	0.4	0.16
2024HRC084	28	29	1	0.11	2024PRCDD096	164.4	164.85	0.45	0.04
2024HRC084	29	30	1	0.09	2024PRCDD096	164.85	165.51	0.66	0.04
2024HRC084	30	31	1	0.04	2024PRCDD096	165.51	166.04	0.53	0.02
2024HRC084	31	32	1	0.1	2024PRCDD096	166.04	166.58	0.54	0.69
2024HRC084	32	33	1	0.04	2024PRCDD096	166.58	166.89	0.31	12.2
2024HRC084	33	36	3	0.05	2024PRCDD096	166.89	167.2	0.31	0.22
2024HRC084	81	84	3	2.45	2024PRCDD096	167.2	167.49	0.29	0.23
2024HRC084	84	87	3	0.07	2024PRCDD096	167.49	167.8	0.31	0.7
2024HRC084	87	90	3	0.06	2024PRCDD096	167.8	168.21	0.41	3.19
2024HRC084	126	127	1	0.05	2024PRCDD096	168.21	168.7	0.49	0.39
2024HRC084	127	128	1	0.09	2024PRCDD096	168.7	169.23	0.53	4

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024HRC084	128	129	1	0.06	2024PRCDD096	169.23	169.8	0.57	3.7
2024HRC084	129	130	1	0	2024PRCDD096	169.8	170.1	0.3	0.63
2024HRC084	130	131	1	0.1	2024PRCDD096	170.1	170.57	0.47	1.3
2024HRC084	131	132	1	0.03	2024PRCDD096	170.57	171.04	0.47	2.77
2024HRC084	132	135	3	1.64	2024PRCDD096	171.04	171.53	0.49	14.3
2024HRC084	135	138	3	0.93	2024PRCDD096	171.53	171.84	0.31	3.25
2024HRC084	138	139	1	0.02	2024PRCDD096	171.84	172.46	0.62	0.41
2024HRC084	139	140	1	0.02	2024PRCDD096	172.46	172.7	0.24	0.13
2024HRC084	151	152	1	9.56	2024PRCDD096	172.7	172.96	0.26	1
2024HRC084	152	153	1	0.07	2024PRCDD096	172.96	173.31	0.35	0.65
2024HRC084	153	154	1	0.02	2024PRCDD096	173.31	173.77	0.46	0.52
2024HRC084	154	155	1	0.09	2024PRCDD096	173.77	174.45	0.68	0
2024HRC086	24	27	3	0.06	2024PRCDD096	174.45	174.85	0.4	0.35
2024HRC086	27	30	3	0.07	2024PRCDD096	174.85	175.47	0.62	0.06
2024HRC086	30	33	3	0.05	2024PRCDD096	175.47	176	0.53	0.02
2024HRC086	66	69	3	0.01	2024PRCDD096	176	176.35	0.35	0.08
2024HRC086	69	72	3	16.1	2024PRCDD096	176.35	176.7	0.35	0.06
2024HRC086	72	75	3	0.05	2024PRCDD096	176.7	177.18	0.48	0.04
2024HRC086	75	78	3	0	2024PRCDD096	177.18	177.7	0.52	0.02
2024HRC086	78	81	3	1	2024PRCDD096	177.7	178	0.3	0
2024HRC086	94	95	1	0.48	2024PRCDD096	178	178.23	0.23	0.13
2024HRC086	95	96	1	2.73	2024PRCDD096	178.23	178.8	0.57	0.16
2024HRC087	18	21	3	0.05	2024PRCDD096	178.8	179.34	0.54	0.17
2024HRC087	21	24	3	0.03	2024PRCDD096	179.34	179.81	0.47	2.27
2024HRC087	24	27	3	0.01	2024PRCDD096	179.81	180.15	0.34	3.8
2024HRC087	27	30	3	0.04	2024PRCDD096	180.15	180.63	0.48	1.7
2024HRC087	30	33	3	0.03	2024PRCDD096	180.63	181	0.37	0.26
2024HRC087	63	66	3	0.12	2024PRCDD096	181	181.37	0.37	0.03
2024HRC087	66	67	1	0.91	2024PRCDD096	181.37	181.9	0.53	0.08
2024HRC087	67	68	1	0.65	2024PRCDD096	181.9	182.24	0.34	0
2024HRC087	68	69	1	0	2024PRCDD096	182.24	182.52	0.28	0.08
2024HRC087	69	70	1	0.26	2024PRCDD096	182.52	182.87	0.35	0.15
2024HRC087	70	71	1	0.46	2024PRCDD096	182.87	183.08	0.21	0.05
2024HRC087	71	72	1	0.62	2024PRCDD096	183.08	183.6	0.52	0.21
2024HRC087	72	73	1	24	2024PRCDD096	183.6	184.03	0.43	0.08
2024HRC087	73	74	1	2.24	2024HHHDD001	38.3	39	0.7	0.04
2024HRC087	74	75	1	0.04	2024HHHDD001	39	39.7	0.7	0.14
2024HRC087	75	76	1	0.02	2024HHHDD001	39.7	40.4	0.7	0.03
2024HRC087	76	77	1	0.02	2024HHHDD001	40.4	41	0.6	0.04
2024HRC087	77	78	1	0	2024HHHDD001	41	41.6	0.6	0.05
2024HRC087	78	79	1	0.02	2024HHHDD001	41.6	42.2	0.6	0.11
2024HRC087	79	80	1	0	2024HHHDD001	42.2	42.9	0.7	0.17
2024HRC087	80	81	1	36.7	2024HHHDD001	42.9	43.6	0.7	0.07
2024HRC087	81	82	1	1.12	2024HHHDD001	43.6	44	0.4	0.04
2024HRC088	96	99	3	1.37	2024HHHDD001	44	44.5	0.5	0.03
2024HRC088	99	100	1	0.3	2024HHHDD001	44.5	45	0.5	0.02

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024HRC088	100	101	1	1.49	2024HHHDD001	45	45.5	0.5	0.04
2024HRC088	101	102	1	0.11	2024HHHDD001	45.5	46	0.5	0.02
2024HRC088	102	105	3	0.14	2024HHHDD001	46	46.41	0.41	0
2024HRC089	60	61	1	0.14	2024HHHDD001	46.41	47	0.59	0.03
2024HRC089	61	62	1	0.02	2024HHHDD001	47	47.4	0.4	0
2024HRC089	62	63	1	0	2024HHHDD001	47.4	48	0.6	0.03
2024HRC089	63	64	1	0.02	2024HHHDD001	48	48.56	0.56	0.02
2024HRC089	64	65	1	3.85	2024HHHDD001	60.75	61.2	0.45	0.21
2024HRC089	65	66	1	0.22	2024HHHDD001	61.2	61.67	0.47	0.2
2024HRC090	18	21	3	1.03	2024HHHDD001	61.67	62.36	0.69	0.39
2024HRC090	21	24	3	0.04	2024HHHDD001	62.36	62.8	0.44	0.07
2024HRC090	24	27	3	0.35	2024HHHDD001	62.8	63.32	0.52	0.03
2024HRC090	27	30	3	0.2	2024HHHDD001	65.8	66.42	0.62	6.53
2024ORC051	27	30	3	0.06	2024HHHDD001	66.42	67.06	0.64	0.48
2024ORC051	30	33	3	0.1	2024HHHDD001	67.06	67.57	0.51	0.03
2024ORC051	69	72	3	0.12	2024HHHDD001	67.57	68.03	0.46	0
2024ORC051	72	75	3	0	2024HHHDD001	68.03	68.3	0.27	0.02
2024ORC051	75	78	3	0.05	2024HHHDD001	68.3	68.8	0.5	0.03
2024ORC051	84	87	3	1.08	2024HHHDD001	68.8	69.2	0.4	0
2024ORC052	0	3	3	0.05	2024HHHDD001	69.2	69.86	0.66	0.04
2024ORC052	3	6	3	0.04	2024HHHDD001	69.86	70.61	0.75	0.02
2024ORC052	6	9	3	0.01	2024HHHDD001	70.61	71.48	0.87	0.05
2024ORC052	9	12	3	0.01	2024HHHDD001	71.48	71.8	0.32	0
2024ORC052	12	15	3	0.07	2024HHHDD001	71.8	72.51	0.71	0.42
2024ORC052	15	18	3	0.03	2024HHHDD001	72.51	73.3	0.79	0.07
2024ORC052	66	69	3	0.29	2024HHHDD001	73.3	74	0.7	0.05
2024ORC052	69	72	3	1.05	2024HHHDD001	74	74.65	0.65	0
2024ORC052	72	75	3	1	2024HHHDD001	74.65	75.02	0.37	0.02
2024ORC052	75	78	3	0.43	2024HHHDD001	75.02	75.77	0.75	0.18
2024ORC052	78	81	3	2	2024HHHDD001	75.77	76.44	0.67	0.06
2024ORC052	81	84	3	0.88	2024HHHDD001	76.44	77.29	0.85	0.11
2024ORC052	141	144	3	0.03	2024HHHDD001	77.29	77.8	0.51	0.07
2024ORC052	144	147	3	0.03	2024HHHDD001	77.8	78.4	0.6	0
2024ORC052	147	150	3	0.02	2024HHHDD001	78.4	78.85	0.45	0.76
2024ORC052	150	153	3	0.02	2024HHHDD001	78.85	79.5	0.65	0.19
2024ORC053	30	33	3	0.01	2024HHHDD001	79.5	79.97	0.47	0.08
2024ORC053	33	36	3	0.01	2024HHHDD001	79.97	80.63	0.66	0.16
2024ORC053	36	39	3	0	2024HHHDD001	80.63	80.8	0.17	0.06
2024ORC053	39	42	3	0.08	2024HHHDD001	80.8	81.48	0.68	0.04
2024ORC053	42	45	3	0	2024HHHDD001	81.48	82.1	0.62	0.05
2024ORC053	45	48	3	0.01	2024HHHDD001	82.1	82.57	0.47	0.09
2024ORC053	48	51	3	0	2024HHHDD001	82.57	83.26	0.69	0.08
2024ORC053	51	54	3	0.01	2024HHHDD001	83.26	83.72	0.46	0.06
2024ORC053	54	57	3	0.01	2024HHHDD001	83.72	84.26	0.54	1
2024ORC053	63	66	3	0.01	2024HHHDD001	84.26	85.03	0.77	1.71
2024ORC053	111	114	3	0.01	2024HHHDD001	85.03	85.44	0.41	0.1

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024ORC053	114	117	3	0	2024HHHDD001	85.44	86	0.56	0.97
2024ORC053	117	120	3	0.02	2024HHHDD001	86	86.46	0.46	0.22
2024ORC053	120	123	3	0.02	2024HHHDD001	86.46	86.8	0.34	0.4
2024ORC053	129	132	3	0.03	2024HHHDD001	86.8	87.37	0.57	2.73
2024ORC053	132	135	3	0.02	2024HHHDD001	87.37	87.65	0.28	0.19
2024ORC053	135	138	3	0.04	2024HHHDD001	87.65	88.24	0.59	0.06
2024ORC053	138	141	3	0.02	2024HHHDD001	88.24	88.72	0.48	0.44
2024ORC054	30	33	3	0.01	2024HHHDD003	98.5	98.8	0.3	2.41
2024ORC054	33	36	3	0	2024HHHDD003	98.8	99.16	0.36	0.03
2024ORC054	36	39	3	0.03	2024HHHDD003	99.16	99.69	0.53	0.44
2024ORC054	39	42	3	0	2024HHHDD003	99.69	100.23	0.54	0.09
2024ORC054	42	45	3	0.01	2024HHHDD003	100.23	100.67	0.44	0.05
2024ORC054	45	48	3	0.02	2024HHHDD003	100.67	101.18	0.51	0.02
2024ORC054	54	57	3	0.02	2024HHHDD003	101.18	101.55	0.37	0.05
2024ORC054	57	58	1	0	2024HHHDD003	101.55	101.81	0.26	0.09
2024ORC054	58	59	1	0.03	2024HHHDD003	101.81	102.36	0.55	0.02
2024ORC054	59	60	1	1.18	2024HHHDD003	102.36	102.86	0.5	0.17
2024ORC054	60	63	3	2.31	2024HHHDD003	102.86	103.16	0.3	0.08
2024ORC054	63	64	1	0.07	2024HHHDD003	103.16	103.49	0.33	0.02
2024ORC054	64	65	1	0.03	2024HHHDD003	103.49	104	0.51	0.1
2024ORC054	65	66	1	0	2024HHHDD003	104	104.41	0.41	3.96
2024ORC054	66	67	1	0.04	2024HHHDD003	104.41	105.22	0.81	0.06
2024ORC054	123	126	3	0.06	2024HHHDD003	105.22	105.7	0.48	0.03
2024ORC054	126	129	3	0.05	2024HHHDD003	105.7	106.32	0.62	0.04
2024ORC054	129	132	3	0.02	2024HHHDD003	106.32	106.95	0.63	0.05
2024ORC054	132	135	3	0.03	2024HHHDD003	106.95	107.51	0.56	1.22
2024ORC054	135	138	3	0.03	2024HHHDD003	107.51	108.15	0.64	0.18
2024ORC054	138	141	3	0.02	2024HHHDD003	108.15	108.73	0.58	0.03
2024ORC054	141	144	3	0	2024HHHDD003	108.73	109.38	0.65	0.02
2024ORC054	144	147	3	0.07	2024HHHDD003	109.38	109.92	0.54	0.05
2024PRC097	71	72	1	0.28	2024HHHDD003	109.92	110.51	0.59	0.1
2024PRC097	72	73	1	0.02	2024HHHDD003	110.51	110.93	0.42	0.03
2024PRC097	73	74	1	0.03	2024HHHDD003	110.93	111.27	0.34	0.04
2024PRC097	153	156	3	0.05	2024HHHDD003	111.27	111.63	0.36	1.83
2024PRC097	156	159	3	0.01	2024HHHDD003	121.22	121.66	0.44	0.02
2024PRC097	225	228	3	0.46	2024HHHDD003	121.66	122.26	0.6	0
2024PRC097	228	231	3	0.02	2024HHHDD003	122.26	122.77	0.51	0.02
2024PRC098	117	120	3	0.02	2024HHHDD003	122.77	123.33	0.56	0.04
2024PRC098	120	123	3	0.01	2024HHHDD003	123.33	123.83	0.5	0.03
2024PRC098	147	148	1	0.02	2024HHHDD003	123.83	124.35	0.52	0.02
2024PRC098	148	149	1	0.29	2024HHHDD003	124.35	125.02	0.67	0
2024PRC098	149	150	1	0.11	2024HHHDD003	125.02	125.5	0.48	0.02
2024PRC098	150	151	1	0.02	2024HHHDD003	125.5	126	0.5	0
2024PRC098	151	152	1	0	2024HHHDD003	126	126.66	0.66	0.02
2024PRC098	152	153	1	0.01	2024HHHDD003	126.66	127.14	0.48	0
2024PRC098	186	187	1	0	2024HHHDD003	127.14	127.59	0.45	0.08

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024PRC098	187	188	1	0.11	2024HHHDD003	127.59	127.94	0.35	0.04
2024PRC098	188	189	1	0.02	2024HHHDD003	127.94	128.5	0.56	0.03
2024PRC098	189	190	1	0.03	2024HHHDD003	128.5	128.98	0.48	0.02
2024PRC098	190	191	1	0.05	2024HHHDD003	130.47	130.98	0.51	0.03
2024PRC098	191	192	1	0.03	2024HHHDD003	130.98	131.5	0.52	0.02
2024PRC098	192	193	1	43.2	2024HHHDD003	131.5	132.17	0.67	0.02
2024PRC098	193	194	1	10.6	2024HHHDD003	132.17	132.63	0.46	0.02
2024PRC098	194	195	1	0.11	2024HHHDD002	46.13	46.82	0.69	0.03
2024PRC098	195	198	3	0.08	2024HHHDD002	46.82	47.6	0.78	0.09
2024PRC098	198	201	3	0	2024HHHDD002	47.6	48.68	1.08	0.02
2024PRC098	201	204	3	0.02	2024HHHDD002	48.68	49.43	0.75	0
2024PRC098	225	228	3	0.05	2024HHHDD002	49.43	50.15	0.72	0.11
2024PRC098	228	231	3	0.06	2024HHHDD002	50.15	50.89	0.74	0.05
2024PRC098	231	234	3	0.04	2024HHHDD002	50.89	51.7	0.81	0.03
2024PRC098	234	237	3	0.02	2024HHHDD002	51.7	52.55	0.85	0.06
2024PRC098	237	240	3	0.03	2024HHHDD002	52.55	53.18	0.63	0.02
2024PRC099	0	3	3	0.33	2024HHHDD002	103.61	103.9	0.29	19.2
2024PRC099	3	6	3	0.04	2024HHHDD002	103.9	104.21	0.31	0.03
2024PRC099	6	9	3	0.02	2024ODD003	59.2	60	0.8	0.02
2024PRC099	27	30	3	0.02	2024ODD003	60	61	1	0.02
2024PRC099	30	33	3	0.01	2024ODD003	61	61.7	0.7	0
2024PRC099	156	159	3	0.01	2024ODD003	61.7	62.32	0.62	0.03
2024PRC099	165	168	3	0.02	2024ODD003	62.32	63.08	0.76	0.02
2024PRC099	168	171	3	0.01	2024ODD003	69.18	69.9	0.72	0.02
2024PRC099	237	240	3	0.04	2024ODD003	69.9	70.58	0.68	0.02
2024PRC099	240	243	3	1.19	2024ODD003	70.58	71.34	0.76	0.02
2024PRC099	243	246	3	1.56	2024ODD003	71.34	72.09	0.75	0
2024PRC099	246	249	3	1.36	2024ODD003	72.09	72.7	0.61	0
2024PRC099	249	252	3	0.3	2024ODD003	72.7	73.2	0.5	0.04
2024PRC099	252	255	3	5.24	2024ODD003	73.2	73.87	0.67	0.28
2024PRC099	255	258	3	1.2	2024ODD003	73.87	74.45	0.58	0.03
2024PRC099	258	261	3	0.03	2024ODD003	74.45	75.03	0.58	0
2024PRC099	261	264	3	0.05	2024ODD003	75.03	75.44	0.41	0.02
2024PRC099	264	267	3	0.03	2024ODD003	75.44	76.06	0.62	0.34
2024PRC099	267	270	3	0.02	2024ODD003	76.06	76.5	0.44	15.2
2024PRC099	270	273	3	0.04	2024ODD003	76.5	77.1	0.6	0.07
2024PRC099	306	309	3	0.03	2024ODD003	77.1	77.8	0.7	0
2024PRC099	309	312	3	0.03	2024ODD003	77.8	78.43	0.63	0
2024PRC099	315	318	3	0.34	2024ODD003	78.43	79	0.57	0.08
2024PRC099	318	321	3	0.02	2024ODD003	79	79.7	0.7	0.03
2024PRC099	321	322	1	0.05	2024ODD003	79.7	80.38	0.68	0.06
2024PRC099	322	323	1	0.03	2024ODD003	80.38	81.1	0.72	0.08
2024PRC099	323	324	1	0.05	2024ODD003	81.1	81.7	0.6	0.07
2024PRC100	260	261	1	1.86	2024ODD003	81.7	82.52	0.82	0.03
2024PRC100	261	262	1	0.02	2024ODD003	82.52	83.23	0.71	0.04
2024PRC100	262	263	1	0.02	2024ODD003	83.23	83.95	0.72	0.03

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024PRC100	263	264	1	0.02	2024ODD003	83.95	84.5	0.55	0.02
2024PRC100	264	265	1	0.02	2024ODD003	115.4	116.09	0.69	0.05
2024PRC100	265	266	1	0.03	2024ODD003	116.09	116.8	0.71	0.04
2024PRC100	266	267	1	0.05	2024ODD003	116.8	117.43	0.63	0.03
2024PRC100	267	270	3	0.42	2024ODD003	117.43	118.13	0.7	0.02
2024PRC100	270	271	1	0.16	2024ODD002	24.4	25	0.6	0.3
2024PRC100	271	272	1	0.05	2024ODD002	25	25.7	0.7	0.08
2024PRC100	272	273	1	0.05	2024ODD002	25.7	26.4	0.7	0.18
2024PRC100	273	274	1	0.04	2024ODD002	26.4	27.1	0.7	0.02
2024PRC100	274	275	1	0.04	2024ODD002	27.1	27.9	0.8	0.05
2024PRC100	275	276	1	0.08	2024ODD002	30.7	31.4	0.7	0.06
2024PRC100	276	277	1	0.08	2024ODD002	31.4	32.1	0.7	0.03
2024PRC100	277	278	1	0.02	2024ODD002	32.1	32.8	0.7	0.02
2024PRC100	278	279	1	0.03	2024ODD002	32.8	33.46	0.66	0.03
2024PRC100	279	280	1	0.03	2024ODD002	33.46	34.07	0.61	0.03
2024PRC100	280	281	1	0.03	2024ODD002	39.4	40.2	0.8	0.23
2024PRC100	281	282	1	0.02	2024ODD002	40.2	40.9	0.7	1.88
2024PRC100	282	283	1	0.02	2024ODD002	40.9	41.68	0.78	1.78
2024PRC100	283	284	1	0.02	2024ODD002	41.68	42.4	0.72	0.03
2024PRC100	288	289	1	0.07	2024ODD002	44.62	45.5	0.88	0.25
2024PRC100	289	290	1	0.07	2024ODD002	45.5	46.9	1.4	0.99
2024PRC100	290	291	1	0.12	2024ODD002	46.9	47.6	0.7	0.02
2024PRC100	291	292	1	0.21	2024ODD002	58.29	59	0.71	0.09
2024PRC100	292	293	1	3.52	2024ODD002	59	59.58	0.58	0.02
2024PRC100	293	294	1	0.14	2024ODD002	59.58	59.88	0.3	0.28
2024PRC100	294	295	1	0.14	2024ODD002	59.88	60.45	0.57	58.9
2024PRC100	295	296	1	0.04	2024ODD002	60.45	61.02	0.57	0.05
2024PRC100	296	297	1	0.02	2024ODD002	61.02	61.35	0.33	0.3
2024PRC100	297	298	1	0.02	2024ODD002	61.35	62	0.65	26.5
2024PRC100	298	299	1	0.02	2024ODD002	62	62.9	0.9	0.49
2024PRC100	299	300	1	0	2024ODD002	62.9	63.7	0.8	0.04
2024PRC100	300	303	3	0.02	2024ODD002	63.7	64.4	0.7	0.02
2024PRC100	303	306	3	0.08	2024ODD002	64.4	65.1	0.7	0.18
2024PRC101	81	84	3	0.02	2024PDD001	217.48	218.16	0.68	0.02
2024PRC101	84	87	3	0.03	2024PDD001	218.16	218.9	0.74	0.02
2024PRC101	114	117	3	0.05	2024PDD001	218.9	219.4	0.5	0.11
2024PRC101	117	120	3	0.04	2024PDD001	219.4	219.9	0.5	0.02
2024PRC101	120	123	3	0	2024PDD001	219.9	220.58	0.68	0.02
2024PRC101	123	126	3	0.04	2024PDD001	220.58	221.22	0.64	0.02
2024PRC101	126	129	3	0.02	2024PDD001	221.22	221.9	0.68	0.09
2024PRC101	129	132	3	0.02	2024PDD001	221.9	222.42	0.52	0.03
2024PRC101	132	135	3	0.02	2024PDD001	222.42	222.84	0.42	0.03
2024PRC101	135	138	3	0.06	2024PDD001	222.84	223.4	0.56	0.01
2024PRC102	132	135	3	0.03	2024PDD001	223.4	223.95	0.55	0.01
2024PRC102	135	138	3	0.02	2024PDD001	223.95	224.43	0.48	0.01
2024PRC102	138	141	3	0.01	2024PDD001	229.2	229.64	0.44	0.02

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024PRC102	147	150	3	0.02	2024PDD001	229.64	230.04	0.4	0.01
2024PRC102	150	153	3	0.02	2024PDD001	230.04	230.52	0.48	0.06
2024PRC102	174	177	3	0.01	2024PDD001	230.52	230.99	0.47	0.24
2024PRC102	177	180	3	0.01	2024PDD001	230.99	231.36	0.37	0.03
2024PRC102	180	183	3	0	2024PDD001	232.32	232.87	0.55	0.01
2024PRC102	183	186	3	0.01	2024PDD001	232.87	233.26	0.39	0.08
2024PRC102	195	198	3	0.01	2024PDD001	233.26	233.9	0.64	0.14
2024PRC102	198	199	1	0.18	2024PDD001	233.9	234.41	0.51	0.02
2024PRC102	199	200	1	0.7	2024PDD001	234.41	235.01	0.6	0.03
2024PRC102	200	201	1	0.5	2024PDD001	235.01	235.74	0.73	0.01
2024PRC102	201	204	3	0.28	2024PDD001	235.74	236.4	0.66	0
2024PRC102	204	207	3	0.01	2024PDD001	236.4	236.9	0.5	0.08
2024PRC102	207	210	3	0.01	2024PDD001	236.9	237.47	0.57	0.12
2024PRC102	210	213	3	0.02	2024PDD001	237.47	238.17	0.7	0.03
2024PRC103	141	144	3	0.02	2024PDD001	238.73	239.42	0.69	0.31
2024PRC103	144	147	3	0.02	2024PDD001	239.42	239.75	0.33	0.34
2024PRC103	147	150	3	0.02	2024PDD001	239.75	240.26	0.51	0.5
2024PRC103	150	153	3	0	2024PDD001	240.26	240.8	0.54	8.81
2024PRC103	153	156	3	0.02	2024PDD001	240.8	241.4	0.6	0.04
2024PRC103	156	159	3	0.03	2024PDD001	272	272.7	0.7	0.98
2024PRC103	159	162	3	0.01	2024PDD001	272.7	272.98	0.28	31.4
2024PRC103	162	165	3	0.01	2024PDD001	272.98	273.58	0.6	0.04
2024PRC103	165	168	3	0	2024PDD001	273.58	273.9	0.32	0.01
2024PRC103	168	171	3	0.01	2024PDD001	273.9	274.3	0.4	0.01
2024PRC103	171	174	3	0	2024PDD001	274.3	274.7	0.4	0.03
2024PRC103	174	177	3	1.4	2024PDD001	274.7	275.1	0.4	0.09
2024PRC103	231	234	3	0.16	2024PDD001	275.1	275.42	0.32	0.08
2024PRC103	234	237	3	0.19	2024PDD001	275.42	276	0.58	0.1
2024PRC103	237	240	3	0.03	2024PDD001	276	276.5	0.5	0.15
2024PRC104	144	147	3	0.35	2024PDD001	276.5	277	0.5	1.15
2024PRC104	147	148	1	0.04	2024PDD001	277	277.38	0.38	13.2
2024PRC104	148	149	1	0.02	2024PDD001	277.38	278	0.62	10.1
2024PRC104	149	150	1	0.08	2024PDD001	278	278.4	0.4	58.4
2024PRC104	150	153	3	0.02	2024PDD001	278.4	279.08	0.68	8.81
2024PRC104	153	156	3	0	2024PDD001	279.08	279.72	0.64	15.4
2024PRC104	156	159	3	0.02	2024PDD001	279.72	280.04	0.32	30.5
2024PRC104	159	162	3	0.02	2024PDD001	280.04	280.65	0.61	48.8
2024PRC104	162	165	3	0.02	2024PDD001	280.65	280.9	0.25	30.9
2024PRC104	177	180	3	0.05	2024PDD001	280.9	281.3	0.4	23.1
2024PRC104	180	183	3	0.04	2024PDD001	281.3	281.63	0.33	35.3
2024PRC104	205	206	1	0.12	2024PDD001	281.63	282	0.37	0.25
2024PRC104	206	207	1	2.11	2024PDD001	282	282.7	0.7	0.11
2024PRC104	207	210	3	0.02	2024PDD001	282.7	283.32	0.62	0.14
2024PRC104	210	211	1	0.16	2024PDD001	283.32	283.72	0.4	0.12
2024PRC104	211	212	1	0.03	2024PDD001	283.72	284.4	0.68	0.1
2024PRC104	212	213	1	0.07	2024PDD001	284.4	285.07	0.67	0.13

Hole ID	From (m)	To (m)	Width (m)	Au (ppm)	Hole ID	From (m)	To (m)	Width (m)	Au (ppm)
2024PRC104	213	216	3	0.03	2024PDD001	285.07	285.7	0.63	0.07
2024PRC104	216	219	3	0.01	2024PDD001	285.7	286.6	0.9	0.06
2024PRC105	36	39	3	0.01	2024PDD001	286.6	286.98	0.38	0.06
2024PRC105	39	42	3	0.01	2024PDD001	286.98	287.7	0.72	0.05
2024PRC105	42	45	3	0	2024PDD001	287.7	288.3	0.6	0.05
2024PRC105	45	48	3	0	2024PDD001	288.3	288.8	0.5	0.01
2024PRC105	48	51	3	0.01	2024PDD001	288.8	289.25	0.45	0.02
2024PRC105	126	127	1	0.07	2024PDD001	289.25	289.7	0.45	0.02
2024PRC105	127	128	1	0.15	2024PDD001	289.7	290.3	0.6	0.02
2024PRC105	128	129	1	2.18	2024PDD001	290.3	290.8	0.5	0
2024PRC105	129	132	3	0.11	2024PDD001	290.8	291.42	0.62	0.02
2024PRC105	132	135	3	0.04	2024PDD001	291.42	292.1	0.68	0.02
2024PRC105	135	138	3	0	2024PDD001	292.1	292.6	0.5	0
2024PRC105	138	141	3	0.03	2024PDD001	292.6	293.13	0.53	0.01
2024PRC105	141	144	3	0	2024PDD001	293.13	293.8	0.67	0.01
2024PRC105	144	147	3	0.01	2024PDD001	293.8	294.4	0.6	0.02
2024PRC105	171	174	3	0.08	2024PDD001	294.4	294.96	0.56	0.01
2024PRC105	176	177	1	0.02	2024PDD001	298.93	299.44	0.51	0.02
2024PRC105	177	178	1	0.11	2024PDD001	299.44	299.9	0.46	0.02
2024PRC105	178	179	1	0.07	2024PDD001	299.9	300.5	0.6	0.02
2024PRC105	179	180	1	0	2024PDD001	300.5	301.1	0.6	0.01
2024PRC105	180	183	3	0.07	2024PDD001	301.1	301.7	0.6	0
2024PRC105	183	186	3	0.19	2024PDD001	301.7	302.24	0.54	0
2024PRC105	186	189	3	0.03	2024PDD001	302.24	302.9	0.66	0.01
2024PRC105	189	192	3	0.03	2024PDD001	302.9	303.4	0.5	0.01
2024PRC105	192	195	3	0	2024PDD001	303.4	304	0.6	0
2024PRC105	195	198	3	0.06	2024PDD001	304	304.66	0.66	0
2024PRC105	198	201	3	0.1	2024PDD001	304.66	305.11	0.45	0.01
2024PRC105	201	204	3	0.02	2024PDD001	305.11	305.62	0.51	0.01
2024PRC105	204	207	3	0.02	2024PDD001	305.62	306.14	0.52	0.01
2024PRC105	207	210	3	0.03	2024PDD001	306.14	306.8	0.66	0.01

APPENDIX 2: Collar and down hole survey of diamond and RC drillholes released in this announcement.

All locations on Australian Geodetic Grid MGA_GDA94-51.

Downhole surveys were completed on all the DD and RC drill holes by the drillers. They used a True North seeking Gyro downhole tool to collect the surveys approximately every 5m down the hole. The azimuth shown is the magnetic azimuth of the drilling direction.

Hole ID	Coordinates			Depth (m)	Collars survey method	Azimuth	Dip	Type	Drilling status	Assay status
	Easting	Northing	RL (m)							
2024HHHDD001	402132.067	6505952.599	307.016	170.8	RTK-GPS	50	-50	DD	Drilled	Received
2024HHHDD002	402176.4136	6505904.755	306.7675	170.8	RTK-GPS	55	-50	DD	Drilled	Received
2024HHHDD003	402233.6217	6505671.965	301.8524	160	RTK-GPS	70	-50	DD	Drilled	Received
2024ODD002	401993.3832	6506655.382	306.4268	153	RTK-GPS	220	-55	DD	Drilled	Received
2024ODD003	401742.6908	6506709.496	305.5468	157.4	RTK-GPS	190	-55	DD	Drilled	Received
2024HRC067	402110.3965	6505973.93	305.2602	198	RTK-GPS	50	-50	RC	Drilled	Received
2024HRC068	402144.4745	6505902.727	306.5542	198	RTK-GPS	110	-50	RC	Drilled	Received
2024HRC069	402205.6365	6505886.088	306.9622	216	RTK-GPS	135	-50	RC	Drilled	Received
2024HRC070	402374.4559	6505597.011	299.7882	102	RTK-GPS	150	-60	RC	Drilled	Received
2024HRC071	402372.2729	6505533.504	298.7619	108	RTK-GPS	130	-70	RC	Drilled	Received
2024HRC072	402366.108	6505568.946	299.1523	114	RTK-GPS	160	-70	RC	Drilled	Received
2024HRC073	402389.6025	6505543.284	298.5807	78	RTK-GPS	95	-65	RC	Drilled	Received
2024HRC074	402368.8319	6505473.279	298.4229	90	RTK-GPS	50	-50	RC	Drilled	Received
2024HRC075	402342.2071	6505455.649	299.0904	126	RTK-GPS	10	-50	RC	Drilled	Received
2024HRC076	402326.679	6505443.296	299.2042	138	RTK-GPS	55	-50	RC	Drilled	Received
2024HRC077	402314.4277	6505412.463	299.508	150	RTK-GPS	40	-50	RC	Drilled	Received
2024HRC078	402295.6202	6505356.77	299.7057	174	RTK-GPS	50	-50	RC	Drilled	Received
2024HRC079	402326.6944	6505327.393	299.1625	132	RTK-GPS	50	-60	RC	Drilled	Received
2024HRC080	402398.6481	6505328.502	298.5106	114	RTK-GPS	80	-50	RC	Drilled	Received
2024HRC081	402442.7074	6505372.759	298.108	84	RTK-GPS	80	-50	RC	Drilled	Received
2024HRC082	402439.8156	6505356.5	298.0836	72	RTK-GPS	80	-50	RC	Drilled	Received
2024HRC083	402279.2784	6505398.336	300.1496	186	RTK-GPS	50	-50	RC	Drilled	Received
2024HRC084	402266.255	6505671.069	302.4323	192	RTK-GPS	50	-50	RC	Drilled	Received
2024HRC085	402207.6316	6505664.196	301.7539	246	RTK-GPS	55	-50	RC	Drilled	Received
2024HRC086	402289.2348	6505631.858	301.0416	126	RTK-GPS	100	-60	RC	Drilled	Received
2024HRC087	402286.1526	6505631.703	301.106	150	RTK-GPS	50	-55	RC	Drilled	Received
2024HRC088	402256.453	6505625.164	300.812	198	RTK-GPS	50	-55	RC	Drilled	Received
2024HRC089	402333.4755	6505615.271	300.6105	126	RTK-GPS	160	-60	RC	Drilled	Received
2024HRC090	402355.7026	6505689.311	305.1964	126	RTK-GPS	160	-60	RC	Drilled	Received
2024ORC051	401758.1126	6506725.043	305.6856	150	RTK-GPS	190	-55	RC	Drilled	Received
2024ORC052	401786.9799	6506725.262	305.3916	156	RTK-GPS	190	-60	RC	Drilled	Received
2024ORC053	401805.418	6506717.849	305.4319	150	RTK-GPS	190	-60	RC	Drilled	Received
2024ORC054	401814.7324	6506704.477	305.316	156	RTK-GPS	190	-65	RC	Drilled	Received
2024PRC097	402535.3772	6504655.214	299.4184	246	RTK-GPS	340	-50	RC	Drilled	Received
2024PRC098	402551.0329	6504632.308	299.2215	252	RTK-GPS	45	-50	RC	Drilled	Received
2024PRC099	402479.5293	6504622.917	299.9557	324	RTK-GPS	340	-50	RC	Drilled	Received
2024PRC100	402336.5168	6504607.395	299.644	318	RTK-GPS	20	-55	RC	Drilled	Received
2024PRC101	402313.1262	6504644.568	299.8316	312	RTK-GPS	15	-60	RC	Drilled	Received

Hole ID	Coordinates			Depth (m)	Collars survey method	Azimuth	Dip	Type	Drilling status	Assay status
	Easting	Northing	RL (m)							
2024PRC102	402565.9606	6504610.624	299.575	246	RTK-GPS	40	-55	RC	Drilled	Received
2024PRC103	402584.8229	6504631.508	298.649	246	RTK-GPS	45	-50	RC	Drilled	Received
2024PRC104	402533.2667	6504713.676	299.1863	240	RTK-GPS	20	-60	RC	Drilled	Received
2024PRC105	402504.1209	6504762.343	299.2988	216	RTK-GPS	70	-50	RC	Drilled	Received
2024PRC106	402488.1557	6504794.755	299.3553	198	RTK-GPS	60	-50	RC	Drilled	Received
2024PRC107	402651.6416	6504851.317	298.408	66	RTK-GPS	200	-50	RC	Drilled	Received
2024PRC108	402662.8616	6504866.554	298.4592	90	RTK-GPS	200	-50	RC	Drilled	Received
2024PRC109	402709.0002	6504835.924	298.9979	66	RTK-GPS	200	-50	RC	Drilled	Received
2024PRC110	402772.5392	6504855.019	298.6156	96	RTK-GPS	200	-50	RC	Drilled	Received
2024PRC111	402788.94	6504826.034	298.7409	72	RTK-GPS	210	-50	RC	Drilled	Received
2024PRC112	402811.0844	6504839.376	297.8776	78	RTK-GPS	180	-50	RC	Drilled	Received
2024PRC113	402814.5771	6504854.507	297.6833	78	RTK-GPS	200	-50	RC	Drilled	Received
2024PRC114	402795.9667	6504857.572	298.0419	78	RTK-GPS	200	-50	RC	Drilled	Received
2024PRC115	403062.8255	6504521.826	292.7608	132	RTK-GPS	80	-50	RC	Drilled	Received
2024PRC116	403116.5052	6504528.614	291.9415	84	RTK-GPS	50	-50	RC	Drilled	Received
2024PRC117	403097.2972	6504448.379	292.2668	150	RTK-GPS	50	-50	RC	Drilled	Received
2024PRC118	403168.7115	6504483.276	291.6717	168	RTK-GPS	80	-50	RC	Drilled	Received
2024PRC119	403218.9122	6504487.742	291.4129	54	RTK-GPS	50	-50	RC	Drilled	Received
2024PRC120	402565.64	6504651.028	298.8655	282	RTK-GPS	345	-60	RC	Drilled	Received
2024PRC121	402773.5818	6504602.375	300.6331	186	RTK-GPS	70	-50	RC	Drilled	Received
2024PRCDD096	402520.3932	6504673.985	299.5149	224.2	RTK-GPS	25	-60	RC/DD	Drilled	Received
2024PDD001	402271.0294	6504855.25	300.9043	332.9	RTK-GPS	125	-55	DD	Drilled	Received

APPENDIX 3: JORC Code, 2012 Edition – Table 1 Exploration Results

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Industry-standard drilling methods, such as diamond drilling (DD) and reverse circulation drilling (RC) were used to sample the project. The RC drilling was to generally accepted industry standards producing 1.0m samples which were collected beneath the cyclone and then passed through a cone splitter. The splitter reject sample was collected into green plastic bags or plastic buckets and laid out on the ground in 20-40m rows. The holes were sampled as initial 3m composites for all prospects using a PVC spear to produce an approximate representative 3kg sample into pre-numbered calico sample bags. Anomalous 3m composites are re-assayed as the 1m splits originally collected beneath the cyclone and cone splitter. This gives a more representative sample of the lithologies intersected. The full length of each hole drilled was sampled. All samples collected are submitted to a contract commercial laboratory. Samples are dried, crushed and homogenised to produce a 40g charge for fire assay and a separate sample for 4- acid digest and 60 multi-element analysis using an Induced Coupled Plasma Mass Spectrometer.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit, or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> RC holes were drilled with a truck-mounted Schramm T685 fitted with a hands-free Sandvik DA554 rod-handler. The diamond rig was an 8x8 truck-mounted Sandvik DE-880 fitted with a hands-free rod handling system. Rod and air trucks are Mercedes 8 x 8 trucks with a 2400cfm 1000psi Hurricane booster and a 350psi/1270cfm auxiliary compressor. All equipment supplied by Top Drill. Diamond drilling was cored using HQ and NQ2 diamond bits Relevant support vehicles were provided. RC holes were drilled using a 145mm (5.5in) face-sampling drilling bit.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Diamond drilling gathers uncontaminated fresh core samples that are processed on the drill site to eliminate drilling fluids and cuttings, resulting in clean core for logging and analysis. The RC samples were not individually weighed or measured for recovery. To ensure maximum sample recovery and the representivity of the samples, an experienced Company geologist was present during drilling to monitor the sampling process. Any issues were immediately rectified. Sample recovery was recorded by the Company Field Assistant based on how much of the sample is returned from the cyclone and cone splitter. This is recorded as good, fair, poor or no sample. Torque is satisfied that the RC holes have taken a sufficiently representative sample of the interval and minimal loss of fines has occurred in the RC drilling resulting in minimal sample bias.

		<ul style="list-style-type: none"> No twin RC drill holes have been completed to assess sample bias. At this stage no investigations have been made into whether there is a relationship between sample recovery and grade.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> Torque geologists logged all chips and drill core using current company logging methodology. Lithology information from mineralised intervals provides enough detail to allow meaningful wireframe interpretation. The qualitative component of the logging describes oxidation state, grain size, lithology code assignment, and stratigraphy code assignment. All 1m RC samples were sieved and chips collected into 20m chip trays for geological logging of colour, weathering, lithology, alteration and mineralisation for potential Mineral Resource estimation and mining studies. RC logging is both qualitative and quantitative in nature. The total length of the RC holes was logged. Where no sample was returned due to cavities/voids it was recorded as such.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all cores taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality, and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Sampling technique: <ul style="list-style-type: none"> All RC samples were collected from the RC rig and were collected beneath the cyclone and then passed through the cone splitter. The samples were generally dry, and all attempts were made to ensure the collected samples were dry. However, on deeper portions of some of the drillholes some samples were logged as moist and/or wet. The cyclone and cone splitter were cleaned with compressed air at the end of every completed hole. The sample sizes were appropriate to correctly represent the mineralisation based on the style of mineralisation, the thickness and consistency of intersections, and the sampling methodology for the primary elements. Quality Control Procedures <ul style="list-style-type: none"> At least one duplicate sample was collected every hole. Certified Reference Material (CRM) samples were inserted in the field every approximately 50 samples. Blank washed sand material was inserted in the field approximately every 50 samples. Overall QAQC insertion rate of 1:10 samples. Laboratory repeats taken and standards inserted at pre-determined level specified by the laboratory. Sample preparation in the Bureau Veritas (Canning Vale, Western Australia) laboratory: The samples are weighed then dried for a minimum of 12 hours at 1000C, then crushed to -2mm using a jaw crusher, and pulverised by LM5 or disc pulveriser to -75 microns for a 40g Lead collection fire assay to create a homogeneous sub-sample. The pulp samples were also analysed with 4 acid digest induced Coupled Plasma Mass Spectrometer for 18

		<p>multi-elements</p> <ul style="list-style-type: none"> The sample sizes are considered appropriate to correctly represent the mineralisation based on the style of mineralisation, the thickness and consistency of intersections, the sampling methodology and the assay value ranges expected for gold.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Duplicates and samples containing standards are included in the samples submitted for analysis, as described above. The quality control procedures employed and described above are considered to provide acceptable levels of accuracy and precision.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Significant intersections have been independently verified by alternative company personnel. The Competent Person has visited the site and supervised the drilling and sampling processes used in the field. All primary data related to logging and sampling are captured into Excel templates on palmtops or laptops. All paper copies of data have been stored. All data is sent to Perth and stored in the centralised database with MX DEPOSIT front end which is managed by a qualified database geologist. No adjustments or calibrations have been made to any assay data, apart from resetting below detection values to half positive detection.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> All collars were initially located by a Geologist using differential RTK-GPS Downhole surveys are being completed on all the RC/DD drill holes by the drillers. They used a True North seeking Gyro downhole tool to collect the surveys approximately every 10m down the hole. The grid system for the Paris Project is MGA_GDA94 Zone 51. Topographic data is collected by differential RTK-GPS
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> This programme was the seventh follow-up drilling programme across a number of different prospects. There may still be variation in the drill spacing and drillhole orientation until geological orientations and attitude of mineralisation can be established with a suitable degree of certainty. The spacing and distribution of the data points is generally not yet sufficiently consistent to establish the degree of geological and grade continuity applied under the 2012 JORC code for the estimation of Mineral Resources. Sample compositing has been applied to this drilling programme with 1m samples collected and submitted to the laboratory as 3m composites.
Orientation of data in relation to	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. 	<ul style="list-style-type: none"> The main lithological units are in predominantly north-south orientation and dipping sub-vertical. Mineralised structures at Paris are often oriented at approximately 290°. The possible presence of

<i>geological structure</i>	<ul style="list-style-type: none"> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<p>Riedel structures has led to several different drillhole azimuth orientations being used to generate further technical information and to intersect specific mineralised structures, but always with an attempt to drill orthogonal to the strike of the interpreted structure. Due to locally varying intersection angles between drillholes and lithological units, all results are defined as downhole widths. True widths are not yet known.</p> <ul style="list-style-type: none"> No drilling orientation and sampling bias has been recognised at this time and drilling is not considered to have introduced a sampling bias.
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> Samples collected are placed in calico bags at site and transported to the relevant Perth or Kalgoorlie laboratory by courier or company field personnel. Sample security is not considered a significant risk.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> The Company database was originally compiled from primary data by independent database consultants based on original assay data and historical database compilations. Data is now managed by suitably qualified in-house personnel. No review or audit of the data and sampling techniques has been completed.

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> The relevant tenements (M15/498, M15/497, M15/496) are 100% owned by and registered to Torque Metals Limited. At the time of reporting, there are no known impediments to obtaining a licence to operate in the area and the tenements are in good standing.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> In 1920, Paris Gold Mine Company was floated in Adelaide to take up a 12-month option over the mine area. Just to the south, another company had an option over the Paris South Gold Mine, but soon abandoned it to focus attention on the Observation Gold Mine, 1 km to the north, which it abandoned in turn after only one month. The Paris Mine at the time contained 5 shafts and 2 costeans. Gold was said to be erratic in a quartz, schist, jasper lode jumbled by faults. At some point it was excavated as an open pit. Western Mining Corporation (WMC) started to explore the Paris area in the 1960s and relied on aerial magnetics supported by geological mapping to assess mineralisation potential. This work identified the basalt/gabbro contact as the major control for Paris style gold-copper mineralisation and extensions to the ultramafic units that host the nickel mineralisation around the Kambalda Dome. In the early 1970s the area was the focus of both nickel and copper-zinc exploration. Reconnaissance diamond drilling for nickel was undertaken by WMC that drilled on 5 lines spaced at 800m across the

		<p>interpreted basal contact position of the Democrat Hill Ultramafic and the BLF. The basal contact of the Kambalda Komatiite (and equivalents) is host to all the nickel mines in the Kambalda district and is the primary exploration area of interest for nickel mineralisation. Base metal exploration involved reconnaissance mapping, gossan search, soil, and stream sediment sampling. In 1973, DHD 101 was drilled to follow up a copper anomaly on the Democratic Shale. Results showed the anomalous gossan values to be associated with a sulphidic shale with values in the range 0.1 to 0.2% Cu and 0.8-1.0% Zn. During the early 1980s, Esso Exploration Australia and Aztec Exploration Limited conducted exploration programs along strike from the Paris Mine. Primary area of interest was copper-zinc-(gold) mineralisation in the felsic volcanics. Work included geochemistry, geophysics, and drilling. The Boundary gossan was discovered, and later drill tested with a single diamond hole in 1984. This hole failed to locate the primary source of the anomalous surface geochemistry.</p> <ul style="list-style-type: none"> • In 1988, Julia Mines conducted an intensive drilling program comprising air core, RC and diamond holes concentrated around the Paris Mine. This work was successful in delineating extensions and parallel lodes to the known Paris mineralisation. both along strike and down plunge. Paris Gold Mine was developed and worked in 1989 by Julia Mines and produced 24koz gold, 17koz silver and 245t copper. Estimated recovered gold grade was 11.2g/t. • In 1989/90, WMC completed a six-hole diamond drilling program to test for depth extensions to the Paris mineralisation below the 180m depth. Results defined a narrow (1-2m) high-grade zone over 70m of strike and intersected hanging wall lodes 10m and 30m stratigraphically above the interpreted main lode. This was the last drilling program to be carried out on the Paris Mine by WMC. From 1994 to 1999, WMC focused their gold resource definition drilling on the HHH deposit and conducted a series of RC drilling campaigns resulting in 30m drill line spacings with holes every 10m to 20m along the lines. Elsewhere, exploration by WMC and later by St Ives Gold Mining Company identified several areas of interest based on favourable structural and geochemistry evaluations. The 7km x 1km long N-S trending soil anomaly at Strauss was systematically drill tested in 2000 and yielded encouraging results associated with the Butcher's Well Dolerite. Air core drilling in 2005 focussed on the southern strike extensions of the mineralisation discovered in the 2000 program with limited success. • Gold Fields Australia (SIGMC - St Ives Gold Mining Company) explored the area in 2008. The Paris and HHH deposits were tested as part of SIGMC's air core programme. Drilling (148 holes, 640m x 80m) focused on poorly exposed differentiated dolerite proximal to interpreted intrusives. The exploration potential was supported by a structural interpretation which highlighted strong NNW trending magnetic features with the apparent intersection of crustal-scale lineaments observed in the regional gravity images. Anomalous values are associated with a felsic intrusive in sediments on the western margin of the area of interest. • Austral Pacific Pty Ltd acquired the Paris Gold Project from SIGMC in July 2015. Mineral Resource
--	--	--

		and Reserve estimates were compiled in-house and exploitation of the Paris and HHH deposits focused on a staged approach with gold production as a priority and near mine exploration to follow.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting, and style of mineralisation. 	<ul style="list-style-type: none"> The Paris Gold Project covers a north-south trending belt of Archaean granite-greenstone terrain, and most of the package is currently situated to the east of the Boulder Lefroy Structural Zone (BLSZ). Consequently, the Parker Domain dominates the project geology, defined as existing east of the BLFZ and bounded to the east by the Mount Monger Fault. The Parker Domain comprises a series of ultramafic and mafic units interlayered with felsic volcanoclastic and sediments. The stratigraphic sequence is like the Kambalda Domain. Gold mineralisation is widespread, occurring in almost all parts of the craton, but almost entirely restricted to the supracrustal belts. Gold occurs as structurally and host-rock controlled lodes, sharply bounded high-grade quartz veins and associated lower-grade haloes of sulphide-altered wall rock. Mineralisation occurs in all rock types, although Fe-rich dolerite and basalt are the most common, and large granitic bodies are the least common hosts. Most deposits are accompanied by significant alteration, generally comprising an outer carbonate halo, intermediate to proximal potassic-mica and inner sulphide zones. The principal control on gold mineralisation is structure, at different scales, constraining both fluid flow and deposition positions.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth AND hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> All relevant information for the drillholes reported in this announcement can be found in the relevant tables and appendices included herein. Only gold assays ≥ 0.03 ppm (0.03 g/t) are recorded in the assay data table, except where relevant as part of a longer intercept. All intercepts are presented as down-hole lengths.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> No high-grade cuts have been applied to the assay results reported in this announcement. Arithmetic weighted averages are used: example 272.0m to 288.3m in hole 24PDD001 is reported as 16.3m @ 7.95 g/t gold, comprising 32 contiguous samples, calculated as follows: $[(0.7m \cdot 0.98gpt) + (0.28m \cdot 31.4gpt) + (0.6m \cdot 0.04gpt) + (0.32m \cdot 0.01gpt) + (0.4m \cdot 0.01gpt) + (0.4m \cdot 0.03gpt) + (0.4m \cdot 0.09gpt) + (0.32m \cdot 0.08gpt) + (0.58m \cdot 0.1gpt) + (0.5m \cdot 0.15gpt) + (0.5m \cdot 1.15gpt) + (0.38m \cdot 13.2gpt) + (0.62m \cdot 10.1gpt) + (0.4m \cdot 58.4gpt) + (0.68m \cdot 8.81gpt) + (0.64m \cdot 15.4gpt) + (0.32m \cdot 30.5gpt) + (0.61m \cdot 48.8gpt) + (0.25m \cdot 30.9gpt) + (0.4m \cdot 23.1gpt) + (0.33m \cdot 35.3gpt) + (0.37m \cdot 0.25gpt) + (0.7m \cdot 0.11gpt) + (0.62m \cdot 0.14gpt) + (0.4m \cdot 0.12gpt) + (0.68m \cdot 0.1gpt) + (0.67m \cdot 0.13gpt) + (0.63m \cdot 0.07gpt) + (0.9m \cdot 0.06gpt) + (0.38m \cdot 0.06gpt) + (0.72m \cdot 0.05gpt) + (0.6m \cdot 0.05gpt) +]$

		<p>[0.7+0.28+0.6+0.32+0.4+0.4+0.4+0.32+0.58+0.5+0.5+0.38+0.62+0.4+0.68+0.64+0.32+0.61+0.25+0.4+0.33+0.37+0.7+0.62+0.4+0.68+0.67+0.63+0.9+0.38+0.72+0.6]</p> <p>=</p> <p>129.564/16.3 = 7.95 g/t gold over 16.3m.</p> <p>No metal equivalent values have been used.</p>
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known'). 	<ul style="list-style-type: none"> All results are reported as downhole widths. Insufficient knowledge of the structural controls on the mineralisation and attitude of the mineralised horizons is known yet to allow true widths to be established.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate maps and summary intercept tables are included in this report. Where sufficient structural data have been gathered to allow meaningful interpretation of the structural setting controlling the mineralisation, appropriate sections for significant discoveries are also included. Where structural data is as yet insufficient to allow meaningful interpretation, sections are not provided as to do so could be considered misleading.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> The individual assays for all drill hole intercepts mentioned herein are reported in Appendix 1, with the qualification that only gold assays ≥ 0.03 ppm (0.03 g/t) are shown, except where relevant as part of a longer intercept. All intercepts are presented as down-hole widths.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> All meaningful and material information has been included in the body of this announcement. Torque's main exploration aim is to establish if any gold mineralisation present is significant enough to warrant advancement to resource definition. Torque continues to explore with the objective of compiling appropriate data to enable a resource to be defined. Previous announcements have reported the outcome of metallurgical testwork conducted to investigate the possible presence, and impact, of any other elements that might also be present within mineralised zones and which could be viewed by some to be deleterious. The metallurgical test work and characterisation studies clearly demonstrated that the presence of elements such as copper did not in any way adversely impact the gold recoveries from mineralised zones which remained in excess of 96% (see announcement of 27-Sep-2023).
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Plans for future work are discussed in the body of this announcement. The possible locations, and extent, of follow-up drilling has not yet been confirmed but will likely include further RC and possibly diamond drilling.