

ASX code: MAU  
ASX Release 3 February 2023

## EXPANDS MINERAL RESOURCE ESTIMATE

### HIGHLIGHTS

- This update incorporates recent drilling results at Lady Julie North 4 (LJN4) and Lady Julie Central (LJC).
- Updated combined (Indicated and Inferred)\* Mineral Resources estimate for the whole project area of:
  - 13.5Mt @ 1.40g/t Au totaling 605,000oz of gold at 0.5g/t cutoff.
  - Increase of 18% of the total ounces over the 27 June 2022 ASX Release Maiden Mineral Resource estimate of 13.1Mt @ 1.22g/t totaling 511,000oz at 0.5g/t cutoff.
- Significantly the resource grade of LJN4 has risen from 1.27g/t Au to 1.93g/t Au.
- LJN4 is now the largest resource in the field – it remains open at depth and similar deposits are being explored for along the extensive 12km Chatterbox shear.
- Key deposits are close to each other and form part of one mining field.
- Three processing plants are nearby, between 10km and 35km away.

Magnetic Resources NL (**Magnetic** or the **Company**) is pleased to announce an Updated Mineral Resource Estimates from its deposits in the Laverton and Homeward Bound area. The main deposits include HN9, Lady Julie Central, Lady Julie North 4, Mount Jumbo East and Homeward Bound South, which are all located in an area with well-endowed regional infrastructure including three processing plants within 35kms.

The update follows extensive infill and down-dip drilling at the Lady Julie Central and Lady Julie N4 deposits.

The verification and reporting of Mineral Resources on behalf of the Company was completed by its JORC Competent Person, Mr M Edwards of Blue Cap Mining. The Mineral Resources Estimate has been prepared and reported in accordance with the 2012 Edition of the JORC Code.

**Total Mineral Resources reported for the Laverton and Homeward Bound South projects is 13.5Mt @ 1.40g/t Au at 0.5g/t cut-off totaling 605,000oz of gold (See table 1 below).**

Managing Director George Sakalidis commented:

*“The Lady Julie North 4 Resource has been the prime drilling focus over the last six months. It has two stacked lodes with a number of thick intersections that have not been closed off at depth. The deeper drilling started on the 25 January with a programme of 13 RC holes for 2532m (averaging 195m), This Deposit sits within a regional structure called the Chatterbox shear that extends over a 12km length within the Magnetic tenements. This shear extends southwards of Lady Julie North 4 and has had initial AC drilling completed and some anomalous intersections that will be followed up with some shallow RC drilling for the purpose of finding further satellite gold deposits.*”


Project studies are well and truly underway with the help of Blue Cap Mining and are being carried out concurrently with drilling to help the future development and production opportunities that these expanded Resources bring. Other strategic opportunities are also being pursued with the assistance of Jefferies.

The Table below summarise the Updated Total Mineral Resource at a 0.5g/t Au cutoff (Table 1), with Table 2 providing details of each resource.

**Table 1. Total Mineral Resource at 0.5 g/t Au Cutoff\***

Classification	Au Cutoff	Volume	Tonnes	Density	Au	Ounces
Indicated	0.50	1,870,000	4,775,000	2.55	1.32	203,100
Inferred	0.50	3,256,000	8,692,000	2.59	1.44	402,160
<b>Total</b>	<b>0.50</b>	<b>5,226,000</b>	<b>13,467,000</b>	<b>2.58</b>	<b>1.40</b>	<b>605,260</b>

**Figure 1. Overview of Magnetic’s Laverton and Homeward Bound South Resources**

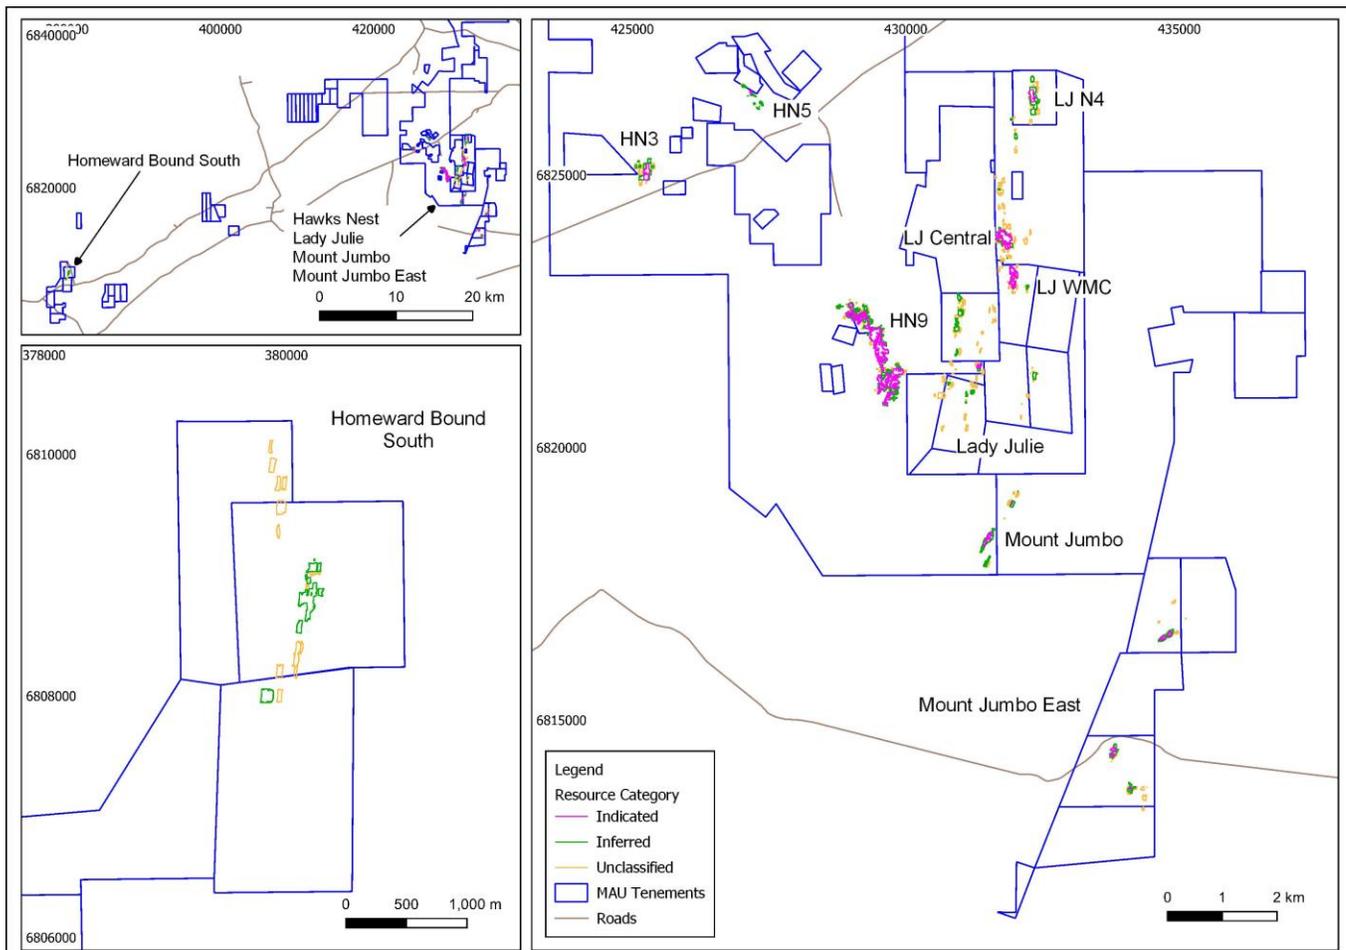

**Table 2. Updated Total Mineral Resource by Deposit at 0.5 g/t Au Cutoff**

Deposit	Classification	Au Cutoff	Volume	Tonnes	Density	Au	Ounces
HN9	Indicated	0.50	792,000	1,995,000	2.52	1.29	82,800
Lady Julie	Indicated	0.50	765,000	1,986,000	2.60	1.52	97,100
HN3	Indicated	0.50	139,000	357,000	2.58	0.72	8,300
HN5	Indicated	0.50	3,800	8,400	2.23	1.59	430
Mt Jumbo	Indicated	0.50	168,000	429,000	2.55	1.05	14,500
Homeward Bound South	Indicated	0.50	0	0	0.00	0.00	0
HN9	Inferred	0.50	460,000	1,182,000	2.57	1.25	47,600
Lady Julie	Inferred	0.50	1,484,000	3,894,000	2.62	1.76	220,800
HN3	Inferred	0.50	95,000	243,000	2.57	0.85	6,600
HN5	Inferred	0.50	17,900	43,700	2.44	0.76	1,060
Mt Jumbo	Inferred	0.50	736,000	1,887,000	2.57	1.16	70,500
Homeward Bound South	Inferred	0.50	563,000	1,442,000	2.56	1.20	55,600
HN9	Total	0.50	1,252,000	3,176,000	2.54	1.28	130,000
Lady Julie	Total	0.50	2,249,000	5,887,000	2.61	1.68	317,900
HN3	Total	0.50	233,000	600,000	2.57	0.77	15,000
HN5	Total	0.50	21,600	52,100	2.41	0.89	1,500
Mt Jumbo	Total	0.50	904,000	2,316,000	2.56	1.14	85,000
Homeward Bound South	Total	0.50	563,000	1,442,000	2.56	1.20	56,000


The key deposits that were mainly drilled in the last six months being Lady Julie North Central and Lady Julie North 4, which form part of the Lady Julie Deposit shown in Table 2 and are further summarised below:

### **Lady Julie Central**


The Lady Julie Central (Indicated and Inferred) Resource of 1.36Mt at 1.67g/t Au for 73,100oz is 350m by 200m in area (Figure 2). The Indicated Category covers 48% of the tonnage total. There are some thicker intersections including a number of intersections that start from surface (Figure 3 a, b and c). The long section (Figure 4) shows a thickened near surface zone starting from surface on the northern end which gently plunges to the south-east forming two distinct zones.



The potential to expand the resource at Lady July Central is considered strong on the basis of mineralized but isolated intersections to north and south – along strike.

Figure 2. Lady Julie Central plan showing resource block grades and drill sections

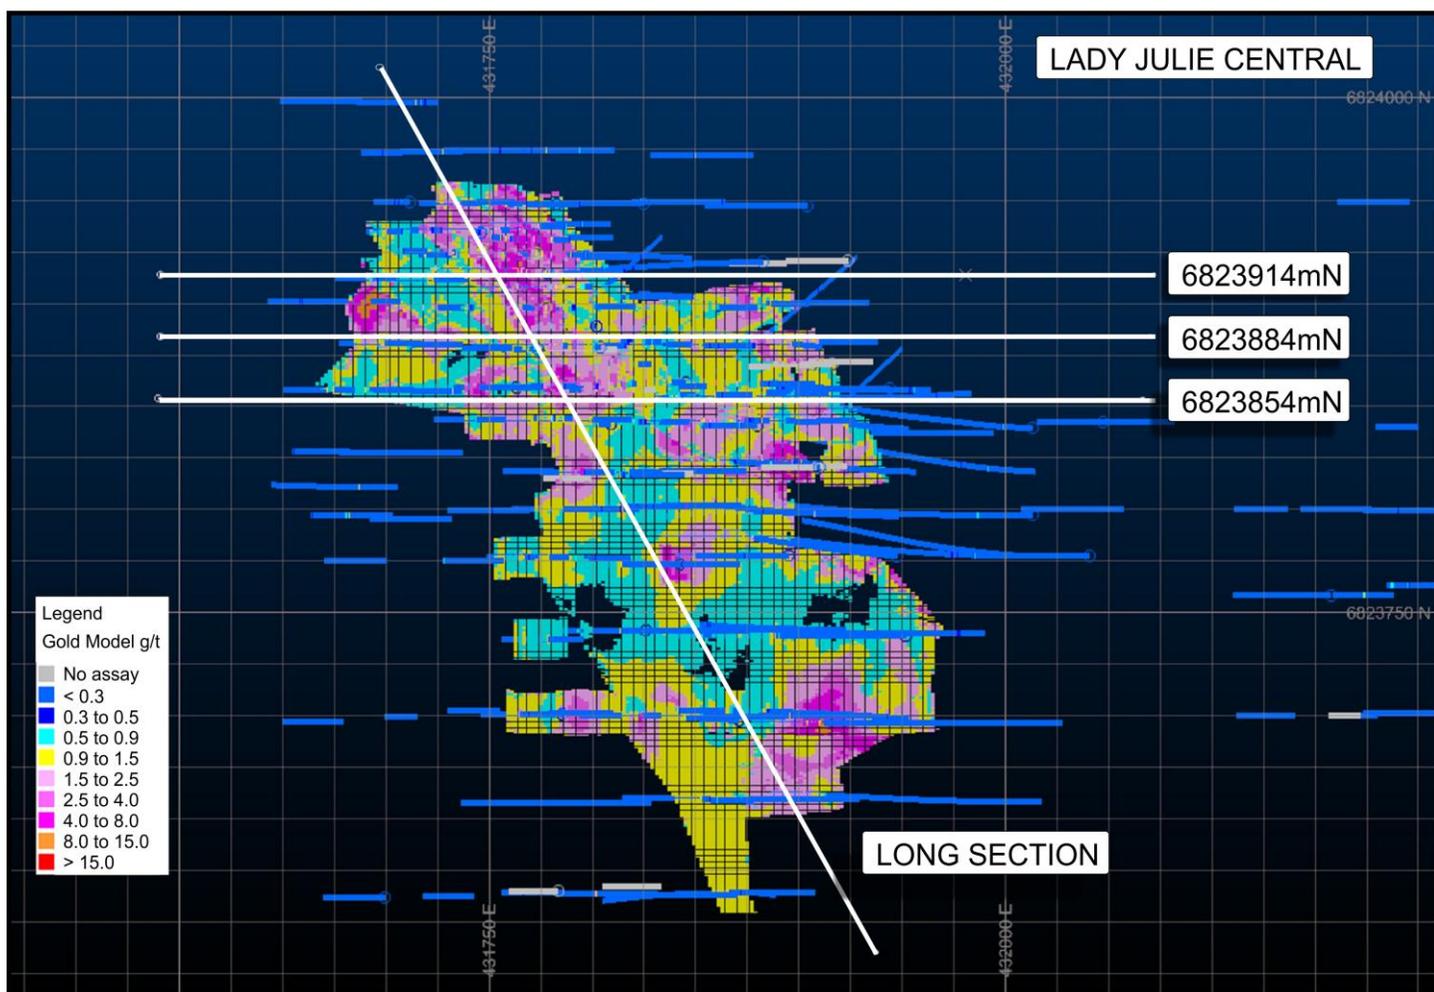


Figures 3 a), b), c). Lady Julie Central cross sections showing main gold intersections and resource wireframes and block grades.

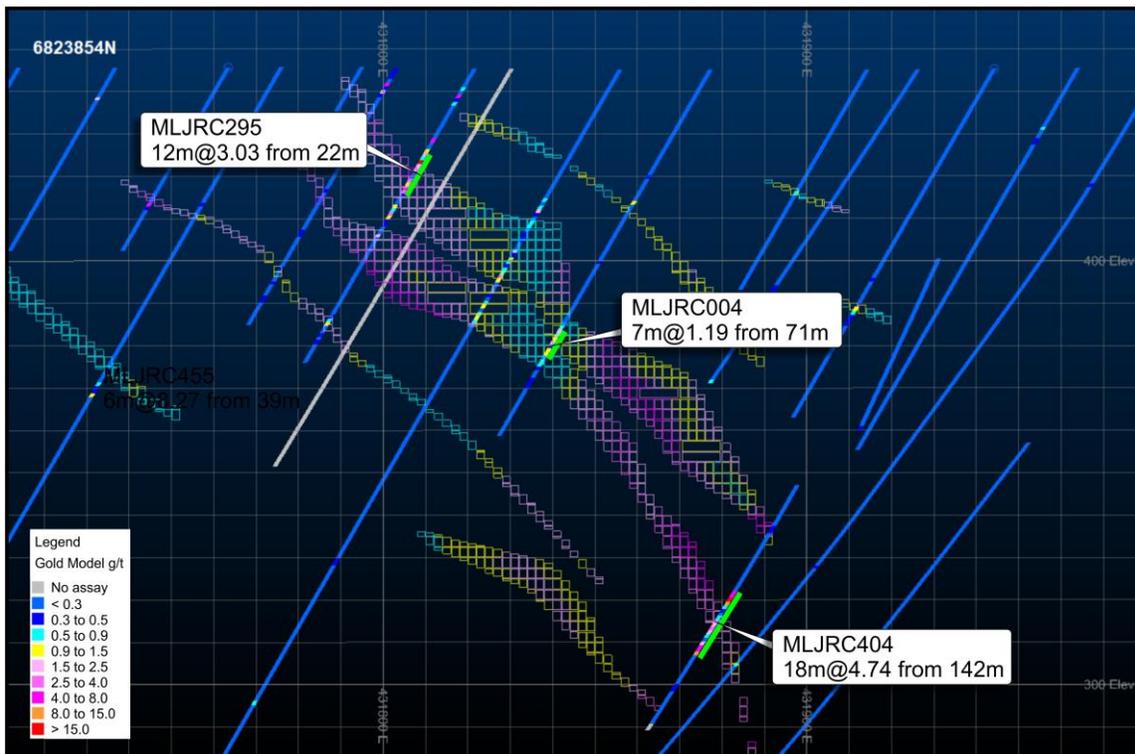

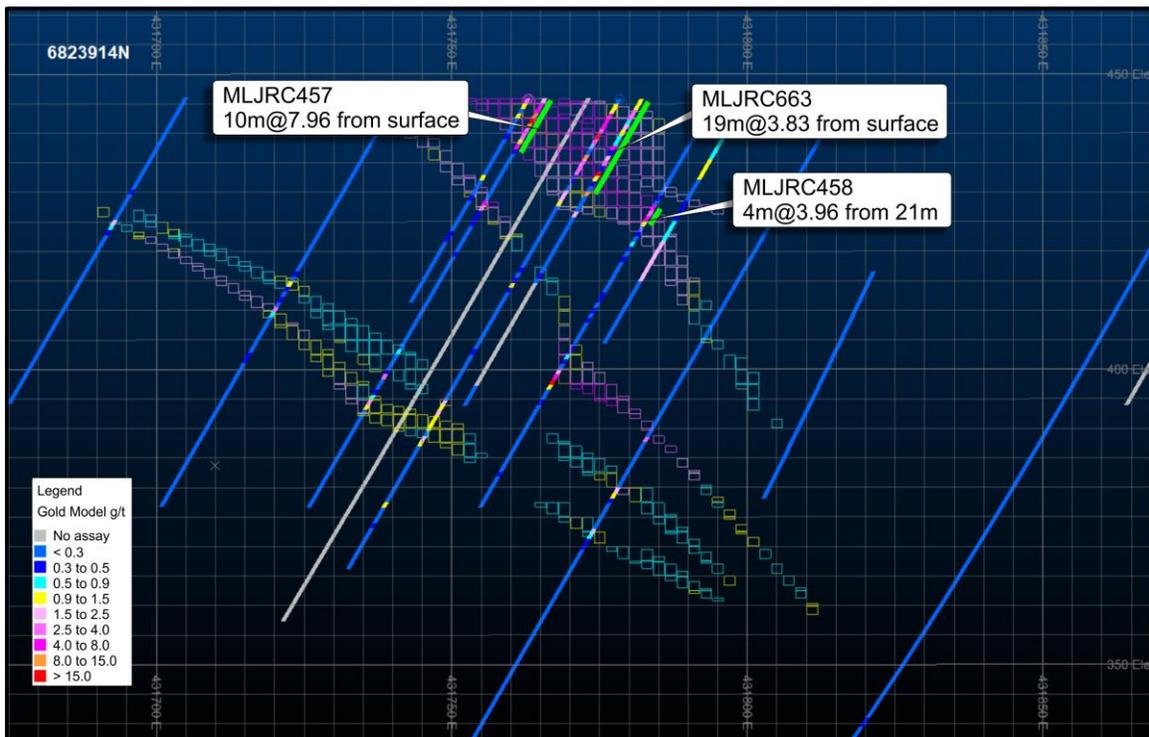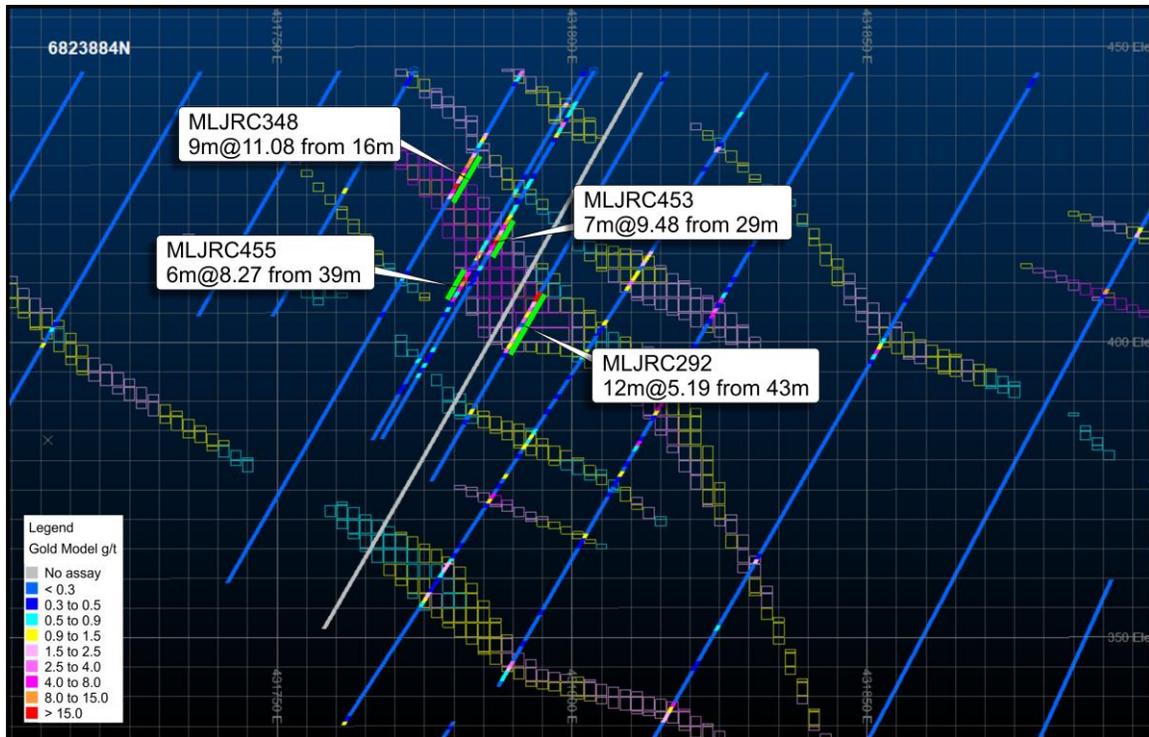

**Figure 4 Lady Julie Central Long Section showing main gold intersections and resource wireframes and block grades.**

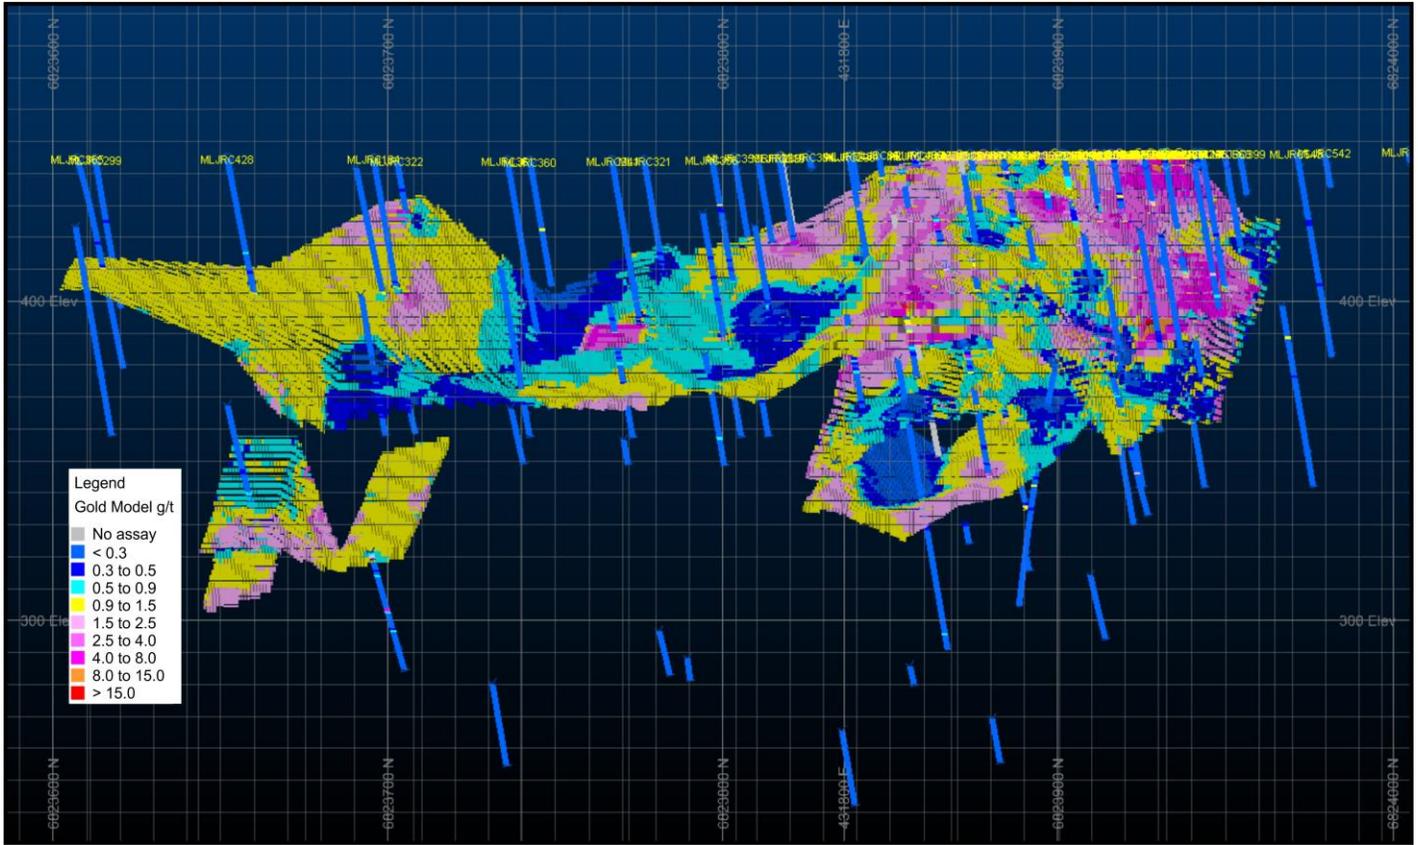


## Lady Julie North 4 Resource

The Lady Julie N4 (Indicated and Inferred) Resource of 3.3 Mt at 1.93 g/t for 204,900 oz covers 750m x150m in area (Figure 5) and is open down dip and to the east, which augers well for the potential size. The recent drilling results have increased both the quantity and the grade of the resource, and has permitted better definition of the nested, shallow-dipping lode structure.


This resource is partly in the Indicated Category (28%) and is being infill drilled with a programme of 13 RC holes for 2,532m with most of these holes aiming to extend the mineralisation at depth (Figures 6 & 6 a and b). The long section (Figure 7) mainly shows a flat plunging thickened mineralised lodes that are shallowing to the north.


The potential to expand the resource at LJN4 is considered strong on the basis of mineralized occurrences within the 12km long Chatterbox shear extending southwards from the LJN4 Deposit. A number of anomalous gold areas are being followed up in the current RC drilling programme which started on the 25 January 2022, with the aim of locating further satellite deposits.

Figure 5. Lady Julie North 4 plan showing resource block grades and drill sections

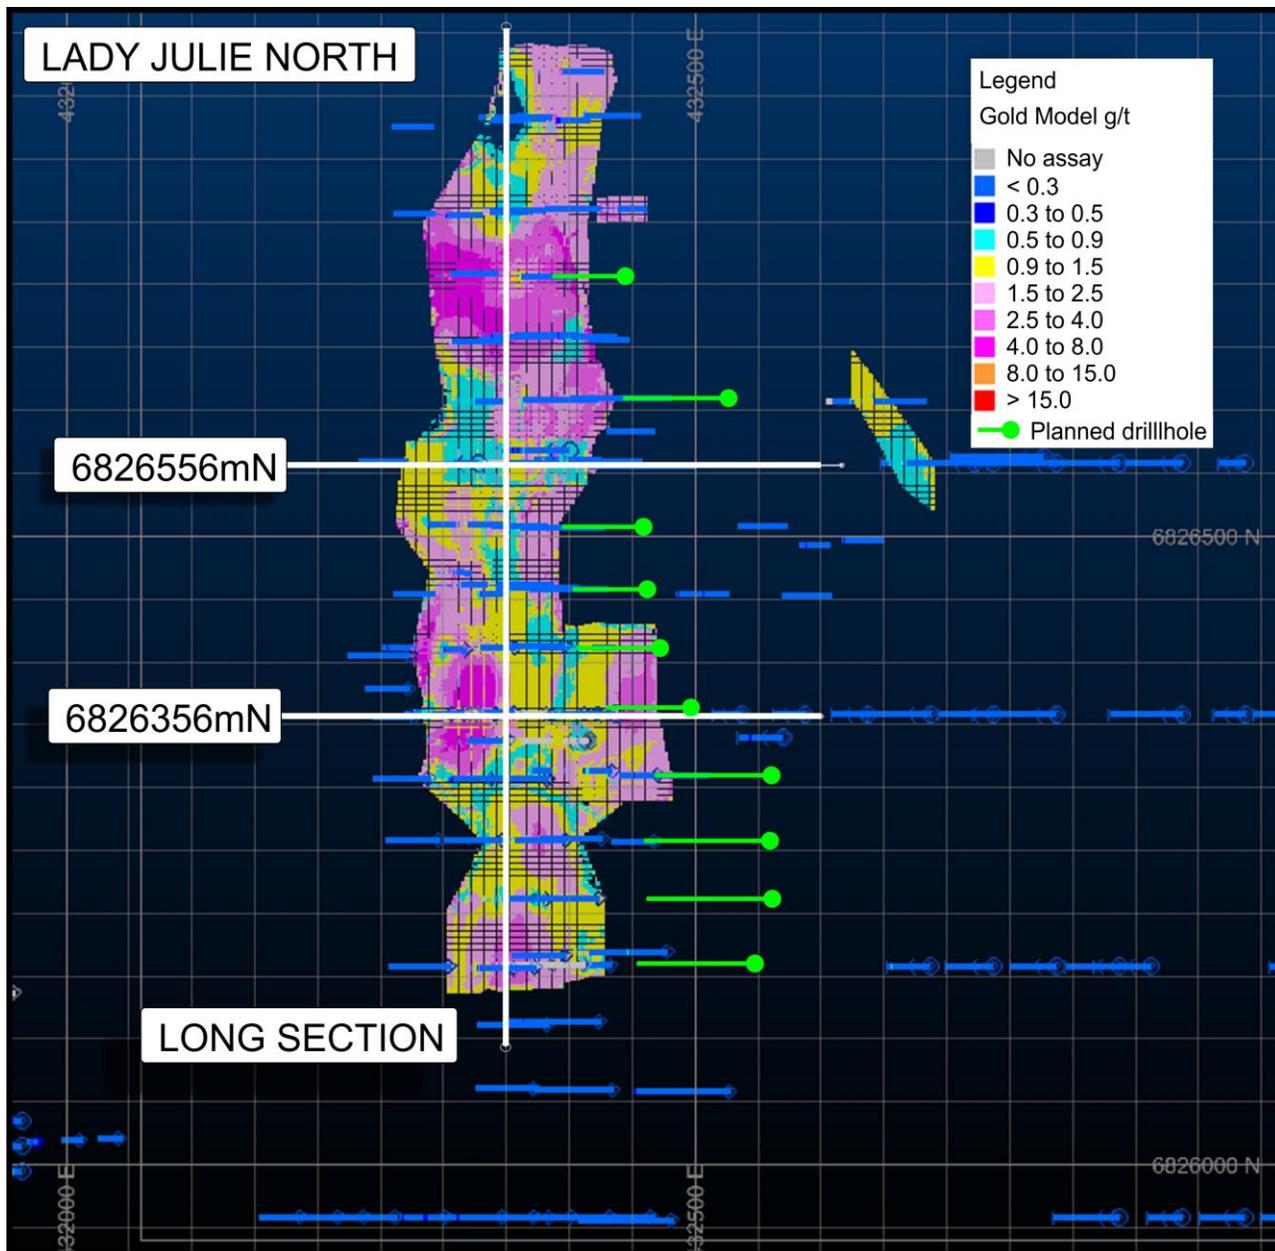


Figures 6 a) and b). Lady Julie North 4 cross sections showing main gold intersections, resource wireframes and block grades

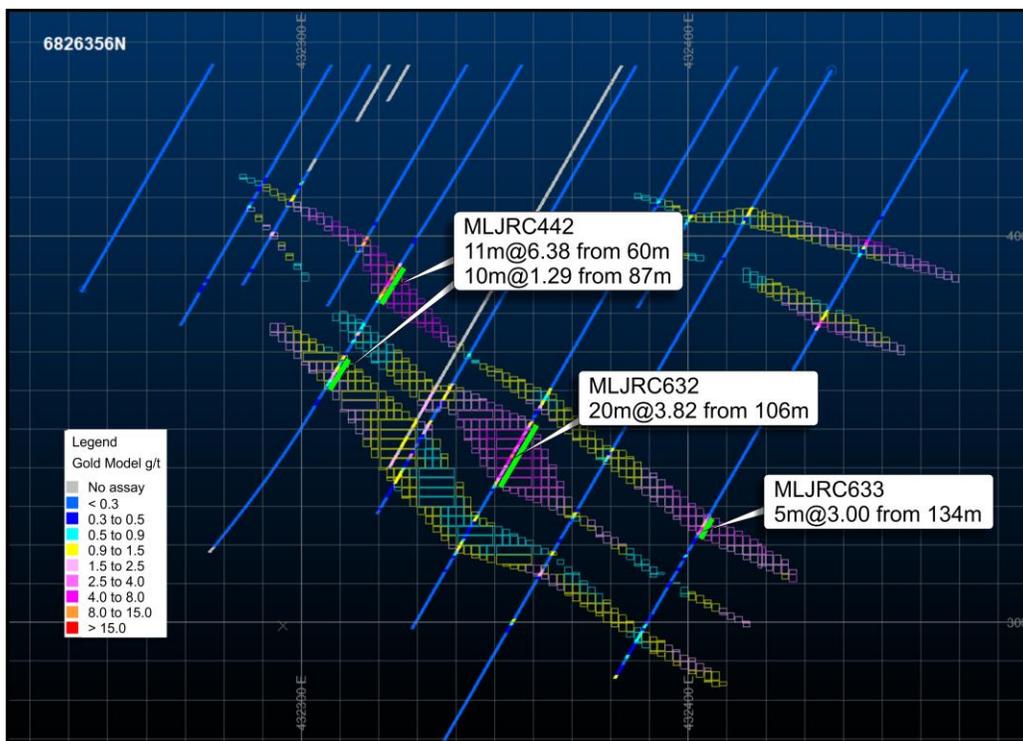

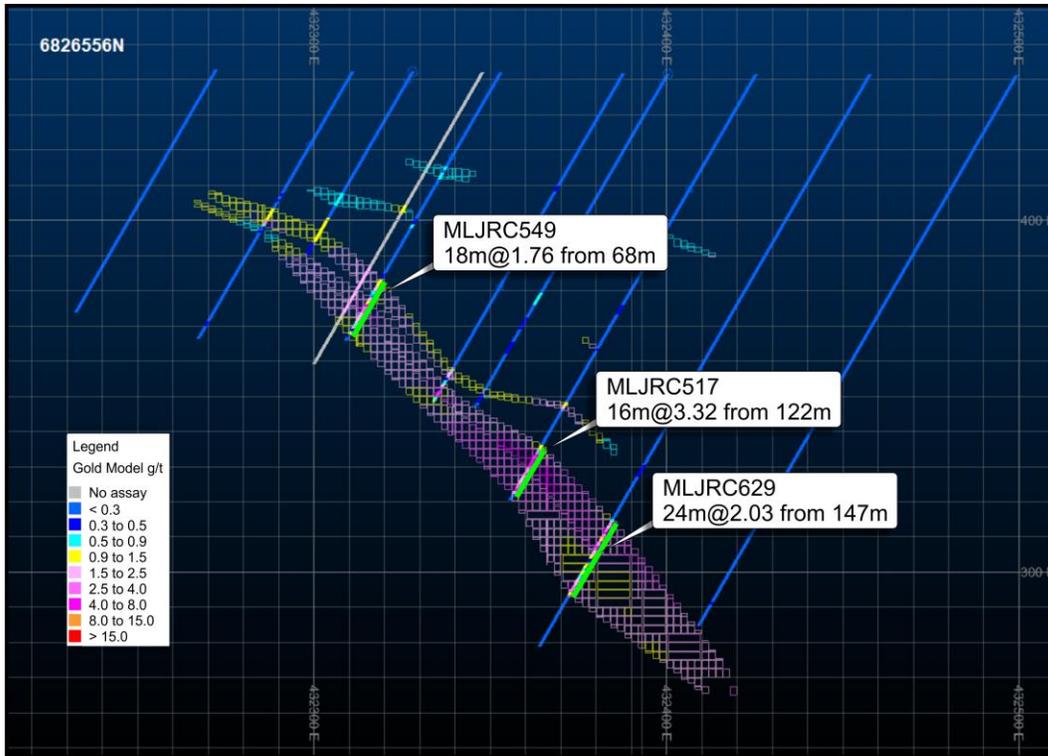

**Figures 7. Lady Julie North 4 Long Section showing main gold intersections, resource wireframes and block grades.**

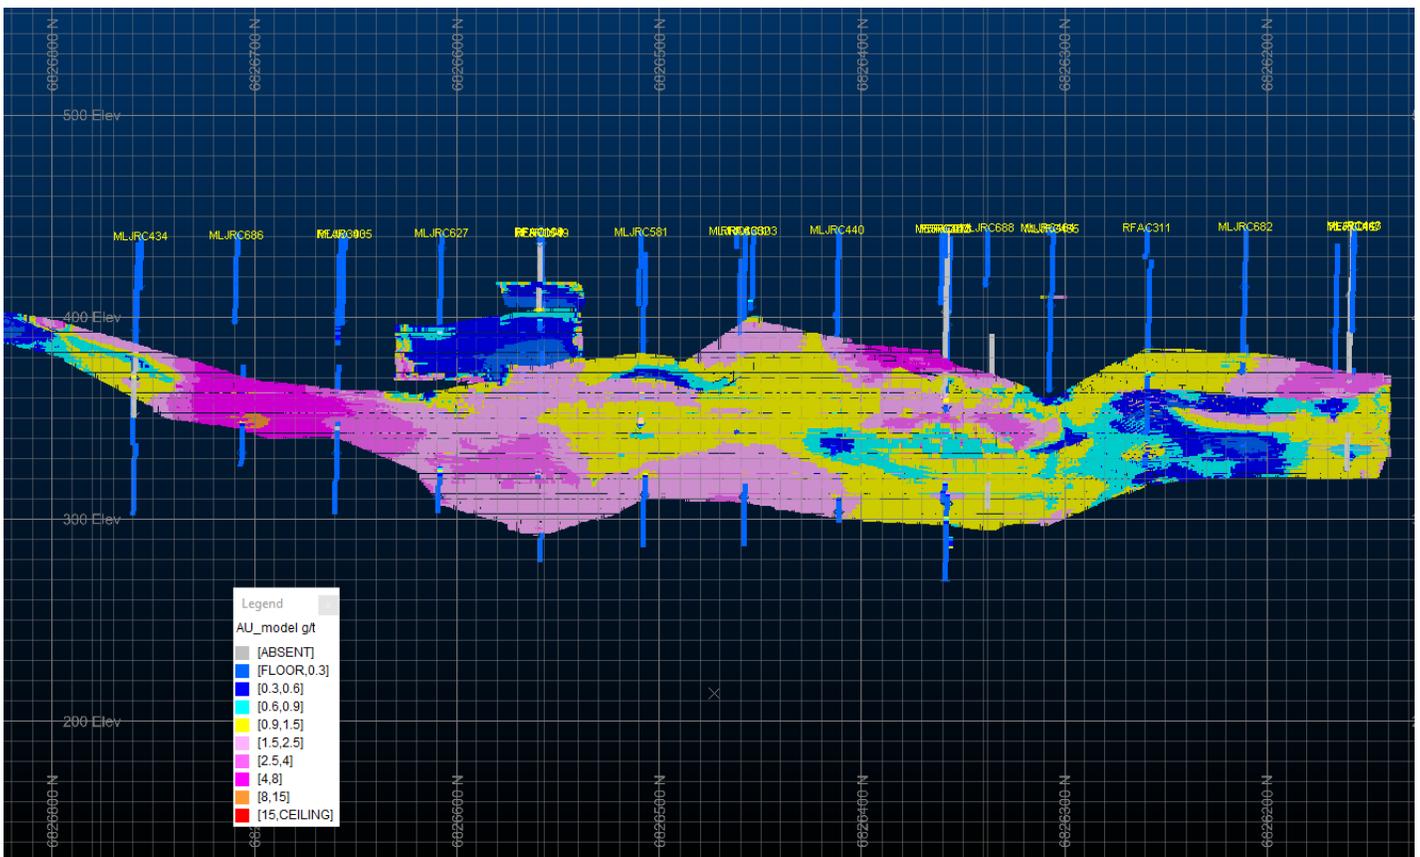

## Technical Summary of the Mineral Resource Estimate

Drilling at the various deposits has been by a variety of methods, and the drill holes used in the modelling of each deposit are summarised below. In general, all holes are used to assist in geological interpretation, while DDH (Diamond), RC (Reverse Circulation) and RAB (Rotary Air Blast) are used for grade estimation.

Deposit	Total Metres	Number of Holes
Hawks Nest 9	44,540	816
Lady Julie	91,063	1,455
Hawks Nest 3	6,262	115
Hawks Nest 5	4,395	103
Mount Jumbo	24,591	373
Homeward Bound S	8120	157
<b>Total</b>	<b>178,971</b>	<b>3,019</b>

### Drill Hole Summary

Historical drilling generally used RAB and Air Core (AC) drilling for initial exploration with most follow up and infill work being carried out using RC. Magnetic has used RC for its recent drilling programs at HN9 and Lady Julie.

Bulk 1 metre samples were obtained from the drilling, from which composite 4m samples were prepared by spear sampling of the bulk 1m samples. 3kg of the composite sample was pulverized to produce a 50g charge for fire assay for gold. The assay results of the composite samples are used to determine which 1m samples from the rig's cyclone and splitter are selected for fire assay using the same method.

One metre RC samples are assayed using a 50g charge and a fire assay method with an AAS finish which is regarded as appropriate. The technique provides an estimate of the total gold content.

Industry standard standards and duplicates are used by the NATA registered laboratory conducting the analyses.

Primary data is entered into an in-house database and checked by Magnetic's database manager. The data is subsequently exported to Micromine format files and imported into Micromine 2022 software for further validation, statistical analysis and resource estimation.

There are two major mineralisation styles in the Laverton-Leonora deposits:

- quartz veining and stock working in the porphyries, and
- shear-hosted quartz veins on porphyry amphibolite contacts

Mineralised domains at HN9, LJC and LJV4 were digitized using mineralized trends. Drill data was flagged inside domain boundaries and composited to 1m intervals. Geostatistical analysis completed to determine top-cut of grades. A Dynamic Anisotropy Modelling methodology was adopted with inverse distance square for estimation.



Model validation has been carried out by comparison of average grades of models and drill hole data, visual examination of models vs drill hole data on section and plan, and swathe plots. All methods have shown good agreement between models and data.

The Mineral Resources have been classified in the Indicated and Inferred categories, in accordance with the 2012 Australasian Code for Reporting of Mineral Resources and Ore Reserves (JORC Code).

A range of criteria has been considered in determining this classification including:

- Geological continuity;
- Data quality;
- Drill hole spacing;
- Modelling technique;
- Estimation properties including search strategy, number of informing data and average distance of data from blocks.

## COMPETENT PERSON STATEMENT

The information in this report that relates to the Laverton and Homeward Bound Mineral Resource Estimates is based on and fairly represents, information which has been prepared by Mr Mat Edwards BSc (Hons), MAIG employed by Blue Cap Mining who is a consultant to the Company. Mat Edwards has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

The information in this report that relates to Exploration Results is based on information compiled by George Sakalidis BSc (Hons), who is a member of the Australasian Institute of Mining and Metallurgy. George Sakalidis is a Director of Magnetic Resources NL. George Sakalidis has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. George Sakalidis consents to the inclusion of this information in the form and context in which it appears in this report.

This announcement has been authorised for release by Managing Director George Sakalidis.  
For more information on the company visit [www.magres.com.au](http://www.magres.com.au)

For more information on the company visit [www.magres.com.au](http://www.magres.com.au)

George Sakalidis  
Managing Director  
Phone (08) 9226 1777  
Mobile 0411 640 337  
Email [george@magres.com.au](mailto:george@magres.com.au)

The information in this report is based on information compiled by George Sakalidis BSc (Hons), who is a member of the Australasian Institute of Mining and Metallurgy. George Sakalidis is a Director of Magnetic Resources NL. George Sakalidis has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. George Sakalidis consents to the inclusion of this information in the form and context in which it appears in this report.

The Information in this report that relates to:

1. Promising 200m wide 0.7g/t soil geochemistry associated with extensive 1km long NS porphyries at newly named Hawks Nest 9. MAU ASX Release 15 October 2018
2. 1.1km NNW Mineralised Gold Intersections at HN9. MAU ASX Release 7 November 2018
3. Surface drilled Mineralisation extends to significant 1.5km at HN9. MAU Release 20 November 2018
4. Hawks Nest Delivers with 8m@4.2g/t Gold from 4m MAU Release 29 January 2018
5. Robust Near Surface High-grade Zone of 7m @ 4.5g/t Gold from 5m from 1m splits. MAU Release 5 March 2018
6. Hawks Nest Geochemical Survey Outlines Potential Extensions to the Prospective 7m @ 4.5g/t Gold Intersected. MAU Release 20 March 2018
7. An 865m RC drilling programme started testing promising 7m at 4.5g/t gold and eight separate anomalous soil geochemical targets at HN5. MAU Release 10 May 2018
8. Large Gold Mineralised Shear Zone Greater Than 250m at Hawks Nest 5. MAU Release 9 June 2018
9. Gold Geochemical Target Zone Grows to Significant 2km in Length at HN9. MAU Release 7 January 2019
10. Significant 2km Gold Target is open to the East on 83% of the 24 Lines Drilled at HN9. MAU Release 4 February 2019
11. Significant 2.1km Gold Target Still open to North, South, East and at Depth. MAU Release 25 March 2019
12. Gold Target Enlarged By 47% to Significant 3.1km and is still open to the North, East and at Depth. MAU Release 22 May 2019
13. HN9 Prospective Zone Enlarged by 170% with Lady Julie Tenements. MAU Release 24 June 2019
14. 200m-Wide Gold Zone Open to The Northeast and Very Extensive Surface Gold Mineralisation Confirmed at HN9 Laverton. MAU Release 27 June 2019
15. 200m Wide Gold Zone Open to the North and New 800m Anomalous Gold Zone defined at HN9 Laverton. MAU Release 4 September 2019
16. Highest Grades Outlined at HN9 and are being Followed Up and Lady Julie Shallow Drilling Commencing Shortly. MAU Release 14 October 2019
17. Central Part of HN9 Shows Significant Thickening of The Mineralised Zone to 28m. MAU Release 28 November 2019
18. Multiple Silicified Porphyry Horizons from Deep Drilling and 57m Mineralised Feeder Zone at MAU Release 17 January 2020
19. Very High-Grade Intersection of 4m at 49g/t Adjacent to 70m Thick Mineralised Feeder Zone MAU Release 5 February 2020
20. 20 km of thickened porphyry units outlined by ground magnetic interpretation at Hawks Nest 9. MAU Release 9 March 2020
21. Further Thick Down Plunge Extensions and NW Extension Shown up at HN9. MAU Release 18 May 2020
22. Four Stacked Thickened Porphyry Lodes at HN9. MAU Release 3 August 2020
23. High-Grade Intersections in Thickened Zone at HN9. MAU Release 18 September 2020
24. Follow up of 16m at 1.16g/t gold from 64m at Lady Julie MAU Release 2 November 2020
25. Shallow Seismic searching for multiple thickened lodes MAU Release 16 November 2020

26. New thicken zone in southern part of Hawks Nest 9. MAU Release 1 December 2020
27. Two RC rigs now operating at HN9 and Lady Julie. MAU Release 11 January 2021.
28. Nine gold targets defined over 14km at HN5, HN6, HN9 and Lady Julie. MAU Release 3 June 2021
29. Lady Julie delivers with 38m at 3.6g/t gold from 32m. MAU Release 23 June 2021
30. Lady Julie North expanded with purchase of tenements. MAU Release 8 June 2021
31. Multiple thick and high-grade zones located at Lady Julie. MAU Release 16 August 2021
32. Multiple thick high-grade intersections from surface at Lady Julie. MAU Release 14 September 2021
33. Thick high-grade intersections are open to the southeast at Lady Julie. MAU Release 22 October 2021
34. High-grade intersections and vertical shoots at Lady Julie. MAU Release 10 January 2022
35. Thicker intersections continue to grow Lady Julie1 and 4 and Homeward Bound. MAU Release 21 February 2022
36. Ten high priority targets & thick intersections – Lady Julie. MAU Release 12 April 2022
37. Second parallel mineralised structure at Lady Julie Central. MAU Release 11 May 2022
38. Lady Julie North 4 delivers with thick intersections that are open at depth. MAU Release 30 May 2022
39. Maiden Mineral Resource Estimate. MAU Release 27 June 2022
40. Thick 56m at 2.2g/t gold at Lady Julie North 4. MAU Release 20 July 2022
41. Drilling commences at Lady Julie North 4. MAU Release 15 August 2022
42. Blue Cap Mining to undertake early works. MAU Release 14 September 2022
43. Mineralisation expands both to north and east at Lady Julie North 4. MAU Release 27 September 2022
44. Early Works progress at Laverton Project. MAU Release 24 October 2022.
45. High grade thick intersections at Lady Julie projects. MAU Release 17 November 2022.
46. Thickest Intersections to Date at Lady Julie North 4. MAU Release 21 December 2022.

All of which are available on [www.magres.com.au](http://www.magres.com.au)

This announcement contains forward-looking statements which involve a number of risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialize, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.



# JORC Code, 2012 Edition – Table 1

## Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary																																								
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>The table below summarises the different types of drilling that have been carried out at the project</li> </ul> <table border="1"> <thead> <tr> <th>Hole Type</th> <th>Holes</th> <th>Metres</th> <th>%</th> </tr> </thead> <tbody> <tr> <td>RC</td> <td>1,788</td> <td>130,412</td> <td>72.9%</td> </tr> <tr> <td>RAB</td> <td>846</td> <td>28,590</td> <td>16.0%</td> </tr> <tr> <td>AC</td> <td>298</td> <td>14,849</td> <td>8.3%</td> </tr> <tr> <td>DDH</td> <td>22</td> <td>3,567</td> <td>2.0%</td> </tr> <tr> <td>RCD</td> <td>2</td> <td>360</td> <td>0.2%</td> </tr> <tr> <td>Unk</td> <td>15</td> <td>395</td> <td>0.2%</td> </tr> <tr> <td>PER</td> <td>17</td> <td>718</td> <td>0.4%</td> </tr> <tr> <td>VAC</td> <td>31</td> <td>81</td> <td>0.0%</td> </tr> <tr> <td>Total</td> <td>3,019</td> <td>178,971</td> <td></td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li>More than 75% of RC drilling (which is the basis of the resource estimate) has been completed by Magnetic Resources. The remainder were drilled by more than a dozen other exploration companies.</li> <li>All the reported historical drilling and relevant sampling procedures, QAQC and analytical methods etc. are referred to in the original WAMEX reports (references in the main text of ASX release of 7 November 2018).</li> <li>For Magnetic’s RC drilling, a 1 metre split is taken directly from a cone splitter mounted beneath the rig’s cyclone. The cyclone and splitter are cleaned regularly to minimize contamination.</li> <li>Sampling and QAQC procedures are carried out using Magnetic’s protocols as per industry sound practice.</li> <li>RC drilling was used to obtain bulk 1 metre samples from which composite 4m samples were prepared by spear sampling of the bulk 1m samples. 3kg of the composite sample was pulverized to produce a 50g charge for fire assay for gold. The assay results of the composite samples are used to determine which 1m samples from the rig’s cyclone and splitter are selected for fire assay using the same method.</li> </ul>	Hole Type	Holes	Metres	%	RC	1,788	130,412	72.9%	RAB	846	28,590	16.0%	AC	298	14,849	8.3%	DDH	22	3,567	2.0%	RCD	2	360	0.2%	Unk	15	395	0.2%	PER	17	718	0.4%	VAC	31	81	0.0%	Total	3,019	178,971	
Hole Type	Holes	Metres	%																																							
RC	1,788	130,412	72.9%																																							
RAB	846	28,590	16.0%																																							
AC	298	14,849	8.3%																																							
DDH	22	3,567	2.0%																																							
RCD	2	360	0.2%																																							
Unk	15	395	0.2%																																							
PER	17	718	0.4%																																							
VAC	31	81	0.0%																																							
Total	3,019	178,971																																								
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other</li> </ul>	<ul style="list-style-type: none"> <li>Rotary air blast (RAB) drilling with a blade bit.</li> <li>Reverse Circulation (RC) drilling was carried out using a face sampling hammer with a nominal diameter of 140mm.</li> <li>Aircore (AC) drilling.</li> </ul>																																								



Criteria	JORC Code explanation	Commentary
	<p><i>type, whether core is oriented and if so, by what method, etc).</i></p>	<ul style="list-style-type: none"> <li>A small amount of Diamond Core drilling.</li> </ul>
<p><i>Drill sample recovery</i></p>	<ul style="list-style-type: none"> <li><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></li> <li><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></li> <li><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></li> </ul>	<ul style="list-style-type: none"> <li>RC sample recoveries are visually estimated qualitatively on a metre by metre basis.</li> <li>Various drilling additives (including muds and foams) have been used to condition the RC holes to maximize recoveries and sample quality.</li> <li>Insufficient drilling and geochemical data is available at the present stage to evaluate potential sample bias. Drill samples are sometimes wet which may result in sample bias because of preferential loss/gain of fine/coarse material.</li> </ul>
<p><i>Logging</i></p>	<ul style="list-style-type: none"> <li><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></li> <li><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></li> <li><i>The total length and percentage of the relevant intersections logged.</i></li> </ul>	<ul style="list-style-type: none"> <li>Lithology, alteration and veining is recorded and imported into the Magnetic Resources central database. The logging is of sufficient standard to support a geological resource.</li> <li>All drill holes were logged in full.</li> </ul>
<p><i>Sub-sampling techniques and sample preparation</i></p>	<ul style="list-style-type: none"> <li><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li><i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> <li><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>RC samples are cyclone split to produce a 2-3kg sample. 4m composite samples are prepared by tube sampling bulk 1m samples.</li> <li>No field duplicates were taken.</li> <li>Sample sizes are appropriate for the grain size being sampled.</li> </ul>
<p><i>Quality of assay data and laboratory tests</i></p>	<ul style="list-style-type: none"> <li><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> <li><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied</i></li> </ul>	<ul style="list-style-type: none"> <li>RC samples are assayed using a 50g charge and a fire assay method with an AAS finish which is regarded as appropriate. The technique provides an estimate of the total gold content.</li> <li>Industry standard standards and duplicates are used by the NATA registered laboratory conducting the analyses</li> </ul>



Criteria	JORC Code explanation	Commentary
	<p>and their derivation, etc.</p> <ul style="list-style-type: none"> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>No independent verification of drill intersections has yet been carried out.</li> <li>Twin holes are planned to be drilled.</li> <li>Primary data is entered into an in-house database and checked by the database manager.</li> <li>No adjustment of assay data other than averaging of repeat and duplicate assays</li> <li>No verification of historically reported drilling has been carried out</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>Drill collars located by hand- held GPS with an accuracy of +/- 5m.</li> <li>Grid system: MGAz51 GDA94.</li> <li>Topographic control using regional DEM data.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>Drilling was carried out at various spacings at the different deposits and varies from 12.5m section spacing to 100m section spacing at HN9 prospect. For LJC and LJC4, drill section spacing in 50m.</li> <li>1m samples were composited into 4m composite samples for assay.</li> <li>Drilling was initially sampled at 1m intervals and composited into 4m samples for preliminary assaying.</li> <li>1m samples were then analysed when 4m composites returned positive results.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>At all deposits drilling was carried out orthogonal to the known mineralisation trends and where possible holes were angled to obtain true-width intersections.</li> </ul>
Sample security	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Samples were stored in the field prior to dispatch to Perth using a commercial freight company.</li> </ul>
Audits or	<ul style="list-style-type: none"> <li>The results of any audits or reviews of</li> </ul>	<ul style="list-style-type: none"> <li>No audits or reviews of the sampling techniques and data from historical drilling have been carried</li> </ul>



Criteria	JORC Code explanation	Commentary
<i>reviews</i>	<i>sampling techniques and data.</i>	out.



## Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <li><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></li> </ul>	<ul style="list-style-type: none"> <li>A full list of all Tenement ID's is provided in the body of the report.</li> <li>All tenements are held 100% by Magnetic Resources NL and are in good standing.</li> <li>All are granted tenements with no known impediments to obtaining a licence to operate.</li> </ul>
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <li><i>Acknowledgment and appraisal of exploration by other parties.</i></li> </ul>	<ul style="list-style-type: none"> <li>The HN9 and Lady Julie areas have been subject to historical exploration as described in the body of the report.</li> </ul>
<i>Geology</i>	<ul style="list-style-type: none"> <li><i>Deposit type, geological setting and style of mineralisation.</i></li> </ul>	<ul style="list-style-type: none"> <li>Two gold mineralization styles have been observed: quartz veining and stock working in the porphyries and shear-hosted quartz veins on porphyry-amphibolite contacts.</li> <li>Mineralisation at Homeward Bound South is associated with the Federation Shear Zone.</li> </ul>
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <li><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <li><i>easting and northing of the drill hole collar</i></li> <li><i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i></li> <li><i>dip and azimuth of the hole</i></li> <li><i>down hole length and interception depth</i></li> <li><i>hole length.</i></li> </ul> </li> <li><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></li> </ul>	<ul style="list-style-type: none"> <li>Exploration results are not being reported in this Mineral Resource Report.</li> </ul>
<i>Data aggregation</i>	<ul style="list-style-type: none"> <li><i>In reporting Exploration Results,</i></li> </ul>	<ul style="list-style-type: none"> <li>No weighting or cutting of gold values, other than</li> </ul>



Criteria	JORC Code explanation	Commentary
methods	<p><i>weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <ul style="list-style-type: none"><li>• <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low- grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></li><li>• <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></li></ul>	<p>averaging of duplicate and repeat analyses.</p>
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"><li>• <i>These relationships are particularly important in the reporting of Exploration Results.</i></li><li>• <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li><li>• <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></li></ul>	<ul style="list-style-type: none"><li>• Exploration results are not being reported in this Mineral Resource Report.</li><li>• However, where possible, drill holes are angled to intersect mineralisation at right angles to the dip.</li></ul>
Diagrams	<ul style="list-style-type: none"><li>• <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></li></ul>	<ul style="list-style-type: none"><li>• Exploration results are not being reported in this Mineral Resource Report.</li><li>• Maps and sections appropriate to the reporting of a mineral resource are included in the report.</li></ul>
Balanced reporting	<ul style="list-style-type: none"><li>• <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.</i></li></ul>	<ul style="list-style-type: none"><li>• Exploration results are not being reported in this Mineral Resource Report.</li></ul>
Other substantive exploration data	<ul style="list-style-type: none"><li>• <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock</i></li></ul>	<ul style="list-style-type: none"><li>• No additional work beyond that noted in July 2022 report has been undertaken.</li></ul>



Criteria	JORC Code explanation	Commentary
	<i>characteristics; potential deleterious or contaminating substances.</i>	
<i>Further work</i>	<ul style="list-style-type: none"><li>• <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li><li>• <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li></ul>	<ul style="list-style-type: none"><li>• Infill drilling is on-going and planned at Lady Julie.</li></ul>



## Section 3 Estimation and Reporting of Mineral Resources

Criteria	JORC Code explanation	Commentary																												
<i>Database integrity</i>	<ul style="list-style-type: none"> <li>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</li> <li>Data validation procedures used.</li> </ul>	<ul style="list-style-type: none"> <li>The drill hole database is managed and validated by magnetic Resource NL. Drill core is logged with digital templates and codes are automatically validated during entry. Assay data is provided digitally by the laboratory and automatically uploaded to the database.</li> <li>The data is stored in an MS Access database system and exported when required.</li> <li>Drill hole data was provided to Blue Cap Mining in MS Access database system.</li> </ul>																												
<i>Site visits</i>	<ul style="list-style-type: none"> <li>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</li> <li>If no site visits have been undertaken indicate why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>No Site visits were undertaken during the new drill programs.</li> </ul>																												
<i>Geological interpretation</i>	<ul style="list-style-type: none"> <li>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</li> <li>Nature of the data used and of any assumptions made.</li> <li>The effect, if any, of alternative interpretations on Mineral Resource estimation.</li> <li>The use of geology in guiding and controlling Mineral Resource estimation.</li> <li>The factors affecting continuity both of grade and geology.</li> </ul>	<ul style="list-style-type: none"> <li>There is reasonable confidence in the interpretation of the porphyries and shear zones, and in the continuity of the various domains. Both drilling and mapping of old workings where possible have been utilised in arriving at an understanding of the orientation and nature of the mineralisation.</li> <li>3D geological models of the porphyry have been constructed at HN9 to assist in control of interpolation of gold grades.</li> </ul>																												
<i>Dimensions</i>	<ul style="list-style-type: none"> <li>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</li> </ul>	<ul style="list-style-type: none"> <li>The areas containing the mineralisation vary by deposit and are summarised below. <table border="1"> <thead> <tr> <th>Deposit</th> <th>Length</th> <th>Width</th> <th>Depth</th> </tr> </thead> <tbody> <tr> <td>Hawks Nest 9</td> <td>2,100</td> <td>200</td> <td>130</td> </tr> <tr> <td>Lady Julie</td> <td>6,600</td> <td>850</td> <td>190</td> </tr> <tr> <td>Hawks Nest 3</td> <td>650</td> <td>80</td> <td>60</td> </tr> <tr> <td>Hawks Nest 5</td> <td>600</td> <td>50</td> <td>90</td> </tr> <tr> <td>Mount Jumbo</td> <td>1,600</td> <td>200</td> <td>200</td> </tr> <tr> <td>Homeward Bound S</td> <td>2,300</td> <td>200</td> <td>120</td> </tr> </tbody> </table> </li> <li>Mineralisation extends up to 200m below the topographic surface.</li> </ul>	Deposit	Length	Width	Depth	Hawks Nest 9	2,100	200	130	Lady Julie	6,600	850	190	Hawks Nest 3	650	80	60	Hawks Nest 5	600	50	90	Mount Jumbo	1,600	200	200	Homeward Bound S	2,300	200	120
Deposit	Length	Width	Depth																											
Hawks Nest 9	2,100	200	130																											
Lady Julie	6,600	850	190																											
Hawks Nest 3	650	80	60																											
Hawks Nest 5	600	50	90																											
Mount Jumbo	1,600	200	200																											
Homeward Bound S	2,300	200	120																											
<i>Estimation and modelling techniques</i>	<ul style="list-style-type: none"> <li>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and</li> </ul>	<ul style="list-style-type: none"> <li>Geological block models were constructed using Datamine software.</li> <li>The estimation process was carried out using Inverse distance functions in Datamine software.</li> <li>The search ellipse was 60x40x10m,</li> </ul>																												



Criteria	JORC Code explanation	Commentary
	<p><i>maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i></p> <ul style="list-style-type: none"><li>• <i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i></li><li>• <i>The assumptions made regarding recovery of by-products.</i></li><li>• <i>Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterisation).</i></li><li>• <i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i></li><li>• <i>Any assumptions behind modelling of selective mining units.</i></li><li>• <i>Any assumptions about correlation between variables.</i></li><li>• <i>Description of how the geological interpretation was used to control the resource estimates.</i></li><li>• <i>Discussion of basis for using or not using grade cutting or capping.</i></li><li>• <i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i></li></ul>	<ul style="list-style-type: none"><li>• The minimum number of samples is 5 in pass 1, 5 in pass 2 and 1 in pass 3. Maximum number of samples is 10 in all passes.</li><li>• A top cut for Au was determined from review of log probability plots. It varies between 10 and 32 g/t depending on domain and deposit.</li><li>• The estimation process was validated by comparing global block grades with the average composite grades, visual checks comparing block grades with raw assay data and swathe plots. All methods showed good correlation between drill data and block model.</li></ul>
Moisture	<ul style="list-style-type: none"><li>• <i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i></li></ul>	<ul style="list-style-type: none"><li>• All tonnages are estimated on a dry basis and moisture content is not considered in the resource estimate.</li></ul>
Cut-off parameters	<ul style="list-style-type: none"><li>• <i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i></li></ul>	<ul style="list-style-type: none"><li>• The resource has been reported at 0.5 g/t Au cutoff. This is based on a potential incremental processing cost and estimated gold recovery only.</li></ul>
Mining factors or assumptions	<ul style="list-style-type: none"><li>• <i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining</i></li></ul>	<ul style="list-style-type: none"><li>• The resource is reported in-situ with no dilution or mining recovery factors applied.</li></ul>



Criteria	JORC Code explanation	Commentary
	<p><i>methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i></p>	
<i>Metallurgical factors or assumptions</i>	<ul style="list-style-type: none"><li><i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i></li></ul>	<ul style="list-style-type: none"><li>Metallurgical parameters have not been factored into this Mineral Resource Estimate.</li><li>For the purposes of generating optimal pits to assess whether there are reasonable prospects of extraction of the resource, a plant recovery of 95% has been assumed. This was done for the Maiden Resource Estimate of 27 June 2022.</li></ul>
<i>Environmental factors or assumptions</i>	<ul style="list-style-type: none"><li><i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i></li></ul>	<ul style="list-style-type: none"><li>Environmental considerations have not been factored into this Mineral Resource Estimate.</li></ul>
<i>Bulk density</i>	<ul style="list-style-type: none"><li><i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i></li><li><i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces</i></li></ul>	<ul style="list-style-type: none"><li>Density is assigned on the basis of oxidation state<ul style="list-style-type: none"><li>Oxide 2.20 t/m<sup>3</sup>.</li><li>Transition 2.40 t/m<sup>3</sup>.</li><li>Fresh 2.65 t/m<sup>3</sup>.</li></ul></li></ul>



Criteria	JORC Code explanation	Commentary
	<p><i>(vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i></p> <ul style="list-style-type: none"><li>• <i>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i></li></ul>	
<i>Classification</i>	<ul style="list-style-type: none"><li>• <i>The basis for the classification of the Mineral Resources into varying confidence categories.</i></li><li>• <i>Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</i></li><li>• <i>Whether the result appropriately reflects the Competent Person's view of the deposit.</i></li></ul>	<ul style="list-style-type: none"><li>• The Mineral Resource has been classified in the Indicated and Inferred categories, in accordance with the 2012 Australasian Code for Reporting of Mineral Resources and Ore Reserves (JORC Code).</li><li>• A range of criteria has been considered in determining this classification including:<ul style="list-style-type: none"><li>• Geological continuity;</li><li>• Data quality;</li><li>• Drill hole spacing;</li><li>• Modelling technique;</li><li>• Estimation properties including search strategy, number of informing data and average distance of data from blocks.</li></ul></li><li>• Indicated material is generally assigned to blocks within areas of ~20m to 25m drill spacing, while Inferred material has up to ~50m drill spacing. Blocks with more widely spaced drill spacing are estimated but are not classified as part of the Mineral Resource.</li><li>• The mineral resource estimate appropriately reflects the Competent Person's views of the deposit.</li></ul>
<i>Audits or reviews</i>	<ul style="list-style-type: none"><li>• <i>The results of any audits or reviews of Mineral Resource estimates.</i></li></ul>	<ul style="list-style-type: none"><li>• The current model has not been audited by an independent third party.</li></ul>
<i>Discussion of relative accuracy/ confidence</i>	<ul style="list-style-type: none"><li>• <i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i></li><li>• <i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i></li></ul>	<ul style="list-style-type: none"><li>• The resource estimate is deemed to be an accurate reflection of both the geological interpretation and tenor of mineralisation within the deposit.</li><li>• The mineral resource statement relates to a global tonnage and grade estimate. Grade estimates have been made for each block in the block model.</li><li>• No production data is available.</li></ul>



Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"><li data-bbox="358 260 821 388"><i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i></li></ul>	