

ROX RESOURCES LIMITED

ASX: RXL

Rox Resources Limited is exploring and developing advanced gold assets in Western Australia: the Youanmi Gold Project and the Mt Fisher – Mt Eureka Gold project.

DIRECTORS

Mr Stephen Dennis
Chairman

Mr Robert Ryan
Managing Director

Dr John Mair
Non-Executive Director

Matthew Hogan
Non-Executive Director

Shares on Issue	360.0m
Share Price	\$0.23
Market Cap.	\$81.0m

Level 2, 87 Colin Street,
West Perth WA 6005

+61 8 9226 0044

admin@roxresources.com.au

www.roxresources.com.au

Follow Rox:



Spectacular high-grade gold results delivered from Link

- Link is a fast-developing strike extension to the historically mined lodes at Youanmi, and benefits from its proximity to established underground infrastructure.
- Recent assay batch received from Youanmi resource development drilling at Link include:
 - **RXDD088: 24.43m @ 12.79g/t Au from 369.00m, incl:**
 - 6.03m @ 25.01g/t Au from 372.97m, and:
 - 1.87m @ 28.65g/t Au from 383.13m, and:
 - 2.68m @ 36.51g/t Au from 390.75m
 - **RXDD092: 7.73m @ 3.12g/t Au from 366.90m, incl:**
 - 4.10m @ 4.65g/t Au from 366.90m
 - **RXDD093: 3.89m @ 5.75g/t Au from 408.00m, incl:**
 - 1.93m @ 9.21g/t Au from 409.96m, and:
 - 1.02m @ 29.88g/t Au from 425.45m
 - **RXDD096: 3.84m @ 9.13g/t Au from 412.51m, incl:**
 - 2.15m @ 13.50g/t Au from 412.51m
- These results strongly support Rox's agenda of moving resources at Link to a higher confidence category to support feasibility studies and to also demonstrate significant resource upside.
- The consistency of the high-grade results received-to-date bodes well for future Resource updates as well as for potential depth extensions.
- Further phase of RC drilling currently underway testing advanced near-mine targets and greenfield regional targets.

West Australian gold exploration and development company Rox Resources Limited ("Rox" or "the Company") (ASX: RXL) is pleased to report spectacular assay results received from resource development drilling at its flagship 100%-owned **3.2Moz Youanmi Gold Project**, located near Mt Magnet in WA.

The assays are from the recently completed 28,507m (increased from 23,000m) resource development and near-mine exploration drilling program. Resource development drilling, which was

focused on the high-priority Link and Kathleen areas of the project, was designed to convert Inferred Resources to the higher confidence Indicated Resource classification. Results continue to confirm the substantial gold endowment of the Youanmi Project.

Drilling at Link was designed to target an upgrade of the Inferred Resource over a strike length of 460m and between 230m and 475m below surface. Assays received to date at Link have provided confidence in the geological interpretation and bode well for improving resource confidence as part of future resource updates, while also highlighting the down-dip potential of the ore zone that increasingly looks to be a significant strike extension to the historically mine lodes at Youanmi.

Managing Director Comments

Rox Resources' Managing Director, Mr Robert Ryan, said the final batch of drilling results from the resource definition drilling at Link reinforced the outstanding gold endowment of the Youanmi mineralised system and bode well for feasibility studies.

"The final batch of assay results from Link have proven to be some of the best yet, with a spectacular intercept of 24.43m at 12.79g/t reinforcing the high-grade nature of the Youanmi Gold Project.

"The latest campaign has defined Link down to ~475m below surface, with the mineralisation remaining open and no deeper drilling completely beyond this depth. Given that the Youanmi Main Lode, which sits just next door, has been intersected at depth of up to 970m below surface, we believe there is immense potential for the mineralisation at Link to continue at depth.

"Following our recent consolidation of tenure ownership over the broader high-grade Youanmi belt, drilling is also underway on regional targets that extend from north of Youanmi to south of the Penny West mine. Drilling is currently underway at Curran's Find and our near-mine targets at Youanmi South, with assay results expected in the coming weeks. "



Figure 1. Drilling in progress at the Youanmi Gold Project.

Resource Drilling Results

The diamond and Reverse Circulation (RC) drilling program at the Youanmi Project was completed on 11 June 2023 with a total of 28,507 metres drilled.

The resource development drilling focused on converting Inferred Resources to the Indicated Resources classification at the high-priority Link and Kathleen areas (Figure 2). This drilling is targeting high-grade mineralisation over a 460m strike length and to a depth of 475m below surface. The drilling was designed to delineate sufficient Indicated Resources for future feasibility studies, as well as to confirm the continuity of gold grades proximal to the current Indicated Resources.

Following the last ASX announcement (6 July 2023), assay results have now been received for the final four diamond tails. The resource definition drilling program is now complete with all assays now received (Figures 3 and 4).

The Link resource drilling continues to confirm the current interpretation with recent results showing greater than expected grade tenor of the deposit. The full list of significant results is shown in Table 2, with highlight drill intercepts for Link including:

- **RXDD088: 24.43m @ 12.79g/t Au from 369.00m, incl:**
 - 6.03m @ 25.01g/t Au from 372.97m, and:
 - 1.87m @ 28.65g/t Au from 383.13m, and:
 - 2.68m @ 36.51g/t Au from 390.75m
- **RXDD092: 7.73m @ 3.12g/t Au from 366.90m, incl:**
 - 4.10m @ 4.65g/t Au from 366.90m
- **RXDD093: 3.89m @ 5.75g/t Au from 408.00m, incl:**
 - 1.93m @ 9.21g/t Au from 409.96m, and:
 - 1.02m @ 29.88g/t Au from 425.45m
- **RXDD096: 3.84m @ 9.13g/t Au from 412.51m, incl:**
 - 2.15m @ 13.50g/t Au from 412.51m: and
 - 22.00m @ 1.32g/t Au from 533.00m, incl:
 - 1.22m @ 5.89g/t Au from 542.00m

With all the assay results now received, it is noted that a number of high-grade results from this in-fill and extensional drill program are positioned near the lower limit of the current resource below the historic United North pit, and to the north of the lower defined resource area below the historic Hill End pit, with intercepts including (Figure 4):

RXDD088: **24.43m @ 12.79g/t Au**
 RXDD052: 4.00m @ 14.85g/t Au; and
 1.73m @ 36.91g/t Au
 RXDD078: 5.96m @ 5.34g/t Au
 RXDD058: **6.53m @ 10.31g/t Au; and**
7.61m @ 8.20g/t Au
 RXDD096: 3.84m @ 9.13g/t Au

The section of the deposit below 125mRL beneath United North pit represents a strong opportunity to extend the resource area at depth in future drilling programs.

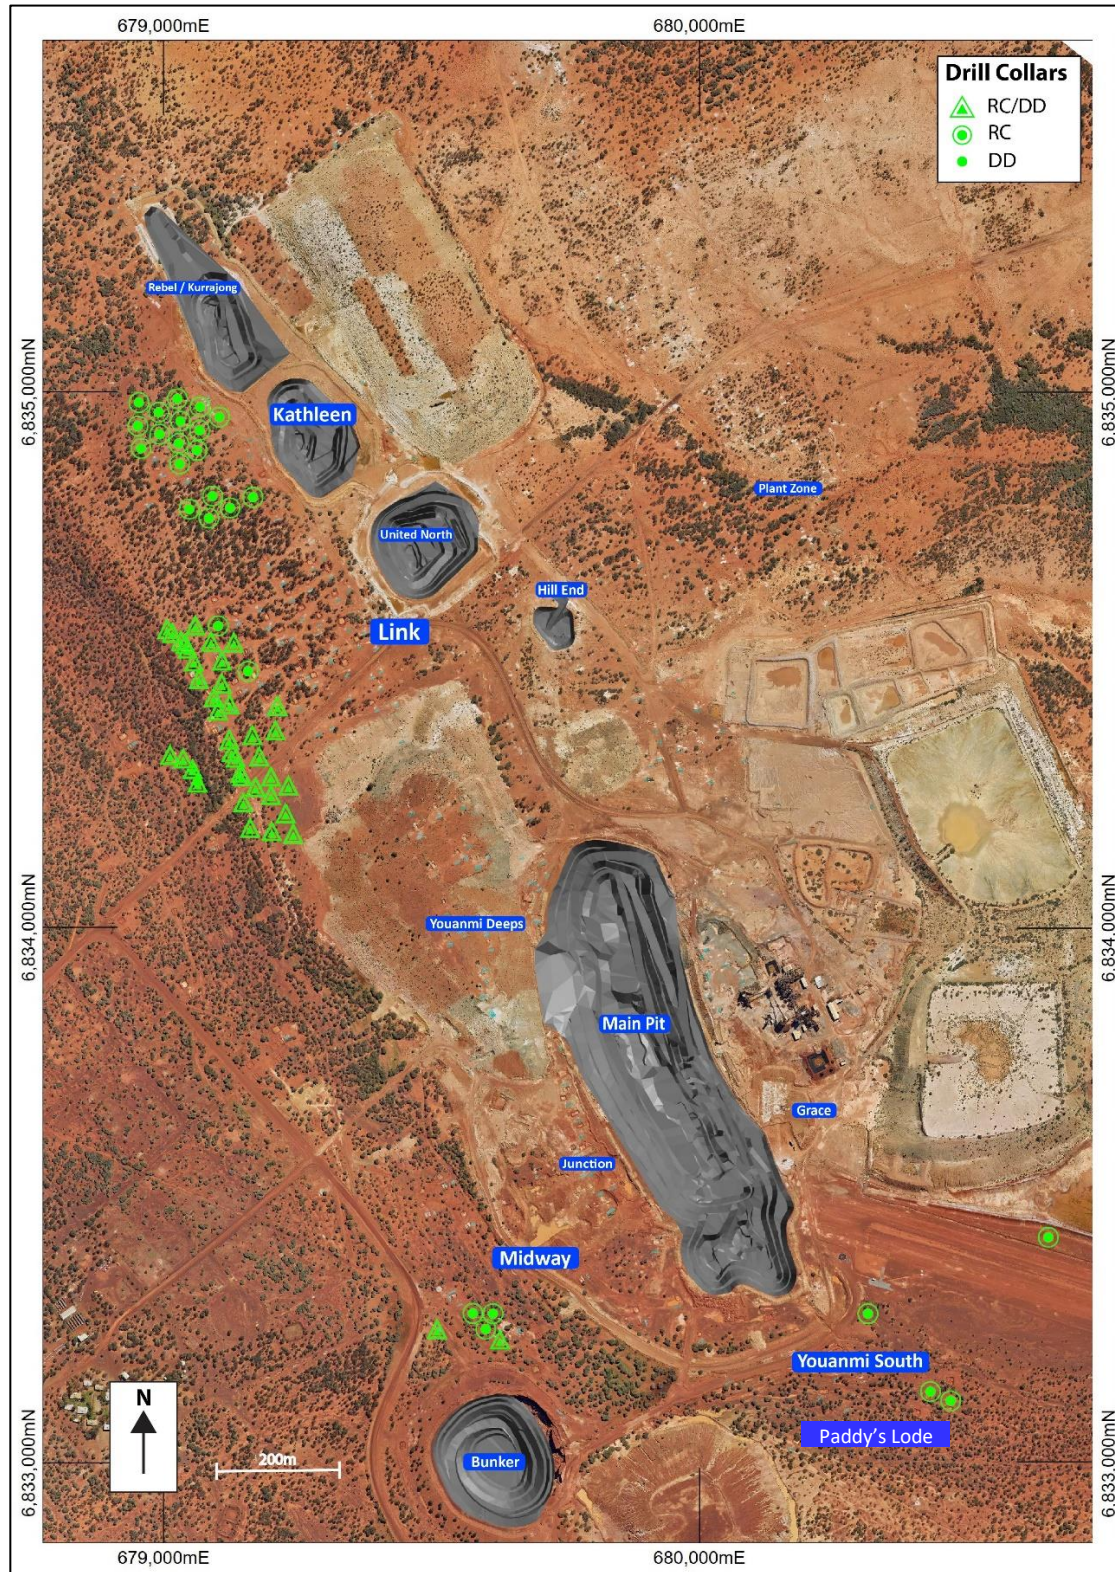


Figure 2. Plan view of proposed resource and exploration drilling at the Youanmi Gold Project.

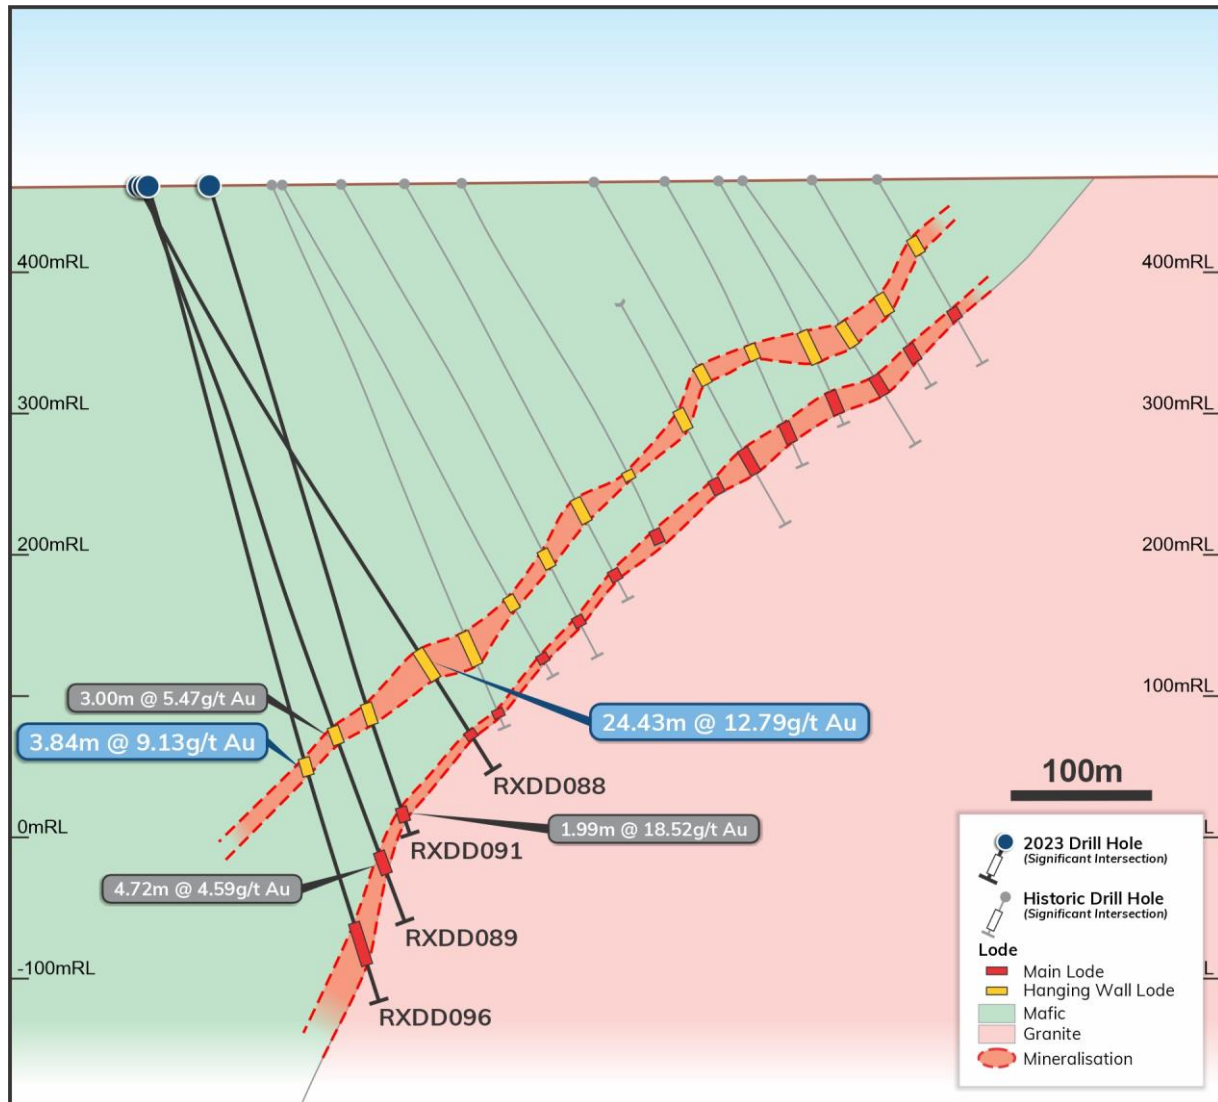


Figure 3. Cross-section of RXDD088 and RXDD096 orientated perpendicular to the Youanmi Lodes. The results presented herein build confidence in the continuity of newly-defined gold lodes at Youanmi.

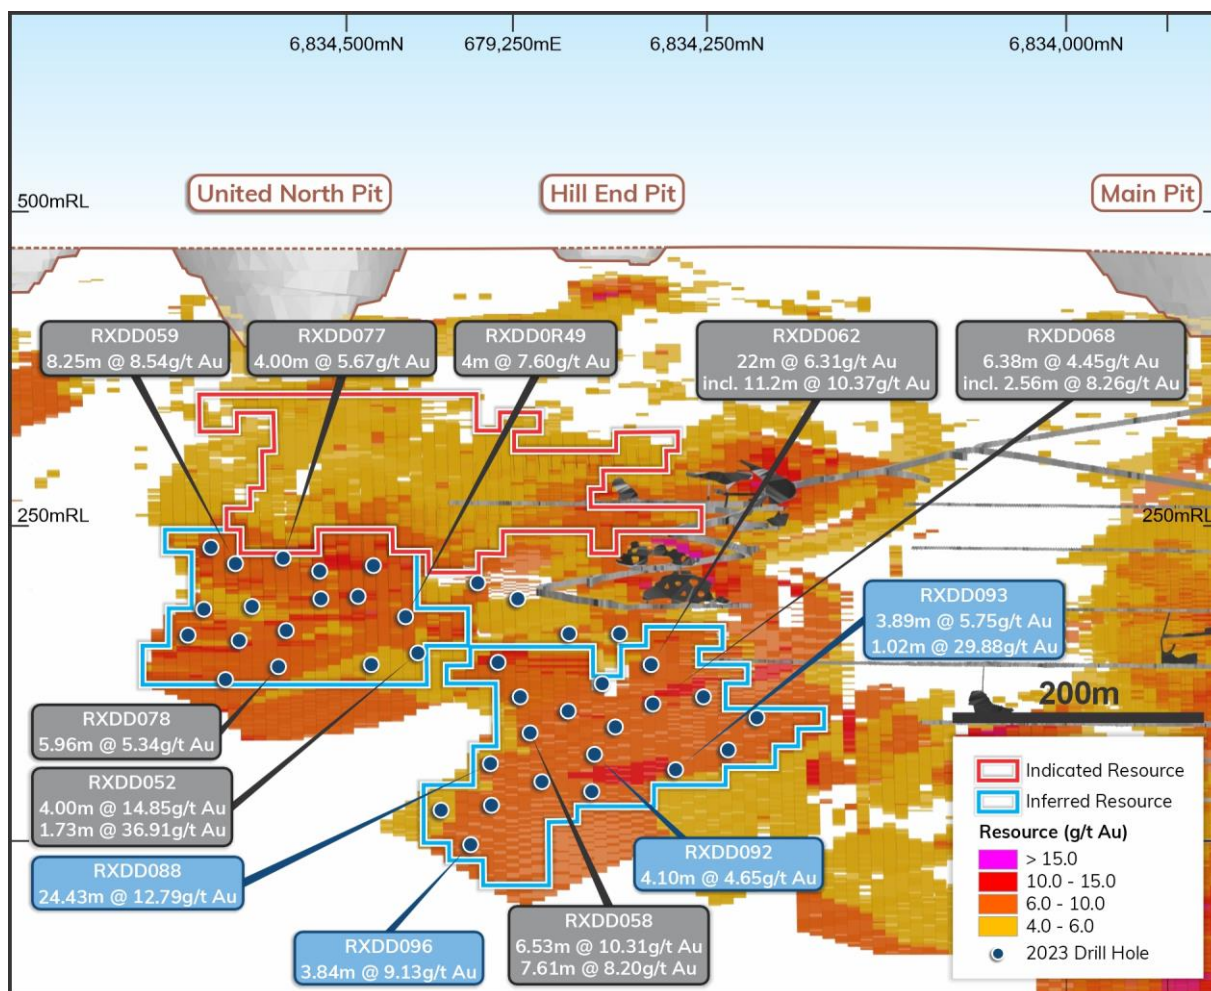


Figure 4. Long Section of the resource development drilling for the Link Area. Existing underground workings are located in close proximity to the strong gold mineralisation at Link.

Authorised for release to the ASX by the Board of Rox Resources Limited.

***** ENDS *****

For more information:

Rob Ryan
Managing Director
Rox Resources Limited

Nicholas Read
Investor Relations
Read Corporate

Tel: +61 8 9226 0044

Tel: 0419 929 046

E: admin@roxresources.com.au

E: info@readcorporate.com.au

Table 1 – Collar Locations and Drilling Details

Hole Id	Prospect	Drill Type	East	North	RL	Depth	Dip	Azi	Comments
RXDD088	Link	RC Pre-Collar	679028	6834314	461	186	-70	59	Assays Received
		Diamond Tail				472.1			Assays Received
RXDD092	Link	RC Pre-Collar	679118	6834266	461	150	-68	62	Assays Received
		Diamond Tail				439.2			Assays Received
RXDD093	Link	RC Pre-Collar	679162	6834186	461	126	-70	65	Reported 13/6/2023
		Diamond Tail				474.1			Assays Received
RXDD096	Link	RC Pre-Collar	679055	6834296	461	180	-75	61	Reported 13/6/2023
		Diamond Tail				583.2			Assays Received
RXRC487	YMS	RC Only	680334	6833023	456	240	-60	90	Assays Received
RXRC488	YMS	RC Only	680502	6833007	456	260	-60	90	Assays Received
RXRC489	YMS	RC Only	680414	6833023	456	100	-58	90	Assays Received
RXRC490	YMS	RC Only	680374	6833023	456	190	-59	90	Assays Received

*Grid MGA94_Zone50S with RL in Australian Height Datum.

RC = Reverse Circulation, DD = Diamond & RCD = RC pre-collar with diamond tail.

Table 2 – Significant Intersections

Hole ID	Prospect	Drill Type	From	To	Interval	Au g/t	Au g.m.
RXDD088	Link	DD	269.84	271.44	1.60	0.71	1.13
RXDD088	Link	DD	298.00	299.00	1.00	0.75	0.75
RXDD088	Link	DD	359.00	359.91	0.91	0.82	0.75
RXDD088	Link	DD	369.00	393.43	24.43**	12.79	312.46
Including			372.97	379.00	6.03	25.01	150.81
Including			383.13	385.00	1.87	28.65	53.58
Including			390.75	393.43	2.68	36.51	97.85
RXDD088	Link	DD	402.10	403.00	0.90	0.58	0.52
RXDD088	Link	DD	411.00	412.00	1.00	0.71	0.71
RXDD088	Link	DD	440.00	441.00	1.00	0.89	0.89
RXDD092	Link	DD	248.00	249.00	1.00	0.69	0.69
RXDD092	Link	DD	264.08	264.55	0.47	1.11	0.52
RXDD092	Link	DD	265.77	268.26	2.49	1.82	4.53
RXDD092	Link	DD	269.58	270.00	0.42	1.39	0.58
RXDD092	Link	DD	277.05	278.18	1.13	2.28	2.58
RXDD092	Link	DD	283.37	284.15	0.78	0.73	0.57
RXDD092	Link	DD	314.00	315.00	1.00	0.50	0.50
RXDD092	Link	DD	320.27	321.14	0.87	3.54	3.08
RXDD092	Link	DD	329.65	330.27	0.62	1.03	0.64
RXDD092	Link	DD	356.20	357.16	0.96	0.57	0.55
RXDD092	Link	DD	366.90	374.63	7.73	3.12	24.09
Including			366.90	371.00	4.10	4.65	19.07
RXDD092	Link	DD	393.13	401.00	7.87	1.34	10.57
Including			399.09	400.13	1.04	5.81	6.04
RXDD092	Link	DD	408.00	409.00	1.00	0.52	0.52
RXDD092	Link	DD	411.00	412.00	1.00	0.73	0.73
RXDD093	Link	DD	179.00	184.00	5.00	0.59	2.95
RXDD093	Link	DD	261.00	262.35	1.35	0.61	0.82
RXDD093	Link	DD	277.77	278.23	0.46	2.43	1.12
RXDD093	Link	DD	280.60	281.16	0.56	1.41	0.79
RXDD093	Link	DD	291.00	292.00	1.00	0.53	0.53
RXDD093	Link	DD	293.00	293.72	0.72	0.86	0.62
RXDD093	Link	DD	350.39	350.83	0.44	2.81	1.24
RXDD093	Link	DD	366.00	366.62	0.62	0.57	0.35
RXDD093	Link	DD	391.03	391.48	0.45	1.34	0.60
RXDD093	Link	DD	402.01	404.85	2.84	0.57	1.62
RXDD093	Link	DD	406.05	406.64	0.59	1.61	0.95
RXDD093	Link	DD	408.00	411.89	3.89	5.75	22.37
Including			409.96	411.89	1.93	9.21	17.78
RXDD093	Link	DD	420.26	421.00	0.74	1.07	0.79
RXDD093	Link	DD	425.45	426.47	1.02	29.88	30.48
RXDD093	Link	DD	431.77	433.52	1.75	3.96	6.93
RXDD093	Link	DD	443.22	444.34	1.12	2.47	2.77
RXDD093	Link	DD	452.00	453.00	1.00	1.55	1.55
RXDD096	Link	DD	190.00	191.00	1.00	0.90	0.90
RXDD096	Link	DD	253.00	254.00	1.00	0.88	0.88
RXDD096	Link	DD	369.53	370.00	0.47	2.03	0.95
RXDD096	Link	DD	377.21	378.00	0.79	0.70	0.55
RXDD096	Link	DD	412.51	416.35	3.84	9.13	35.08

Table 2 – Significant Intersections

Hole ID	Prospect	Drill Type	From	To	Interval	Au g/t	Au g.m.
<i>Including</i>			412.51	414.66	2.15	13.50	29.03
RXDD096	Link	DD	452.00	453.00	1.00	0.60	0.60
RXDD096	Link	DD	525.00	525.30	0.30	1.80	0.54
RXDD096	Link	DD	527.70	528.45	0.75	0.92	0.69
RXDD096	Link	DD	533.00	555.00	22.00	1.32	29.04
<i>Including</i>			542.00	543.22	1.22	5.89	7.19
RXRC487	YMS	RC	157	158	1	0.57	0.57
RXRC488	YMS	RC				NSI	
RXRC489	YMS	RC	88	89	1	0.64	0.64
RXRC490	YMS	RC				NSI	

Minimum significant intercept is 1m @ 0.5g/t Au, maximum 1m contiguous internal dilution.

NSI = No significant Intercept

** Includes a 2.44m interval of internal dilution (386.08m to 388.52m)

Competent Person Statement

Exploration Results

The information in this report that relates to Data and Exploration Results is based on information compiled and reviewed by Mr Travis Craig a Competent Person who is a Member of the Australasian Institute of Geologists (AIG) and Exploration Manager at Rox Resources. Mr Craig has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which he has undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for the Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Craig consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Where reference is made to previous releases of exploration results in this announcement, the Company confirms that it is not aware of any new information or data that materially affects the information included in those announcements and all material assumptions and technical parameters underpinning the exploration results included in those announcements continue to apply and have not materially changed.

The information in this report that relates to previous Exploration Results was prepared and first disclosed under the JORC Code 2012 and has been properly and extensively cross-referenced in the text to the date of the original announcement to the ASX.

Resource Statements

The Statement of Estimates of Mineral Resources for the Youanmi Near Surface Resource was reported by Rox in accordance with ASX Listing Rule 5.8 in the announcement released to the ASX on 20th April 2022. Rox confirms it is not aware of any new information or data that materially affects the information included in the previous announcements and that all material assumptions and technical parameters underpinning the estimates in the previous announcements continue to apply and have not materially changed.

The Statement of Estimates of Mineral Resources for the Youanmi Underground Resource was reported by Rox in accordance with ASX Listing Rule 5.8 in the announcement released to the ASX on 20th January 2022. Rox confirms it is not aware of any new information or data that materially affects the information included in the previous announcements and that all material assumptions and technical parameters underpinning the estimates in the previous announcements continue to apply and have not materially changed.

The Statement of Estimates of Mineral Resources that relates to gold Mineral Resources for the Mt Fisher – Mt Eureka Project was reported by Rox in accordance with ASX Listing Rule 5.8 in the announcement released to the ASX on 2nd November 2022. Rox confirms it is not aware of any new information or data that materially affects the information included in the previous announcements and that all material assumptions and technical parameters underpinning the estimates in the previous announcements continue to apply and have not materially changed.

Forward-Looking Statements

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning Rox Resources Limited planned exploration program(s) and other statements that are not historical facts. When used in this document, the words such as "could," "plan," "estimate," "expect," "intend," "may", "potential," "should," and similar expressions are forward looking statements.

About Rox Resources

Rox Resources (ASX: RXL) is a West Australian focused gold exploration and development company. It is the 100 per cent owner of the historic Youanmi Gold Project near Mt Magnet, approximately 480 kilometres northeast of Perth, and owns the Mt Fisher - Mt Eureka Gold and Nickel Project approximately 140 kilometres southeast of Wiluna, with 100% ownership of certain tenure with the remaining tenure held via a joint venture (Rox 51%, earning into 75%).

Youanmi Project has a Total Mineral Resource of 3.2Moz of contained gold, with potential for further expansion with the integration of existing prospects into the Resource and further drilling. Youanmi was a high-grade gold mine and produced ~667,000oz of gold (at 5.47 g/t Au) before it closed in 1997. It is classified as a disturbed site and is on existing mining leases which have significant existing infrastructure to support a return to mining operations.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<p>RC hole diameter was 5.5" (140 mm) reverse circulation percussion (RC). Sampling of RC holes was undertaken by collecting 1m cone split samples at intervals.</p> <p>Diamond drill hole core size is NQ2 size diameter through the mineralisation. Sampling of diamond holes was by cut half core as described further below.</p> <p>Drill holes were generally angled at -60° towards grid northeast (but see Table for individual hole dips and azimuths) to intersect geology as close to perpendicular as possible.</p>
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used</i>	Drillhole locations were picked up by differential GPS. Logging of drill samples included lithology, weathering, texture, moisture and contamination (as applicable). Sampling protocols and QAQC are as per industry best practice procedures.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information</i>	<p>RC drillholes were sampled on 1m intervals using a cone splitter. A nominal 3-4kg sample is taken and analysed for gold by Fire Assay 50g (FA50).</p> <p>Diamond core is dominantly NQ2 size, sampled on geological intervals, with a minimum of 0.3 m up to a maximum of 1.2 m. The diamond core was cut in half, with one half sent to the lab and one half retained. The sample was analysed for gold by Fire Assay 50g (FA50).</p>
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Drilling technique was Reverse Circulation (RC) and diamond core (DD). The RC hole diameter was 140mm face sampling hammer.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed</i>	RC drill recoveries were high (>90%).
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples</i>	Samples were visually checked for recovery, moisture and contamination and notes made in the logs.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	There is no observable relationship between recovery and grade, and therefore no sample bias.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Detailed geological logs have been carried out on all RC, but no geotechnical data have been recorded (or is possible to be recorded due to the nature of the sample). Detailed geological and geotechnical logs were carried out on all diamond drill holes for recovery, RQD, structures etc. which included structure type, dip, dip direction, alpha angle, beta angle, texture, shape, roughness, fill material, and this data is stored in the database. The geological data would be suitable for inclusion in a Mineral Resource estimate.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging of diamond core and RC chips recorded lithology, mineralogy, mineralisation, weathering, colour, and other sample features. RC chips are stored in plastic RC chip trays.
	<i>The total length and percentage of the relevant intersections logged</i>	All holes were logged in full.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Drill core was cut in half on site using a core saw. All samples were collected from the same side of the core, preserving the orientation mark in the kept core half.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	RC samples were collected on the drill rig using a cone splitter. If any mineralised samples were collected wet these were noted in the drill logs and database.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	The sample preparation followed industry best practice. Fire Assay samples were dried, coarse crushing to ~10mm, followed by pulverisation of the entire sample in an LM5 or equivalent pulverising mill to a grind size of 85% passing 75 micron.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Field QC procedures involve the use of Certified Reference Materials (CRM's) as assay standards, along with duplicates and blank samples. The insertion rate of the CRM's was approximately 1:20, and blank sample insertion rate was approximately 1:50.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	For RC drilling field duplicates were taken on a routine basis at an approximate 1:20 ratio using the same sampling techniques (i.e. cone splitter) and inserted into the sample run. No diamond core field duplicates were taken.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The sample sizes are considered more than adequate to ensure that there are no particle size effects relating to the grain size of the mineralisation which lies in the percentage range.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	The analytical technique involved Fire Assay 50g.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical or portable analysis tools were used to determine assay values stored in the database.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	Internal laboratory control procedures involve duplicate assaying of randomly selected assay pulps as well as internal laboratory standards. All of these data are reported to the Company and analysed for consistency and any discrepancies.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Senior personnel from the Company have visually inspected mineralisation within significant intersections.
	<i>The use of twinned holes.</i>	No twinned holes to date.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Primary data was collected using a standard set of Excel templates on Toughbook laptop computers in the field. These data are transferred to Geobase Pty Ltd for data verification and loading into the database.
	<i>Discuss any adjustment to assay data.</i>	No adjustments or calibrations have been made to any assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Drill hole locations have been established using a differential GPS with an accuracy of +/- 0.3m.
	<i>Specification of the grid system used.</i>	The grid system is MGA_GDA94, zone 50 for easting, northing and RL.
	<i>Quality and adequacy of topographic control.</i>	The topography of the mined open pits is well defined by historic monthly survey pickups
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	RC and diamond drill hole spacing varies 40-200 metres between drill sections, with some areas at 40 metre drill section spacing. Down dip step-out distance varies 20-100 metres.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Data spacing and distribution are sufficient to establish the degree of geological and grade continuity appropriate for JORC (2012) classifications applied.
	<i>Whether sample compositing has been applied.</i>	No sample compositing has occurred for diamond core drilling. Sample intervals are based on geological boundaries with even one metre samples between. For RC samples, 1m samples through target zones were sent to the laboratory for analysis. The remainder of the hole was sampled using 4m composite samples. For 4m composite samples >0.2g/t Au, 1m samples were collected and sent to the laboratory for analysis.

JORC Table 1 - Section 1 Data and Sampling Techniques

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	The mineralisation strikes generally WNW and dips to the SW at approximately -60 degrees. The drill orientation was 065 and -60 dip. Drilling is believed to be generally perpendicular to strike.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	No sampling bias is believed to have been introduced.
Sample security	<i>The measures taken to ensure sample security.</i>	Sample security is managed by the Company. After preparation in the field samples are packed into polyweave bags and despatched to the laboratory. For a large number of samples these bags were transported by the Company directly to the assay laboratory. In some cases the sample were delivered by a transport contractor the assay laboratory. The assay laboratory audits the samples on arrival and reports any discrepancies back to the Company. No such discrepancies occurred.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits have yet been completed.

JORC Table 1 - Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p>	<p>Rox Resources Ltd is in a Joint Venture Agreement with Venus Metals Corporation Ltd under which it has a 70% interest in the Youanmi Gold Mine Joint Venture (OYG Joint Venture). Tenements in the JV consist of the following mining leases: M 57s /10, 51,76,97,109, 135, 160A, 164, 165, 166 and 167.</p>
	<p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<p>The tenement is in good standing and no known impediments exist.</p>
Exploration done by other parties	<p><i>Acknowledgment and appraisal of exploration by other parties.</i></p>	<p>Significant previous exploration has been carried out throughout the project by various companies, including AC/RAB, RC drilling and diamond drilling 1971-1973 WMC: RAB, RC and surface diamond drilling 1976 Newmont: 10 surface diamond drillholes (predominantly targeting base metals). 1980-1986 BHP: RAB, RC and surface diamond drilling (predominantly targeting base metals). 1986-1993 Eastmet: RAB, RC and surface diamond drilling. 1993-1997 Goldmines of Australia: RAB, RC and surface diamond drilling. Underground mining and associated underground diamond drilling. 2000-2003 Aquila Resources Ltd: Shallow RAB and RC drilling 2004-2005 Goldcrest Resources Ltd: Shallow RAB and RC drilling; data validation. 2007- 2013 Apex Minerals NL: 9 diamond holes targeting extensions to the Youanmi deeps resource.</p>

JORC Table 1 - Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Geology		<p>The Youanmi Project straddles a 40km strike length of the Youanmi Greenstone Belt, lying within the Southern Cross Province of the Archaean Yilgarn Craton in Western Australia. The greenstone belt is approximately 80km long and 25km wide, and incorporates an arcuate, north-trending major crustal structure termed the Youanmi Fault Zone. This structure separates two discordant greenstone terrains, with the stratigraphy to the west characterised by a series of weakly deformed, layered mafic complexes (Windimurra, Black Range, Youanmi and Barrambie) enveloped by strongly deformed, north-northeast trending greenstones. Gold mineralisation is developed semi-continuously in shear zones over a strike length of 2,300m along the western margin of the Youanmi granite.</p> <p>Gold is intimately associated with sulphide minerals and silicates in zones of strong hydrothermal alteration and structural deformation. Typical Youanmi lode material consists of a sericite-carbonate- quartz- pyrite- arsenopyrite schist or mylonite which frequently contains significant concentrations of gold, commonly as fine, free gold particles in the silicates, occluded in sulphide minerals and in solid solution in arsenopyrite. The lodes contain between 10% and 25% sulphide, the principal species being pyrite (10% to 20%) and arsenopyrite (1% to 5%).</p> <p>There are a series of major fault systems cutting through the Youanmi trend mineralisation that have generated some significant off-sets.</p> <p>The Youanmi Deeps project area is subdivided into three main areas or fault blocks by cross-cutting steep south-east trending faults; and these are named Pollard, Main, and Hill End from south to north respectively.</p> <p>Granite hosted gold mineralisation occurs at several sites, most notably Grace and the Plant Zone Prospects. Gold mineralization occurs as free particles within quartz-sericite altered granite shear zones.</p> <p>The Commonwealth-Connemarra mineralised trend is centred 4km northwest of the Youanmi plant. The geology comprises a sequence of folded mafic and felsic volcanic rocks intercalated with BIF and intruded by granite along the eastern margin. Gold mineralisation is developed over a 600m strike length, associated with a north trending and steeply west dipping shear zone that traverses the northwest trending succession.</p>
	<i>Deposit type, geological setting and style of mineralisation.</i>	

JORC Table 1 - Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. 	Refer to drill results Table/s and the Notes attached thereto.
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<p>All reported assay intervals have been length weighted. No top cuts have been applied. A lower cut-off of 0.5g/t Au was applied for RC and diamond core.</p> <p>Mineralisation over 0.5g/t Au has been included in aggregation of intervals for RC and diamond core.</p> <p>No metal equivalent values have been used or reported.</p>
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p> <p>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</p>	The mineralisation strikes generally WNW and dips to the west at approximately -60 degrees. Drill orientations are usually 060 degrees and -60 dip. Drilling is believed to be generally perpendicular to strike. Given the angle of the drill holes and the interpreted dip of the host rocks and mineralisation (see Figures in the text), reported intercepts approximate true width.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to Figures and Table in the text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Representative reporting of both low and high grades and widths is practiced.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All meaningful and material information has been included in the body of the announcement.

JORC Table 1 - Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Further work	<p><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive</i></p>	<p>Further work (RC and diamond drilling) is justified to locate extensions to mineralisation both at depth and along strike.</p>