

ASX RELEASE | 23 March 2023

Further assays confirm Adina as a robust, high-grade lithium project

HIGHLIGHTS

- Latest intersections confirm the impressive tenor and thickness of the lithium mineralisation through the Main Zone at Adina. The full results are set out Appendix 1 to this announcement and include:
 - 1.64% Li₂O over 47.4m from 32.7m (AD-22-042),
 - 1.35% Li₂O over 55.5m from 28.0m (AD-22-036),
 - 1.26% Li₂O over 59.4m from 41.6m (AD-22-035),
 - 1.56% Li₂O over 44.7m from 26.3m (AD-22-041),
 - 1.14% Li₂O over 54.8m from 2.2m (AD-22-006), and
 - 1.08% Li₂O over 44.0m from 123.0m (AD-22-059).
- Exceptionally high-grade zones continue to be intersected within the pegmatite body such as:
 - 2.40% Li₂O over 9.0m from 49.0m (AD-22-036),
 - 2.00% Li₂O over 15.1m from 26.3m,
 - 1.92% Li₂O over 18.0m from 48.0m (AD-22-041),
 - 2.15% Li₂O over 14.6m from 32.7m,
 - 1.78% Li₂O over 23.0m from 55.1m (AD-22-042), and
 - 2.82% Li₂O over 6.0m from 84.0m (AD-22-046) (see Appendix 1 for further details).
- Assays have now been received from 21 drillholes of 38 holes completed to date.
- Third drill rig to be mobilised to Adina in coming weeks to further investigate potential strike length and depth extension of main pegmatite body and follow up on other gravity targets.

Winsome Resources (ASX:WR1; “**Winsome**” or “**the Company**”) is pleased to announce further high-grade assay results from drilling at its 100 per cent-owned Adina project in Quebec, Canada.

Assays are from the central portion of the Main Zone at Adina and include several +50 metre intersections above grades of 1% Li₂O. Key results are shown in Figure 1 and summarised in Table 1 below.

Intercepts are calculated using a 0.3 % Li₂O cut-off grade, a minimum thickness of 5m and including up to 7m of internal dilution. A full list of intersections can be found in Appendix 1 below and drillhole locations are shown on Figure 3. Other relevant drilling data is included in the appendices.

WINSOME RESOURCES MANAGING DIRECTOR CHRIS EVANS SAID:

“Results from drilling are demonstrating that Adina is a robust lithium project well placed for development to supply future North American demand. We have intersected mineralisation on every drill section over a 700-metre strike length. More importantly the consistency of grade and width through the core of the deposit is very encouraging and gives encouragement for the future development of the project. The assay results are supporting our initial interpretations based on logged spodumene-bearing pegmatite zones which allows us to plan drilling effectively and efficiently without having to wait for assay data. Having recently been on site and seeing the exceptional work done to date I am grateful to our team for their hard work to fast track this project and look forward to both more drilling data and more assay results in coming weeks.”

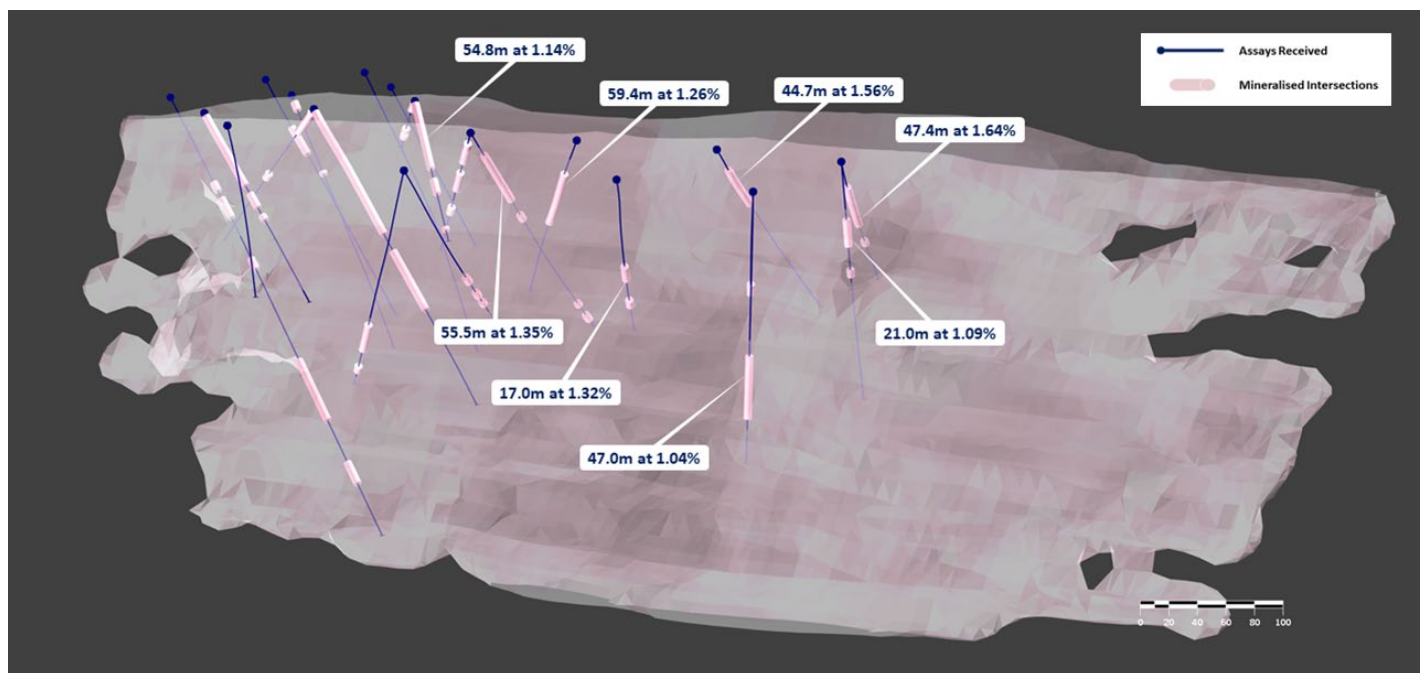


Figure 1: New Results from Adina Main Zone Drilling
 Oblique view looking to west over conceptual model of pegmatite body.

Hole	Intercepts	Setting
AD-22-006	1.14% Li ₂ O over 54.8m from 2.2m to 57.0m Includes: <ul style="list-style-type: none"> 1.88% Li₂O over 5.8m from 2.2m to 8.0m 1.69% Li₂O over 10.0m from 10.0m to 20.0m 1.54% Li₂O over 6.0m from 45.0m to 51.0m 	Main Zone Central Section 50m East of AD-22-005
AD-22-034	1.32% Li ₂ O over 17.0m from 112.9m to 129.9m Includes: <ul style="list-style-type: none"> 1.93% Li₂O over 5.0m from 112.9m to 117.9m 1.67% Li₂O over 7.0m from 121.9m to 128.9m 1.28% Li ₂ O over 7.5m from 156.9m to 164.4m	Main Zone Central 250m East of AD-22-005
AD-22-035	1.26% Li ₂ O over 59.4m from 41.6m to 101.0m Includes: <ul style="list-style-type: none"> 1.71% Li₂O over 21.4m from 41.6m to 63.0m 1.49% Li₂O over 23.0m from 78.0m to 101.0m 	Main Zone Central Scissor hole to AD-22-005
AD-22-036	1.35% Li ₂ O over 55.5m from 28.0m to 83.5m Includes: <ul style="list-style-type: none"> 2.40% Li₂O over 9.0m from 49.0m to 58.0m 1.51% Li₂O over 9.0m from 62.0m to 71.0m 	Main Zone Central Scissor hole to AD-22-006
AD-22-037	1.12% Li ₂ O over 28.4m from 162.3m to 190.7m Includes: <ul style="list-style-type: none"> 1.48% Li₂O over 17.4m from 162.3m to 179.7m 1.75% Li ₂ O over 5.4m from 207.7m to 213.1m	Main Zone Central Down-dip AD-22-035
AD-22-039	2.37% Li ₂ O over 6.0m from 154.0m to 160.0m	Main Zone Central Down-dip AD-22-036
AD-22-041	1.56% Li ₂ O over 44.7m from 26.3m to 71.0m Includes: <ul style="list-style-type: none"> 2.00% Li₂O over 15.1m from 26.3m to 41.4m 1.92% Li₂O over 18.0m from 48.0m to 66.0m 	Main Zone Central 280m East of AD-22-005
AD-22-042	1.64% Li ₂ O over 47.4m from 32.7m to 80.1m Includes: <ul style="list-style-type: none"> 2.15% Li₂O over 14.6m from 32.7m to 47.3m 1.78% Li₂O over 23.0m from 55.1m to 78.1m 	Main Zone Central 350m East of AD-22-005 Section F (Figure 4)
AD-22-046	1.09% Li ₂ O over 21.0m from 45.0m to 66.0m Includes: <ul style="list-style-type: none"> 1.20% Li₂O over 4.0m from 45.0m to 49.0m 1.33% Li₂O over 13.0m from 52.0m to 65.0m 2.82% Li ₂ O over 6.0m from 84.0m to 90.0m	Main Zone Central Down-dip AD-22-046 Section F (Figure 4)
AD-22-055	1.56% Li ₂ O over 10.0m from 95.5m to 105.5m	Main Zone Central 310m East of AD-22-005
AD-22-059	1.08% Li ₂ O over 44.0m from 123.0m to 167.0m Includes: <ul style="list-style-type: none"> 1.37% Li₂O over 10.0m from 123.0m to 133.0m 	Main Zone Central Down dip AD-22-055

Table 1. Key mineralised intercepts, Adina Main Zone

Adina Main Zone results commentary

Intersections in Table 1 display consistent widths (downhole) and thicknesses of spodumene-hosted lithium mineralisation through the central portion of the Adina Main Zone. Downhole widths of 40 – 50 metres have been frequently encountered with grades over 1% Li₂O. Exceptional high grades continue to be present at the top and base of the pegmatite body, closest to the contact with the regional amphibolites.

The assay results presented in this release are from 14 drillholes in the central portion of the Adina Main Zone (which covers the Jamar discovery, Figure 1). These holes were drilled in November-December 2022.

Over 8,600 metres have now been drilled in 38 holes at the Adina Main Zone (Appendix 3), defining a substantial continuous pegmatite body over a strike length of approximately 700m and to depths 200 metres from surface (Figure 2). Based on drilling intersections the pegmatite body pinches and swells along strike and down-dip which, along with the variations in the tenor of lithium mineralisation, is likely to indicate multiple phases of pegmatitic intrusions over time and possible compositional variations between phases in addition to zonation within phases. Both geochemistry and mineralogy are to be used to better map the individual phases and aid future drill targeting.

Mineralisation remains open along strike to the east and west of these results as well as down dip. Assays are awaited from some 16 drillholes and drilling continues at site with two rigs in operation (Figure 2).

Recent drilling completed includes a fence of drillholes which successfully intersected spodumene bearing pegmatite along strike from holes AD-22-042 and AD-22-046, to the east of section E02 (refer to Table 2 and Figures 2 and 3).

Drilling is currently testing the pegmatite body down dip of the intersections reported here and previously¹ after which step outs to the east of holes AD-23-071 – 073 are planned to be drilled.

A further potential strike extension of the pegmatite body to a total of 1,600m has been interpreted based on recent drilling results and geophysical surveys², with a third drilling rig being mobilised to site to fast-track drilling of these targets as well as those delineated by ground gravity surveying.

Hole	Intercepts	Setting
AD-23-053	81.2m – 116.0m pegmatite (34.8m interval)	Main Zone East 40m east of Section E02 (Figure 4)
AD-23-054	Aggregate of 63.0m of pegmatite in 4 intersections between 25 and 214 metres	Main Zone East 130m east of Section E02 (Figure 4)
AD-23-057	66.4 – 99.0m pegmatite (32.6m interval)	Down-dip AD-23-053
AD-23-060	124.3m – 165.2m pegmatite (40.9m interval)	Down-dip AD-23-053 & 057
AD-23-071	61.0 – 83.0m pegmatite (22.0m interval) & 127.0 – 141.5m pegmatite (14.5m interval)	Main Zone East 100m east of Section F02 (Figure 4)

Table 2. New drill observations, Adina Main Zone

¹ “Strong lithium mineralisation recorded from first Adina drill hole assays” ASX Announcement 6 January 2023 and “New assay results confirm strong lithium mineralisation at Adina” ASX Announcement 14 February 2023

² “Pegmatite at Adina extended to 1,600m of potential strike” ASX Announcement 25 January 2023

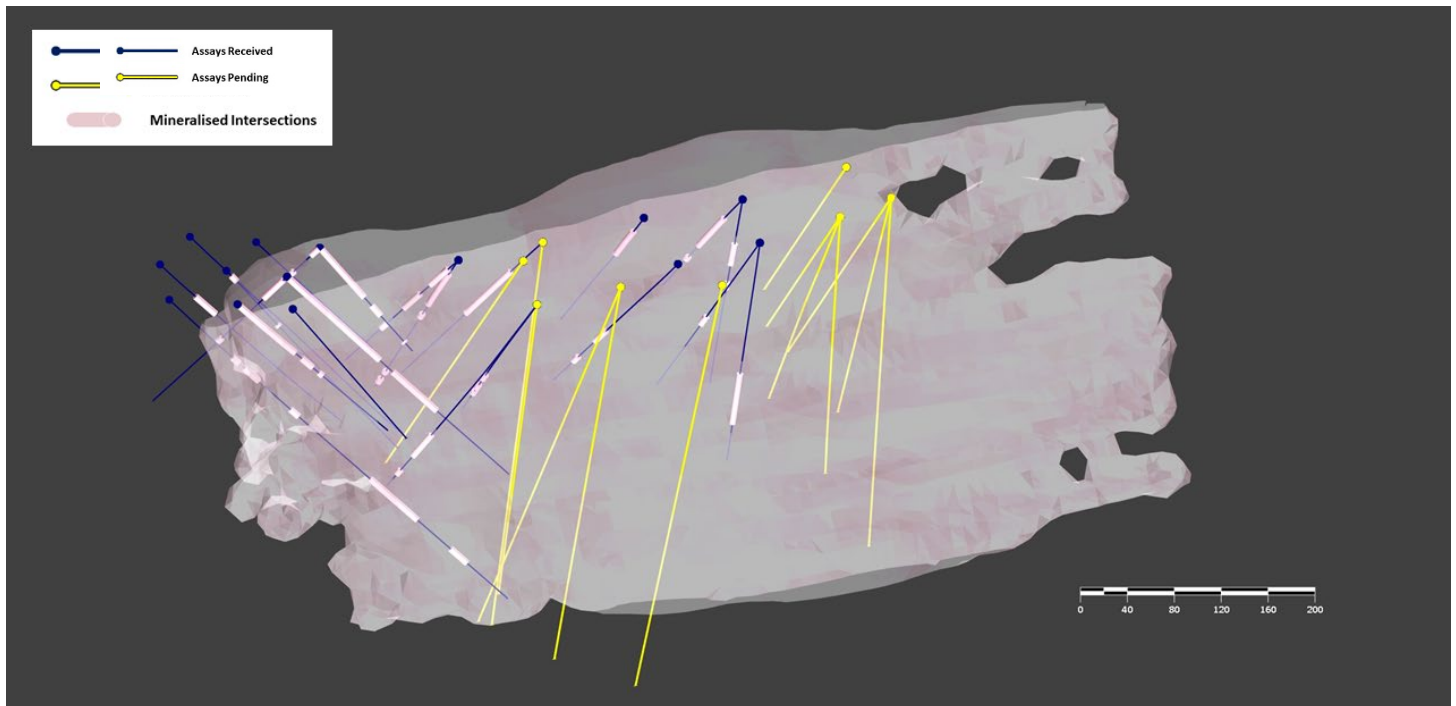


Figure 2: Oblique view of drilling to date at Adina Main Zone showing conceptual model of pegmatite body and drillholes where assays are pending.

The Company reminds investors that the presence of spodumene crystals within pegmatite does not necessarily equate to lithium mineralisation or indicate the percentage of lithium mineralisation, which can only be accurately confirmed by chemical assays. When such laboratory results become available, they will be reported in full in a future report.

Winsome carries out logging of all drill samples at its nearby exploration project base. Visual estimates of the pegmatite mineralogy - as a percentage range of spodumene content, textures, mineralogy and omnipresent structures - are recorded by project geologists and supervisors prior to sending samples to the laboratory. Strict handling procedures and QAQC protocols are followed.

Further drilling updates, including summaries of visual observations of core recovered from drilling, will be provided on an on-going basis to the market. Core samples from all prospective intervals continue to be dispatched to SGS in neighbouring Ontario for analysis. Results will be reported when they become available. The program's full results to date are set out in the appendices below.

The Company also expects to provide an update on its Cancet drilling campaign, which is running concurrently with the Adina campaign, in the near term.

For further information please contact

INVESTORS

Chris Evans - Managing Director

Winsome Resources

E. administration@winsomeresources.com.au

MEDIA

Simon Shepherdson - Media Manager

Spoke Corporate

E. simon@spokecorporate.com

P. +61 413 809 404

This announcement has been approved for release by the Board of Directors.

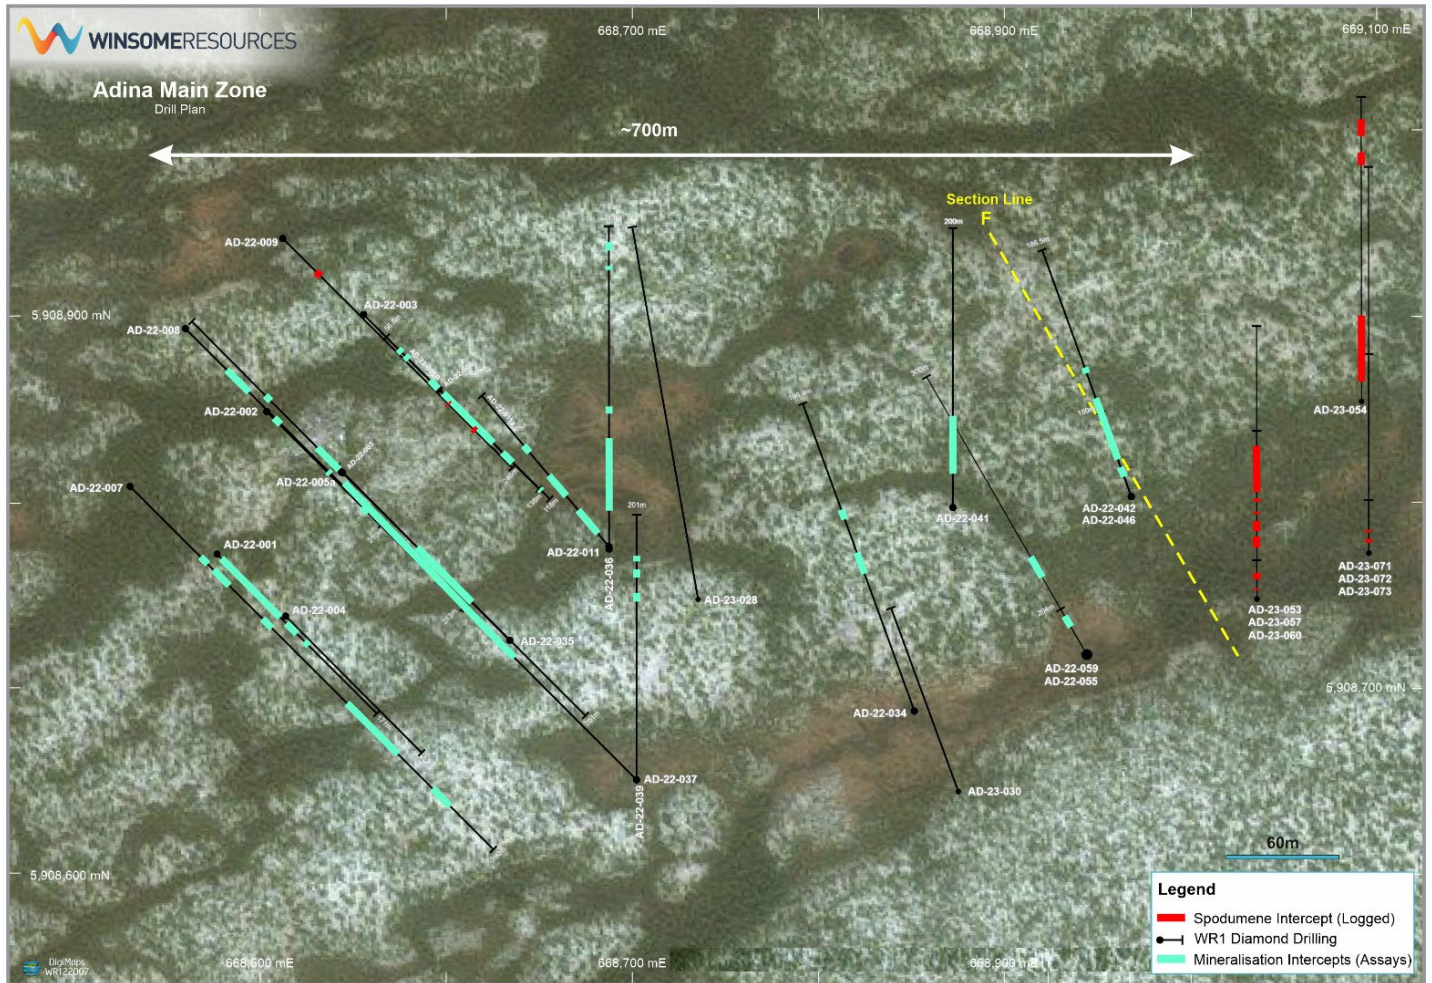


Figure 3: Plan view Adina Main Zone drilling

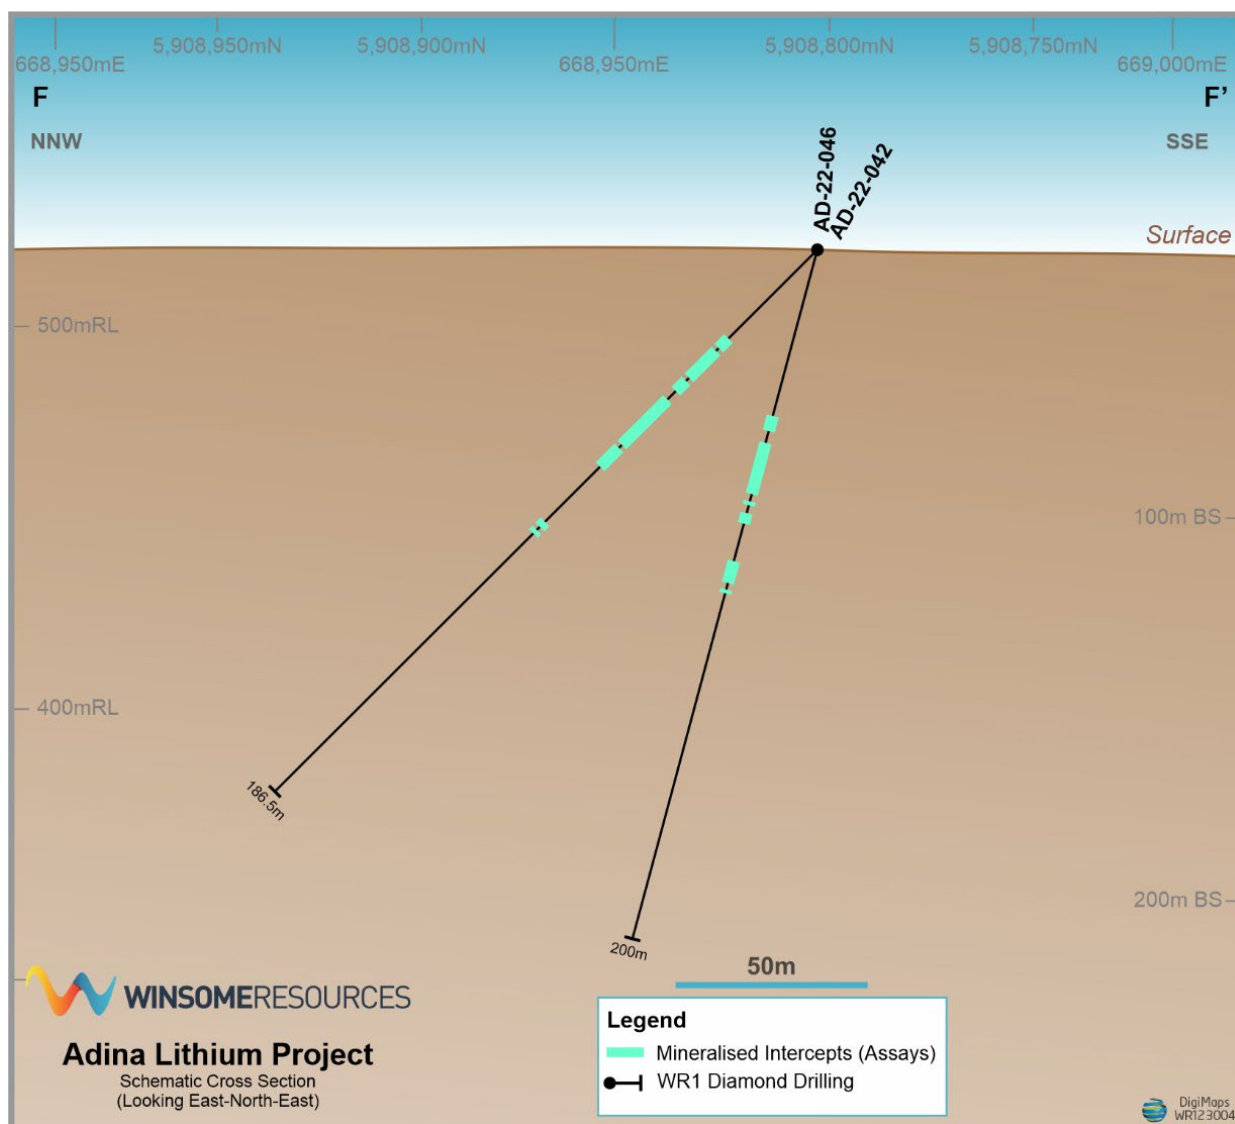


Figure 4: Section view looking North-East – Section F – F'

ABOUT WINSOME RESOURCES

Winsome Resources (ASX: WR1) is a Perth-based, lithium focused exploration and development company with five project areas in Quebec, Canada. Three of Winsome's projects – Cancet, Adina and Sirmac-Clappier are 100% owned by the Company. The Company also has exclusive option agreements to acquire and explore 669 claims totalling 385km² in Decelles and a further 259 claims totalling 149km² at Mazerac, located near the Quebec mining town of Val-d'Or.

The most advanced of Winsome's projects - Cancet and Adina, provide shallow, high grade lithium deposits and are strategically located close to established infrastructure and supply chains.

In addition to its impressive portfolio of lithium projects in Quebec, Winsome Resources owns 100% of the offtake rights for lithium, cesium and tantalum from Power Metals Corp (TSXV:PWM) Case Lake Project in Eastern Ontario, as well as a 10% equity stake in PWM.

Winsome is led by a highly qualified team with strong experience in lithium exploration and development as well as leading ASX listed companies.

More details: www.winsomerresources.com.au

CAUTION REGARDING FORWARD-LOOKING INFORMATION

This document contains forward-looking statements concerning Winsome. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of, the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory, including environmental regulation and liability and potential title disputes.

Forward-looking statements in this document are based on the Company's beliefs, opinions and estimates of Winsome as of the dates the forward-looking statements are made, and no obligation is assumed to update forward-looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

COMPETENT PERSON'S STATEMENT

The information in this report which relates to Exploration Results is based on, and fairly represents, information and supporting documentation prepared by Mr Carl Caumartin, VP Exploration of Winsome Resources Ltd. Mr Caumartin is a member of the Quebec Board of Professional Engineers (OIQ, Canada) and he has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which has been undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".

Mr Caumartin consents to the inclusion in this release of the matters based on the information in the form and context in which they appear. Mr Caumartin is a shareholder of Winsome.

PREVIOUSLY ANNOUNCED RESULTS

Winsome notes that this announcement contains references to previously announced exploration results. Winsome has referred to the original announcement in which each previously disclosed result was originally announced (**Original Announcements**).

Winsome confirms that it is not aware of any new information or data which materially affects the information included in the Original Announcements. Winsome confirms the form and context in which the Competent Person's findings are presented have not been materially modified from the Original Announcements.

-ends-

Appendix 1: Significant Drillhole Lithium Intercepts – New Results ³

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (degrees)	Azimuth (degrees)	From (m)	To (m)	Thickness (m)	Li ₂ O %
AD-22-003	668555	5908901	513	-45	135	85.0	89.0	4.0	2.08
AD-22-004	668513	5908739	512	-45	135	87.1	90.2	3.1	1.50
						93.0	96.0	3.0	1.18
AD-22-006	668596	5908861	515	-45	135	2.2	57	54.8	1.14
		including				2.2	8	5.8	1.88
		including				10	20	10.0	1.69
		including				27	32	5.0	1.37
		including				45	51	6.0	1.54
						66.2	78	11.8	0.55
AD-22-006B	668596	5908861	515	-45	315	1	11	10.0	0.89
						34.1	37.45	3.35	1.46
AD-22-009	668512	5908942	511	-45	135	33.9	37.9	4.0	0.26
AD-22-011	668687	5908776	517	-45	320	13.6	37	23.4	0.88
		including				28	37	9.0	1.70
						51	72	21.0	0.82
		including				51	66	15.0	1.00
						94.8	102.2	7.4	0.53
AD-22-034	668852	5908687	517	-45	340	112.9	129.9	17.0	1.32
		including				112.9	117.9	5.0	1.93
		including				121.9	128.9	7.0	1.67
						156.9	164.4	7.5	1.28
AD-22-035	668634	5908726	519	-45	315	41.6	101	59.4	1.26
		including				41.6	63	21.4	1.71
		including				78	101	23.0	1.49
AD-22-036	668687	5908776	517	-45	360	28	83.5	55.5	1.35
		including				49	58	9.0	2.40
		including				62	71	9.0	1.51
		including				74	83.5	9.5	1.17
						101.8	107.7	5.9	0.36
						227.7	234.5	6.8	0.76
AD-22-037	668702	5908651	515	-55	315	162.3	190.7	28.4	1.12
		including				162.3	179.7	17.4	1.48
						207.7	213.1	5.4	1.75

³ Intercepts calculated using a 0.3 % Li₂O cut-off grade, minimum 5m thickness and widths including up to 7m internal dilution.

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (degrees)	Azimuth (degrees)	From (m)	To (m)	Thickness (m)	Li ₂ O %
AD-22-039	668702	5908651	515	-45	360	135	142	7.0	0.59
						154	160	6.0	2.37
						166	170.6	4.6	0.97
AD-22-041	668872	5908797	520	-45	360	26.3	71	44.7	1.56
		including				26.3	41.4	15.1	2.00
		including				48	66	18.0	1.92
AD-22-042	668968	5908803	520	-45	340	32.7	80.1	47.4	1.64
		including				32.7	47.3	14.6	2.15
		including				55.1	78.1	23.0	1.78
						100.4	104.65	4.25	1.39
AD-22-046	668968	5908803	520	-65	340	45	66	21.0	1.09
		including				45	49	4.0	1.20
		including				52	65	13.0	1.33
						84	90	6.0	2.82
AD-22-055	668944	5908718	512	-55	330	95.5	105.5	10	1.55
AD-22-059	668944	5908718	512	-82	330	123	167	44.0	1.08
		including				123	133	10.0	1.37

Appendix 2: Significant Drillhole Lithium Intercepts – Previous Results ⁴.

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (degrees)	Azimuth (degrees)	From (m)	To (m)	Thickness (m)	Li ₂ O %
AD-22-001 ²	668477	5908772	511	-45	135	3.0	66.1	63.1	1.35
		including				3.0	11.0	8.0	1.61
		including				23.0	39.0	16.0	2.16
		including				60.4	66.1	5.7	2.37
		including				73.1	85.8	12.7	1.89
		further including				73.1	77.2	4.1	4.19
AD-22-002 ²	668503	5908851	511	-45	135	6.0	11.0	5.0	0.60
AD-22-005 ¹	668542	5908812	513	-45	135	2.3	109.9	107.6	1.34
		including				2.3	23.0	20.7	1.52
		including				23.0	41.0	18.0	0.68
		including				41.0	71.0	30.0	2.21
		including				71.0	97.5	26.5	1.05
		including				103.0	109.9	6.9	0.96
AD-22-005A ²	668542	5908812	513	-45	315	4.6	28.5	23.9	1.52
		including				4.6	18.5	13.9	2.04
						78.6	84.4	5.8	1.59
AD-22-007 ²	668430	5908809	510	-45	135	88.6	105.6	17.0	1.56
		including				98.6	105.6	7.0	2.72
AD-22-007 ²						141.9	151.4	9.5	0.69
						232.8	287.0	54.2	1.04
		including				232.8	238.8	6.0	2.14
		including				249.0	260.0	11.0	1.14
		including				275.3	287.0	11.7	1.77
						324.6	343.6	19.0	0.88
		including				324.6	329.6	4.6	2.01
AD-22-008 ²	668460	5908892	510	-45	135	41.9	65.7	23.8	0.88
		including				41.9	48.9	7.0	1.31
		including				51.9	54.9	3.0	1.34
		including				60.5	63.5	3.0	1.89

¹ Assays previously reported. “Strong lithium mineralisation recorded from first Adina drill hole assays” ASX Announcement 6 January 2023

² Assays previously reported. “New assay results confirm strong lithium mineralisation at Adina” ASX Announcement 14 February 2023

⁴ Intercepts calculated using a 0.3 % Li₂O cut-off grade, minimum 5m thickness and widths including up to 7m internal dilution.

Appendix 3: Diamond Drilling Summary for Winsome's drilling program at Adina.

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (Degrees)	Azimuth (Degrees)	Total Depth (m)
AD-22-001	668477	5908772	511	-45	135	171.0
AD-22-002	668503	5908851	511	-45	135	213.0
AD-22-003	668555	5908901	513	-45	135	138.0
AD-22-004	668513	5908739	511	-45	135	147.0
AD-22-005	668542	5908812	513	-45	135	261.0
AD-22-005A	668542	5908812	513	-45	315	162.0
AD-22-006	668596	5908861	515	-45	135	118.0
AD-22-006B	668596	5908861	515	-45	315	56.5
AD-22-007	668430	5908809	510	-45	135	390.0
AD-22-008	668460	5908892	510	-45	135	210.2
AD-22-009	668512	5908942	511	-45	135	246.0
AD-22-011	668687	5908776	517	-45	320	150.0
AD-22-034	668688	5909055	519	0	135	196.4
AD-22-035	668634	5908726	519	-45	315	186.0
AD-22-036	668687	5908776	517	-45	360	243.0
AD-22-037	668702	5908651	515	-45	315	228.0
AD-22-039	668702	5908651	515	-45	360	201.0
AD-22-041	668872	5908797	520	-45	360	213.0
AD-22-042	668968	5908803	520	-45	340	150.0
AD-22-043	670003	5909088	531	-45	340	141.1
AD-22-046	668968	5908803	520	-75	340	186.0
AD-22-055	668944	5908718	512	-55	330	300.0
AD-22-059	668944	5908718	512	-82	330	204.0
AD-23-044	670165	5909126	533	-45	340	168.0
AD-23-045	670312	5909224	533	-45	330	114.0
AD-22-048	668702	5908651	515	-75	360	297.0
AD-23-053	669034	5908748	512	-45	360	187.0
AD-23-054	669090	5908854	512	-45	360	231.0
AD-23-057	669034	5908748	512	-65	360	213.0
AD-23-060	669034	5908748	512	-85	240	240.0
AD-23-071	669094	5908773	512	-85	360	324.0
AD-23-072	669094	5908773	512	-65	360	252.0
AD-23-073	669094	5908773	512	-45	360	292.1
AD-23-048	668702	5908651	515	-75	360	297.0
AD-23-028	668735	5908748	518	-50	350	315.7
AD-23-030	668874	5908645	508	-75	340	402.0
AD-23-038A	668789	5908668	512	-60	350	420.0
AD-23-050	668789	5908668	512	-75	350	378.0
AD-23-051	668769	5908781	519	-75	360	392.5

Appendix 4 – Visual estimates of mineralisation intersections in Adina diamond drill holes where assays are yet to be received (main sampling intervals).

Hole ID	From (m)	To (m)	Thickness (m)	Visual Estimate %
AD-23-053	81.2	116	34.8	Pegmatite – spodumene observed
AD-23-054	25	45	20	Pegmatite – spodumene observed
	45	65	20	Pegmatite – spodumene observed
	179	189	10	Pegmatite – spodumene observed
	201	214	13	Pegmatite – spodumene observed
AD-23-057	66.4	99	32.6	Pegmatite – spodumene observed
AD-23-060	57	62.5	5.5	Pegmatite – spodumene observed
	124.3	165.2	40.9	Pegmatite – spodumene observed
AD-23-071	61	83	22	Pegmatite – spodumene observed
	127	141.5	14.5	Pegmatite – spodumene observed
AD-23-072				Logging/sampling in progress
AD-23-073				Logging/sampling in progress
AD-23-048				Logging/sampling in progress
AD-23-028				Logging/sampling in progress
AD-23-030				Logging/sampling in progress
AD-23-038A				Logging/sampling in progress
AD-23-050				Logging/sampling in progress
AD-23-051				Logging/sampling in progress

Legend for Appendices 3 and 4:

- AD-22-005 Assays previously reported
- AD-22-001 Assays reported in this announcement
- AD-22-006 Assays awaited, collar/lithological data reported previously
- AD-22-060 Assays awaited, collar/lithological data reported in this announcement

The Company reminds investors that the presence of spodumene crystals within pegmatite does not necessarily equate to lithium mineralisation or indicate the percentage of lithium mineralisation, which can only be accurately confirmed by chemical assays. When such laboratory results become available, they will be reported in full in a future report.

Visual estimates have been removed from this table for holes where assays have been received and reported (refer Appendices 1 and 2).

JORC Code, 2012 edition Table 1
Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	Explanation
Sampling techniques	<ul style="list-style-type: none"> All core is NQ (76mm) in this program. Core sample intervals were geologically logged, measured for average length, photographed, and placed into numbered core trays. Sample were sent to SGS Minerals Geochemistry under standard preparation procedures.
Drilling techniques	<ul style="list-style-type: none"> NQ diamond drilling was completed at Adina. Oriented core drilling was not completed. Downhole surveying was conducted using a gyro-based system.
Drill sample recovery	<ul style="list-style-type: none"> The recovery of the diamond drilling samples was reported by the operators and supervised by our consulting geologist. No sample bias has been established.
Logging	<ul style="list-style-type: none"> NQ core was logged and cut according to geological boundaries, with ~1 m intervals targeted for individual samples. Features such as rock type, modal mineralogy, rock textures, alteration were recorded. Geological logging information was recorded directly onto the Geotic Logger system and compiled onto Database platform, with weekly backups. The core is stored in the Geological consultants (TechnoMinex) yard in Rouyn-Noranda which is a secure location. Various qualitative and quantitative logs were completed. All core has been photographed. The logging database contains lithological data for all intervals in all holes in the database.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> Drill core was split (sawn) by TechnoMinex facilities in Rouyn-Noranda("RN"), QC; half core sample intervals submitted to SGS preparation facilities in Sudbury, ON; - 250gr pulp sub-samples were analysed at SGS analytical facilities in Burnaby, BC; Pulps and coarse rejects to be returned to Winsome, for storage at TechnoMinex facilities in RN. Laboratory QC procedures for drill core assays involve the use of internal certified reference material as assay standards, along with blanks, duplicates and replicates.
Quality control & Quality of assay data and laboratory tests	<ul style="list-style-type: none"> Industry standard assay quality control techniques were used for lithium related elements. Assay and laboratory procedures have been selected following a review of techniques provided by internationally certified laboratories. Samples are submitted for multi-element ICP analysis by SGS, which is applicable for high-grade lithium analysis.

Criteria	Explanation
	<ul style="list-style-type: none"> Sodium Peroxide Fusion is used followed by combined ICP-AES and ICP-MS analyses (56 elements). Li is reported by the lab and converted to Li_2O for reporting using a factor of 2.153. No handheld instruments were used for analysis. Comparison of results with standards indicate sufficient quality in data. No external laboratory checks have been used but are planned to be completed shortly. Different grades of certified reference material (CRM) for lithium mineralisation were inserted, as well as field duplicates, and blanks. The CRM's submitted represented a weakly mineralised pegmatite (OREAS 750), and a moderate lithium mineralised pegmatite (AMIS 0341) to high grade lithium mineralised pegmatite (OREAS 752 & 753). Quality Assurance and Quality Control utilised standard industry practice, using prepared standards, field blanks (approximately 0.4 kg), duplicates sampled in the field and pulp duplicates at the lab. Blank samples were submitted at a rate of approximately 5%, same for duplicates and repeat assay determinations, whereas standards were submitted at a rate of approximately 20%.
Verification of sampling and assaying	<ul style="list-style-type: none"> Hard copy field logs are entered into and validated on an electronic Excel database, both of which are stored at the Winsome Perth office and with Technominex. Data verification was carried out by the Project Geologist on site, and a final verification was performed by a Senior Geologist at the Technominex core handling facilities in Rouyn Noranda. Diamond core drilled was photographed on site where a preliminary geological logging was performed. Core boxes were then crated and ship to Technominex handling facilities for detailed logging and sample splitting/cutting. Half core samples were packaged and ship to the SGS Sudbury Laboratory facilities Ontario, for preparation. No assays have been adjusted. A factor of 2.153 has been applied to the reported Li assays so to report as Li_2O.
Location of data points	<ul style="list-style-type: none"> The drill holes have been reported as being located by hand-held GPS. Historical drill holes have been verified by GPS. The grid datum is NAD83. Zone 18N. Topographic elevation and landmarks are readily visible from a Digital Elevation Model with a 50cm grid resolution and orthophoto obtained from Lidar surveys performed in 2017 and 2022 over the property. Government topographic maps have been used for topographic validation. The GPS is otherwise considered sufficiently accurate for elevation data. Down hole dip surveys were taken at approximately 30m intervals and at the bottom of the diamond drill holes.

Criteria	Explanation
Data spacing and distribution	<ul style="list-style-type: none"> In this early delineation stage, drilling is largely set along sections at 100m spacing and aiming to intercept targeted horizon at 80-100m centres. No assessment has been made regarding the current drill hole location and intersections with respect to resources or reserve estimation. No sample compositing has been completed. However, internal dilution of non-mineralised material into calculated grade over widths reported herein may occur but is not considerable.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Drilling is designed to confirm the historical drilling results and test potential mineralisation. They were oriented sub-perpendicular to the potential mineralised trend and stratigraphic contacts as determined by field data and cross section interpretation. Intersection widths will therefore be longer than true widths. No significant sample bias has been identified from drilling due to the optimum drill orientation described above. Where present, sample bias will be reported.
Sample security	<ul style="list-style-type: none"> The company takes full responsibility on the custody including the sampling process itself and transportation. Samples were shipped via accredited transporter KEP A Transport from project site to Technominex facilities in Rouyn-Noranda, where samples were split and then delivered to SGS facilities in Sudbury for sample preparation
Audits or reviews	<ul style="list-style-type: none"> No external audit of the database has been completed, apart for the consulting geologists acting on behalf of the company. Drill hole sample data is verified at time of entry into excel as well as when assays are linked.

Section 2 Reporting of Exploration Results

(Criteria in the preceding section also apply to this section.)

Criteria	Explanation
Mineral tenement and land tenure status	<ul style="list-style-type: none"> The Winsome Adina Lithium Project is a 100% owned by Winsome Adina Lithium Inc. All tenements are in good standing and have been legally validated by a Quebec lawyer specialising in the field.
Exploration done by other parties	<ul style="list-style-type: none"> Initial Exploration and Review was undertaken by MetalsTech Limited. Government mapping records multiple lithium bearing pegmatites within the project areas with only regional data available.
Geology	<ul style="list-style-type: none"> The mineralisation encountered at the Adina project is typical of a Lithium-Caesium-Tantalum (LCT) type of pegmatite. The pegmatite body is oriented sub-parallel to the general strike of the host rocks. The host rocks are composed of Archean Lac Guyer greenstone rocks, which include

Criteria	Explanation
	mafic and ultramafic rocks interlayered with horizons of metasedimentary and felsic volcanic rocks
Drill hole Information	<ul style="list-style-type: none"> For the current drill program, the following information has been included for all holes reported: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (reduced level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception level hole length A summary of drill hole information was included in the Company's prospectus within the Independent Geologists Report prepared by Mining Insights pages 19-38 and Table 3 of Appendix B, pages 69 and 70
Data aggregation methods	<ul style="list-style-type: none"> No sample weighting or metal equivalent values have been used in reporting. Aggregation issues are not considered material at this stage of project definition. No metal equivalent values were used
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> The pierce angle of the drilling varies from hole to hole, in order to attempt, wherever possible, to represent true widths
Diagrams	<ul style="list-style-type: none"> See figures and maps provided in the text of the announcement.
Balanced reporting	<ul style="list-style-type: none"> Winsome Resources Ltd will endeavour to produce balanced reports accurately detailing the results from any exploration activities. All drillholes and intersections have been presented in this announcement and in previous announcements.
Other substantive exploration data	<ul style="list-style-type: none"> No other substantive exploration data is available at this time.
Further work	<ul style="list-style-type: none"> Winsome Resources Ltd continues to complete further site investigations. Further work planned includes comprehensive data interpretation, field mapping and exploration drilling.