

ASX Announcement

6 July 2023

LATEST AIR-CORE RESULTS EXTEND EASTERN CORRIDOR

Successful 2023 air-core program identifies multiple mineralised trends for follow-up RC drilling

Highlights

- Significant assay results received from the final seven lines of extensional air-core (AC) drilling between Cardinia Hill and Collymore within the Eastern Corridor at the 1.54Moz Cardinia Gold Project in WA, with highlights including:
 - 4m at 0.98g/t Au from 32m (CR23AC349)
 - 16m at 0.57g/t Au from 56m (CR23AC415)
 - 8m at 0.50g/t Au from 4m (CR23AC416)
 - 6m at 0.81g/t Au from 60m to EOH (CR23AC419)
- The assay results have confirmed two new mineralised trends to the north of Rangoon, with continuous mineralisation now delineated to Collymore, approximately 2.0km north. Shallow mineralisation intersected in air-core drilling remains open and untested at depth.
- The results provide further indications of the potential for “camp-scale” gold mineralisation along the +5km strike extent between Cardinia Hill and Helens in the south to Collymore in the north.
- Geological logging indicates that the mineralisation is associated with quartz veining, pyrite and alteration located on the margins of felsic and mafic volcanic units. The mineralisation style and host rocks are analogous to the high-grade gold mineralisation encountered at other locations such as Helens, Helens East, Cardinia Hill and Rangoon.
- AC drilling results show that the mineralisation is continuous with previous AC drilling between Collymore and Rangoon completed in 2020, and initial results from the northern portion of this program. Significant results from the northern part of the current program include:
 - 9m at 2.10g/t Au from 36m to end-of-hole (EOH) (CR23AC053)
 - 4m at 1.84g/t Au from 4m (CR23AC055)
 - 4m at 2.08g/t Au from 20m (CR23AC019)
 - 4m at 2.30g/t Au from 52m (CR23AC021)
 - 4m at 2.39g/t Au from 16m (CR23AC026)
 - 4m @ 2.09 g/t Au from 8m (CR23AC177)
 - 8m at 1.84g/t Au from 0m (CR23AC093)
- All assays now returned for the 14,690m AC drilling program.

ASX Code: KIN

Shares on issue: 1178 million

Market Capitalisation: \$40 million

Cash: \$6.7 million (31 March 2023)

Kin Mining NL

342 Scarborough Beach Road

Osborne Park WA 6017

P: +61 9 9242 2227

E info@kinmining.com.au

kinmining.com.au

Kin Mining NL (ASX: KIN or “the Company”) is pleased to advise that it has received the final batch of assays from recent air-core (AC) drilling in the Eastern Corridor area, part of its 100%-owned **1.54Moz Cardinia Gold Project** (CGP), located near Leonora in Western Australia.

The new assays complement previously reported results from AC drilling at Collymore (see ASX announcements 24 August, 12 October and 28 October 2020) and the results from the recently completed extensional AC program (see ASX announcements, 1 June and 13 June 2023). They provide further evidence of an **extensive, continuously mineralised corridor spanning the entire 5km strike extent between the Cardinia Hill, Helens, Rangoon and Collymore prospects.**

The latest results include several significant intercepts which have defined extensions to two parallel mineralised trends north of Rangoon in the Eastern Corridor.

Between Rangoon and Collymore, intercepts such as 16m @ 0.57g/t from 56m (CR23AC415) and 6m at 0.81g/t from 60m to EOH (CR23AC419) confirm the continuity of the mineralised structures between the Rangoon deposit and the Collymore prospect (see Figures 2 and 3).

Steep-dipping structures are an important feature of the Eastern Corridor mineralisation and host significant Mineral Resources at Helens (121koz at 1.41g/t), Helens East (70koz at 1.57g/t) and Cardinia Hill (97koz at 1.38g/t).

Commenting on the latest drill results, Kin Mining Managing Director Andrew Munckton said:

“We are pleased with the consistently strong results generated from the recent air-core drilling program, following on from the initial results released on 1 June between Rangoon and Collymore and further results released on 13 June between Helens East and Cardinia Hill. These latest results confirm that a number of newly discovered mineralised positions within the Eastern Corridor have geological continuity of mineralisation, confirming these areas as priority targets for follow-up RC drilling and highlighting extensions to previously intersected quartz pyrite mineralisation.

“These results have very similar characteristics to those seen at all deposits within the Eastern Corridor – where the combination of anomalous soil geochemistry at surface followed by broad-spaced, ore grade AC results in the oxide and regolith zone in the right geological environment has frequently led to the discovery of sizeable gold deposits at depth when tested with RC and diamond drilling. Based on these similarities, we’re very much looking forward to testing the emerging additional mineralised positions with deeper drilling.

“The Eastern Corridor – where Kin has focused most of its exploration efforts over the last 18 months – is emerging as a large, multi-faceted mineralised gold camp. It already hosts a very significant mineralised position, with Mineral Resources totalling 475koz at 1.42g/t defined so far, mainly at the Helens-Rangoon, Helens East and Cardinia Hill deposits, the three most recent discoveries.

“With these latest results suggesting that the 2km strike extent between Collymore and Rangoon may be continuously mineralised – opening up the possibility of significant additional targets along this corridor – we believe that the growth potential in this area for more discoveries of similar size and grade is exceptional.”

Eastern Corridor AC Program

KIN commenced a 14,690m AC drilling program across the Eastern Corridor in April 2023. The drilling, which was completed in mid-June, was designed to assess the extent of gold mineralisation in the regolith profile in this highly prospective area.

The program was designed to extend the previously drilled AC lines, generally at 400m line spacing, over the entirety of the anomalous gold and pathfinder geochemistry within the corridor. In-fill AC drilling over confirmed mineralised trends was also completed at 200m line spacing in the latter stages of the program.

Assay results were received and reported for the first four lines (approximately 5,000m of AC drilling sampled as 4m composites) in the ASX announcement of 1 June and for the second four lines in the northern and central portion of the Eastern Corridor in the ASX announcement of 13 June (Figure 1).

The results in this announcement cover the southern third of the program from Line 9 to Line 13, within the area containing the Cardinia Hill to East Lynne mineralised trends. Additional drilling on Line 14 to Line 16 was completed to in-fill the strong results received from Line 1 to Line 4 earlier in the program. The results clearly demonstrate the extension of the mineralised trends between Rangoon and Collymore along strike in the near-surface environment.

Similar to other deposits within the Eastern Corridor, gold mineralisation intersected in the lines of AC drilling returned are correlated with logged pyrite, up to 30% quartz and intermittent shearing and silica alteration in a mix of lower saprolite and bottom-of-hole saprock.

The mineralised trends defined to date are strongly associated with the mapped NNW trending geological contacts between mafic and felsic volcanic rock units, along with apparent mineralised splays from the Helens-Rangoon Fault (Figure 2 and Figure 3).

Felsic volcanic geological units are marked by a significant gravity-low lineament, as illustrated in Figure 3. This association, coupled with the geological features logged in the AC drill chips, provides strong evidence that similar mapped felsic rock units with coincident gravity features across the greater Cardinia area may host mineralised structures and deposits similar to those identified within the emerging Eastern Corridor area.

The results in the corridor between Cardinia Hill and Collymore indicate the presence of a series of mineralised structures which cross-cut the NNW stratigraphy and now span the entire 5km by 2km area of the Eastern Corridor, as shown in Figure 2 and Figure 3.

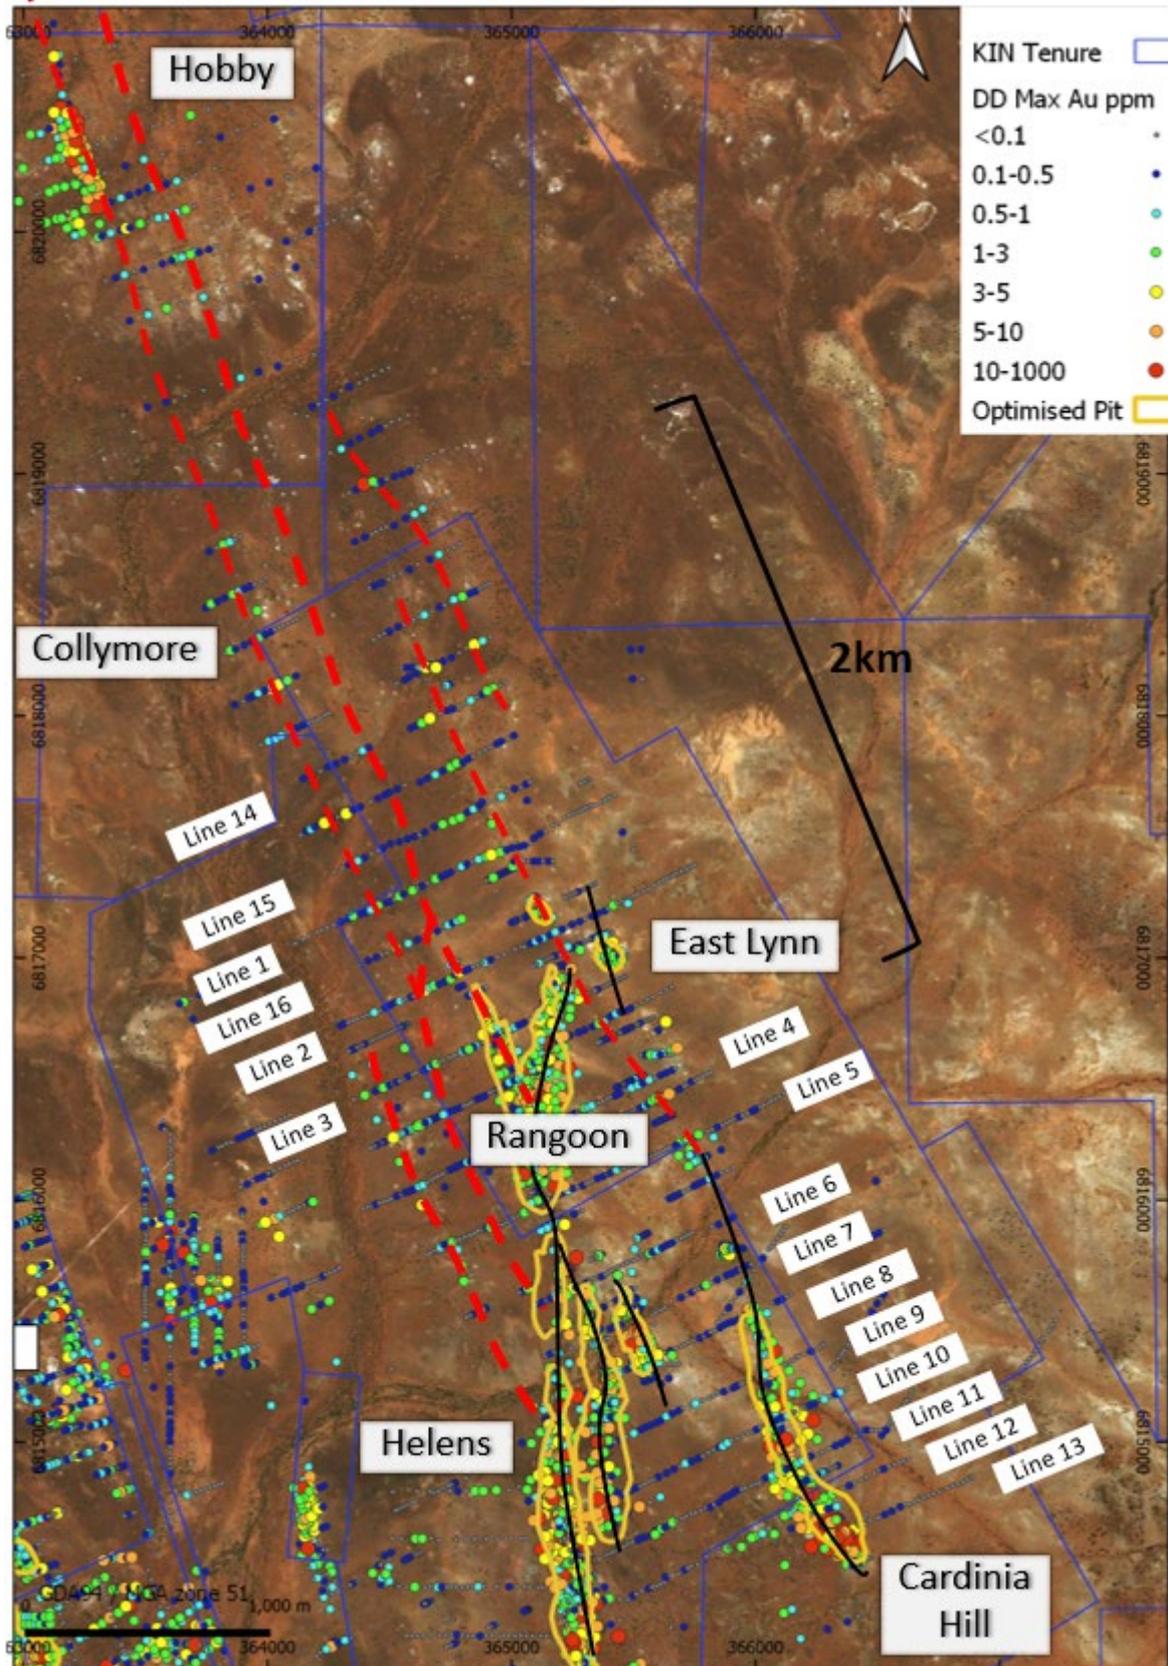


Figure 1 – Overview of the 2023 Eastern Corridor AC program at Cardinia. Black solid lines indicate confirmed mineralised trends, Red dashed lines indicate the interpreted mineralised trends within the Eastern Corridor, which remains open to the north, south and down-dip. Optimised pit designs from Announcement 3 July 2023. Note the location of the Collymore, Rangoon, Helens, East Lynne and Cardinia Hill deposits within the strongly mineralised Eastern Corridor.

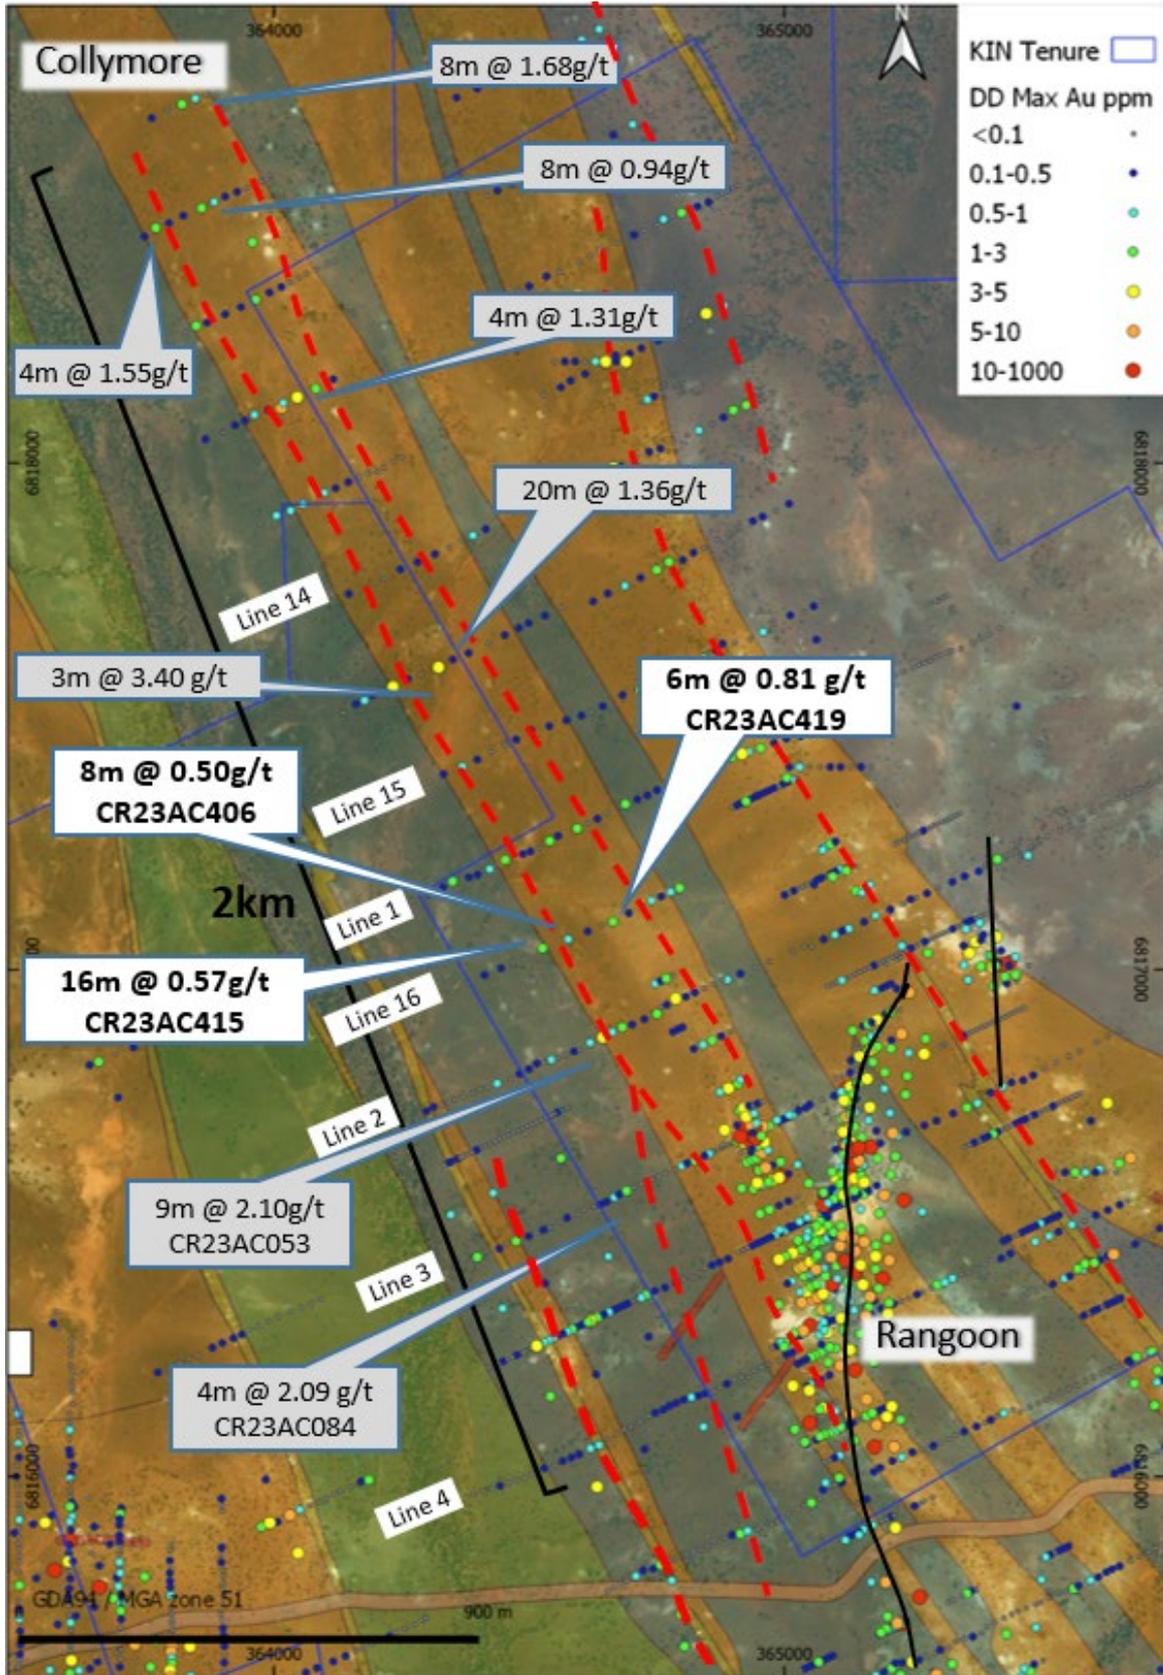


Figure 2 – Location of assays results from recent AC drilling. Black solid lines indicate confirmed mineralised trends, Red dashed lines indicate the interpreted mineralised trends within the Eastern Corridor, which remains open to the north, south and down-dip. White labels refer to results from this announcement. Grey labels refer to results reported on 1 June and 13 June 2023.

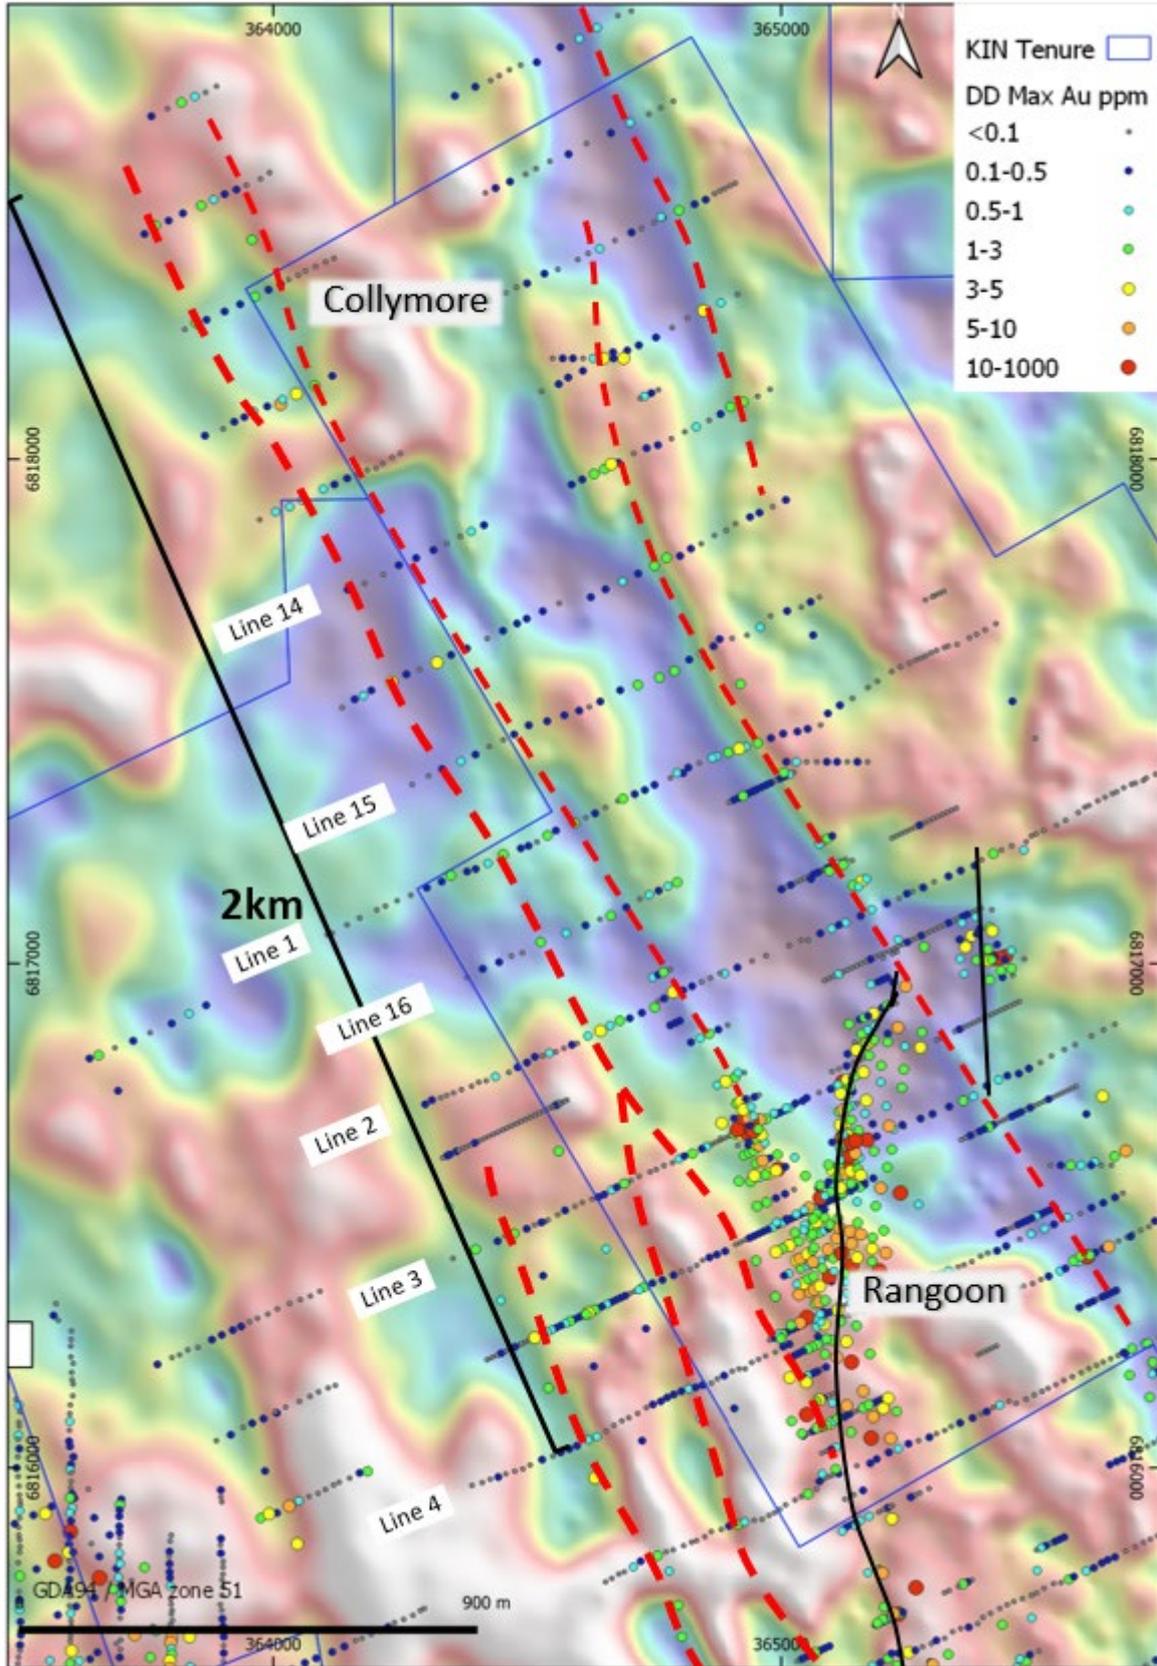


Figure 3 – AC drilling lines 1-4 and 14-16 showing results received as max gold in hole, along with previous drilling results, over gravity image. Black solid lines indicate confirmed mineralised trends, Red dashed lines indicate the interpreted mineralised trends within the Eastern Corridor, which remains open to the north, south and down-dip. Note the coincidence of mineralised trends with the boundary of gravity lows (blue green colours) with gravity highs (red white colours).

Next Steps

Further work in the September Quarter will include following up with deeper RC drilling to determine the extent and grade of the mineralisation below the regolith at approximately 30m depth. Future programs will be targeted depending on results from the proposed initial RC program.

Table 1 – Significant intercepts (>0.4g/t) for results received from 13 June to 6 July from the 2023 East Cardinia AC program.

Hole ID	From	To	Width (m)	Grade g/t Au
CR23AC331	20	24	4	0.46
CR23AC343	8	12	4	0.48
CR23AC344	16	20	4	0.44
CR23AC346	4	8	4	0.77
CR23AC349	32	36	4	0.98
CR23AC355	24	28	4	0.40
CR23AC360	32	36	4	0.47
CR23AC376	16	20	4	0.42
CR23AC400	28	32	4	0.50
CR23AC404	20	24	4	0.42
CR23AC405	52	56	4	0.42
CR23AC415	56	72	16	0.57
CR23AC416	4	12	8	0.50
CR23AC417	8	12	4	0.42
CR23AC419	60	66	6	0.81

Table 2 – Collar details for holes drilled to date with results received.

Hole ID	Hole Type	Depth	Easting	Northing	RL
CR23AC318	AC	26	365943.8	6815512	420.55
CR23AC319	AC	58	365955.5	6815523	426.09
CR23AC320	AC	49	366070	6815574	420.53
CR23AC321	AC	48	366089	6815582	414.09
CR23AC322	AC	36	366109.7	6815591	412.22
CR23AC323	AC	53	366127.4	6815602	424.05
CR23AC324	AC	54	366145.2	6815613	424.47
CR23AC325	AC	35	365888	6815218	410.78
CR23AC326	AC	31	365908.7	6815224	420.91
CR23AC327	AC	25	365924.2	6815233	421.14
CR23AC328	AC	16	365938.4	6815239	414.82
CR23AC329	AC	16	365948.5	6815245	417.82
CR23AC330	AC	21	365966.2	6815249	421.28
CR23AC331	AC	42	365976.6	6815259	414.29
CR23AC332	AC	31	366122.4	6815322	414.40
CR23AC333	AC	32	366138.4	6815332	415.55

Hole ID	Hole Type	Depth	Easting	Northing	RL
CR23AC334	AC	21	366153.7	6815339	420.29
CR23AC335	AC	22	366166.2	6815351	422.74
CR23AC336	AC	36	366176.5	6815355	415.02
CR23AC337	AC	39	366199.1	6815365	425.42
CR23AC338	AC	52	366226.4	6815375	412.85
CR23AC339	AC	29	366262.7	6815391	417.84
CR23AC340	AC	24	366277.9	6815402	421.67
CR23AC341	AC	39	366188.8	6815142	424.01
CR23AC342	AC	21	366206.6	6815146	414.45
CR23AC343	AC	30	366221.6	6815151	414.30
CR23AC344	AC	38	366240.7	6815159	414.86
CR23AC345	AC	26	366264.9	6815171	414.80
CR23AC346	AC	37	366282.1	6815177	414.13
CR23AC347	AC	39	366303.9	6815188	420.93
CR23AC348	AC	32	366327.1	6815198	417.36
CR23AC349	AC	50	366344.7	6815205	416.50
CR23AC350	AC	38	366371.7	6815220	424.71
CR23AC351	AC	17	366252.5	6814946	431.05
CR23AC352	AC	52	366273.2	6814958	430.55
CR23AC353	AC	40	366300.7	6814973	427.49
CR23AC354	AC	35	366325.8	6814985	427.48
CR23AC355	AC	31	366351.9	6814996	429.05
CR23AC356	AC	51	366375.4	6815010	421.80
CR23AC357	AC	35	366410.3	6815025	411.35
CR23AC358	AC	28	366429.9	6815034	416.89
CR23AC359	AC	63	366475.1	6815050	416.70
CR23AC360	AC	51	366327.8	6814798	424.91
CR23AC361	AC	57	366356.8	6814807	418.75
CR23AC362	AC	54	366384	6814821	418.51
CR23AC363	AC	44	366406.2	6814831	416.50
CR23AC364	AC	42	366433.4	6814844	416.07
CR23AC365	AC	44	366455.5	6814856	410.03
CR23AC366	AC	31	366488.6	6814871	410.56
CR23AC367	AC	34	366506.6	6814884	425.68
CR23AC368	AC	46	366524.7	6814889	425.38
CR23AC369	AC	26	366430.6	6814650	413.11
CR23AC370	AC	21	366449.3	6814662	392.76
CR23AC371	AC	36	366471.2	6814673	431.45
CR23AC372	AC	37	366495.3	6814685	417.47
CR23AC373	AC	40	366508.8	6814689	417.71
CR23AC374	AC	54	366528.5	6814701	430.00
CR23AC375	AC	51	366558.1	6814715	423.54
CR23AC376	AC	36	366591.9	6814733	430.18
CR23AC377	AC	30	366613.9	6814742	429.26

Hole ID	Hole Type	Depth	Easting	Northing	RL
CR23AC378	AC	34	366628.4	6814745	427.97
CR23AC379	AC	36	366651.9	6814754	427.83
CR23AC380	AC	30	366666.2	6814761	427.26
CR23AC381	AC	44	366456	6815045	423.29
CR23AC382	AC	28	366689.5	6814772	429.92
CR23AC383	AC	39	366709.7	6814780	430.11
CR23AC384	AC	35	366730.7	6814786	426.41
CR23AC385	AC	27	366754.8	6814794	425.62
CR23AC386	AC	30	366787	6814808	426.08
CR23AC387	AC	28	366808.5	6814820	426.71
CR23AC388	AC	36	366828.9	6814829	427.35
CR23AC389	AC	29	366851.7	6814834	427.32
CR23AC390	AC	19	366867.9	6814845	427.59
CR23AC391	AC	10	366888.8	6814855	427.70
CR23AC392	AC	55	366547.7	6814898	422.70
CR23AC393	AC	31	366569.9	6814908	422.50
CR23AC394	AC	22	366590.1	6814914	422.61
CR23AC395	AC	25	366605.4	6814922	419.98
CR23AC396	AC	27	366627.5	6814930	420.27
CR23AC397	AC	69	364273.4	6817355	429.48
CR23AC398	AC	73	364305.9	6817372	419.68
CR23AC399	AC	74	364332.5	6817386	415.64
CR23AC400	AC	52	364369.4	6817401	422.29
CR23AC401	AC	62	364398.2	6817414	418.53
CR23AC402	AC	50	364425.4	6817430	431.06
CR23AC403	AC	37	364453.1	6817444	431.33
CR23AC404	AC	57	364474.3	6817454	425.86
CR23AC405	AC	57	364503.1	6817473	422.84
CR23AC406	AC	61	364539.3	6817481	420.62
CR23AC407	AC	50	364573.2	6817492	430.12
CR23AC408	AC	26	364602.3	6817502	430.02
CR23AC409	AC	13	364622.1	6817509	429.74
CR23AC410	AC	54	364643.8	6817520	432.94
CR23AC411	AC	57	364381.7	6816973	419.27
CR23AC412	AC	71	364412.5	6816989	420.47
CR23AC413	AC	75	364444.7	6817003	419.74
CR23AC414	AC	62	364490.3	6817021	425.63
CR23AC415	AC	73	364526.3	6817042	424.19
CR23AC416	AC	63	364576.5	6817060	424.22
CR23AC417	AC	64	364614.7	6817076	421.62
CR23AC418	AC	42	364643	6817088	421.34
CR23AC419	AC	66	364664.3	6817095	419.02
CR23AC420	AC	54	364695.2	6817112	419.56
CR23AC421	AC	61	364469	6817015	421.26

Hole ID	Hole Type	Depth	Easting	Northing	RL
CR23AC422	AC	37	364746.4	6816366	428.96
CR23AC423	AC	49	364766.3	6816373	429.30
CR23AC424	AC	16	364788	6816382	429.84
CR23AC425	AC	9	364803.4	6816389	430.15
CR23AC426	AC	5	364820.5	6816393	430.26
CR23AC427	AC	4	364834	6816401	430.99
CR23AC428	AC	5	364845.1	6816412	434.94
CR23AC429	AC	27	364858.7	6816417	434.46
CR23AC430	AC	20	364873.4	6816423	435.45
CR23AC431	AC	28	364889.6	6816430	433.99

-ENDS-

Authorised for release by the Board of Directors

For further information, please contact:

Investor enquiries

Andrew Munckton
 Managing Director, Kin Mining NL
 +61 8 9242 2227

Media enquiries

Nicholas Read
 Read Corporate
 +61 419 929 046

ABOUT KIN MINING NL

Kin Mining NL (ASX: KIN) is a West Australian based gold development and exploration company. Kin's key focus is its 100% owned Cardinia Gold Project (CGP) located in the highly prospective North-Eastern Goldfields region of Western Australia. The CGP has a 1.54Moz gold Mineral Resource (see Table 3) defined in both oxide and deeper primary mineralisation with considerable potential to grow this resource with further drilling.

Kin's exploration effort is the systematic program of exploration across the Cardinia Mining Centre that seeks to advance a number of targets in parallel while developing a pipeline of exploration targets for ongoing Mineral Resource expansion.

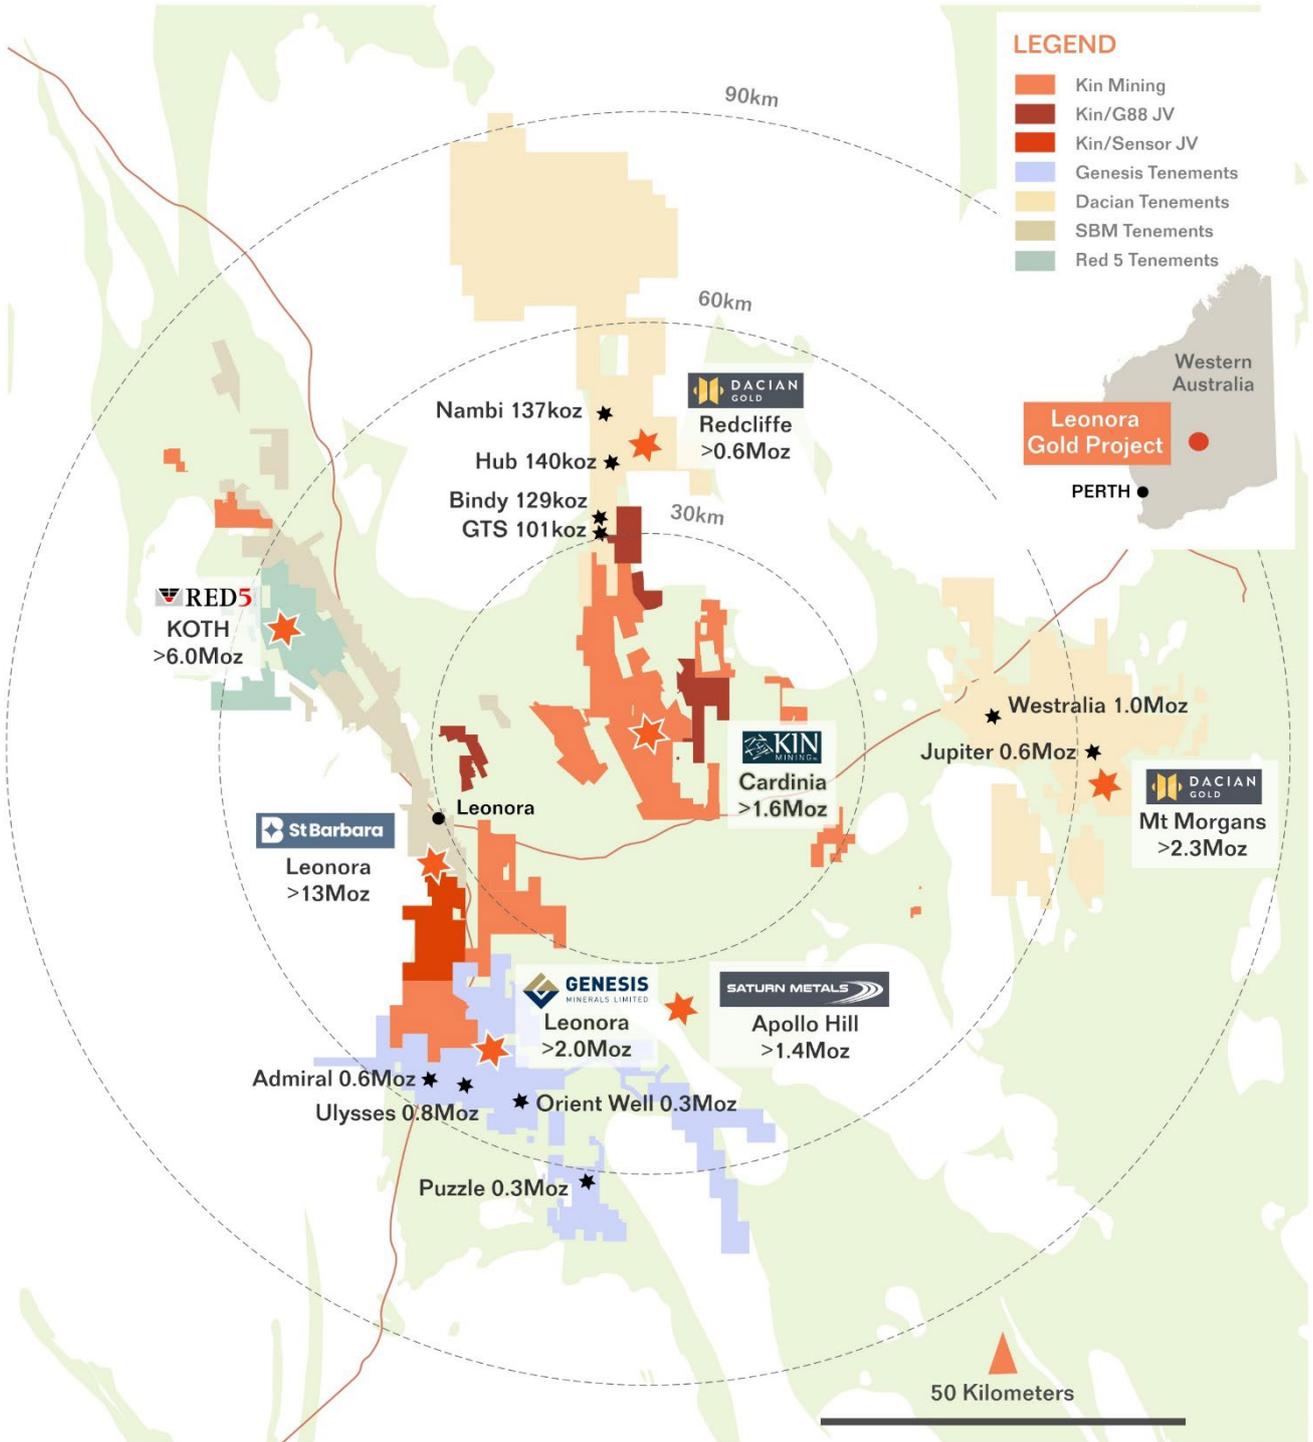


Figure A1 - Regional overview showing KIN tenure and surrounding projects with Resources

Table A1 - Mineral Resource Estimate Table June 2023¹

Cardinia Gold Project: Mineral Resources: June 2023															
Project Area	Resource Gold Price (AUD)	Lower Cut off (g/t Au)	Measured			Indicated			Inferred			Total Resources			Date Announced
			Tonnes (Mt)	Au (g/t Au)	Au (k Oz)	Tonnes (Mt)	Au (g/t Au)	Au (k Oz)	Tonnes (Mt)	Au (g/t Au)	Au (k Oz)	Tonnes (Mt)	Au (g/t Au)	Au (k Oz)	
Mertondale															
Mertons Reward	\$ 2,600	0.4				0.9	2.1	62	2.0	0.6	41	2.9	1.11	103	26-Nov-20
Mertondale 3-4	\$ 2,600	0.4				1.3	1.8	80	1.0	1.0	32	2.4	1.46	112	26-Nov-20
Tonto	\$ 2,600	0.4				1.9	1.1	68	1.1	1.2	45	3.0	1.17	113	26-Nov-20
Mertondale 5	\$ 2,600	0.4				0.5	1.6	27	0.9	1.2	34	1.4	1.35	62	26-Nov-20
Eclipse	\$ 2,600	0.4							0.8	1.0	24	0.8	0.97	24	26-Nov-20
Quicksilver	\$ 2,600	0.4							1.2	1.1	42	1.2	1.08	42	26-Nov-20
Mertondale Underground		2.0				0.0	2.4	1	0.0	2.7	1	0.0	2.55	1	18-Oct-22
Subtotal Mertondale						4.6	1.6	237	7.0	1.0	220	11.7	1.22	457	
Cardinia															
Bruno/Lewis	\$ 2,600	0.4	0.8	1.2	31	7.7	1.0	257	3.6	0.9	100	12.1	1.00	388	17-May-21
Kyte	\$ 2,600	0.4				0.3	1.5	17	0.1	0.9	3	0.5	1.37	20	26-Nov-20
Helens	\$ 2,600	0.4				1.4	1.5	64	1.3	1.4	57	2.7	1.41	121	26-Jun-23
Helens East	\$ 2,600	0.4				0.4	1.7	24	1.0	1.5	46	1.4	1.57	70	26-Jun-23
Fiona	\$ 2,600	0.4				0.2	1.3	10	0.1	1.1	3	0.3	1.25	13	26-Jun-23
Rangoon	\$ 2,600	0.4				1.3	1.3	56	1.5	1.3	65	2.8	1.32	121	26-Jun-23
Hobby	\$ 2,600	0.4							0.6	1.3	23	0.6	1.26	23	17-May-21
Cardinia Hill	\$ 2,600	0.4				0.5	2.2	38	1.6	1.1	59	2.2	1.38	97	26-Jun-23
Cardinia Underground		2.0				0.0	2.6	1	0.4	2.4	29	0.4	2.41	29	18-Oct-22
Subtotal Cardinia			0.8	1.2	31	12.0	1.2	467	10.2	1.2	385	22.9	1.20	882	
Raeside															
Michaelangelo	\$ 2,600	0.4				1.2	2.0	74	0.4	2.1	31	1.6	2.09	105	26-Nov-20
Leonardo	\$ 2,600	0.4				0.4	2.4	31	0.2	1.9	13	0.6	1.65	44	26-Nov-20
Forgotten Four	\$ 2,600	0.4				0.1	2.1	7	0.1	2.1	10	0.3	2.01	17	26-Nov-20
Krang	\$ 2,600	0.4				0.4	1.6	20	0.1	1.8	3	0.4	0.00	23	26-Nov-20
Raeside Underground		2.0				0.1	2.6	5	0.1	2.5	7	0.2	2.51	13	18-Oct-22
Subtotal Raeside						2.1	2.0	138	1.0	2.1	64	3.1	2.04	202	
TOTAL			0.8	1.25	31	18.7	1.40	842	18.2	1.15	669	37.7	1.27	1541	

Table 3: Cardinia Gold project Open Pit Mineral Resource estimate. Mineral Resources estimated by Jamie Logan and reported in accordance with JORC 2012 using a 0.4 g/t Au cut-off within AUD2,600 optimisation shells. Underground Resources are reported using a 2.0 g/t cut-off outside AUD2,600 optimisation shells. Note *Cardinia Hill, Hobby and Bruno-Lewis Mineral Resource Estimates completed by Cube Consulting, and also reported in accordance with JORC 2012 using a 0.4 g/t Au cut-off within AUD2,600 optimisation shells.

¹The company confirms that it is not aware of any new information or data that materially affects the information included in the ASX Announcement of 3 July 2023 "Cardinia Gold Project Mineral Resource Passes 1.5Moz..", and that all material assumptions and technical parameters underpinning the estimates in that announcement continue to apply and have not materially changed.

COMPETENT PERSONS STATEMENT

Exploration Results

The information contained in this report relating to exploration results relates to information compiled or reviewed by Leah Moore. Ms Moore is a member of the Australian Institute of Geoscientists and is a full time employee of the company. Ms Moore has sufficient experience of relevance to the styles of mineralisation and the types of deposit under consideration, and to the activities undertaken to qualify as a Competent Person as defined in the 2012 edition of the JORC "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".

Ms Moore consents to the inclusion in this report of the matters based on information in the form and context in which it appears.

CAUTIONARY STATEMENT

In relation to the disclosure of visual mineralisation, the Company cautions that visual estimates of sulphide material abundance should never be considered a proxy or substitute for laboratory analysis. Laboratory assay results are required to determine the widths and grade of the visible mineralisation reported in preliminary geological logging. The Company will update the market when laboratory analytical results become available.

Appendix A

JORC 2012 TABLE 1 REPORT

Cardinia Gold Project - Section 1 & 2

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	• JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30g charge for fire assay'). In other</i></p>	<p><u>Diamond</u></p> <p>Historic (pre-2014) diamond core (DD) sampling utilised half core or quarter core sample intervals; typically varying from 0.3m to 1.4m in length. 1m sample intervals were favoured and sample boundaries principally coincided with geological contacts.</p> <p>Recent (2014-2018) diamond core (DD) samples, either HQ3 or NQ2 in size diameter, were either cut in half longitudinally or further cut into quarters, using a powered diamond core drop saw centered over a cradle holding core in place. Core sample intervals varied from 0.2 to 1.25m in length but were predominantly aligned to 1m intervals or with sample boundaries which respected geological contacts.</p> <p>2019 diamond core samples, either HQ3 or NQ2 in size diameter, were either cut in half longitudinally or a third longitudinally, using an automated Corewise core saw Core was placed in boats, holding core in place. Core sample intervals varied from 0.3 to 1.3m in length but were predominantly aligned to 1m intervals or with sample boundaries which respected geological contacts.</p> <p><u>RC</u></p> <p>Historic reverse circulation (RC) drill samples were collected over 1m downhole intervals beneath a cyclone and typically riffle split to obtain a sub-sample (typically 3-4kg). 1m sub-samples were typically collected in pre-numbered calico bags and 1m sample rejects were commonly stored at the drill site. 3m or 4m composited interval samples were often collected by using a scoop (dry samples) or spear (wet samples). If composite samples returned anomalous results once assayed, the single metre sub-samples of the anomalous composite intervals were retrieved and submitted for individual gold analysis.</p> <p>Recent reverse circulation (RC) drill samples were collected by passing through a cyclone, a sample collection box, and riffle or cone splitter. All RC sub-samples were collected over one metre downhole intervals and averaged 3-4kg.</p> <p>2019 RC drilling samples were collected in 1m downhole intervals by passing through a cyclone, a collection box and then dropping through a cone splitter. All RC sub-samples were collected over one metre downhole intervals and averaged 3-4kg.</p> <p><u>AC/RAB</u></p> <p>Historic air core (AC) and rotary air blast (RAB) were typically collected at 1 metre intervals and placed on the ground with 3-4kg sub-samples collected using a scoop or spear. Three metre or four metre composited interval samples were often collected by</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>using a scoop (dry samples) or spear (wet samples). If composite samples returned anomalous results once assayed, the single metre sub-samples of the anomalous composite intervals were retrieved and submitted for individual gold analysis.</p> <p><u>Assay Methodology</u></p> <p>Historic sample analysis typically included a number of commercial laboratories with preparation as per the following method, oven drying (90-110°C), crushing (<2mm to <6mm), pulverizing (<75µm to <105µm), and riffle split to obtain a 30, 40, or 50gram catchweight for gold analysis. Fire Assay fusion, with AAS finish was the common method of analysis however, on occasion, initial assaying may have been carried out via Aqua Regia digest and AAS/ICP finish. Anomalous samples were subsequently re-assayed by Fire Assay fusion and AAS/ICP finish.</p> <p><u>Rock Chips</u></p> <p>All rock chip samples are taken using a pick. The samples are taken from outcrop where possible. Samples are also taken from in situ float material or waste rock around historic workings, where outcrop is not present. Care is taken to ensure all samples are representative of the medium being sampled. For example, if a 1m sediment unit is being sampled, a channel sample will be taken across the entire unit.</p> <p>All recent drilling, sample collection and sample handling procedures were conducted and/or supervised by KIN geology personnel to high level industry standards. QA/QC procedures were implemented during each drilling program to industry standards.</p>
<p>Drilling techniques</p>	<p><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p>Drilling carried out since 1986 and up to the most recent drill programs completed by KIN Mining was obtained from a combination of reverse circulation (RC), diamond core (DD), air core (AC), and rotary air blast (RAB) drilling.</p> <p>Data prior to 1986 is limited due to lack of exploration.</p> <p><u>Diamond</u></p> <p>Diamond coring was undertaken with a surface drill rig and an industry recognized contractor</p> <p>Core size is HQ until competent followed up NQ</p> <p>The core was orientated using a Reflex Ez-Ori Tool</p> <p><u>RC</u></p> <p>2022 RC drilling was carried out by Swick Mining Services truck-mounted Swick version Schramm 685 RC Drill Rig (Rod Handler & Rotary Cone Splitter) with support air truck and dust suppression equipment. Drilling utilised downhole face-sampling hammer bits (Ø 140mm). The majority of drilling retrieved dry samples, with the occasional use of the auxiliary and booster air compressors beneath the water table, to maintain dry sample return as much as possible.</p> <p>2022 RC was surveyed at regular downhole intervals (every 30m with an additional end-of-hole survey) using electronic gyroscopic survey equipment.</p> <p><u>AC/RAB</u></p> <p>Historic AC drilling was conducted utilising suitable rigs with appropriate compressors (eg 250psi/600cfm). AC holes were drilled using ‘blade’ or ‘wing’ bits, until the bit was unable to penetrate (‘blade refusal’), often near the fresh rock interface. Hammer bits were used only when it was deemed necessary to penetrate further into the fresh rock profile or through notable “hard</p>

Criteria	• JORC Code explanation	Commentary
		<p>boundaries” in the regolith profile. No downhole surveying is noted to have been undertaken on AC drillholes.</p> <p>Historic RAB drilling was carried out using small air compressors (eg 250psi/600cfm) and drill rods fitted with a percussion hammer or blade bit, with the sample return collected at the drillhole collar using a stuffing box and cyclone collection techniques. Drillhole sizes generally range between 75-110mm. No downhole surveying is noted to have been undertaken on RAB drillholes.</p>
<p>Drill sample recovery</p>	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p><u>Diamond</u></p> <p>Historic core recovery was recorded in drill logs for most of the diamond drilling programs since 1985. A review of historical reports indicates that core recovery was generally good (>80%) with lesser recoveries recorded in zones of broken ground and/or areas of mineralisation. Overall recoveries are considered acceptable for resource estimation.</p> <p>Recent core recovery data was recorded for each run by measuring total length of core retrieved against the downhole interval actually drilled and stored in the database. KIN representatives continuously monitor core recovery and core presentation quality as drilling is conducted and issues or discrepancies are rectified promptly to maintain industry best standards. Core recoveries averaged >95%, even when difficult ground conditions were being encountered. When poor ground conditions were anticipated, a triple tube drilling configuration was utilised to maximize core recovery</p> <p><u>RC/AC/RAB</u></p> <p>Historic sample recovery information for RC, AC, and RAB drilling is limited.</p> <p>Recent RC drilling samples are preserved as best as possible during the drilling process. At the end of each 1 metre downhole interval, the driller stops advancing, retracts from the bottom of hole, and waits for the sample to clear from the bottom of the hole through to the sample collector box fitted beneath the cyclone. The sample is then released from the sample collector box and passed through either a 3-tiered riffle splitter or cone splitter fitted beneath the sample box.</p> <p>Sample reject is collected in plastic bags, and a 3-4kg sub-sample is collected in pre-marked calico bags for analysis. Once the samples have been collected, the cyclone, sample collector box and riffle splitter are flushed with compressed air, and the splitter cleaned by the off-sider using a compressed air hose at both the end of each 6 metre drill rod and then extensively cleaned at the completion of each hole. This process is maintained throughout the entire drilling program to maximise drill sample recovery and to maintain a high level of representivity of the material being drilled.</p> <p>Collected samples are deemed reliable and representative of drilled material and no material discrepancy, that would impede a mineral resource estimate, exists between collected RC primary and sub-samples.</p>
<p>Logging</p>	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean,</i></p>	<p>Logging data coded in the database, prior to 2014, illustrates at least four different lithological code systems, a legacy of numerous past operators (Hunter, MPI, Metana, CIM, MEGM, Pacmin, SOG, and Navigator). Correlation between codes is difficult to establish however, based on historical reports, drill hole logging procedures appear consistent with normal industry practices of the time.</p> <p>KIN has attempted to validate historical logging data and to standardize the logging code system by incorporating the SOG and Navigator logging codes into one.</p> <p><u>Diamond</u></p> <p>KIN DD logging is carried out on site once geology personnel retrieve core trays from the drill rig site. Core is collected from the rig daily. The entire length of every hole is logged. Recorded data includes lithology, alteration, structure, texture,</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>mineralisation, sulphide content, weathering and other features. Drillhole collar coordinates, azimuth, dip, depth and sampling intervals are also recorded. KIN DD logging is to geological contacts.</p> <p>Qualitative logging includes classification and description of lithology, weathering, oxidation, colour, texture and grain size. Quantitative logging includes percentages of identified minerals, veining, and structural measurements (using a kenometer tool). In addition, logging of diamond drilling includes geotechnical data, RQD and core recoveries.</p> <p>Drill core is photographed at the Cardinia site, prior to any cutting and/or sampling, and then stored in this location. Photographs are available for every diamond drillhole completed by KIN and a selection of various RC chip trays. SG data is also collect</p> <p>All information collected is entered directly into laptop computers or tablets, validated in the field, and then transferred to the database. The level of logging detail is considered appropriate for exploration and to support appropriate mineral resource estimation, mining studies, and metallurgical studies.</p> <p><u>RC/AC/RAB</u></p> <p>KIN RC logging of was carried out in the field and logging has predominantly been undertaken on a metre by metre basis. KIN logging is inclusive of the entire length of each RC drillhole from surface to ‘end of hole’.</p> <p>Recorded data includes lithology, alteration, structure, texture, mineralisation, sulphide content, weathering and other features. Drillhole collar coordinates, azimuth, dip, depth and sampling intervals are also recorded.</p> <p>Qualitative logging includes classification and description of lithology, weathering, oxidation, colour, texture and grain size. Quantitative logging includes identification and percentages of mineralogy, sulphides, mineralisation, and veining.</p> <p>All information collected is entered directly into laptop computers or tablets, validated in the field, and then transferred to the database. The level of logging detail is considered appropriate for exploration and to support appropriate mineral resource estimation, mining studies, and metallurgical studies.</p>
<p><i>Sub-sampling techniques and sample preparation</i></p>	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the</i></p>	<p><u>Diamond</u></p> <p>Historic diamond drill core (NQ/NQ3 or HQ/HQ3) samples collected for analysis were longitudinally cut in half, and occasionally in quarters for the larger (HQ/HQ3) diameter holes, using a powered diamond core drop saw centered over a cradle holding the core in place. Half core or quarter core sample intervals typically varied from 0.3m to 1.4m in length. 1m sample intervals were favoured and are the most common method of sampling, however sample boundaries do principally coincide with geological contacts. The remaining core was retained in core trays.</p> <p>All sub-sampling techniques and sample preparation procedures conducted and/or supervised by KIN geology personnel are to standard industry practice. Sub-sampling and sample preparation techniques used are considered to maximise representivity of drilled material. QA/QC procedures implemented during each drilling program are to industry standard practice.</p> <p>Samples sizes are considered appropriate for this style of gold mineralisation and as an industry accepted method for evaluation of gold deposits in the Eastern Goldfields of Western Australia.</p> <p><u>RC/AC/RAB</u></p> <p>Samples obtained from conventional RC drilling techniques with cross-over subs often suffered from down hole contamination, especially beneath the water table. Samples obtained from RC drilling techniques using the face sampling hammer suffered less</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>from down hole contamination and were more likely to be kept dry beneath the water table, particularly if auxiliary and booster air compressors were used. These samples are considered to be representative.</p> <p>The vast majority of Reverse Circulation (RC) drill samples were collected at 1m downhole intervals from beneath a cyclone and then riffle split to obtain a sub-sample (typically 3-4kg). After splitting, 1m sub-samples were typically collected in pre-numbered calico bags, and the 1m sample rejects were commonly stored at the drill site in marked plastic bags, for future reference. First pass sampling often involved collecting composite samples by using a scoop (dry samples) or spear/tube (wet samples) to obtain 3m or 4m composited intervals, with the single metre split sub-samples being retained at the drill site. If the composite sample assays returned anomalous results, single metre sub-samples for the anomalous composite intervals were retrieved and submitted for analysis.</p> <p>Recent RC sub-samples were collected over 1 metre downhole intervals and retained in pre-marked calico bags, after passing through a cyclone and either a riffle splitter, prior to March 2018, or cone splitter, after March 2018. The majority of RC sub-samples consistently averaged 3-4kg. Sample reject from the riffle splitter were retained and stored in plastic bags, and located near each drillhole site. When drilling beneath the water table, the majority of sample returns were kept dry by the use of the auxiliary and booster air compressors. Very few wet samples were collected through the splitter, and the small number of wet or damp samples is not considered material for resource estimation work.</p> <p>KIN RC drill programs utilise field duplicates, at regular intervals at a ratio of 1:25, and assay results indicate that there is reasonable analytical repeatability; considering the presence of nuggety gold.</p> <p>All sub-sampling techniques and sample preparation procedures conducted and/or supervised by KIN geology personnel are to standard industry practice. Sub-sampling and sample preparation techniques used are considered to maximise representivity of drilled material. QA/QC procedures implemented during each drilling program are to industry standard practice.</p> <p>Samples sizes are considered appropriate for this style of gold mineralisation and as an industry accepted method for evaluation of gold deposits in the Eastern Goldfields of Western Australia.</p> <p>No duplicates are taken for rock chip sampling. Sample sizes are approximately 3kg, this is considered appropriate for the material being sampled.</p>
<p>Quality of assay data and laboratory tests</p>	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures</i></p>	<p>Assaying and laboratory procedures used are NATA certified techniques for gold. Samples were prepared and assayed at NATA accredited Intertek Genalysis.</p> <p>Numerous assay laboratories and various sample preparation and assay techniques have been used since 1981. Historical reporting and descriptions of laboratory sample preparation, assaying procedures, and quality control protocols for the samples from the various drilling programs are variable in their descriptions and completeness.</p> <p>Assay data obtained prior to 2001 is incomplete and the nature of results could not be accurately quantified due to the combinations of various laboratories and analytical methodologies utilised.</p> <p>Limited information is available regarding check assays for drilling programs prior to 2004.</p> <p>KIN sample analysis from 2014 to 2018 was conducted by SGS Australia Pty Ltd's ("SGS") Kalgoorlie and Perth laboratories. Sample preparation included oven drying (105°C), crushing (<6mm), pulverising (P90% passing 75µm) and riffle split to obtain a 50 gram catchweight. Analysis for gold only was carried out by Fire Assay fusion technique with AAS finish (SGS Lab Code FAA505).</p>

Criteria	• JORC Code explanation	Commentary
	<p><i>adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></p>	<p>From late 2018 samples have been analysed by Intertek Genalysis, with sample preparation either at their Kalgoorlie prep laboratory or the Perth Laboratory located in Maddington. Sample preparation included oven drying (105°C), crushing (<6mm), pulverising (P90% passing 75µm) and split to obtain a 50 gram catchweight. Analysis for gold only was carried out by Fire Assay fusion technique with AAS finish.</p> <ul style="list-style-type: none"> • KIN regularly insert blanks and CRM standards in each sample batch at a ratio of 1:25. Kin accepts that this ratio of QAQC is industry standard. Field duplicates are typically collected at a ratio of 1:25 samples and test sample assay repeatability. Blanks and CRM standards assay result performance is predominantly within acceptable limits for this style of gold mineralisation. • KIN requests laboratory pulp grind and crush checks at a ratio of 1:50 or less in order to better qualify sample preparation and evaluate laboratory performance. Samples have generally illustrated appropriate crush and grind size percentages since the addition of this component to the sample analysis procedure. • Intertek include laboratory blanks and CRM standards as part of their internal QA/QC for sample preparation and analysis, as well as regular assay repeats. Sample pulp assay repeatability, and internal blank and CRM standards assay results are typically within acceptable limits. <ul style="list-style-type: none"> • All samples are initially sent to Intertek sample Preparation facility in Kalgoorlie. Samples submitted for analysis via Photon assay technique were dried, crushed to nominal 85% passing 2mm, linear split and a nominal 500g sub sample taken (method code PAP3512R) • The 500g sample is assayed for gold by PhotonAssay (method code PAAU2) along with quality control samples including certified reference materials, blanks and sample duplicates. • About the Intertek PhotonAssay Analysis Technique: <ul style="list-style-type: none"> • Developed by CSIRO and the Chrysos Corporation, the PhotonAssay technique is a fast and chemical free alternative to the traditional fire assay process and utilizes high energy x-rays. The process is non-destructive on and utilises a significantly larger sample than the conventional 50g fire assay. • Intertek has thoroughly tested and validated the PhotonAssay process with results benchmarked against conventional fire assay. • The National Association of Testing Authorities (NATA), Australia's national accreditation body for laboratories, has issued Intertek with accreditation for the technique in compliance with ISO/IEC 17025:2018-Testing. • In addition to the Company QAQC samples (described earlier) included within the batch the laboratory included its own CRM's, blanks and duplicates.
<p>Verification of sampling and assaying</p>	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data</i></p>	<p>Intersection assays were documented by KIN's professional exploration geologists and verified by KIN's Exploration Manager.</p> <ul style="list-style-type: none"> • No drillholes were twinned. • All assay data were received in electronic format from Intertek, checked, verified and merged into KIN's database by the Database Administrator. • Original laboratory data files in CSV and locked PDF formats are stored together with the merged data. • There were no adjustments to the assay data.

Criteria	• JORC Code explanation	Commentary
	<p><i>storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	
<p>Location of data points</p>	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<p>Several local grids were established and used by previous project owners. During the 1990s, SOG transformed the surface survey data firstly to AMG and subsequently to MGA (GDA94 zone51).</p> <p>Navigator recognised errors in the collar co-ordinates resulting from transformations and as a result, a significant number of holes were resurveyed and a new MGA grid transformation generated. Historical collars have been validated against the original local grid co-ordinates and independently transformed to MGA co-ordinates and checked against the database. Navigator's MGA co-ordinates were checked against the surveyor's reports.</p> <p>Recent KIN drill hole collars are located and recorded in the field by a contract surveyor using RTK-DGPS (with a horizontal and vertical accuracy of ±50mm). Location data was collected in the GDA94 Zone51 grid coordinate system.</p> <p>A small selection of drillhole collars, which do not have DGPS collar surveys, were picked up with a handheld GPS and individually appraised in regards to their location prior to modelling; the position of these collars is deemed appropriate for the resource estimation work.</p>
<p>Data spacing and distribution</p>	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<p>Drill hole spacing patterns vary considerably throughout the Cardinia Gold Project area and are deposit specific, depending on the nature and style of mineralisation being tested.</p> <p>Drill hole spacing within the resource areas is sufficient to establish an acceptable degree of geological and grade continuity and is appropriate for both the mineral resource estimation and the resource classifications applied.</p>
<p>Orientation of data in relation to geological structure</p>	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to</i></p>	<p>The Cardinia greenstone sequence displays a NNW to NW trend. Drilling and sampling programs were carried out to obtain unbiased locations of drill sample data, generally orthogonal to the strike of mineralisation.</p> <p>At Helens mineralisation is structurally controlled in sub-vertical shear zones, with supergene components of varying lateral extensiveness present in the oxide profile.</p> <p>The vast majority of historical drilling, pre-Navigator (pre-2004), and KIN drilling is orientated at -60°/245° (WSW) and -60°/065° (ENE).</p> <p>At Bruno-Lewis and Kyte, mineralisation is either stratigraphy parallel (trending NNW, steep to moderately W-dipping) or cross-cutting and dipping shallowly to the NE (striking NW). The vast majority of the drilling is therefore predominantly orientated at -</p>

Criteria	JORC Code explanation	Commentary
	<i>have introduced a sampling bias, this should be assessed and reported if material.</i>	60°/225-250° or -60°/090°. Grade Control drillholes were drilled vertically. Since late 2018, Kin's drilling has been largely oriented to 070° to target contact lodes and 225-250° to target the NE-dipping potassic lodes. The chance of sample bias introduced by sample orientation is considered minimal. No orientation sampling bias has been identified in data thus far.
Sample security	<i>The measures taken to ensure sample security.</i>	KIN employees or contractors are utilised to transport samples to the laboratory. No perceived opportunity for samples to be compromised from collection of samples at the drill site, to delivery to the laboratory, where they were stored in their secure compound, and made ready for processing is deemed likely to have occurred. On receipt of the samples, the laboratory independently checked the sample submission form to verify samples received and readied the samples for sample preparation. Intertek sample security protocols are of industry standard and deemed acceptable for resource estimation work.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews completed

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The Cardinia Project, 35-40km NE of Leonora is managed, explored and maintained by KIN, and constitute a portion of KIN's Leonora Gold Project (LGP), which is located within the Shire of Leonora in the Mt Margaret Mineral Field of the North Eastern Goldfields. The Helens and Rangoon area includes granted mining tenements M37/316 and M37/317, The tenements are held in the name of Navigator Mining Pty Ltd, a wholly owned subsidiary of KIN. The Bruno-Lewis and Kyte areas includes granted mining tenements M37/86, M37/227, M37/277, M37/300, M37/428 and M37/646. The tenements are held in the name of Navigator Mining Pty Ltd, a wholly owned subsidiary of KIN. The following royalty payment may be applicable to the areas within the Cardinia Project's Bruno and Lewis areas that comprise the deposits being reported on: <ol style="list-style-type: none">1. Gloucester Coal Ltd (formerly CIM Resources Ltd and Centenary International Mining Ltd) in respect of M37/86 - 1% of the quarterly gross value of sales for gold ounces produced, in excess of 10,000 ounces. There are no known native title interests, historical sites, wilderness areas, national park or environmental impediments over the outlined current resource areas, and there are no current impediments to obtaining a licence to operate in the area.

Criteria	• JORC Code explanation	Commentary
<p><i>Exploration done by other parties</i></p>	<p><i>Acknowledgment and appraisal of exploration by other parties.</i></p>	<p>At Cardinia, from 1980-1985, Townson Holdings Pty Ltd (“Townson”) mined a small open pit over selected historical workings at the Rangoon prospect. Localised instances of drilling relating to this mining event are not recorded and are considered insubstantial and immaterial for resource modelling.. Companies involved in the collection of the majority of the gold exploration data since 1985 and prior to 2014 include: Thames Mining NL (“Thames”) 1985; Mt Eden Gold Mines (Aust) NL (also Tarmoola Aust Pty Ltd “MEGM”) 1986-2003; Centenary International Mining Ltd (“CIM”) 1986-1988, 1991-1992; Metana Minerals NL (“Metana”) 1986-1989; Sons of Gwalia Ltd (“SOG”) 1989, 1992-2004; Pacmin Mining Corporation (“Pacmin”) 1998-2001, and Navigator Resources Ltd (“Navigator”) 2004-2014.</p> <p>In 2009 Navigator commissioned Runge Limited (“Runge”) to complete a Mineral Resource estimate for the Bruno, Lewis, Kyte, Helens and Rangoon deposits. Runge reported a JORC 2004 compliant Mineral Resource estimate, at a cut-off grade of 0.7g/t Au, totaling 1.45Mt @ 1.3 g/t au (61,700 oz Au) for Helens and Rangoon, and totaling 4.34Mt @ 1.2 g/t au (169,700 oz Au) for Bruno, Lewis and Kyte.</p> <p>A trial pit (Bruno) was mined by Navigator in 2010, and a ‘test parcel’ of ore was extracted and transported firstly to Sons of Gwalia’s processing plant in Leonora, and finally to Navigator’s processing plant located at Bronzewing, where approximately 100,000 tonnes were processed at an average head grade of 2.33 g/t au (7,493 oz Au).</p>
<p><i>Geology</i></p>	<p><i>Deposit type, geological setting and style of mineralisation.</i></p>	<p>The Cardinia Project area is located in the central part of the Norseman-Wiluna Greenstone Belt, which extends for some 600km on a NNW trend across the Archean Yilgarn Craton of Western Australia.</p> <p>The regional geology comprises a suite of NNE-North trending greenstones positioned within the Mertondale Shear Zone (MSZ) a splay limb of the Kilkenny Lineament. The MSZ denotes the contact between Archaean felsic volcanoclastics and sediment sequences in the west and Archaean mafic volcanics in the east. Proterozoic dolerite dykes and Archaean felsic porphyries have intruded the sheared mafic/felsic volcanoclastic/sedimentary sequence.</p> <p>Locally within the Cardinia Project area, the stratigraphy consists of intermediate, mafic and felsic volcanic and intrusive lithologies and locally derived epiclastic sediments, which strike NNW, dipping steep-to-moderately to the west. Structural foliation of the areas stratigraphy predominantly dips steeply to the east but localised inflections are common and structural orientation can vary between moderately (50-75°) easterly to moderately westerly dipping.</p> <p>Mineralisation at Helens is controlled by a cross-cutting fault, hosted predominantly in mafic rock units, adjacent to the felsic volcanic/sediment contacts. The ore zones are associated with increased shearing, intense alteration and disseminated sulphides. Minor supergene enrichment occurs locally within mineralised shears throughout the regolith profile.</p> <p>Mineralisation at Bruno-Lewis is largely controlled by the stratigraphic contact between basalt and felsic volcanics. Gold is associated with significant sulphide mineralisation in the sediments and volcanoclastics between the 2 volcanic units. Gold is also hosted within shallowly NE-dipping lodes, associated with increased potassic-sericite alteration and quartz stockwork veining. These lodes also host the mineralisation at Kyte. Substantial supergene mineralisation sits above both styles of mineralisation.</p>

Criteria	• JORC Code explanation	Commentary
Drill hole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <ul style="list-style-type: none"> • <i>easting and northing of the drill hole collar</i> • <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> • <i>dip and azimuth of the hole</i> • <i>down hole length and interception depth</i> • <i>hole length.</i> <p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	<p>Material drilling information for exploration results has previously been publicly reported in numerous announcements to the ASX by Navigator (2004-2014) and KIN since 2014.</p>
Data aggregation methods	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	<p>When exploration results have been reported for the resource areas, the intercepts are reported as weighted average grades over intercept lengths defined by geology or lower cut-off grades, without high grade cuts applied. Where aggregate intercepts incorporated short lengths of high grade results, these results were included in the reports.</p> <p>For these AC results, significant intercepts are recorded for maximum 5m internal waste and a minimum grade of 0.4 g/t.</p> <p>Since 2014, KIN have reported RC drilling intersections with low cut off grades of ≥ 0.4 g/t Au and a maximum of 2m of internal dilution at a grade of <0.4g/t Au.</p> <p>There is no reporting of metal equivalent values.</p>
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg ‘down hole length, true width not known’).</i></p>	<p>The orientation, true width, and geometry of mineralised zones have been primarily determined by interpretation of historical drilling and continued investigation and verification of KIN drilling.</p> <p>Drill intercepts are reported as downhole widths not true widths.</p> <p>Accompanying dialogue to reported intersections normally describes the attitude of mineralisation.</p>

Criteria	• JORC Code explanation	Commentary
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Appropriate maps and sections are included in the main body of this report.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	Public reporting of exploration results by KIN and past tenement holders and explorers for the resource areas are considered balanced. Representative widths typically included a combination of both low and high grade assay results. All meaningful and material information relating to this mineral resource estimate is or has been previously reported.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Since 2018, a campaign of determining Bulk Densities has been undertaken. The water displacement method is used on drill samples selected by the logging geologist. These measurements are entered into the logging software interface and loaded to the Datashed database.
Further work	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	KIN intend to continue exploration and drilling activities at in the described area, with the intention to increase the project's resources.