

NEW HIGH-GRADE GOLD INTERCEPTS AT CROWN PRINCE

Ora Gold Limited (ASX: OAU) is pleased to announce new, high-grade results from the latest drilling program at the Crown Prince Gold Prospect (M51/886). The drill holes were designed to test for potential extensions to mineralised zones along strike of known mineralisation to the north-west and south-east.

Highlights:

- 7m @ 15.75g/t Au from 30m in OGGAC456, incl. 6m @ 38.06g/t Au from 41m
- 12m @ 4.27g/t Au from 30m in OGGAC447
- 8m @ 5.75g/t Au from 10m in OGGAC455
- 8m @ 5.43g/t Au from 5m in OGGAC446

The Crown Prince Prospect is a high-grade gold deposit within Ora Gold’s Garden Gully Project. Mineralisation at Garden Gully is controlled by gold bearing structures located in geologically favourable settings within the Archean-age Abbots greenstone belt. At Crown Prince, where mineralisation is hosted in steeply south dipping gold lodes, these new drill results extend the known mineralisation along strike to the west and east.

Crown Prince is located 22 kilometres north-west of Meekatharra in Western Australia via the Great Northern Highway and the Mt Clere Road (Figures 1 and 2).

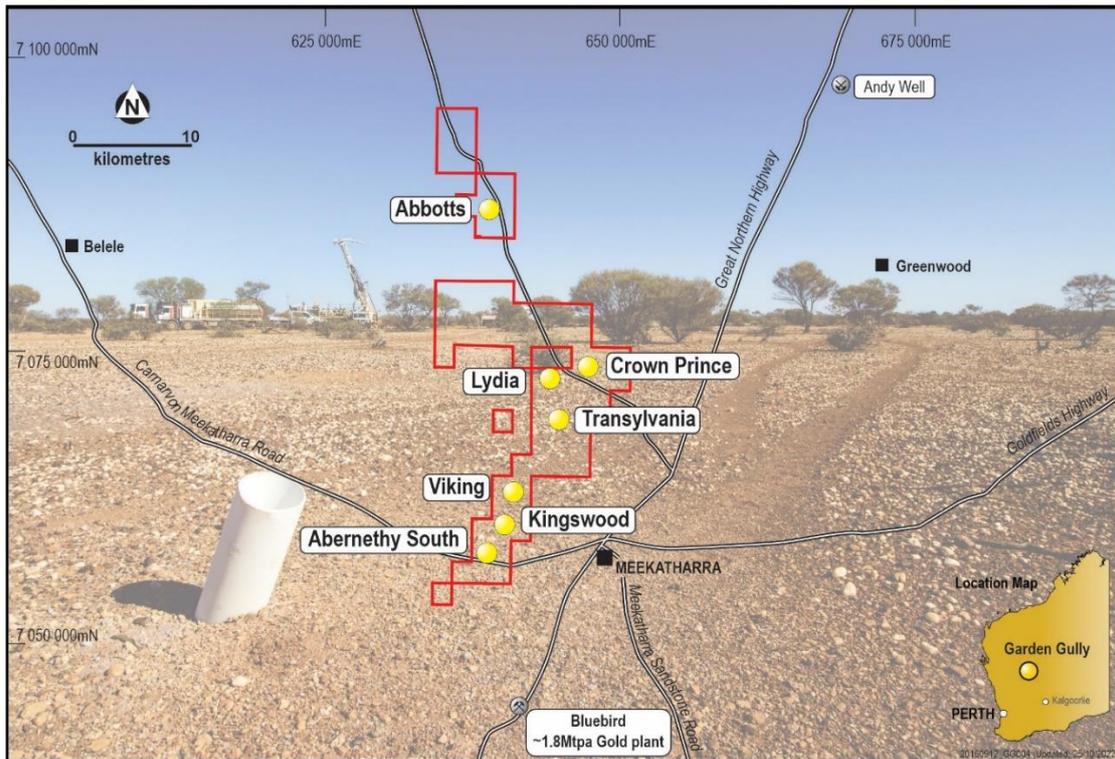


Figure 1. Garden Gully tenements and the main gold prospect’s location

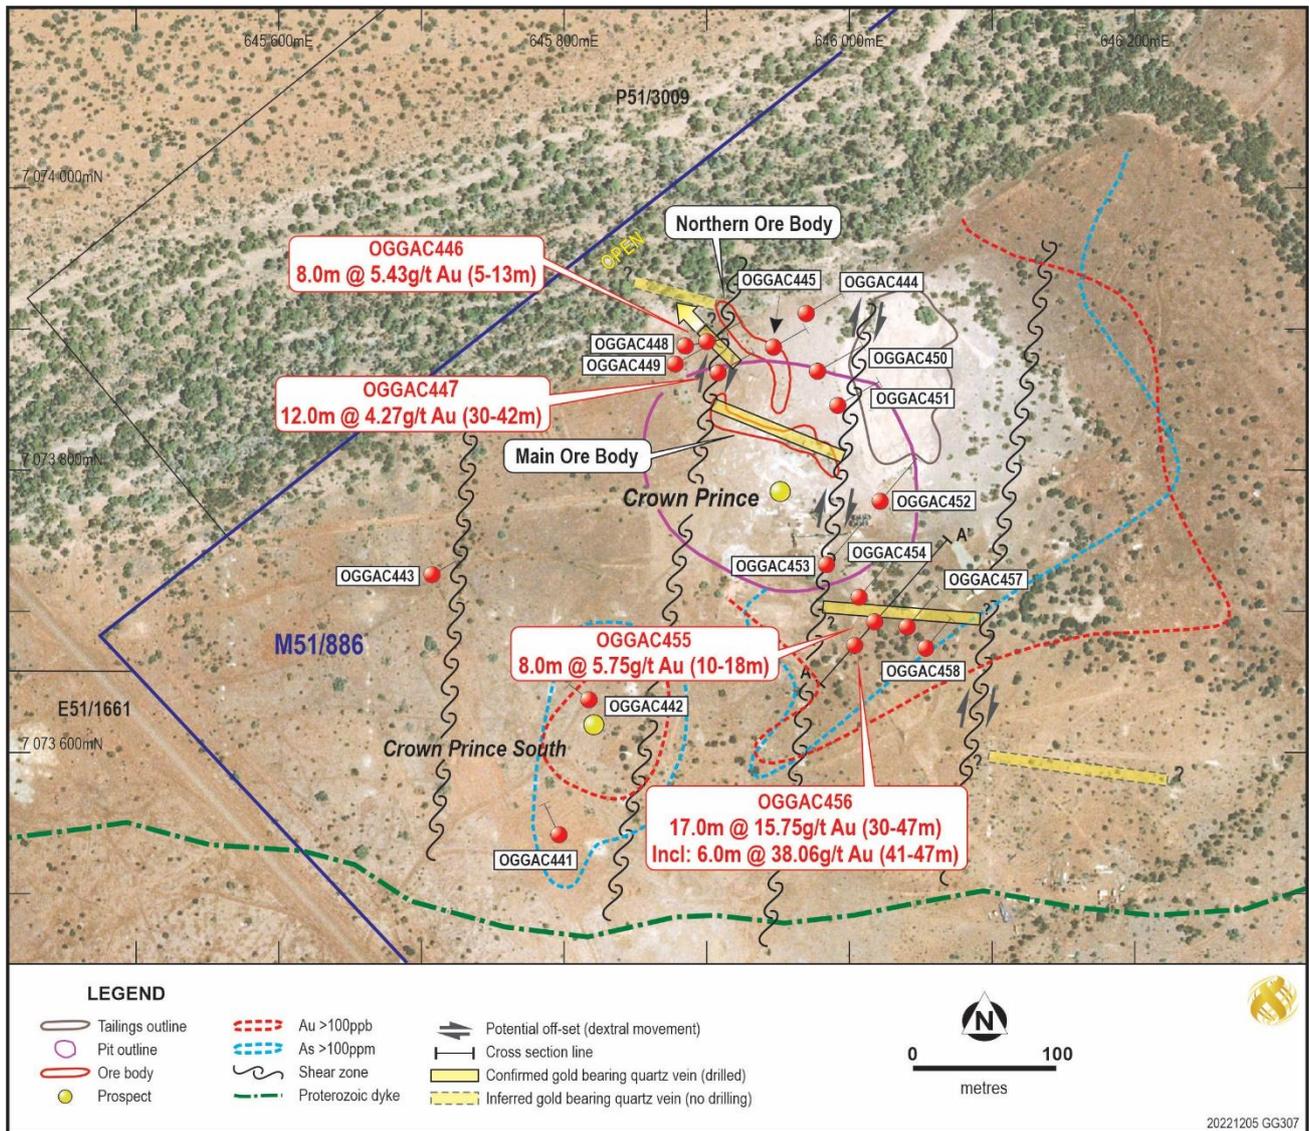


Figure 2. Significant air core drill holes intersections and the inferred extension of the mineralisation at Crown Prince

The Crown Prince deposit is a structurally controlled, orogenic type and is hosted by more competent doleritic rocks above a strongly deformed and ductile ultramafic package and as stockwork veins along the contacts of intercalated black shale units.

Some gold mineralisation occurs in the near surface indurated and saprolitic layers in the lateritic profile as supergene mineralisation.

Importantly, in fresh rock, gold mineralisation occurs in quartz veins hosted by chloritized, carbonated and strongly sheared meta-basalt, dolerite, black shale units and quartz porphyry, showing strong sericite-carbonate alteration in the vicinity of the quartz veins.

Locally, mineralisation at Crown Prince is hosted within WNW – ESE striking (steep southerly dip) quartz rich lodes. These lodes are offset by N-S to NNE trending shears, which are interpreted to have a near vertical dip or to dip steeply to the west. Movement along the shears is dextral, displacing mineralisation with offsets of around 100 metres (Figure 2).

This pattern of offset lodes was not previously recognised and substantially opens up the potential for new discoveries along strike of known mineralisation.

South-eastern extension of main ore body - identified within four out of five holes drilled north-easterly of known mineralisation. A cross-section showing the most important drill line with shallow gold-intercepts is displayed in Figure 3 (**8m @ 5.75g/t Au** from 10m in OGGAC455 and **17m @ 15.75g/t Au** from 30m in OGGAC456, incl. **6m @ 38.06g/t Au** from 41m). These are the best drill intercepts identified to date at Crown Prince Prospect. The main shear in this area shows dextral movement off-setting the main ore body by approximately 100m to the south-west (Figure2). One drill hole (OGGAC454) missed the main ore zone, intersecting above the target horizon, while OGGAC457 intersected a ferruginized gold-bearing quartz from 16m to 45m. Assays from only the top 2m of this hole have been received to date (**2m @ 5.57g/t Au** from 16m). The last hole OGGAC558 was abandoned in mineralization at 55m due to technical issues.

North-western extension of the mineralization - tested by four holes (OGGAC446-449). Two intersected high-grade gold mineralization at a shallow depth (refer Figure 2). Best results were **8m @ 5.43g/t Au** from 5m in OGGAC446 and **12m @ 4.27g/t Au** from 30m in OGGAC447. These new shallow intersections appear to define a new sub-parallel mineralized zone, located west of the known main zone, and were not identified in the past due to lack of drilling within this area. This zone is interpreted to be the lateral equivalent of the main zone off set to the north by N-S shear zone (Figure 2).

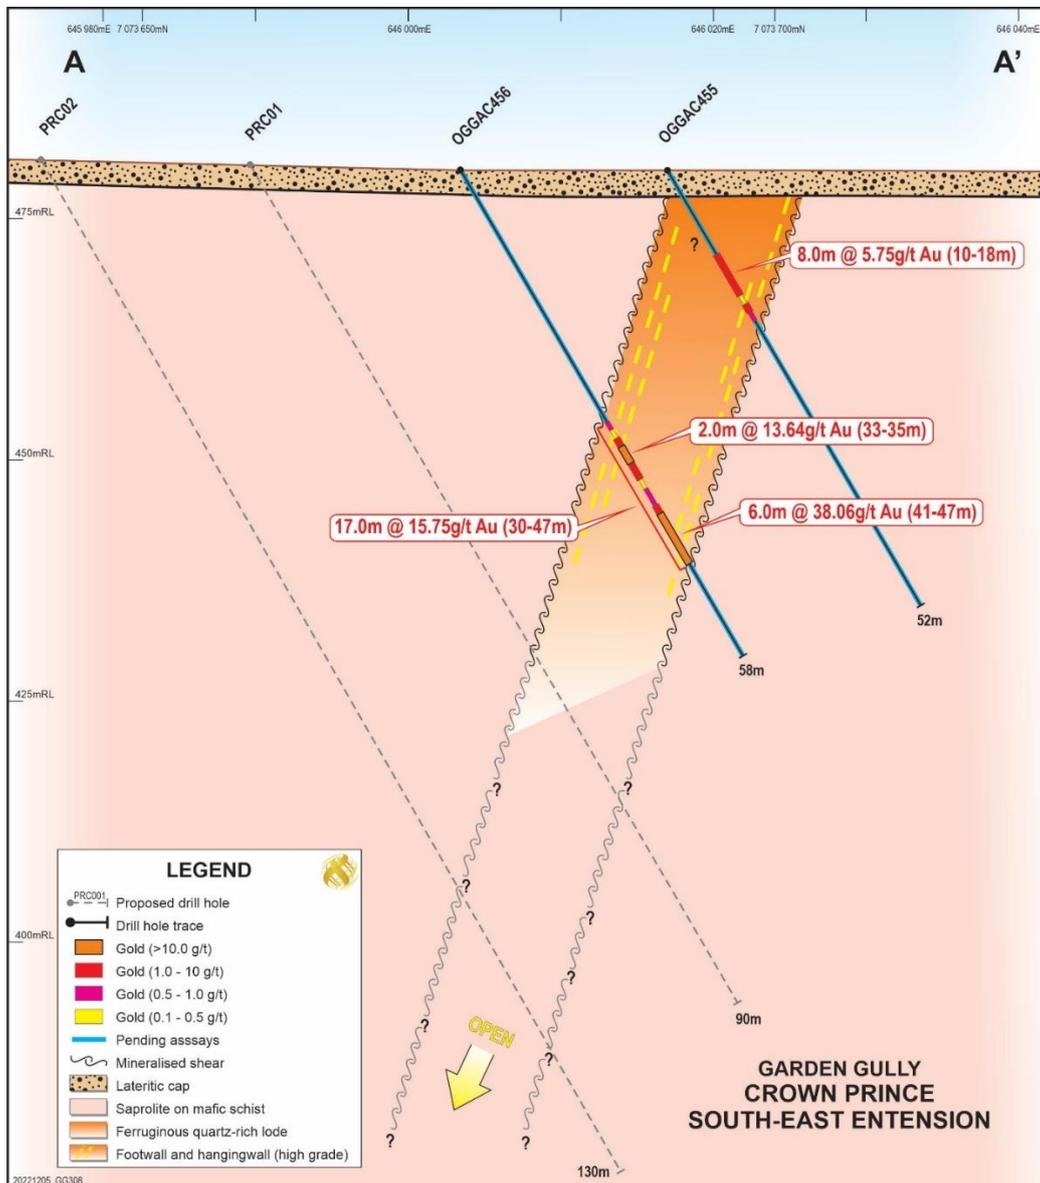


Figure 3. Cross section over the south-eastern extension of the mineralised zone at Crown Prince gold prospect

Recent Drilling Program

The program consisted of eighteen air core holes totalling 1,074m over the north-western, north-eastern and south-eastern margin of the proposed pit (Figure 2). All hole details and sampling information are included in Table 1.

All assay results from a selected batch of 92 priority samples were received to date and are included in Appendix 1. The samples selection was based on the visible amount of quartz veins from logging, alteration halo and elevated arsenic values from systematic readings with a hand-held XRF Vanta device. The bulk of the sample assays from all holes, totaling 776 samples, remain pending.

Holes drilled at Crown Prince south prospect targeted a well-defined gold and arsenic anomaly delineated from laterite sampling and shallow RAB drilling (Figure 2). Holes OGGAC441-442 were abandoned due to water flow and difficult ground conditions other assays are pending.

OGGAC443 was drilled to test a southern extension of previously identified gold anomalism. A small shear zone was intersected at the contact between an ultramafic and dolerite unit between 32-35m assays are pending (Figure 2).

Four holes (OGAC444, 445, 450, 451) were designed to test supergene gold anomalism on the northern edge of known mineralisation and under tailings from historical workings (Figure 2). All intersected a deep weathering profile consisting of red/brownish saprolite clay with elevated arsenic values from hand-held XRF. All assays for these holes are pending.

OGGAC452 and 453 were drilled to test a possible eastern extension of Crown Prince main zone. Both holes intersected a complex lithological package of mafic/ultramafic schists with intercalated black shale. Elevated copper and zinc values are present.

Background and History

Between 1908 and 1915, the Crown Prince deposit was partially mined along two strongly mineralised quartz veins on four underground levels to a depth of 90m. Production was 29,400 tonnes for 20,178 ounces at a recovered grade of 21.7g/t Au using gravity and cyanidation processing, and no mining has occurred since.

Ora Gold has published a modest Mineral Resource at Crown Prince (see ASX announcement 21 October 2019). This resource comprises 479kt @ 3.6g/t Au for 56koz Au.

Further infill and deeper reverse circulation drilling are likely to delineate additional resources in the new mineralized structures outside of the known resource.

Next Steps

Ora Gold is currently planning an RC drill program to be undertaken in the March quarter to test both newly identified extensions to the known mineralized zone at Crown Prince and down-dip continuity to the south.

Table 1. Drill hole details and sampling information

Hole No	Easting	Northing	Azimuth	Dip	Depth	Sampling details and comments
OGGAC441	645794	7073540	335	-60	48	All assays pending
OGGAC442	645816	7073634	310	-60	39	All assays pending
OGGAC443	645705	7073724	60	-60	37	All assays pending
OGGAC444	645968	7073909	60	-60	57	All assays pending
OGGAC445	645945	7073885	60	-60	52	All assays pending
OGGAC446	645898	7073889	60	-60	58	(5-41m, assays received)
OGGAC447	645906	7073867	60	-60	58	(30-42m, assays received)
OGGAC448	645883	7073886	60	-80	61	(18-35m, assays received)
OGGAC449	645876	7073873	60	-60	79	(65-71m, assays received)
OGGAC450	645976	7073868	60	-60	73	All assays pending
OGGAC451	645990	7073844	60	-60	67	All assays pending
OGGAC452	646020	7073776	40	-40	79	All assays pending
OGGAC453	645982	7073731	40	-40	76	All assays pending
OGGAC454	646005	7073708	40	-40	55	(26-31m, assays received)
OGGAC455	646016	7073690	40	-40	52	(10-18m, assays received)
OGGAC456	646002	7073674	40	-40	58	(30-47m, assays received)
OGGAC457	646039	7073687	40	-40	70	(16-19m, assays received)
OGGAC458	646052	7073672	40	-40	55	All assays pending

About Ora Gold Limited

Ora Gold's wholly-owned tenements cover the prospective area of the Abbotts Greenstone Belt and comprise 4 granted Mining Leases, 1 granted Prospecting Licence and 6 granted Exploration Licences covering about 217 square kilometres.

The strategy for the advanced gold projects – Abbotts, Crown Prince and Lydia and base metal prospects at Government Well, is to pursue early gold production while increasing resources and exploring for large gold and base metal deposits.

The announcement has been authorised for release to ASX by the Board of Ora Gold Limited.

For further information contact:

Frank DeMarte
Executive Director
08 9389 6927

Competent Person Statement

The details contained in this report that pertain to Exploration Results, Mineral Resources or Ore Reserves, are based upon, and fairly represent, information and supporting documentation compiled by Mr Costica Vieru, a Member of the Australian Institute of Geoscientists and a full-time employee of the Company. Mr Vieru has sufficient experience which is relevant to the style(s) of mineralisation and type(s) of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (JORC Code). Mr Vieru consents to the inclusion in this report of the matters based upon the information in the form and context in which it appears.

ORA GOLD LIMITED**ASX Code: OAU****Quoted Shares:**

984.2M

Unquoted Options:

62.6M

REGISTERED OFFICE

Level 2, 47 Stirling Hwy, Nedlands, WA 6009

PO Box 333, Nedlands, WA 6909

Tel: +61 8 9389 6927

www.ora.goldinfo@ora.gold

Appendix 1. Assay results - Fire Assay 50g charge and analysed by Flame Atomic Absorption Spectrometry at Intertek Genalysis labs in Perth

Hole No	From	To	Int(m)	Au(ppm)	Au-Rp1	Average	Comments
OGGAC446	0	5					Assays pending
	5	6	1	8.243			8m at 5.43gr/t Au from 5m
	6	7	1	9.987			
	7	8	1	1.326			
	8	9	1	2.568			
	9	10	1	1.894			
	10	11	1	8.44			
	11	12	1	8.583			
	12	13	1	2.438			
	13	14	1	0.109			
	14	15	1	0.022	0.017	0.019	
	16	17	1	0.17			
	17	18	1	0.038			
	18	19	1	0.006			
	19	20	1	0.165			
	20	21	1	0.009			
	21	22	1	0.008			
	37	38	1	0.015			
	38	39	1	0.008			
	39	40	1	X			
	40	41	1	X			
	41	58					Assays pending
OGGAC447	0	30					Assays pending
	30	31	1	0.535			12m at 4.27gr/t Au from 30m
	31	32	1	1.661			
	32	33	1	1.854			
	33	34	1	0.204			
	34	35	1	3.433			
	35	36	1	9.711			
	36	37	1	0.501			
	37	38	1	3.036	1.484	2.26	
	38	39	1	5.401			
	39	40	1	11.553	11.691	11.622	
	40	41	1	4.409			
	41	42	1	9.674			
	42	58		OPEN			Assays pending
OGGAC448	0	18					Assays pending
	18	19	1	0.029			
	19	20	1	0.083			

Hole No	From	To	Int(m)	Au(ppm)	Au-Rp1	Average	Comments
	20	21	1	0.169			
	21	22	1	0.507			
	22	23	1	0.19			
	23	24	1	0.35			
	24	25	1	1.235			
	25	26	1	0.06			
	28	29	1	0.402			
	29	30	1	0.088	0.098	0.093	
	30	31	1	0.442			
	31	32	1	0.422			
	32	33	1	0.604			
	33	34	1	3.619			
	34	35	1	0.441			
	35	61		OPEN			Assays pending
OGGAC449	0	65					Assays pending
	65	66	1	0.059			
	66	67	1	0.064			
	67	68	1	0.064			
	68	69	1	0.019			
	69	70	1	0.005			
	70	71	1	0.017			
	71	79					Assays pending
OGGAC454	0	26					Assays pending
	26	27	1	0.175			
	27	28	1	0.087			
	28	29	1	0.014			
	29	30	1	0.015			
	30	31	1	0.005			
	31	55					Assays pending
OGGAC455	0	10					Assays pending
	10	11	1	1.538			8m at 5.75gr/t Au from 10m
	11	12	1	21.236	19.004	20.12	
	12	13	1	4.777	4.757	4.767	
	13	14	1	1.519			
	14	15	1	5.838			
	15	16	1	0.578			
	16	17	1	10.871			
	17	18	1	0.797			
	18	52		OPEN			Assays pending
OGGAC456	0	30					Assays pending
	30	31	1	0.525			17m at 15.75gr/t Au from 30m
	31	32	1	0.498			

Hole No	From	To	Int(m)	Au(ppm)	Au-Rp1	Average	Comments
	32	33	1	2.04			
	33	34	1	9.756			
	34	35	1	17.619	17.44	17.5295	
	35	36	1	4.335			
	36	37	1	2.301			
	37	38	1	0.324			
	38	39	1	0.785			
	39	40	1	0.757			
	40	41	1	2.415			
	41	42	1	37.841	36.713	37.277	including
	42	43	1	4.554			6m at 38.06gr/t Au from 41m
	43	44	1	151.326	147.397	149.362	
	44	45	1	13.89			
	45	46	1	13.102			
	46	47	1	10.154			
	47	58		OPEN			Assays pending
OGGAC457	0	16					Assays pending
	16	17	1	10.019			2m at 5.57gr/t Au from 16m
	17	18	1	1.113			
	18	19	1	0.229			
	19	70		OPEN			Assays pending

Appendix 2: JORC Table 1 Checklist of Assessment and Reporting Criteria

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down-hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representativity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1m samples from which 3 kg was pulverised to produce a 30g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Air core (AC) sample was collected in plastic bag and split in even metre intervals where sample was dry. Wet sample was speared or on occasion sampled by scooping. AC drill chips from each metre were examined visually and logged by the geologist. Evidence of alteration or the presence of mineralisation was noted on the drill logs. Intervals selected by the site geologist were tested by hand-held XRF and all those with elevated arsenic contents have been bagged and numbered for laboratory analysis. Duplicate samples were submitted at a rate of approximately 10% of total samples taken (ie one duplicate submitted for every 20 samples). The Vanta XRF Analyser is calibrated before each session and is serviced according to the manufacturer's (Olympus) recommended schedule. The presence or absence of mineralisation is initially determined visually by the site geologist, based on experience and expertise in evaluating the styles of mineralisation being sought.
Drilling techniques	<p>Drill type (eg. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</p>	<ul style="list-style-type: none"> Narrow diameter air core drilling using a Hino GT scout drill rig with the capacity of 100m 600cfm.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Volume of material collected from each metre interval of drilling completed is monitored visually by the site geologist and field assistants. Dry sample recoveries were estimated at ~95%. Wet sample recovery was lower, estimated to an average of 70%. Samples were collected by spearing the bag content. Based on the relatively small number of assays received to date, there is no evidence of either a recovery/grade relationship or of sample bias.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> AC chips are logged visually by qualified geologists. Lithology, and where possible structures, textures, colours, alteration types and mineral estimates, are recorded. Representative chips are retained in chip trays for each metre interval drilled. The entire length of each drill hole is logged and evaluated.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representativity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> AC samples collected in plastic bags were speared for further sampling. Material was sampled using a 4cm diameter spear. Sample submitted to the laboratory comprised three spear samples in different directions into the material for each metre interval. The samples were sent to Intertek labs in Perth for Au analysis by FA50 (Fire Assay on 50g charge). Sample preparation techniques are well-established standard industry best practice techniques. Drill chips are dried and crushed and pulverised (whole sample) to 95% of the sample passing -75µm grind size. Field QC procedures include using certified reference materials as assay standards. One duplicate sample is submitted for every 20 samples and a blank at 100 samples, approximately. Evaluation of the standards, blanks and duplicate samples assays shows them to be within acceptable limits of variability. Sample representativity and possible relationship between grain size and grade was confirmed following re-sampling and re-assaying of high-grade interval.

		<ul style="list-style-type: none"> • Sample size follows industry standard best practice and is considered appropriate for these style(s) of mineralisation.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> • The assay techniques used for these assays are international standard and can be considered total. Samples were dried, crushed and pulverised to 95% passing -75µm and assayed for gold by 50g Fire Assay following ICPO (Atomic) Emission Spectrometry. • The handheld XRF equipment used is an Olympus Vanta XRF Analyser and Ora Gold Ltd. follows the manufacturer's recommended calibration protocols and usage practices but does not consider XRF readings sufficiently robust for public reporting. Ora Gold Ltd. uses the handheld XRF data as an indicator to support the selection of intervals for submission to laboratories for formal assay. • The laboratory that carried out the assays is an AQIS registered site and is ISO certified. It conducts its own internal QA/QC processes in addition to the QA/QC implemented by Ora Gold Ltd, as its sample submission procedures. Evaluation of the relevant data indicates satisfactory performance of the field sampling protocols in place and of the assay laboratory. The laboratory uses check samples and assay standards to complement the duplicate sampling procedures practiced by Ora Gold Ltd.
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • All significant intersections are calculated and verified on screen and are reviewed prior to reporting. • The programme included no twin holes. • Data is collected and recorded initially on hand-written logs with summary data subsequently transcribed in the field to electronic files that are then copied to head office. • No adjustment to assay data has been needed.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • Collar locations were located and recorded using hand-held GPS (Garmin 62S model) with a typical accuracy of ±5m. Due to the short hole length and scout drilling nature of the programme, no down-hole surveys were carried out. • The map projection applicable to the area is Australian Geodetic GDA94, Zone 50 and converted to MGA2020. • Topographic control is based on standard industry practice of using the GPS readings. Local topography is relatively flat. Detailed altimetry is not warranted.
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • Drill hole collars were located and oriented to deliver maximum relevant geological information to allow the geological model being tested to be assessed effectively. • This is still early-stage exploration and is not sufficiently advanced for this to be applicable. • Various composite sampling was applied depending on the geology of the hole. All assay results received to date are reported in Appendix 1. Zones where geological logging and/or XRF analyses indicated the presence of mineralised intervals were sampled on one metre intervals.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • This programme is the first exploration drilling undertaken by Ora Gold Limited aiming to extend the known gold mineralization outside of the designed pit at Crown Prince prospects. It was aimed to follow up and replicate the previous intersections and to test the supergene potential of these areas, along the inferred structures/shears splays and as such insufficient data has been collected and compiled yet to be able to establish true widths, orientation of lithologies, relationships between lithologies, or the nature of any structural controls. The main aim of this programme is to generate geological data to develop an understanding of these parameters. • Data collected so far presents no suggestion that any sampling bias has been introduced.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • When all relevant intervals have been sampled, the samples are collected and transported by company personnel to secure locked storage in Perth before delivery by company personnel to the laboratory for assay.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code Explanation	Commentary
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> Internal reviews are carried out regularly as a matter of policy. All assay results are considered representative as both the duplicates, standards and blanks from this programme have returned satisfactory replicated results.
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Garden Gully project comprises one granted prospecting licence, P51/3009, six granted exploration licence E51/1661, E51/1737, E51/1609, E51/1708, E51/1790, E51/1791 and four mining leases M51/390, M51/567, M51/886 and M51/889, totalling approximately 217 square kilometres. Ora Gold Limited holds a 100% interest in each lease. The project is partially located in the Yoothapina pastoral lease, 15km north-west of Meekatharra, in the Murchison of WA. The licences are in good standing and there are no known impediments to obtaining a licence to operate.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Workings at Garden Gully began with the Crown Gold Mine (1895 – 1901: 264 tonnes at 1.99 oz/t (~56 g/t) Au average). The Kyarra Mine followed (1909 – 1917): 18,790 oz gold from quartz veins in “strongly sheared, decomposed, sericite rich country rock”. Over the northern part of Sabbath area (currently Transylvania), Matlock and Kestral Mining have conducted exploration including three RAB drilling lines between 1989-1991. Best intersections included 6m at 3.54g/t from 10m in GGR-19 (Wamex a29334) and 8m at 2.1g/t Au from 12m in GGR-32 (Wamex a33351). Abernethy Shear Zone was intensely explored by Western Mining Corporation, Tantalum Australia NL, Accent Resources and more recently by Doray Minerals Ltd. starting from early 1990’s (Wamex a 041275, a069958, a084025, a093068, a097544, a39471, a45387, a59788 and a83010).
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Garden Gully project comprises now most of the Abbots Greenstone Belt and consists of Archaean rocks of the Greensleeves Formation (Formerly Gabanintha); a bimodal succession of komatiitic volcanic mafics and ultramafics overlain by felsic volcanics and volcanoclastic sediments, black shales and siltstones and interlayered with mafic to ultramafic sills. Regional synclinal succession trending N-NE with a northern fold closure postdating E-W synform, further transected by NE trending shear zones, linearity with the NE trend of the Abernethy Shear, which is a proven regional influence on structurally controlled gold emplacement in Abbots and Meekatharra Greenstone Belts and in the Meekatharra Granite and associated dykes. The project is blanketed by broad alluvial flats, occasional lateritic duricrust and drainage channels braiding into the Garden Gully drainage system. Bedrock exposures are limited to areas of dolerite, typically massive and unaltered. Small basalt and metasediment outcrops exist, with some exposures of gossanous outcrops and quartz vein scree. Gold bearing quartz reefs, veins and lodes occur almost exclusively as siliceous impregnations into zones within the Kyarra Schist Series, schistose derivatives of dolerites, gabbros and tuffs, typically occurring close to axial planes of folds and within anastomosing ductile shear zones.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not material and this exclusion does not 	<ul style="list-style-type: none"> All relevant drill hole details are presented in Table 1. The principal geologic conclusion of the work reported from this programme at Crown Prince prospect confirms the presence of high-grade gold mineralisation in what are interpreted to be steep shear zones within mafic schists; the presence of primary mineralisation associated with sulphides offers a very positive outlook for deep potential for the prospect which is to be further tested in follow-up drilling.

	detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg. cutting of high grades) and cut-off grades are usually material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> The significant drill intercepts are displayed in Figures 2 and 3. All assay data received to date are included in Appendix 1. No assay grades have been cut. Arithmetic weighted averages are used. For example, 16m to 18m in OGGAC457 is reported as 2m at 5.57g/t Au. This comprised 2 samples, each of 1m, calculated as follows: $[(1 \times 10.019) + (1 \times 1.113)] / 2 = 5.57 \text{g/t Au}$. No metal equivalent values are used.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg. 'down hole length, true width not known'). 	<ul style="list-style-type: none"> Insufficient geological data have yet been collected to allow the geometry of the mineralisation to be interpreted. True widths are unknown and insufficient information is available yet to permit interpretation of geometry. Reported intercepts are downhole intercepts and are noted as such.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to, a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Relevant location maps and figures are included in the body of this announcement (Figures 1-3). Based on the historical and recent drill data information, seven cross sections have been drawn with enough confidence to display the structural and lithological and metallogenic setting.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> This announcement includes the results of 92 Au assays for the forty-four holes drilled at the Crown Prince prospect. Further 766 samples have been submitted to the lab and the assay results are expected in the next quarter. The reporting is comprehensive and thus by definition balanced. It represents early results of a larger programme to investigate the potential for economic mineralisation at Garden Gully.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including, but not limited to: geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density; groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> This announcement includes qualitative data relating to interpretations and potential significance of geological observations made during the programme. As additional relevant information becomes available it will be reported and announced to provide context to current and planned programmes.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Additional deep RC drilling is planned to commence in the next quarter at Crown Prince prospects as soon as possible to test the potential for strike extension and down-dip primary mineralisation along the newly defined mineralised structures. Limited diamond drilling will be undertaken to better define the structural setting of the mineralised system.