



ASX Announcement | 11 November 2021

High Grade Assays Continue at the Talon

- Further high-grade copper assays have been received along the Western Talon at Oracle Ridge
- Results occur outside the existing JORC Resource and within a strong geophysical anomaly stretching over 750m. Assays include:
 - 5.8m at 2.72% Cu, 29.59g/t Ag and 0.72g/t Au (WT-21-33); within
 - 16.6m at 1.87% Cu, 18.53g/t Ag and 0.51g/t Au
 - 7.6m at 2.20% Cu, 20.70g/t Ag and 0.25g/t Au (WT-21-34); and
 - 3.3m at 2.06% Cu, 22.48g/t Ag and 0.56g/t Au (WT-21-34).
- The results are within the recently defined 'Wave' zone, now interpreted to connect to the historic Leatherwood Mine (production included 12% Cu, 200g/t Ag and 1g/t Au)¹
- Enhanced potential to expand the existing JORC Resource with the Wave zone which remains open to the east and along strike
- Three drill rigs operating with two testing the Wave zone and one completing resource upgrade drilling
- Assays pending for 13 holes in the Mine Area and further 11 holes at Golden Eagle

Eagle Mountain Mining CEO, Tim Mason, commented:

"These latest drilling results are significant as they not only provide further support for expanding our JORC Resource, but they confirm the prospectivity of the 'Wave' structure which hosts some of the thickest intercepts at Oracle Ridge. Furthermore, the Wave zone, which is a feature within the Talon, is now interpreted to connect recent high-grade intercepts to the historic Leatherwood mine where mineralisation outcrops at the surface at the southern end of the mine area. While the Leatherwood mine is relatively small, the reported mined grades are spectacular suggesting potential for very high-grade copper mineralisation to also occur along the Wave zone. We have assays pending for 11 drill holes from the northern part of the Wave zone and further holes will be drilled as roads are established in this area.

Unfortunately, assays have recently been delayed due to a crusher outage at the laboratory. The crusher has since been fixed and our results from the Wave are being expedited through to the assay. Our own modern core saw has been delivered to our Tucson facility and is being commissioned this week. We look forward to receiving further assays from the Talon which has continued to show strong potential to build our JORC Resource."

¹ BRAUN, E, 1969, Geology and Ore Deposits of Marble Peak Area, Santa Catalina Mountains, Pima County, Arizona. University of Arizona
The thesis states that at the time of the investigation, one tunnel was being mined with a shipment at that time reported as Imperial units, converted to Metric units and rounded down. The historic production records cannot be verified by the Company and are not JORC compliant.

Eagle Mountain Mining Limited (ASX:EM2) (“Eagle Mountain”, the “Company”) is pleased to provide an exploration update at its 100% owned Oracle Ridge Mine Project (“Oracle Ridge”, “Project”) in Arizona, USA.

Assays have been received for four drill holes and the remainder of one hole, completed in the Western Talon area. Significant assays are summarised in Table 1. Figure 1 and 2 illustrates the location of these new results at the Talon.

Table 1 – Significant intersections above 1% Copper cut-off grade

Hole ID	From	To	Width	Cu	Ag	Au
	[m]	[m]	[m]	[%]	[g/t]	[g/t]
WT-21-32*	225.4	226.1	0.7	2.46	14.75	0.17
WT-21-33	315.2	321.0	5.8	2.72	29.59	0.72
<i>within</i>	308.9	325.5	16.6	1.87	18.53	0.51
WT-21-34	218.2	221.5	3.3	2.06	22.48	0.56
	313.2	320.8	7.6	2.20	20.70	0.25
WT-21-35	144.2	145.3	1.1	2.51	19.80	0.19
	152.8	157.1	4.3	1.03	4.95	0.06
WT-21-36	228.6	230.7	2.1	1.51	17.55	0.07

*Results shown for hole WT-21-32 are for the upper part of the hole. Refer to announcement 28 September 2021 for previously reported results in this hole



Figure 1 – 3D view looking west showing the Oracle Ridge Project areas and the general location of recently received assay results.

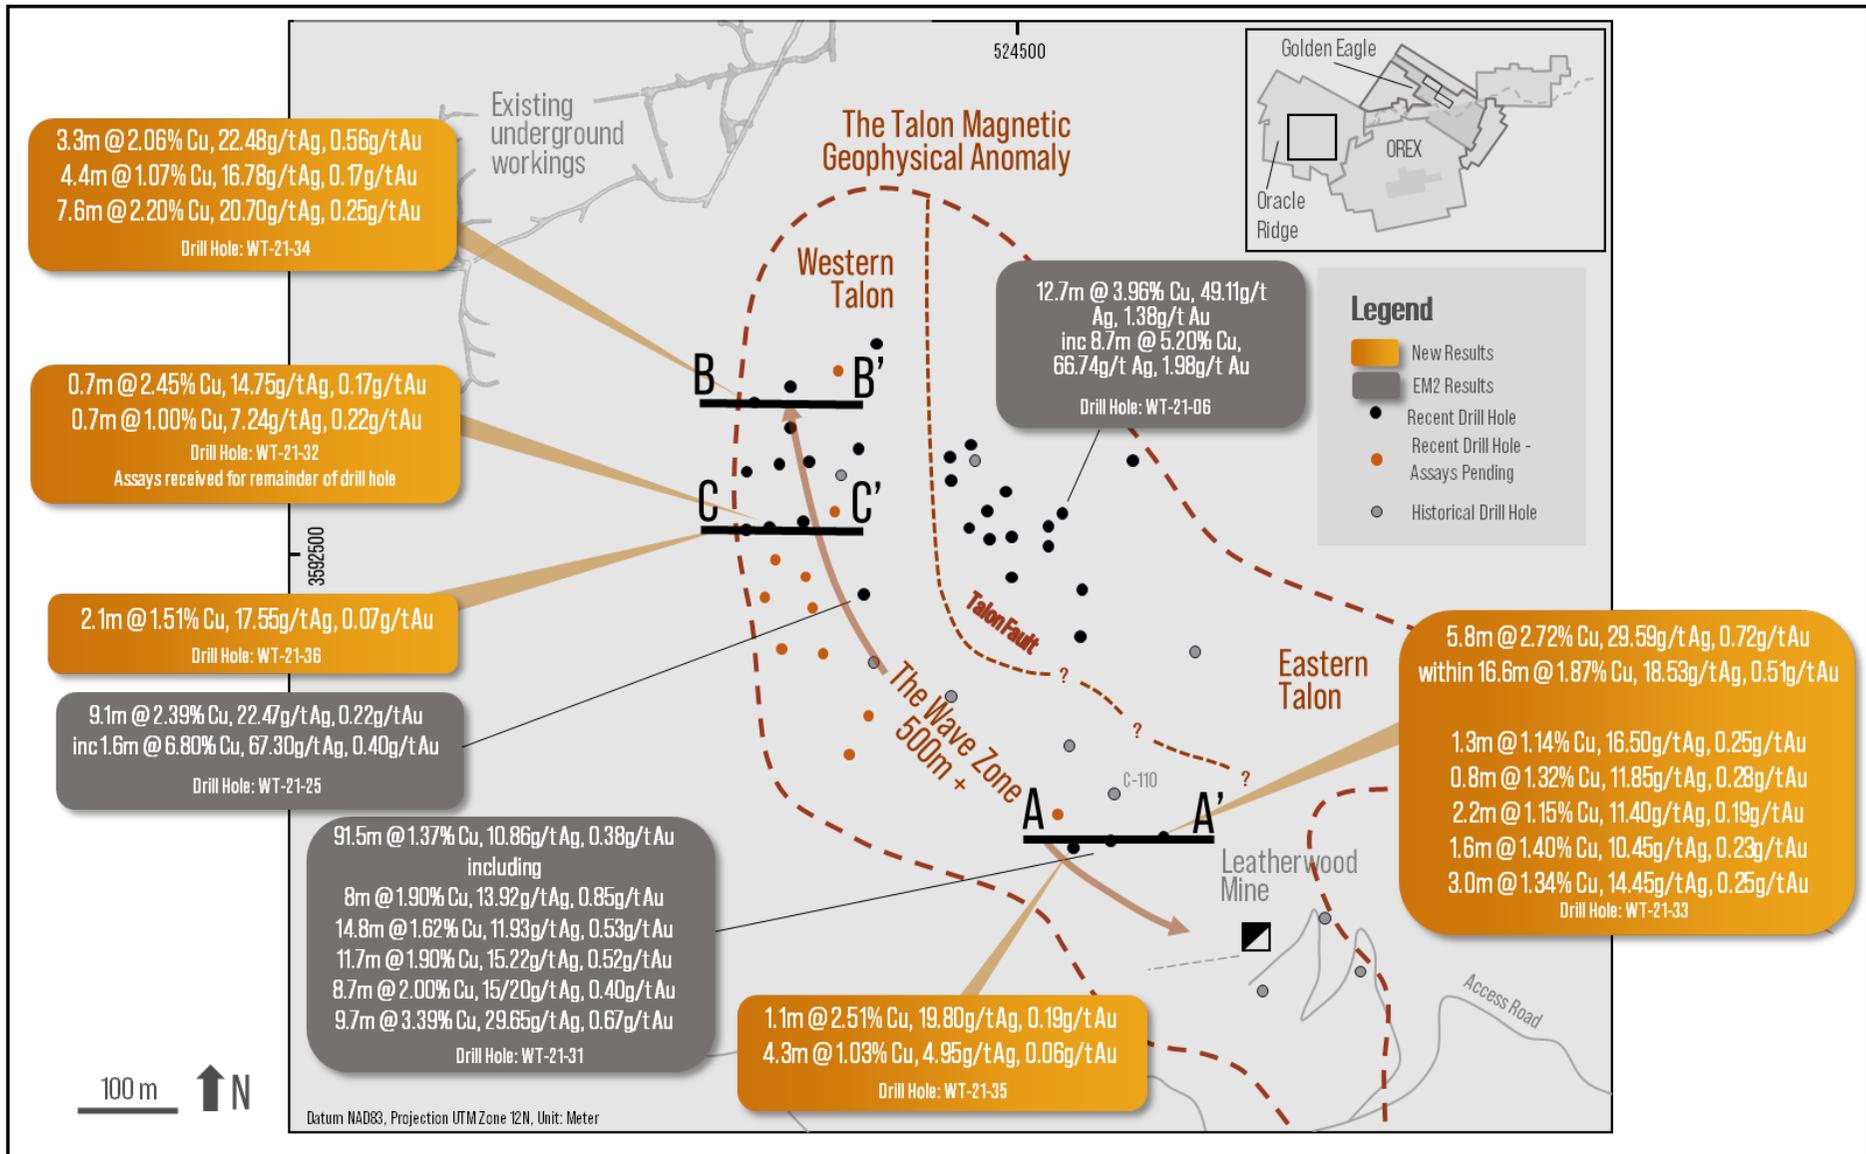


Figure 2 – Plan view of the Talon target showing reported results along the Wave zone. Due to the geometry of the drilling completed (e.g. fan drilling from a limited number of pads) the circles represent the approximate pierce point of each hole through the Leatherwood-Sediments contact. (Refer also announcement 29 October 2021)

The Wave Zone and Leatherwood Mine

The Wave zone is a recently defined feature which the Company has intersected in recent drill holes at the Western Talon. Some of the best intercepts at Oracle Ridge have been observed in sediments adjacent to, and within, the Wave zone. Previously reported intercepts along the Wave include (see announcement 28 September 2021):

- 28.9m at 2.34% Cu, 21.95g/t Ag, 0.37g/t Au in WT-21-32; and
- 91.5m at 1.37% Cu, 10.64g/t Ag and 0.38 g/t Au in WT-21-31.

The Wave feature is defined by the Leatherwood intruding along a gently dipping fault structure (Wave Fault) which has created favourable conditions for the precipitation of minerals from hydrothermal fluids. Thick zones of mineralisation are observed within the Wave feature and remain open to the east.

A new interpretation extends the Wave zone for over 500 metres to the historical Leatherwood mine (Figure 1 & 2) at the southern end of the Talon area, where copper, silver and gold mineralisation outcrops at the surface (Figure 3).

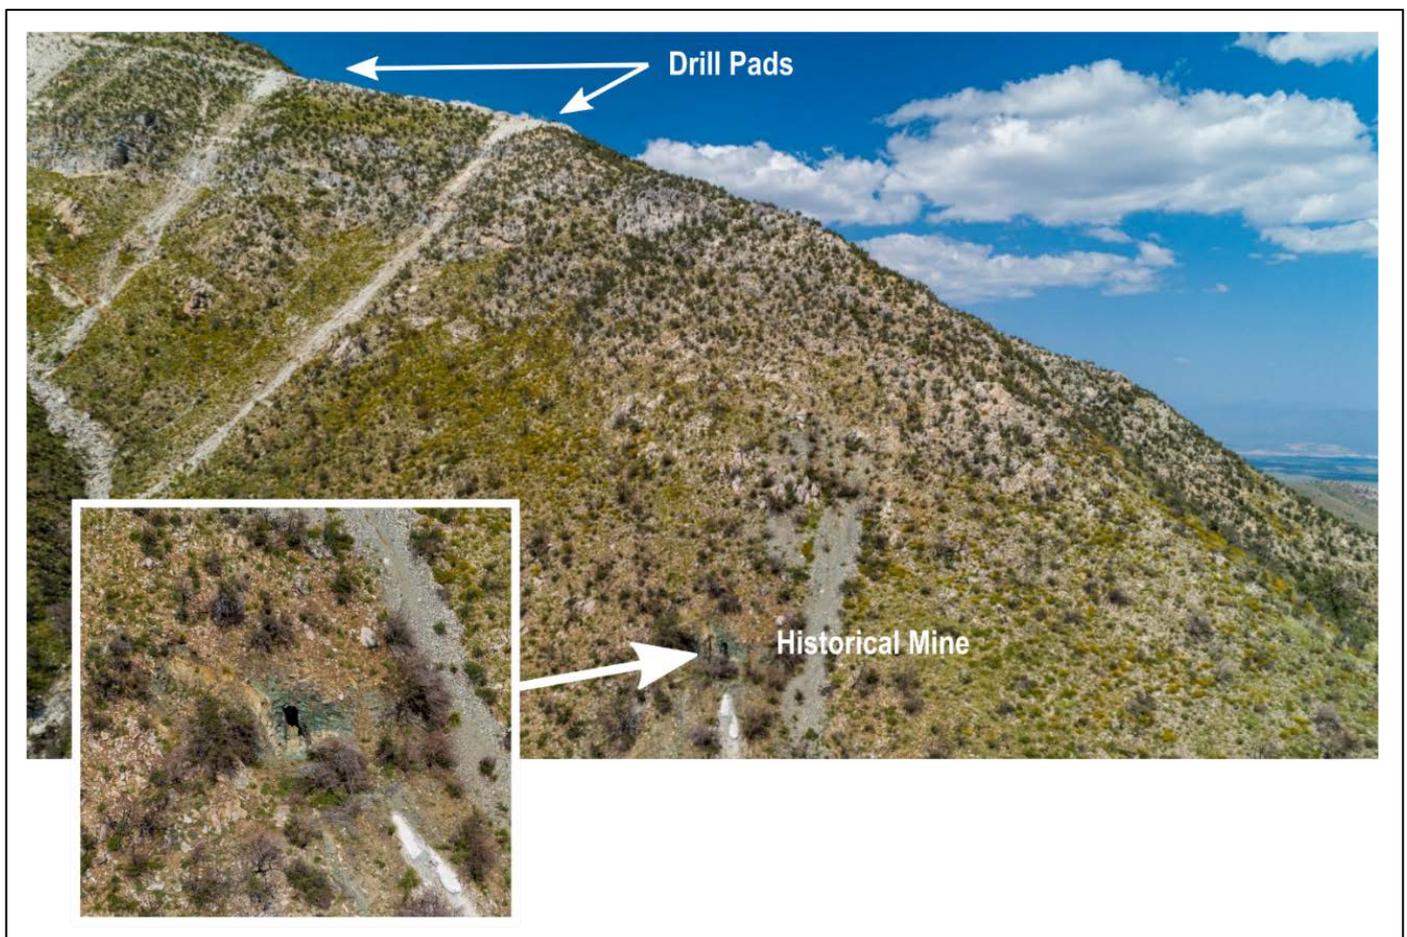


Figure 3 – Surface photo of the southern end of the Talon area showing location of historical workings in the Leatherwood Mine area with recent drill pads higher on the ridge. Note the abundant green copper staining near the mine entrance.

The Leatherwood mine includes two tunnels extending for approximately 50 metres connected by an internal shaft. Mineralisation is contained within skarn and breccias, with magnetite being present. Copper-bearing sulphides include bornite, chalcopyrite, chalcocite and covellite, listed in order of decreasing abundance. A shipment of ore in 1969 consisted of about 45 tonnes of hand-sorted ore

composed of approximately 12% copper, 200g/t silver and 1g/t gold (Figure 4). No other production records are known.²

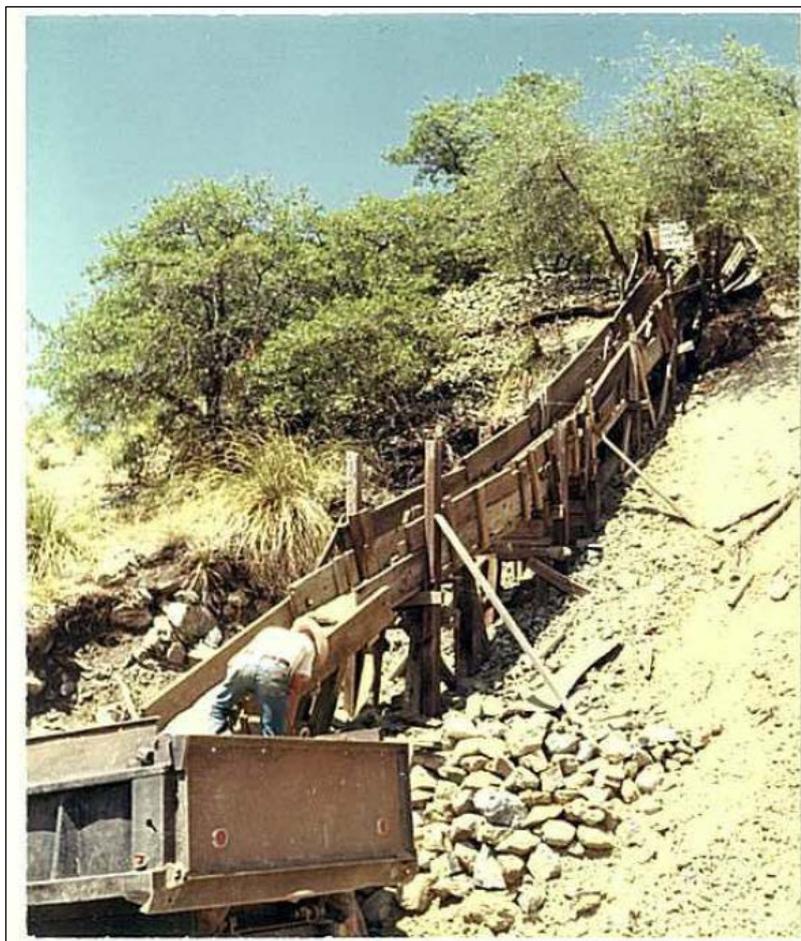


Figure 4 – Production from the Leatherwood Mine (circa 1969)²

The combination of both the thickness and grade of drill intercepts within the Wave, combined with the interpreted strike extent of this feature for over 500 metres significantly enhances the prospectivity of this area.

WT-21-33

WT-21-33 was drilled approximately 50 metres to the east of WT-21-31 (91.5m at 1.37% Cu, 10.86g/t Ag and 0.38g/t Au) and 60 metres to the southeast of C-110 (8.4m at 2.7% Cu and 27.05 g/t Ag) (Figure 2, Figure 4). The hole intersected a broad zone of magnetite skarn alteration at the Leatherwood-Sediments contact. A second zone displaying weaker alteration and discontinuous mineralisation was encountered between 235 and 260 metres downhole. Results include:

- 16.6m at 1.87% Cu, 18.53g/t Ag and 0.51g/t Au including
 - 5.8m at 2.72% Cu, 29.59g/t Ag and 0.72 g/t Au
- 2.2m at 1.15% Cu, 11.40g/t Ag and 0.19g/t Au
- 1.6m at 1.40% Cu, 10.45g/t Ag and 0.23g/t Au

² BRAUN, E, 1969, Geology and Ore Deposits of Marble Peak Area, Santa Catalina Mountains, Pima County, Arizona. University of Arizona
The thesis states that, at the time of the investigation, one tunnel was being mined. Information originally reported as Imperial units, converted to Metric units and rounded down.

The differences in mineralisation between WT-21-31 and WT-21-33 are likely influenced by the geometry of the Wave in the area, with proximity to this feature interpreted as a critical control on mineralisation.

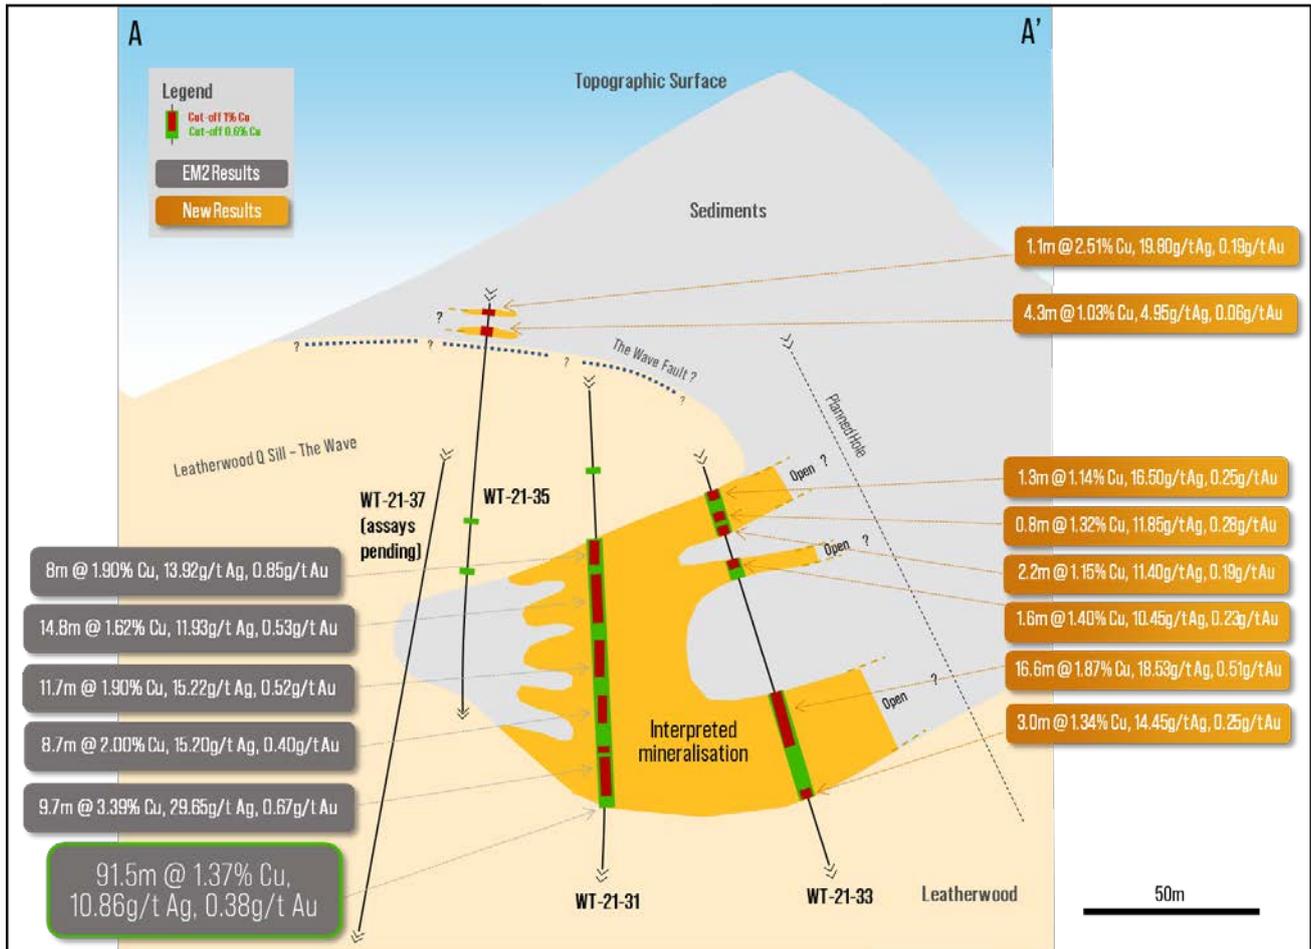


Figure 4 – East-west section through drill holes WT-21-33 and WT-21-35 showing location mineralised intersections and their spatial correlation with the Wave. See Figure 1 for section location. (Refer also announcement 29 October 2021)

WT-21-34

WT-21-34 was drilled approximately 40 metres to the west of WT-21-21, targeting the western extension to large alteration zones with a best mineralised interval of 2.6m at 1.35% Cu, 5.12g/t Ag and 0.08g/t Au (Figure 2, Figure 5). Three zones of mineralisation showing good copper and silver grades were encountered:

- 3.3m at 2.06% Cu, 22.48g/t Ag and 0.56g/t Au;
- 4.4m at 1.07% Cu, 16.78g/t Ag and 0.17g/t Au; and
- 7.6m at 2.20% Cu, 20.70g/t Ag and 0.25g/t Au.

These zones remain open to the west, towards the curl of the Wave, which previously returned very strong results in drill holes WT-21-31 and WT-31-32. Further drill holes have been planned to test this prospective area.

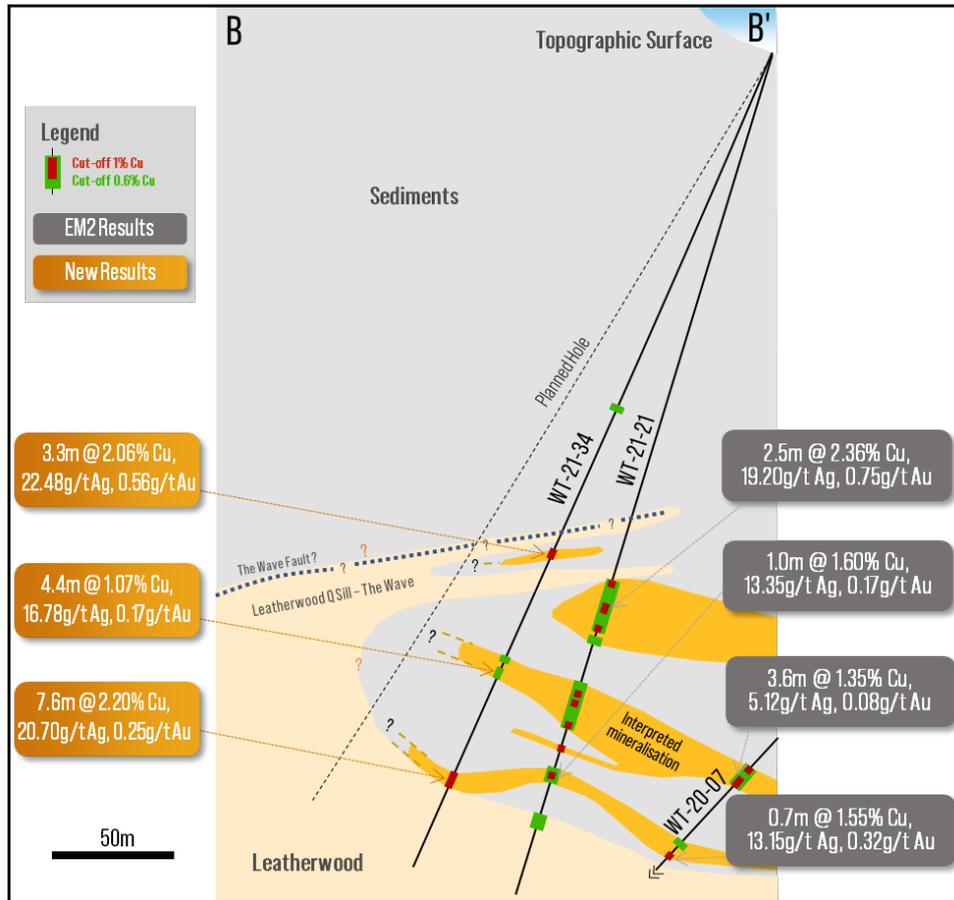


Figure 5 – East-west section through drill holes WT-21-34 showing location mineralised intersections and their spatial correlation with the Wave. See Figure 1 for section location. (Refer also announcements 29 October 2021 and 29 January 2021)

WT-21-35

WT-21-35 was drilled approximately 50 metres to the southwest of WT-21-31 (Figure 2, Figure 4). Only short sections of sediments favourable to hosting skarn mineralisation were encountered in the prospective area. Most of the drill hole encountered a phase of the Leatherwood locally known as Q-sill, before transitioning into the main Leatherwood body at depth. Two intersections exceeded the 1% Cu cut-off grade:

- 1.1m at 2.51% Cu, 19.80 g/t Ag and 0.19g/t Au
- 4.3m at 1.03% Cu, 4.95g/t Ag and 0.06g/t Au

The geological observations from WT-21-35 were instrumental in developing a geological model for this area which ultimately led to the recognition of the Wave as a key feature in controlling mineralisation at the Western Talon.

WT-21-36

WT-21-36 was drilled west of WT-21-32 (Figure 2, Figure 6). The drill hole intersected a thin mineralised zone at the upper contact between Sediments and the Wave (2.1m at 1.51% Cu, 17.55g/t Ag and 0.07g/t Au). Similar mineralisation was also encountered in WT-21-32 and WT-21-29 to the east (Figure 6). This prospective contact remains mostly untested to the west and will be targeted by further exploration drilling in the coming months.

The lower part of WT-21-36 was drilled entirely within the Wave (Q-Sill) and in the underlying Leatherwood intrusive. While no significant copper mineralisation was encountered in this area, the geological observations in WT-21-36, together with those in WT-21-35, helped develop the local geological model which is currently being tested by two rigs.

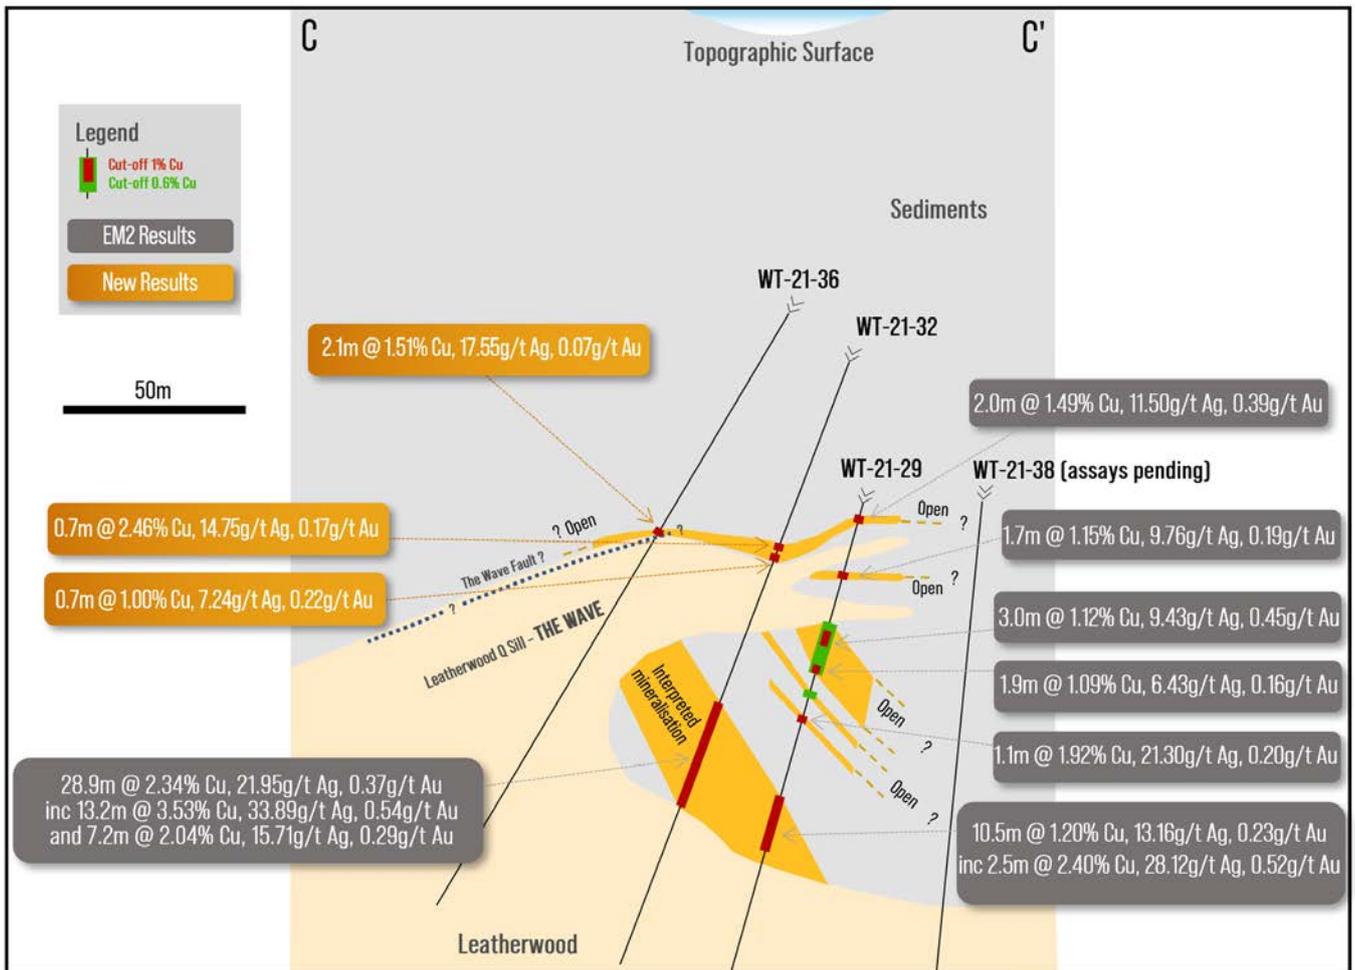


Figure 6 – East-west section through drill holes WT-21-36 showing location of mineralised intersections and their spatial correlation with the Wave. See Figure 1 for section location. (Refer also announcement 29 October 2021)

Next steps

Three rigs are currently operating at Oracle Ridge with two at the Talon and one continuing the Resource Upgrade program in the northern part of the resource area. The Company is continuing the establishment of new roads and drill pads, as well as improving existing access to various parts of the Project. A new road connection is being completed on the eastern side of Marble Mountain which will improve safety, reduce travel time for the Company's crew and will allow two rigs to be deployed contemporaneously at the southern end of the Talon.

Assay results are pending for 13 holes at the Mine Area and 11 holes at Golden Eagle. Laboratory turnaround times have increased again over the last few weeks partly because of longer than expected core cutting, sample preparation and crushing times. The Company is installing a modern core cutting machine at its office in Tucson to allow core cutting and sampling to be completed in-house, thus avoiding some of the delays experienced at the laboratories. The core saw is expected to be brought online in mid-November.

For further information please contact:

Tim Mason

BEng, MBA, GAICD
Chief Executive Officer
tim@eaglemountain.com.au

Mark Pitts

B.Bus, FCA, GAICD
Company Secretary
mark@eaglemountain.com.au

Jane Morgan

Investor and Media Relations
jm@janemorganmanagement.com.au

This Announcement has been approved for release by the Board of Eagle Mountain Mining Limited

COMPETENT PERSON STATEMENT

The information in this document that relates to new Exploration Activities is based on information compiled by Mr Fabio Vergara and Mr Brian Paull who are both Members of The Australasian Institute of Mining and Metallurgy (MAusIMM) and have sufficient experience relevant to the activity which they are undertaking to qualify as a Competent Persons as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code 2012). Mr Vergara is the Chief Geologist and Mr Paull Principal Geologist of Eagle Mountain Mining Limited and consent to the inclusion in this document of the information in the form and context in which it appears. Mr Vergara and Mr Paull hold shares and options in Eagle Mountain Mining Limited.

Where the Company references historic exploration results including technical information from previous ASX announcements including 25 May 2020, JORC Table 1 disclosures are included within them. The Company confirms that it is not aware of any new information or data that materially affects the information included in those announcements, and all material assumptions and technical parameters underpinning the results within those announcements continue to apply and have not materially changed. In addition the form and context in which the Competent Persons findings are presented have not been materially modified from the original reports.

The information in this report that relates to historic production results was prepared and first disclosed under a pre-2012 edition of the JORC Code. The data has been compiled but NOT validated by Eagle Mountain geologists. At this stage Eagle Mountain is unable to conclude that the production data is reliable. However nothing has come to the attention of Eagle Mountain that causes it to question the accuracy or reliability of the historic production results and the various source reports.

EAGLE MOUNTAIN MINING LIMITED

Eagle Mountain is a copper-gold explorer focused on the strategic exploration and development of the Oracle Ridge Copper Mine and the highly-prospective greenfields Silver Mountain project, both located in Arizona, USA.

Arizona is at the heart of America's mining industry and home to some of the world's largest copper discoveries such as Bagdad, Miami and Resolution, one of the largest undeveloped copper deposits in the world

Follow the Company's developments through our website and social media channels



Website <https://eaglemountain.com.au/>



Twitter https://twitter.com/eagle_mining



LinkedIn <https://www.linkedin.com/company/eagle-mountain-mining-ltd/>

Attachment 1

Summary table of recent drill holes at Oracle Ridge

Hole ID	Easting	Northing	Elevation	Dip	Azimuth	Depth
	[m]	[m]	[m]	[°]	[°]	[m]
WT-21-26	524024	3593218	2094	62	279	242.3
WT-21-27	524560	3592300	2108	75	003	345.9
WT-21-28	524024	3593218	2094	70	279	176.2
WT-21-29	524372	3592479	2189	73	235	373.4
WT-21-30	524560	3592300	2108	85	000	312.42
WT-21-31	524560	3592300	2108	50	166	391.4
WT-21-32	524372	3592479	2189	67	239	366.1
WT-21-33	524560	3592300	2108	53	153	367.3
WT-21-34	524371	3592480	2189	64	290	359.1
WT-21-35	524559	3592298	2108	48	179	380.4
WT-21-36	524372	3592479	2189	61	247	333.8
WT-21-37	524559	3592298	2108	54	188	390.8
WT-21-38	524372	3592479	2189	81	223	375.7
WT-21-39	524434	3592417	2153	54	222	395.6
WT-21-40	524369	3592480	2194	61	205	374
WT-21-41	524436	3592408	2151	47	232	Abandoned
WT-21-42	524368	3592479	2195	56	215	371.2
WT-21-43	524433	3592415	2152	46	230	376.7
WT-21-44	524372	3592479	2193	67	207	376.1
WT-21-45	524437	3592417	2151	53	199	401.4
WT-21-46	524372	3592479	2193	61	225	377.0
WT-21-47	524436	3592408	2151	49	211	Abandoned
WT-21-48	524372	3592479	2193	76	188	Abandoned
WT-21-49	524436	3592408	2157	47	197	413.3
WT-21-50	524365	3592477	2194	72	339	399.3
WT-21-51	524024	3593225	2098	63	237	176.8
WT-21-52	524023	359223	2098	59	225	218.8
WT-21-53	524365	3592477	2194	66	343	In progress
WT-21-54	524433	3592417	2152	73	260	In progress
WT-21-55	524026	3593221	2099	84	262	In progress
GE-21-01	527468	3593409	1497	65	035	261.5
GE-21-02	527468	3593409	1497	60	002	249.9
GE-21-03	527468	3593409	1497	76	002	295.7
GE-21-04	527468	3593409	1497	64	065	253.3
GE-21-05	527468	3593408	1497	50	260	309.4
GE-21-06	528007	3593650	1485	80	180	487.7
GE-21-07	526940	3593290	1559	60	45	639.2
GE-21-08	526940	3593290	1559	83	45	526.1
GE-21-09	526939	3593291	1559	50	340	624.8
GE-21-10	526822	3593288	1562	45	190	449.6
GE-21-11	526566	3593264	1592	47	0	478.8
GE-21-12	526577	3593249	1592	60	0	548.6
GE-21-13	526564	3593262	1594	85	355	276.5

Summary table of recent diamond drill hole intersections at Oracle Ridge

Note - All reported intervals are downhole widths.

Hole ID	From	To	Width	Cu	Ag	Au
	[m]	[m]	[m]	[%]	[g/t]	[g/t]
WT-21-26	47.3	158.8	111.5	1.00	13.25	0.13
<i>including</i>	90.9	91.4	0.5	2.23	15.55	0.16
<i>and</i>	111.5	115.5	4.0	2.23	21.01	0.28
<i>and</i>	127.0	131.3	4.3	1.13	8.65	0.07
<i>and</i>	133.3	133.6	0.3	3.82	72.90	0.60
<i>and</i>	144.2	148.5	4.3	2.22	42.06	0.38
<i>and</i>	151.5	158.8	7.3	2.13	31.84	0.35
WT-21-27	179.5	183.0	3.5	2.24	14.23	0.36
<i>within</i>	179.5	187.0	7.5	1.40	8.89	0.20
	197.7	198.0	0.3	2.52	27.90	0.09
	235.3	236.8	1.5	1.84	13.08	0.29
	239.0	240.2	1.2	3.40	28.91	0.45
	243.1	247.7	4.6	2.00	18.17	0.56
<i>within</i>	239	247.7	8.7	1.68	15	0.38
<i>and within</i>	235.3	247.7	12.4	1.44	12.41	0.45
	254.9	255.6	0.7	2.36	34.80	0.61
WT-21-28	111.0	161.8	50.8	0.64	7.49	0.06
<i>including</i>	112.3	114.1	1.8	1.66	15.76	0.19
<i>and</i>	117.0	118.0	1.0	1.85	16.05	0.19
<i>and</i>	121.2	121.7	0.5	1.12	8.32	0.12
<i>and</i>	132.4	133.5	1.1	1.21	12.05	0.08
<i>and</i>	147.1	150.6	3.5	2.69	39.76	0.22
<i>and</i>	157.7	161.8	4.1	1.02	10.20	0.06
WT-21-29	211.4	213.4	2.0	1.49	11.50	0.39
WT-21-29	225.5	227.2	1.7	1.15	9.76	0.19
	244.5	247.5	3.0	1.12	9.43	0.45
	252.0	253.9	1.9	1.09	6.43	0.16
	267.0	268.1	1.1	1.92	21.30	0.20
	292.5	303.0	10.5	1.20	13.16	0.23
<i>including</i>	300.5	303.0	2.5	2.40	28.12	0.52
WT-21-30	167.7	170.8	3.1	1.25	10.80	0.25
	222.7	224.2	1.5	1.67	14.40	0.61
WT-21-31	253.5	261.5	8.0	1.90	13.92	0.85
	271.2	286.0	14.8	1.62	11.93	0.53
	294.5	306.2	11.7	1.90	15.22	0.52
	313.0	321.7	8.7	2.00	15.20	0.40
	335.3	345.0	9.7	3.39	29.65	0.67
<i>within</i>	253.5	345.0	91.5	1.37	10.64	0.38
WT-21-32	225.4	226.1	0.7	2.46	14.75	0.17
	228.6	229.3	0.7	1.00	7.24	0.22
	270.6	299.5	28.9	2.34	21.95	0.37
<i>including</i>	270.6	283.8	13.2	3.53	33.89	0.54
<i>including</i>	292.3	299.5	7.2	2.04	15.71	0.29
WT-21-33	235.4	236.7	1.3	1.14	16.50	0.25
	243.9	244.7	0.8	1.32	11.85	0.28

Hole ID	From	To	Width	Cu	Ag	Au
	245.5	247.7	2.2	1.15	11.40	0.19
	260.8	262.4	1.6	1.40	10.45	0.23
	315.2	321.0	5.8	2.72	29.59	0.72
<i>within</i>	308.9	325.5	16.6	1.87	18.53	0.51
	340.0	343.0	3.0	1.34	14.45	0.25
WT-21-34	218.2	221.5	3.3	2.06	22.48	0.56
	269.6	274.0	4.4	1.07	16.78	0.17
	313.2	320.8	7.6	2.20	20.70	0.25
WT-21-35	144.2	145.3	1.1	2.51	19.80	0.19
	152.8	157.1	4.3	1.03	4.95	0.06
WT-21-36	228.6	230.7	2.1	1.51	17.55	0.07
WT-21-37	Assays pending					
WT-21-38	Assays pending					
WT-21-39	Assays pending					
WT-21-40	Assays pending					
WT-21-41	Hole Abandoned					
WT-21-42	Assays pending					
WT-21-43	Assays pending					
WT-21-44	Assays pending					
WT-21-45	Assays pending					
WT-21-46	Assays pending					
WT-21-47	Hole Abandoned					
WT-21-48	Hole Abandoned					
WT-21-49	Assays pending					
WT-21-50	Assays pending					
WT-21-51	Assays pending					
WT-21-52	Assays pending					
WT-21-53	Hole in progress					
WT-21-54	Hole in progress					
WT-21-55	Hole in progress					
GE-21-01	200.4	202.0	1.6	0.02	0.50	0.91
GE-21-02	Assays pending					
GE-21-03	236.8	258.0	21.2	0.11	1.86	1.88
<i>including</i>	250.0	258.0	8.0	0.20	3.79	3.80
<i>and</i>	236.8	244.0	7.2	0.09	0.83	1.26
GE-21-04	Assays pending					
GE-21-05	Assays pending					
GE-21-06	Assays pending					
GE-21-07	NSI (lower part of the hole); Assays pending					
GE-21-08	Assays pending					
GE-21-09	Assays pending					
GE-21-10	Assays pending					
GE-21-11	Assays pending					
GE-21-12	Assays pending					
GE-21-13	Assays pending					

*Assays for part of the hole are still outstanding

Attachment 2

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data



Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Diamond drilling. Nominal sampling interval of 3m adjusted as required for local geological conditions. Core was sawn and half-core was crushed, pulverised and split to produce a representative sample for assaying. For WT-series drilling, samples returning weighted average Cu \geq 1% are reported in the announcement. Wider intercepts are reported using a 0.6% Cu cut-off. For GE-series drilling, samples returning weighted average Au \geq 0.5g/t are reported in the announcement. Visual results presented are based on geological observations, and for WT-series drilling consider the copper content of different sulphide species at a 0.6% Cu nominal cut-off
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Diamond drilling completed by Boart Longyear using an LF-90 drill rig. Core is HQ3 Downhole deviation surveys are performed approximately every 30.5m (100 feet) The core is oriented with a Boart Longyear Truecore™ system to allow measurement of structural information.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Core recoveries are recorded by the drillers at the rig and verified by Company's personnel during core logging To maximise sample recovery and core quality drilling is performed with a "triple tube" set up where two splits are inserted in the barrel to minimize core displacement and core loss. No relationship has been determined between sample recoveries and grade.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate 	<ul style="list-style-type: none"> A quick log is completed on site and detailed logging is performed at the Company's facility in Tucson.

Criteria	JORC Code explanation	Commentary
	<p><i>Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <ul style="list-style-type: none"> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • Logging is both qualitative and quantitative in nature. Portable XRF and magnetic susceptibility measurements are taken at regular intervals on the core. • Core is photographed after mark-up, before sampling, wet and dry • 100% of the relevant intersections is logged.
<p><i>Sub-sampling techniques and sample preparation</i></p>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • The core is sawn in half by ALS Minerals or Skyline Assayers and Laboratories at their Tucson facilities. Half of the core is bagged and sent for assaying while the other half is left in the core box for future reference. • ALS Minerals or Skyline Assayers and Laboratories conducted all preparation work: samples were weighed, dried, crushed and crushed to better than 70% passing 2mm; sample was split with a riffle splitter and a split of up to 250g pulverised to better than 85% passing 75µm. • Duplicates are used to assess the sampling representativeness. When duplicates are collected the core is quartered: one quarter is sent to the laboratory as the primary sample, the other quarter is sent to the laboratory as the duplicate and the remaining half of the core is left in the box for future reference • Sample sizes are considered appropriate to the grain size of the material being sampled
<p><i>Quality of assay data and laboratory tests</i></p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • ALS Minerals assay methods: ME-MS61 (48 element four acid ICP-MS) and Au-AA23 (Au 30g charge Fire Assay with Atomic Absorption finish). The technique is considered a near total digest of relevant minerals. Above detection samples are re-assayed with Au-GRA21, Ag-OG62, Cu-OG62, Pb-OG62, Zn-OG62 • Skyline Assayers and Laboratories methods: TE-5 (47 element multi acid digestion with ICP-MS) and FA-01 (Au Fire Assay with Atomic Absorption finish). The technique is considered a near total digest of relevant minerals. • Certified Reference Material (CRM), blanks and duplicates were inserted/collected at a ratio of 1:10 with a minimum of 1 CRM per assays batch. CRMs are inserted at intervals never exceeding 20 samples. Acceptable levels of accuracy and precision have been established. • Before releasing results from geological observations (e.g. visual mineralisation), the Company adopts the following QA/QC procedures: <ul style="list-style-type: none"> ○ Core is dispatched to the laboratory and cut. Samples are bagged, crushed and pulverised (sample preparation) ○ After sample preparation is finalised, a sub-sample is returned to

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> o the Company while assays are being completed at the laboratory o Returned sub-samples are analysed with the Company's portable XRF instrument o Portable XRF readings are compared with the visual logs o Visual results are approved for release to the market
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • Significant intersections have been verified by Company's Principal Geologist • No twinned holes reported • Logging and sampling data are collected using tablet computers and Logchief software to ensure data integrity. The data is transferred weekly to the Datashed database after further data validation by the database manager • No assay adjustment performed
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • NAD83 Arizona State Plane Central (International feet). Data is presented in NAD83 UTM Zone 12N (meters) • National Elevation Dataset. Horizontal resolution of approximately 10m and vertical resolution of 1m • Drill holes are located with a hand-held GPS with an estimated horizontal accuracy of $\pm 5m$. Collar location is subsequently recaptured using a DGPS system with an estimated accuracy of $\pm 0.5m$
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • The data spacing of the new drilling results reported is insufficient to establish the degree of geological and grade continuity appropriate for Mineral Resource estimation
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • The relationship between drilling orientation and orientation of key mineralised structures is yet to be determined
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • Core boxes are collected at the drill rig by Company personnel and transported to the Tucson logging facility. After logging the core is delivered by Company personnel to ALS Minerals' Tucson facilities for cutting, sampling, sample preparation and assaying.
Audits or reviews	<ul style="list-style-type: none"> • The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> • No audits or reviews of sampling techniques have been completed.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<p><i>Mineral tenement and land tenure status</i></p>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> • The Oracle Ridge Mine Project (Project) is located in the Marble Peak area, approximately 30 kilometres by air northeast of Tucson, Arizona, U.S.A. It is located in Sections 17, 18, 19 and 20 of Township 11 South, Range 16 East, Gila and Salt River Base and Meridian of the U.S. cadastral system. The geographical coordinates are approximately Latitude 32°28' North, Longitude 110°41' West. • The Project is 100% owned by Eagle Mountain Mining Ltd through its Arizona subsidiaries Wedgetail Operations LLC (100%) and Wedgetail Holdings LLC (100%). • The Project consists of four main areas: Oracle Ridge, OREX, Golden Eagle and Red Hawk <p>Oracle Ridge (including historical Tailings Storage Facility)</p> <ul style="list-style-type: none"> • Oracle Ridge comprises 57 Patented Mining Claims and 45 Unpatented Mining Claims within the Coronado National Forest (United States Forest Service). • 100% of the mineral rights starting from 15.2m (50 feet) below surface are owned by Wedgetail Operations LLC • In 2009, the surface rights for the area necessary for potential mining access (e.g. portals), processing facilities and offices have been secured by an industrial property lease. Under the agreement, Wedgetail Operations LLC leases the surface rights to the project for the purpose of carrying out its exploration, potential development and mining. The lease has an initial term of three years and is renewable for nine additional extensions of three years each. • A separate surface access agreement is in place to allow access to drill sites and drill pads construction • There is a 3% net smelter returns royalty on the future sale of any metals and minerals derived from the Oracle Ridge mine. <p>OREX</p> <ul style="list-style-type: none"> • The OREX area is covered by 93 Unpatented Mining Claims within the Coronado National Forest (United States Forest Service). • 100% of the mineral rights are owned by Wedgetail Operations LLC • The OREX area is also partly covered by Patented Mining Claims controlled by Pima County. The Company has an agreement in place for non-ground disturbing exploration work to occur on Pima County's

Criteria	JORC Code explanation	Commentary
		<p>Patented Mining Claims. The Company does not currently control the Mineral Rights over Pima County's claims</p> <p>Golden Eagle</p> <ul style="list-style-type: none"> • The Golden Eagle area is covered by 3 Patented Mining Claims and 32 Unpatented Mining Claims within the Coronado National Forest (United States Forest Service). • 100% of the mineral rights are owned by Wedgetail Operations LLC • The Golden Eagle area is also partly covered by Patented Mining Claims controlled by Pima County. The Company has an agreement in place for non-ground disturbing exploration work to occur on Pima County's Patented Mining Claims. The Company does not currently control the Mineral Rights over Pima County's claims <p>Red Hawk</p> <ul style="list-style-type: none"> • The Red Hawk area is covered by 24 Unpatented Mining Claims within the Coronado National Forest (United States Forest Service). • 100% of the mineral rights are owned by Wedgetail Operations LLC • The land tenure is secure at the time of reporting and there are no known impediments to obtaining permits to operate in the area.
<p>Exploration done by other parties</p>	<ul style="list-style-type: none"> • <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<p>Oracle Ridge</p> <ul style="list-style-type: none"> • The Oracle Ridge Mining District was discovered in 1873. In 1881, an 18 tonne per day copper smelter was erected at nearby Apache Camp. The ore for this smelter was supplied from the Hartman, Homestake, Leatherwood, Stratton, Geesman and other small mines in the area. • Phelps Dodge Copper Company (Phelps Dodge) entered the District in 1910 and undertook considerable development and exploration work. • Continental Copper, Inc began exploring in the District in the 1950s. Continental leased the property in 1968 with an option to purchase and undertook a large exploration and development program. This was the first time there was a large scale assessment of the mineralisation. • Union Miniere began a new exploration program in April 1980. In 1984, a feasibility study for an 1,814 short ton per day operation was completed. • In October 1988, South Atlantic Ventures acquired Union Miniere's interest and entered into a 70-30 partnership with Continental to develop the mine. Minproc Engineers Inc. was contracted to

Criteria	JORC Code explanation	Commentary
		<p>supervise the confirmatory metallurgical test work. A detailed design was started in November 1989 on a column flotation plant. Construction of the facility commenced in April 1990 and the first ore was processed through the plant on March 3, 1991. The capacity of the mill was initially set at 771 short ton per day. The mill capacity was later expanded to approximately 1,000 short ton per day.</p> <ul style="list-style-type: none"> • The mine closed in 1996. Production records show that approximately 1,200,000 short ton were milled since commencement of operation. • Between 2009 and 2015 the project was owned by Oracle Ridge Mining, a TSX-V listed company, which drilled approximately 130 surface and underground holes <p>Golden Eagle</p> <ul style="list-style-type: none"> • Small scale mining occurred in the Golden Eagle area in the first half of the 1900s focussed on gold. The largest operation was the Sanderson Mine. The mine is part of the Golden Eagle mineralised system but is located outside the Company's landholding. It reported smelter returns between 1936 and 1941 averaging 0.4 Oz/short ton Au (13.7 g/t Au), 0.65 Oz/ton Ag (22.3 g/t Ag) and 0.46% Cu (small tonnage). • Oracle Ridge mining conducted exploration at Golden Eagle in the mid-1990s. A geophysical magnetic survey was flown over the area. Few magnetic anomalies, postulated to be magnetite-rich skarn were tested by reconnaissance drilling. Results were not deemed sufficiently encouraging and no further drilling was conducted in the area. <p>OREX</p> <ul style="list-style-type: none"> • Details of historical (pre-1980s) exploration and mining activities in the OREX area are not known. Few small-scale workings were found during mapping. • In 1980 a Joint Venture between Gulf Minerals Corporation and W.R. Grace Company completed mapping of the area and drilled 7 holes. Results of the program were reviewed by Oracle Ridge Mining Partners and summarised in an internal communication in 1992. <p>Red Hawk</p> <ul style="list-style-type: none"> • No historical exploration nor mining activities are known for the Red Hawk area

Criteria	JORC Code explanation	Commentary
Geology	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> • The deposit is classified as copper dominated skarn. Minerals representative of both prograde and retrograde skarn development are present, the former being represented by diopside and garnets, the latter by epidote, magnetite and chlorite. • Copper dominated mineralisation generally contain chalcopyrite and bornite. The deposits are most commonly associated with Andean-type plutons intruded in older continental-margin carbonate sequences. The associated intrusive rocks are commonly porphyritic stocks, dikes and breccia pipes of quartz diorite, granodiorite, monzo-granite and tonalite composition, intruding carbonate rocks, calcareous-volcanic or tuffaceous rocks. The deposits shapes vary from stratiform and tabular to vertical pipes, narrow lenses, and irregular zones that are controlled by intrusive contacts. • The copper rich skarn deposits at Oracle Ridge are found in conformable lens along the contact with the Leatherwood Granodiorite or associated with faults and shear zones which intersect the Leatherwood. These have acted as feeders into the reactive carbonate horizons. The latter can form a “Christmas Tree” type shape.
Drill hole Information	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • See body of announcement including Attachment 1.
Data aggregation methods	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> 	<ul style="list-style-type: none"> • For WT-series drilling, exploration results are reported as weighted averages of assays equal or above a 1% copper cut-off. Lower grade intersections are reported as weighted averages of assays equal or above a 0.6% copper cut-off. Intersections start and end at a sample at or exceeding the specified cut-off. • For GE-series drilling, exploration results are reported as weighted averages of assays equal or above a 0.5g/t gold cut-off. Intersections start and end at a sample at or exceeding the specified cut-off.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> No metal equivalents reported
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> All intervals reported are down hole length. True widths are not known at this stage.
<i>Diagrams</i>	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> See body of announcement
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> All exploration results obtained so far have been reported.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> No other meaningful and material exploration data beyond this and previous ASX announcements by the Company
<i>Further work</i>	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Further work will include interpretation of logging and assay results when they become available. Additional drill holes will be completed at Oracle Ridge in the coming weeks.