

20 January 2022

Tietto hits 152.26 g/t Au from 37m within 10m @ 16.53 g/t Au at AG Core

Highlights:

- Tietto hits **shallow high-grade gold** at **AG Core**, from infill drilling on the main Abujar shear at its **3.35Moz** Abujar Gold Project; results include:
 - **10m @ 16.53 g/t Au from 37m incl. 5m @ 32.61 g/t Au** (ZDD859 – Section 28C)
 - **18m @ 3.67 g/t Au from 11m incl. 6m @ 8.27 g/t Au** (ZDD806 – Section 23A)
 - **19m @ 1.65 g/t Au from 347m incl. 9m @ 3.11 g/t Au** (ZDD843 – Section 25B)
 - **10m @ 3.01 g/t Au from 144m incl. 5m @ 5.59 g/t Au** (ZDD796 – Section 26B)
- **Multiple high-grade gold** drill intercepts from infill drilling at **AG South**; results include:
 - **7m @ 9.78 g/t Au from 181m incl. 5m @ 13.50 g/t Au** (ZDD807 – Section 1B)
 - **10m @ 3.04 g/t Au from 105m incl. 3m @ 8.34 g/t Au** (ZDD805 – Section 13C)
 - **1m @ 24.73 g/t Au from 46m** (ZDD848 – Section 9B)
- **High-grade gold** mineralisation **extended 150m vertical** below previous resource drilling at **AG Core**; results include:
 - **6m @ 4.28 g/t Au within 10m @ 2.84 g/t Au from 630m** (ZDD844 – Section 20)
- AG Core infill drilling completed; program designed to convert Abujar AG Indicated Resources (**35Mt @ 1.5 g/t Au for 1.65Moz**) to Measured – targeting the first two years of Abujar’s gold production
- Tietto awaits assays for 62 drill holes (9,465m) expected in February 2022; six diamond drill rigs actively drilling with **next resource update due end of Q1 CY2022**
- Abujar DFS demonstrated robust financial results and estimated **first-year gold production of 260,000oz** and 1.2Moz over the first six years of Abujar’s 11-year mine life for an NPV_{5%} A\$1.3B (pre-tax) and A\$0.97B (post-tax) using US\$1,700/oz and A\$/US\$=0.74¹
- Tietto is funded to production² with construction progressing on schedule – **targeting first gold** at Abujar in **Q4 CY2022**

West African gold explorer and developer Tietto Minerals Limited (ASX: TIE) (**Tietto** or the **Company**) is pleased to report high-grade gold results from the eighth batch of infill and

¹ Refer ASX Announcement dated 5th October 2021

² Refer ASX Announcement dated 22nd November 2021

extensional drilling completed at the Abujar-Gludehi (**AG**) deposit, part of its **3.35Moz** Abujar Gold Project in Côte d'Ivoire, West Africa.

Tietto Managing Director, Dr Caigen Wang, said: *"Our eighth batch of results from our infill drilling program at **AG** has delivered further **high-grade gold intercepts** close to surface that will **de-risk open pit mining at Abujar**. Our exploration team has now completed the infill drilling program, which was designed to convert Indicated Resources to Measured Resources scheduled to be mined over the first two years of production.*

*Down-dip drilling below **AG Core** has confirmed the extension of **high-grade shoots 150m below** the previous resource drilling. These new results will be incorporated into the upcoming mineral resource update. **AG Core** remains open at depth and further holes are planned to test the limits of this growing gold system.*

*With completed settlement of the second tranche of our recent capital raise, we are now fully funded to production at **Abujar**, which has potential to be one of the largest gold producing mines in Côte d'Ivoire, expected to produce **more than 260,000 ounces of gold** in the first year and **1.2M ounces of gold** in the first six years.*

*"We are well positioned to execute our dual strategy in 2022; our exploration team is planning on drilling 100,000m of diamond core this year to drive resource growth, and our build team is advancing construction work on schedule as we develop the Abujar Gold Project into **West Africa's next gold mine**."*

Drilling Results

This announcement relates to 38 diamond drill holes (8,871.5m) completed as part of Tietto's infill and extensional diamond drilling programs. The infill drilling program was designed to increase confidence in Abujar mineral resource estimates (i.e., upgrading Indicated Resources to Measured Resources). The extensional drilling is designed to test the limits of gold mineralisation at AG Core below the current resource model.

- *AG Core infill -17 holes for 3,074m*
- *AG Core underground targets – 4 holes for 2,033m*
- *AG South infill and extension – 17 holes for 3,764.5m*

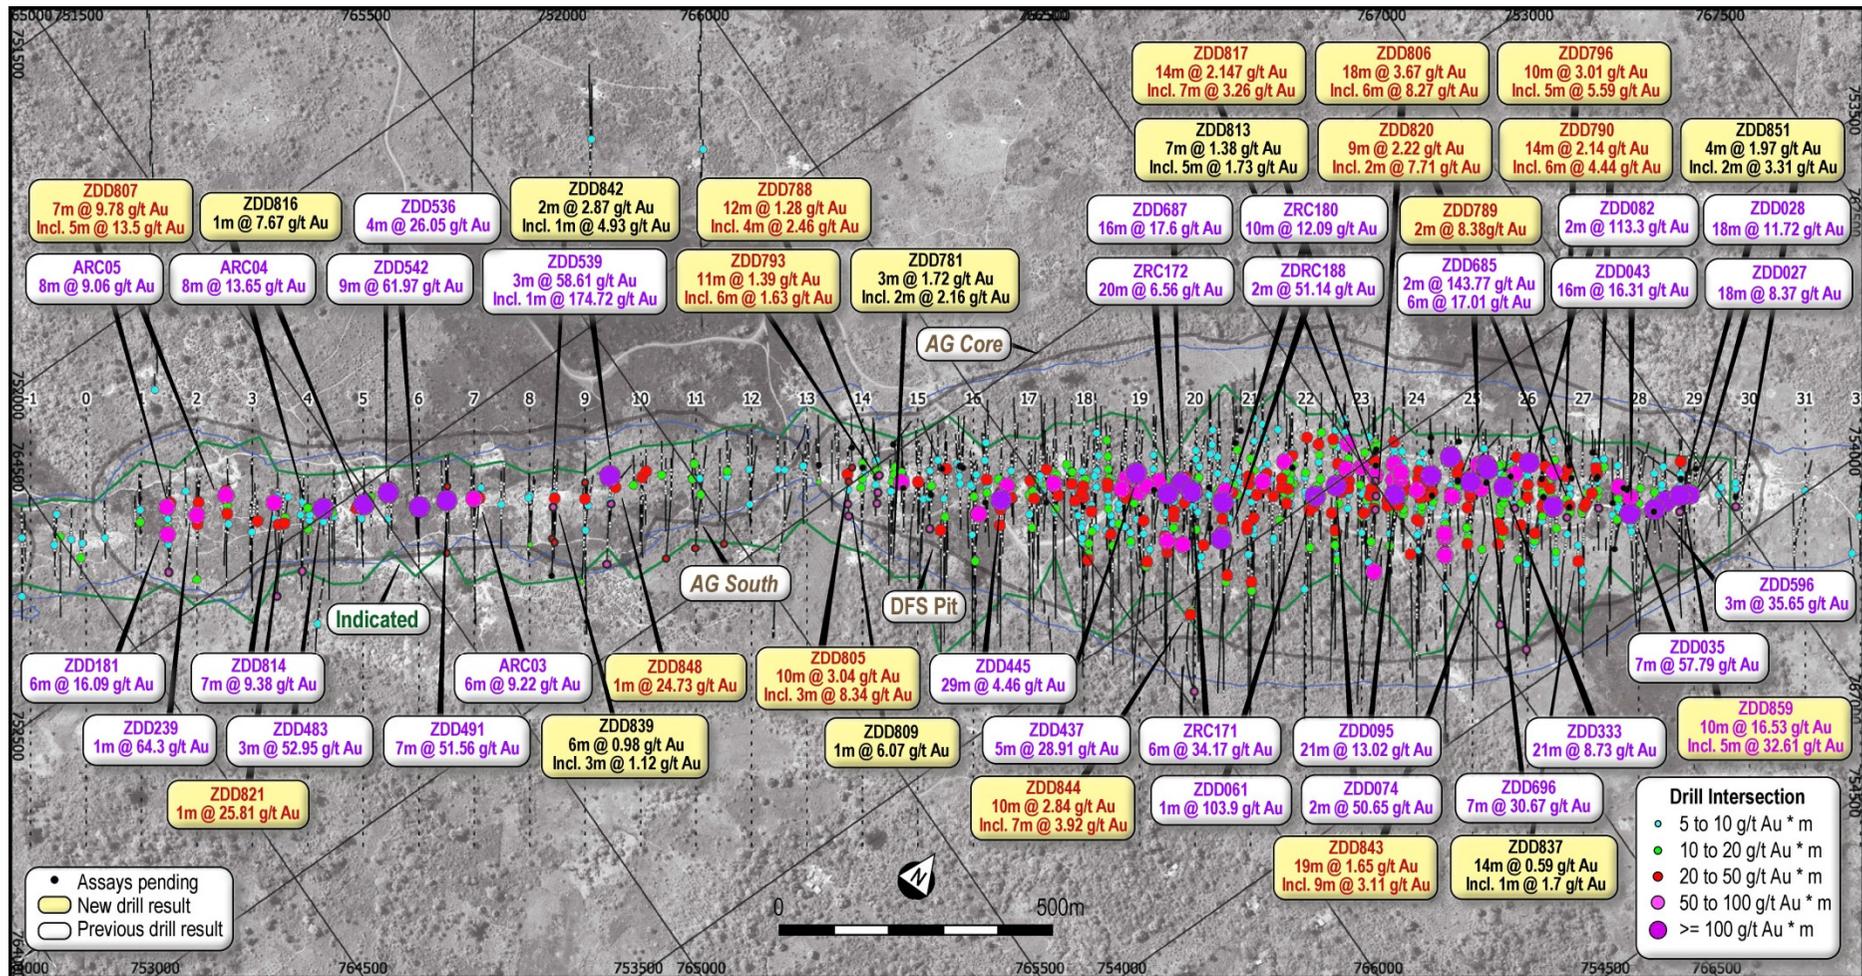


Figure 1: Plan view showing latest drill results at AG Core and AG South

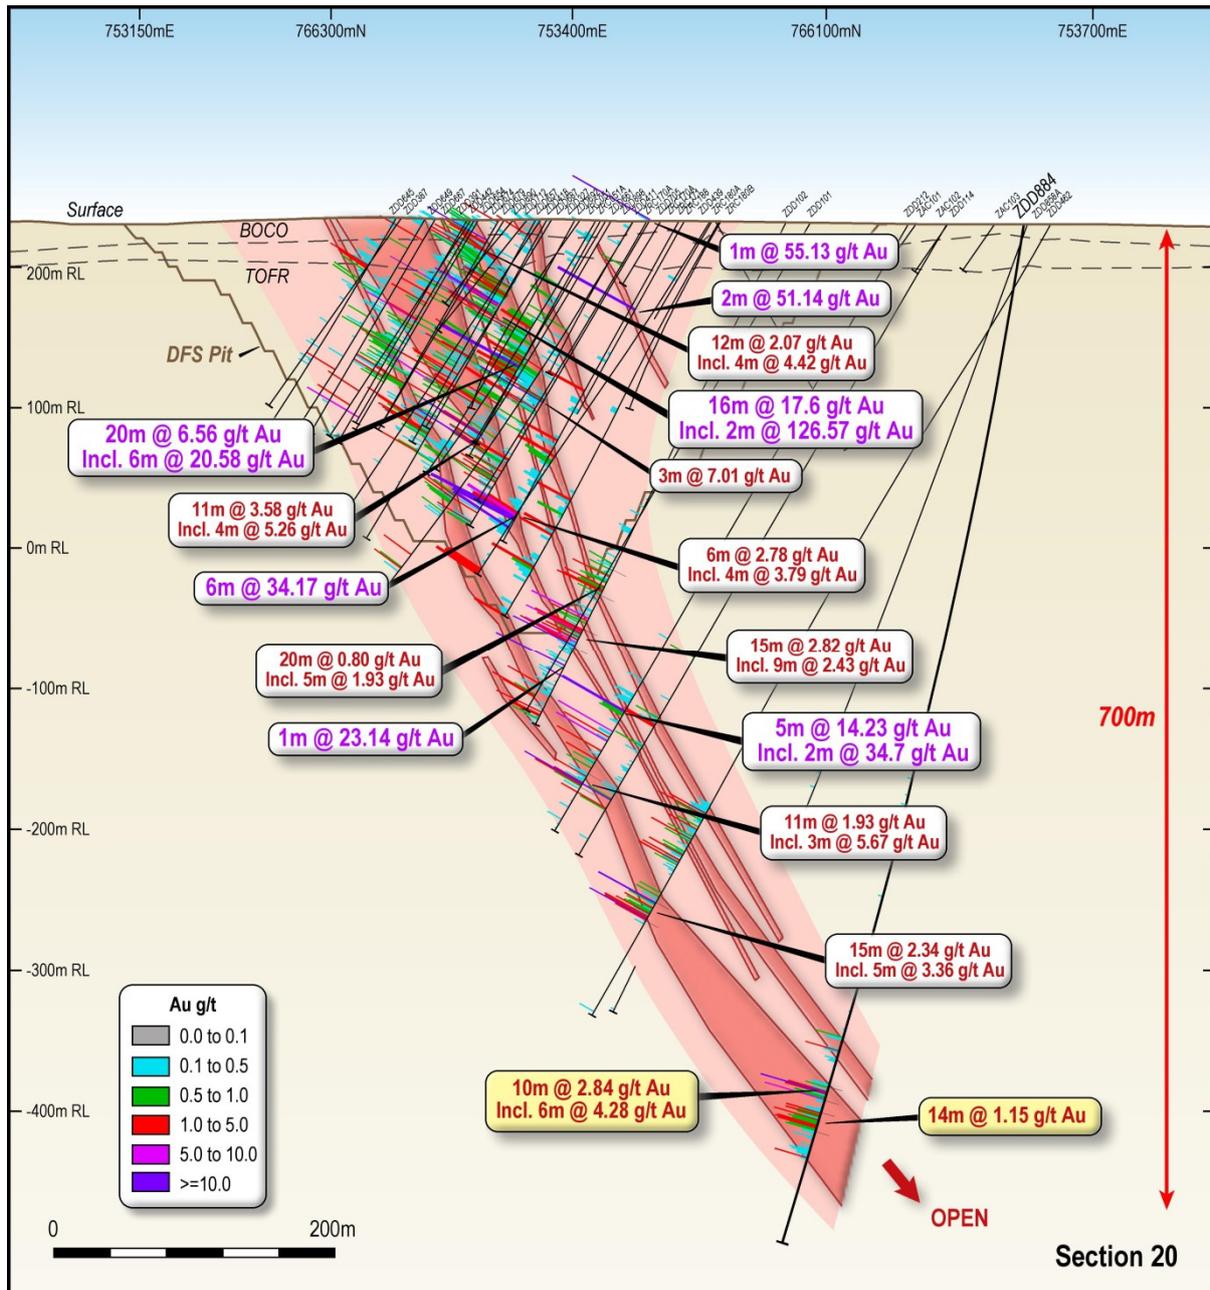


Figure 2: Oblique cross section showing latest drill results at AG Core (Section 20 +/-50m)

Infill Drilling – AG Core

Results are presented for 16 diamond drill holes (3,074m) completed as part of Tietto’s infill drilling program which aims to increase confidence in Abujar mineral resource estimates (i.e., upgrading Indicated Resources to Measured Resources).

More significant intersections from the latest batch of assays received for 1m diamond drill samples are summarised in **Table 1**.

Table 1: Significant Intersections from AG Core Infill³

Hole id	Depth from	Depth to	Length	g/t Au	Includes ⁴
ZDD788	83	95	12	1.28	4m @ 2.46 g/t Au
ZDD789	95	97	2	8.38	2m @ 8.38 g/t Au
ZDD790	117	131	14	2.14	6m @ 4.44 g/t Au
ZDD793	116	127	11	1.39	6m @ 1.63 g/t Au
ZDD796	144	154	10	3.01	5m @ 5.59 g/t Au
ZDD805	105	115	10	3.04	3m @ 8.34 g/t Au
ZDD806	11	29	18	3.67	6m @ 8.27 g/t Au
ZDD817	112	126	14	2.14	7m @ 3.26 g/t Au
ZDD859	37	47	10	16.53	5m @ 32.61 g/t Au
ZDD859	113	114	1	21.87	1m @ 21.87 g/t Au

Drill collar details and assay results are in **Table 7** and **Table 10** respectively. Location of the reported drill collars and associated assay results is presented in **Figure 1**. An oblique cross-section highlighting selected assay results is presented in **Figure 5** and an oblique long section presents the results in **Figure 6**.

Tietto is completing infill drilling at AG on 25m line spacing (Measured Resource) between Section Lines 14 to 30 across the AG Core to a depth covering the first two years of gold production at Abujar (~120m vertical depth).

Tietto has now reported results for 176 holes for 32,401m with the release of this eighth batch. Significant intersections (>=20 gold gram metres) from the program including those from this release are presented in **Table 2**.

Table 2: AG Core - significant intersections from infill program greater than 20 gold gram metres⁵

Hole id	From	To	Length	g/t Au	gold gram metres	ASX Reporting
ZDD685	54	56	2	143.77	288	13 Oct 2021
ZDD687	69	85	16	17.60	282	22 Sep 2021
ZDD696	125	132	7	30.67	215	21 Oct 2021
ZDD859	37	47	10	16.53	165	20 Jan 2022
ZDD665	97	119	22	5.62	124	13 Oct 2021

³ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

⁴ 1.0 g/t Au cut off used with max 3m internal dilution and no top cut applied

⁵ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

Hole id	From	To	Length	g/t Au	gold gram metres	ASX Reporting
ZDD596	85	88	3	35.65	107	10 Sep 2021
ZDD685	61	67	6	17.01	102	13 Oct 2021
ZDD703	187	195	8	12.43	99	12 Nov 2021
ZDD617	66	73	7	12.48	87	10 Sep 2021
ZDD734	83	90	7	11.87	83	30 Nov 2021
ZDD704	214	232	18	4.36	78	12 Nov 2021
ZDD703	208	220	12	6.10	73	12 Nov 2021
ZDD730	91	96	5	14.44	72	22 Dec 2021
ZDD814	254	261	7	9.38	66	30 Nov 2021
ZDD806	11	29	18	3.67	66	20 Jan 2022
ZDD702	227	236	9	6.97	63	12 Nov 2021
ZDD633	60	78	18	3.30	59	22 Sep 2021
ZDD701	120	128	8	7.17	57	30 Nov 2021
ZDD705	0	1	1	55.13	55	12 Nov 2021
ZDD724	82	91	9	6.03	54	22 Dec 2021
ZDD770	74	79	5	10.16	51	22 Dec 2021
ZDD760	234	243	9	5.47	49	22 Dec 2021
ZDD691	79	87	8	5.95	48	21 Oct 2021
ZDD699	162	176	14	3.27	46	12 Nov 2021
ZDD606	143	162	19	2.33	44	10 Sep 2021
ZDD750	196	200	4	10.75	43	30 Nov 2021
ZDD671A	136	150	14	2.87	40	13 Oct 2021
ZDD698	178	189	11	3.58	39	12 Nov 2021
ZDD670	138	139	1	36.82	37	22 Dec 2021
ZDD727	61	72	11	3.34	37	30 Nov 2021
ZDD799	18	29	11	3.09	34	22 Dec 2021
ZDD774	248	252	4	8.30	33	22 Dec 2021
ZDD707	201	228	27	1.19	32	12 Nov 2021
ZDD805	105	115	10	3.04	30	20 Jan 2022
ZDD796	144	154	10	3.01	30	20 Jan 2022
ZDD790	117	131	14	2.14	30	20 Jan 2022
ZDD817	112	126	14	2.14	30	20 Jan 2022
ZDD607	93	110	17	1.68	29	10 Sep 2021
ZDD707	237	238	1	28.39	28	12 Nov 2021
ZDD658	71	77	6	4.69	28	13 Oct 2021
ZDD691	112	115	3	9.32	28	21 Oct 2021
ZDD629	34	41	7	3.66	26	10 Sep 2021
ZDD703	149	151	2	12.64	25	12 Nov 2021
ZDD618	91	98	7	3.56	25	10 Sep 2021
ZDD679	18	30	12	2.07	25	22 Sep 2021
ZDD636	101	105	4	6.11	24	22 Sep 2021
ZDD636	70	74	4	6.02	24	22 Sep 2021

Hole id	From	To	Length	g/t Au	gold gram metres	ASX Reporting
ZDD608	104	113	9	2.64	24	10 Sep 2021
ZDD668	108	109	1	23.70	24	13 Oct 2021
ZDD668	168	169	1	23.52	24	13 Oct 2021
ZDD608	167	173	6	3.88	23	10 Sep 2021
ZDD589	56	68	12	1.91	23	10 Sep 2021
ZDD747	40	46	6	3.82	23	22 Dec 2021
ZDD682	97	105	8	2.80	22	22 Dec 2021
ZDD688	157	159	2	11.14	22	22 Dec 2021
ZDD637	79	90	11	1.98	22	22 Sep 2021
ZDD859	113	114	1	21.87	22	20 Jan 2022
ZDD706A	113	129	16	1.34	21	12 Nov 2021
ZDD705	148	151	3	7.01	21	12 Nov 2021
ZDD704	146	157	11	1.90	21	12 Nov 2021
ZDD682	181	191	10	2.06	21	22 Dec 2021
ZDD750	225	231	6	3.33	20	30 Nov 2021
ZDD615	11	19	8	2.45	20	10 Sep 2021
ZDD662A	66	67	1	19.52	20	13 Oct 2021

Drilling has intersected good widths and grades in assays received to date with these new results increasing the tally to 64 intervals greater than 50 gold gram metres and 10 intervals greater than 200 gold gram metres at AG Core (**Table 3**).

Gold mineralisation at AG Core remains open at depths well below open pit limits and Tietto will plan further drilling to assess the potential for underground mining at Abujar below the planned DFS open pit.

Table 3: AG Core - significant intersections greater than 50 gold gram metres⁶

Hole id	From	To	Length	g/t Au	gold gram metres	Section
ZDD035	76	83	7	57.79	405	26B
ZDD084	55	62	7	41.76	292	24B
ZDD685	54	56	2	143.77	288	25A
ZDD687	69	85	16	17.60	282	19C
ZDD095	215	236	21	13.02	273	23B
ZDD043	111	127	16	16.31	261	27C
ZDD082	83	85	2	113.30	227	26
ZDD696	125	132	7	30.67	215	25A
ZDD028	39	57	18	11.72	211	28B
ZRC171	238	244	6	34.17	205	20
ZDD333	173	194	21	8.73	183	25B
ZDD859	37	47	10	16.53	165	28C
ZDD027	70	88	18	8.37	151	29
ZDD437	203	208	5	28.91	145	19
ZRC172	108	128	20	6.56	131	19B
ZDD445	120	149	29	4.46	129	16B
ZDD665	97	119	22	5.62	124	24A

⁶ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

Hole id	From	To	Length	g/t Au	gold gram metres	Section
ZDD180	286	296	10	12.09	121	20B
ZDD058	179	186	7	15.50	109	25
ZDD596	85	88	3	35.65	107	28A
ZDD061	254	255	1	103.90	104	22
ZRC188	70	72	2	51.14	102	20B
ZDD685	61	67	6	17.01	102	25A
ZDD074	174	176	2	50.65	101	22B
ZDD703	187	195	8	12.43	99	23C
ZDD232	370	382	12	7.54	90	24B
ZRC164A	268	286	18	4.90	88	19
ZDD617	66	73	7	12.48	87	25C
ZDD096	173	178	5	17.27	86	23B
ZDD734	83	90	7	11.87	83	22C
ZDD704	214	232	18	4.36	78	18C
ZDD081	78	94	16	4.75	76	25
ARC17	48	58	10	7.46	75	17B
ZDD703	208	220	12	6.10	73	23C
ZDD029	91	97	6	12.07	72	27C
ZDD730	91	96	5	14.44	72	18C
ZRC047A	208	218	10	7.16	72	23
ZDD212	401	406	5	14.23	71	20B
ZDD043	177	178	1	70.35	70	27C
ZDD092	147	153	6	11.49	69	23B
ZRC187	100	106	6	11.37	68	19B
ZDD096	122	124	2	33.53	67	23B
ZDD187	259	267	8	8.26	66	24B
ZDD806	11	29	18	3.67	66	23A
ZRC169B	186	192	6	10.52	63	21C
ZDD702	227	236	9	6.97	63	19A
ZRC037	66	68	2	31.10	62	25
ZDD104	364	370	6	9.91	59	16
ZDD633	60	78	18	3.30	59	21A
ZRC044	74	76	2	29.50	59	24
ZRD104	245	251	6	9.60	58	19
ZDD337A	257	267	10	5.75	58	24B
ZDD511	536	540	4	14.37	57	23
ZDD701	120	128	8	7.17	57	25A
ZDD235	440	447	7	8.16	57	24B
ZDD180	317	323	6	9.35	56	20B
ZRC188	252	254	2	27.70	55	20B
ZDD705	0	1	1	55.13	55	19C
ZDD058	194	198	4	13.63	55	25
ZDD724	82	91	9	6.03	54	22C
ZDD093	0	2	2	26.33	53	23B
ZDD080	54	56	2	26.05	52	26B
ZDD770	74	79	5	10.16	51	14C
ZRC174	240	250	10	5.00	50	16B

Underground Target - AG Core

Results are presented for four diamond drill holes (2,033m) completed as part of Tietto's down-dip extensional drilling program targeting potential underground mineralisation at AG Core. Three holes were abandoned before hitting design depth. The fourth hole (ZDD844) drilled on Section 20 attained a depth of 746.5m downhole (deepest hole drilled at Abujar) and intersected high-grade gold mineralisation 150m below previous drilling.

More significant intersections from the latest batch of assays received for 1m diamond drill samples are summarised in **Table 4**.

Table 4: Significant Intersections from drilling testing UG targets at AG Core ⁷

Hole id	Depth from	Depth to	Length	g/t Au	Includes ⁸
ZDD820	375	384	9	2.22	2m @ 7.71 g/t Au
ZDD843	347	366	19	1.65	5m @ 4.93 g/t Au
ZDD844	630	640	10	2.84	6m @ 4.28 g/t Au

Drill collar details and assay results are in **Table 8** and **Table 11** respectively. Location of the reported drill collars and associated assay results is presented in **Figure 1**. An oblique cross-section highlighting selected assay results is presented in **Figure 2** and an oblique long section presents the results in **Figure 6**.

Gold mineralisation at AG Core remains open at depths well below open pit limits and further drilling is planned to assess the potential for underground mining at Abujar below the planned DFS open pit.

⁷ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

⁸ 2.0 g/t Au cut off used with max 3m internal dilution and no top cut applied

Infill and Extensional Drilling – AG South

Results are presented for 17 diamond holes (3,764.5) completed as part of Tietto’s infill and extensional drilling program at AG South.

More significant intersections from the latest batch of assays received for 1m diamond drill samples are summarised in **Table 5**.

Table 5: Significant Intersections from AG South drilling⁹

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁰
ZDD807	122	128	6	2.45	5m @ 2.82 g/t Au
ZDD807	181	188	7	9.78	2m @ 32.42 g/t Au
ZDD821	265	266	1	25.18	1m @ 25.18 g/t Au
ZDD821	286	287	1	11.77	1m @ 11.77 g/t Au
ZDD848	46	47	1	24.73	1m @ 24.73 g/t Au

Drill collar details and assay results are in **Table 9** and **Table 12** respectively. Location of the reported drill collars and associated assay results is presented in a plan (**Figure 1**) an oblique long section presents the results in **Figure 6**. This new intercept increases the tally to 12 intervals greater than 50 gold gram metres at AG South (**Table 6**).

Table 6: AG South - significant intersections greater than 50 gold gram metres¹¹

Hole id	From	To	Length	g/t Au	gold gram metres	Section
ZDD542	99	108	9	61.97	558	6
ZDD491	53	60	7	51.56	361	6B
ZDD539	64	67	3	58.61	176	9B
ZDD483	71	74	3	52.95	159	4B
ARC04	102	110	8	13.66	109	5
ZDD536	63	67	4	26.05	104	5B
ZDD181	34	40	6	16.09	97	1B
ARC05	12	20	8	9.06	73	2B
ZDD807	181	188	7	9.78	68	1B
ZDD814	254	261	7	9.38	66	3B
ZDD239	183	184	1	64.30	64	2
ARC03	64	70	6	9.22	55	7

Gold mineralisation at AG South remains open and Tietto is planning further drilling to the limits of mineralisation.

⁹ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

¹⁰ 1.0 g/t Au cut off used with max 3m internal dilution and no top cut applied

¹¹ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

Next Steps

The second tranche of Tietto's A\$85 million Placement¹² was approved by shareholders on 7 January 2022 and shares issued on 17 January 2022.

The capital raising complements Tietto's debt strategy, where the Company mandated Taurus Mining Finance Fund No.2 L.P. (Taurus) to deliver an underwritten Project Development Facility of up to US\$140 million of debt funding for the US\$200 million project.

Tietto remains very well positioned to advance its dual strategy into 2022:

1. **Continue to drive rapid resource growth at the 3.35Moz Abujar Gold Project; and**
2. **Fast-track development of Abujar Gold Project to achieve first gold in Q4 CY22**

Tietto continued to deliver milestones during 2021 and key findings from its 5 October 2021 Definitive Feasibility Study (DFS) demonstrated robust financial results and estimated gold production of 260,000oz in the first year and 200,000oz per year over the first six years of Abujar's 11-year mine life (refer ASX announcement 5 October 2021).

The Company is negotiating the final regulatory step, the Abujar Mining Convention, with the Ivorian Government, having already secured all mining and environmental approvals.

Tietto's owner's team is advancing construction of the process plant and associated infrastructure which remains on schedule as the Abujar Gold Project progresses towards first gold by the end of Q4 CY22 and on track to become West Africa's next gold mine.

ENDS

This update has been authorised on behalf of Tietto Minerals Limited by:

Dr Caigen Wang
Managing Director
Tel: +61 8 9420 8270

Mark Strizek
Executive Director
Mob: +61 431 084 305

¹² ASX 22 November 2021

Competent Persons' Statements

The information in this report that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Mark Strizek, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Strizek is a non-executive director of the Company. Mr Strizek has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Strizek consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears. Additionally, Mr Strizek confirms that the entity is not aware of any new information or data that materially affects the information contained in the ASX releases referred to in this report.

The information in this presentation that relates to Mineral Resources was prepared by RPM Global and released on the ASX platform on 12 July 2021. The Company confirms that it is not aware of any new information or data that materially affects the Minerals Resources in this publication. The Company confirms that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed. The Company confirms that the form and context in which the RPM Global's findings are presented have not been materially modified.

The information in this report that relates to Mineral Resources is based on information evaluated by Mr Jeremy Clark who is a Member of The Australasian Institute of Mining and Metallurgy (MAusIMM) and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Clark is an associate of RPM and he consents to the inclusion of the estimates in the report of the Mineral Resource in the form and context in which they appear.

The information in this report that relates to Ore Reserves was prepared by RPM and released on the ASX platform on 5 October 2021. The Company confirms that it is not aware of any new information or data that materially affects the Ore Reserves in this publication. The Company confirms that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed. The Company confirms that the form and context in which the RPM findings are presented have not been materially modified

The information in the report that relates to Ore Reserves for the Abujar Gold Project is based on information compiled and reviewed by Mr. Igor Bojanic, who is a Fellow of the Australasian Institute of Mining and Metallurgy, and is an employee of RPM. Mr. Igor Bojanic has sufficient experience, which is relevant to the style of mineralisation and type of deposit under consideration and to the activity, which he has undertaken to qualify as a Competent Person, as defined in the 2012 Edition of the Australasian Code for the Reporting of Mineral Resources and Ore Reserves. Mr. Igor Bojanic is not aware of any potential for a conflict of interest in relation to this work for the Client. The estimates of Ore Reserves presented in this Statement have been carried out in accordance with the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (30 September, 2021).

Compliance Statement

This report contains information extracted from ASX market announcements reported in accordance with the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" ("2012 JORC Code") and available for viewing at www.tietto.com. Includes results reported previously and published on ASX platform, 16 January 2018, 27 March 2018, 23 April 2018, 8 May 2018, 7 June 2018, 4 October 2018, 1 November 2018, 28 November 2018, 31 January 2019, 26 February 2019, 12 March 2019, 19 March 2019, 9 April 2019, 9 May 2019, 30 May 2019, 9 July 2019, 26 July 2019, 2 October 2019, 24 October 2019, 12 December 2019, 23 January 2020, 20 February 2020, 10 March 2020, 24 March 2020, 2 April 2020, 9 April 2020, 23 April 2020, 3 June 2020, 9 June 2020, 25 June 2020, 2 July 2020, 21 July 2020, 20 July 2020, 29 July 2020, 19 August 2020, 9 September 2020, 24 September 2020, 26 October 2020, 11 December 2020, 18 January 2021, 12 February 2021, 23 February 2021, 23 March 2021, 6 April 2021, 8 April 2021, 20 April 2021, 3 May 2021, 6 May 2021, 11 May 2021, 21 May 2021, 27 May 2021, 11 June 2021, 16 June 2021, 12 July 2021, 10 September 2021, 22 September 2021, 5 October 2021, 13 October 2021, 21 October 2021, 8 November 2021, 12 November 2021, 16 November 2021, 22 November 2021, 30 November 2021, 10 December 2021, 22 December 2021 and 18 January 2022. The Company confirms that all material assumptions and technical parameters underpinning the Mineral Resources and Ore Reserves continue to apply and have not materially changed. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcements.

Table 7: Drill Collar Information for holes completed at AG Core

Hole ID	Easting	Northing	Elevation	Depth (m)	dip	Azi	Section	Drill Type
ZDD781	753,147	765,796	224	220	-60	305	15A	DD
ZDD784	753,017	765,775	219	120	-60	305	14A	DD
ZDD788	753,041	765,756	220	150	-60	305	14A	DD
ZDD789	753,722	766,680	210	190.5	-60	305	25C	DD
ZDD790	753,809	766,805	208	221	-60	305	27A	DD
ZDD792	752,977	765,743	218	121.5	-60	305	13C	DD
ZDD793	753,055	765,743	220	170	-60	305	14A	DD
ZDD794	753,479	766,544	215	151.5	-60	305	23A	DD
ZDD795	752,994	765,724	218	121.5	-60	305	13C	DD
ZDD796	753,790	766,748	209	240.5	-60	305	26C	DD
ZDD805	753,026	765,699	218	174	60	305	13C	DD
ZDD806	753,538	766,502	214	252	-60	305	23A	DD
ZDD809	753,045	765,688	218	133.5	-60	305	13C	DD
ZDD813	753,561	766,488	216	254	-60	305	23A	DD
ZDD817	753,580	766,473	217	262.5	-60	305	23A	DD
ZDD851	753,948	767,009	207	141.5	-60	305	29C	DD
ZDD859	753,898	766,921	209	150	-45	305	28C	DD
17 Holes				3,074.0m				

Table 8: Drill Collar Information for holes testing UG targets completed at AG Core

Hole ID	Easting	Northing	Elevation	Depth (m)	dip	Azi	Section	Drill Type
ZDD820	753,941	766,553	209	442.5	-62	305	26	DD*
ZDD837	753,948	766,623	208	418.5	-62	305	26B	DD*
ZDD843	753,877	766,540	209	425.5	-62	305	25B	DD*
ZDD844	753,660	766,018	231	746.5	-86	284	20	DD ¹
4 Holes				2,033.0m				

* Hole abandoned

1 Assays pending

Table 9: Drill Collar Information for holes completed at AG South

Hole ID	Easting	Northing	Elevation	Depth (m)	dip	Azi	Section	Drill Type
ZDD785	752,964	765,680	218	135	-60	305	13A	DD
ZDD802	752,683	765,057	222	276	-50	309	6B	DD
ZDD807	752,423	764,627	217	244	-50	309	1B	DD
ZDD810	752,956	765,476	221	276	-50	309	11B	DD
ZDD815	752,933	765,429	222	310	-55	309	11	DD
ZDD816	752,560	764,825	217	271.5	-56	309	4	DD
ZDD821	752,570	764,762	215	370.5	-60	309	3B	DD
ZDD823	752,918	765,375	223	315.5	-50	309	10B	DD
ZDD826	752,865	765,282	222	296.5	-55	307	9B	DD
ZDD833	752,864	765,227	220	320.5	-55	309	9	DD
ZDD835	752,586	765,126	227	90	-50	309	6B	DD
ZDD836	752,757	765,189	225	211.5	-55	309	8	DD
ZDD839	752,771	765,227	227	113.5	-50	309	8B	DD*
ZDD839A	752,779	765,227	227	222	-50	309	8B	DD
ZDD842	752,726	765,261	230	111	-50	309	8B	DD
ZDD845	752,723	765,334	231	81	-50	309	9	DD
ZDD848	752,781	765,350	232	120	-47	309	9B	DD
17 Holes				3,764.5m				

*Hole abandoned

Table 10: Assay results being reported for holes completed at AG Core¹³

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁴
ZDD781	58	59	1	0.46	
ZDD781	111	114	3	1.72	2m @ 2.16 g/t Au
ZDD781	118	119	1	0.44	
ZDD781	144	147	3	0.94	1m @ 1.23 g/t Au
ZDD781	161	162	1	0.98	
ZDD781	167	168	1	0.58	
ZDD784	0	1	1	2.74	1m @ 2.74 g/t Au
ZDD784	21	22	1	2.87	1m @ 2.87 g/t Au
ZDD784	51	52	1	0.69	
ZDD784	57	58	1	0.60	
ZDD788	27	28	1	0.76	
ZDD788	40	41	1	0.67	
ZDD788	83	95	12	1.28	4m @ 2.46 g/t Au
ZDD788	117	118	1	5.13	1m @ 5.13 g/t Au
ZDD788	144	145	1	0.45	
ZDD788	146	147	1	0.40	
ZDD789	71	74	3	0.45	
ZDD789	95	97	2	8.38	2m @ 8.38 g/t Au
ZDD789	105	115	10	0.51	1m @ 1.74 g/t Au
ZDD789	122	132	10	1.41	5m @ 2.54 g/t Au
ZDD789	146	150	4	1.09	1m @ 3.16 g/t Au
ZDD790	28	29	1	0.71	
ZDD790	35	41	6	0.41	
ZDD790	59	69	10	1.24	5m @ 1.79 g/t Au
ZDD790	86	88	2	0.82	
ZDD790	92	102	10	0.94	3m @ 1.88 g/t Au
ZDD790	112	113	1	1.77	1m @ 1.77 g/t Au
ZDD790	117	131	14	2.14	6m @ 4.44 g/t Au
ZDD792	14	16	2	0.84	1m @ 1.25 g/t Au
ZDD792	75	76	1	0.48	
ZDD792	107	108	1	0.54	
ZDD793	1	3	2	0.80	1m @ 1.13 g/t Au
ZDD793	68	71	3	2.01	1m @ 5.34 g/t Au
ZDD793	116	127	11	1.39	6m @ 1.63 g/t Au
ZDD793	150	151	1	2.39	1m @ 2.39 g/t Au
ZDD793	165	166	1	0.40	
ZDD794	11	12	1	0.59	
ZDD794	20	29	9	0.46	

¹³ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

¹⁴ 1.0 g/t Au cut off used with max 3m internal dilution and no top cut applied

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁴
ZDD795	7	8	1	2.27	1m @ 2.27 g/t Au
ZDD795	39	40	1	0.56	
ZDD795	55	56	1	0.44	
ZDD795	87	88	1	0.61	
ZDD796	42	44	2	0.78	
ZDD796	48	49	1	4.74	1m @ 4.74 g/t Au
ZDD796	61	70	9	1.35	7m @ 1.53 g/t Au
ZDD796	110	114	4	0.58	1m @ 1.06 g/t Au
ZDD796	125	128	3	0.67	1m @ 1.27 g/t Au
ZDD796	144	154	10	3.01	5m @ 5.59 g/t Au
ZDD805	0	1	1	0.45	
ZDD805	49	50	1	0.44	
ZDD805	88	89	1	0.94	
ZDD805	100	101	1	2.54	1m @ 2.54 g/t Au
ZDD805	105	115	10	3.04	3m @ 8.34 g/t Au
ZDD805	121	126	5	0.43	
ZDD805	149	150	1	0.58	
ZDD805	154	156	2	0.80	1m @ 1.13 g/t Au
ZDD805	169	170	1	0.56	
ZDD806	11	29	18	3.67	6m @ 8.27 g/t Au
ZDD806	58	66	8	1.78	2m @ 5.75 g/t Au
ZDD806	71	72	1	0.61	
ZDD806	113	125	12	1.02	3m @ 2.84 g/t Au
ZDD806	137	138	1	0.54	
ZDD806	147	148	1	1.42	1m @ 1.42 g/t Au
ZDD806	235	236	1	0.64	
ZDD809	1	2	1	0.41	
ZDD809	96	97	1	6.07	1m @ 6.07 g/t Au
ZDD809	117	118	1	0.58	
ZDD813	8	9	1	0.41	
ZDD813	28	30	2	1.34	1m @ 2.1 g/t Au
ZDD813	34	35	1	0.89	
ZDD813	48	49	1	0.51	
ZDD813	71	72	1	0.40	
ZDD813	78	79	1	0.85	
ZDD813	90	98	8	1.16	6m @ 1.43 g/t Au
ZDD813	142	149	7	1.38	5m @ 1.73 g/t Au
ZDD813	206	207	1	1.35	1m @ 1.35 g/t Au
ZDD817	22	23	1	14.08	1m @ 14.08 g/t Au
ZDD817	32	34	2	1.13	1m @ 1.33 g/t Au
ZDD817	50	58	8	0.60	1m @ 1.86 g/t Au
ZDD817	76	79	3	1.47	3m @ 1.47 g/t Au

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁴
ZDD817	103	104	1	1.01	1m @ 1.01 g/t Au
ZDD817	112	126	14	2.14	7m @ 3.26 g/t Au
ZDD817	132	133	1	0.80	
ZDD817	137	139	2	0.62	
ZDD817	167	169	2	4.52	2m @ 4.51 g/t Au
ZDD817	229	230	1	10.38	1m @ 10.38 g/t Au
ZDD851	0	1	1	0.78	
ZDD851	27	28	1	0.69	
ZDD851	41	42	1	0.65	
ZDD851	46	47	1	0.68	
ZDD851	62	66	4	1.97	2m @ 3.31 g/t Au
ZDD851	77	78	1	0.95	
ZDD851	85	86	1	0.75	
ZDD851	94	95	1	0.85	
ZDD851	99	106	7	0.43	
ZDD851	107	108	1	0.42	
ZDD851	115	116	1	0.45	
ZDD859	37	47	10	16.53	5m @ 32.61 g/t Au
ZDD859	54	55	1	0.42	
ZDD859	59	74	15	0.62	1m @ 1.72 g/t Au
ZDD859	81	88	7	0.63	1m @ 1.61 g/t Au
ZDD859	92	93	1	0.70	
ZDD859	97	100	3	0.51	
ZDD859	107	108	1	1.11	1m @ 1.11 g/t Au
ZDD859	113	114	1	21.87	1m @ 21.87 g/t Au
ZDD859	118	119	1	0.52	
ZDD859	131	132	1	0.50	

Table 11: Assay results being reported for holes testing UG targets completed at AG Core¹⁵

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁶
ZDD820	145	146	1	0.81	
ZDD820	179	180	1	0.40	
ZDD820	214	215	1	2.33	1m @ 2.33 g/t Au
ZDD820	315	316	1	0.67	
ZDD820	319	320	1	0.73	
ZDD820	341	342	1	0.87	
ZDD820	349	350	1	0.41	
ZDD820	363	371	8	0.63	
ZDD820	375	384	9	2.22	2m @ 7.71 g/t Au
ZDD837	275	280	5	0.43	
ZDD837	297	298	1	0.52	
ZDD837	310	311	1	0.86	
ZDD837	318	324	6	0.58	
ZDD837	328	329	1	0.81	
ZDD837	334	335	1	0.60	
ZDD837	338	352	14	0.59	
ZDD837	387	388	1	0.73	
ZDD843	280	284	4	0.74	
ZDD843	300	301	1	1.22	
ZDD843	305	306	1	0.64	
ZDD843	311	312	1	0.42	
ZDD843	323	342	19	0.68	1m @ 2.42 g/t Au
ZDD843	347	366	19	1.65	5m @ 4.93 g/t Au
ZDD844	370	371	1	0.42	
ZDD844	593	594	1	0.77	
ZDD844	603	604	1	1.20	
ZDD844	630	640	10	2.84	6m @ 4.28 g/t Au
ZDD844	649	663	14	1.15	1m @ 2.68 g/t Au
ZDD844	667	668	1	0.45	
ZDD844	677	678	1	0.45	
ZDD844	682	683	1	1.12	

¹⁵ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

¹⁶ 2.0 g/t Au cut off used with max 3m internal dilution and no top cut applied

Table 12: Assay results being reported for holes at AG South¹⁷

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁸
ZDD785	2	3	1	0.43	
ZDD785	12	13	1	0.49	
ZDD785	133	134	1	0.61	
ZDD802	132	133	1	1.72	1m @ 1.72 g/t Au
ZDD802	161	164	3	0.59	1m @ 1.04 g/t Au
ZDD802	189	191	2	1.05	1m @ 1.19 g/t Au
ZDD802	238	239	1	0.64	
ZDD802	265	266	1	0.48	
ZDD807	0	1	1	0.45	
ZDD807	35	36	1	0.44	
ZDD807	77	80	3	2.11	3m @ 2.11 g/t Au
ZDD807	92	97	5	0.44	1m @ 1.24 g/t Au
ZDD807	103	107	4	0.92	2m @ 1.4 g/t Au
ZDD807	122	128	6	2.45	5m @ 2.82 g/t Au
ZDD807	136	137	1	0.43	
ZDD807	153	157	4	0.44	
ZDD807	159	160	1	0.46	
ZDD807	161	163	2	0.42	
ZDD807	175	176	1	0.51	
ZDD807	181	188	7	9.78	5m @ 13.5 g/t Au
ZDD807	194	196	2	1.21	1m @ 1.86 g/t Au
ZDD807	217	218	1	0.56	
ZDD810	184	185	1	1.19	1m @ 1.19 g/t Au
ZDD810	197	198	1	0.45	
ZDD810	203	204	1	1.40	1m @ 1.4 g/t Au
ZDD810	232	233	1	0.74	
ZDD815	58	59	1	0.45	
ZDD815	165	169	4	0.57	1m @ 1 g/t Au
ZDD815	176	177	1	0.99	
ZDD815	230	231	1	0.65	
ZDD815	239	240	1	0.42	
ZDD816	38	39	1	0.78	
ZDD816	170	174	4	0.53	
ZDD816	223	225	2	3.49	2m @ 3.49 g/t Au
ZDD816	230	231	1	7.67	1m @ 7.67 g/t Au
ZDD821	216	217	1	1.02	1m @ 1.02 g/t Au

¹⁷ 0.4 g/t Au cut off used with max 3m internal dilution and no top cut applied

¹⁸ 1.0 g/t Au cut off used with max 3m internal dilution and no top cut applied

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁸
ZDD821	221	222	1	2.06	1m @ 2.06 g/t Au
ZDD821	246	248	2	1.79	1m @ 2.62 g/t Au
ZDD821	259	260	1	0.43	
ZDD821	265	266	1	25.18	1m @ 25.18 g/t Au
ZDD821	272	276	4	0.53	
ZDD821	286	287	1	11.77	1m @ 11.77 g/t Au
ZDD821	363	364	1	6.81	1m @ 6.81 g/t Au
ZDD823	168	169	1	0.43	
ZDD823	170	171	1	0.44	
ZDD823	195	196	1	0.55	
ZDD823	220	222	2	1.30	1m @ 1.69 g/t Au
ZDD826	54	55	1	2.63	1m @ 2.63 g/t Au
ZDD826	74	75	1	0.89	
ZDD826	169	170	1	1.26	1m @ 1.26 g/t Au
ZDD826	211	212	1	0.49	
ZDD826	244	245	1	1.11	1m @ 1.11 g/t Au
ZDD826	283	284	1	0.68	
ZDD826	289	290	1	0.41	
ZDD833	102	103	1	0.48	
ZDD833	117	118	1	0.81	
ZDD833	126	127	1	0.54	
ZDD833	140	141	1	0.48	
ZDD833	215	216	1	0.63	
ZDD833	221	222	1	0.51	
ZDD833	228	229	1	0.56	
ZDD833	277	278	1	0.77	
ZDD835	57	58	1	1.90	1m @ 1.9 g/t Au
ZDD836	118	121	3	0.41	
ZDD836	182	183	1	0.63	
ZDD839	81	82	1	1.07	1m @ 1.07 g/t Au
ZDD839	105	111	6	0.98	3m @ 1.12 g/t Au
ZDD839A	7	9	2	1.28	1m @ 2.06 g/t Au
ZDD839A	53	54	1	0.42	
ZDD839A	95	96	1	0.58	
ZDD839A	106	107	1	0.73	
ZDD839A	114	120	6	0.41	
ZDD839A	129	130	1	0.52	
ZDD839A	147	148	1	0.63	
ZDD839A	161	162	1	0.87	
ZDD842	1	3	2	0.88	1m @ 1.04 g/t Au
ZDD842	13	14	1	0.60	
ZDD842	38	40	2	2.87	1m @ 4.93 g/t Au

Hole id	Depth from	Depth to	Length	g/t Au	Includes ¹⁸
ZDD842	65	66	1	0.85	
ZDD842	74	75	1	0.48	
ZDD842	104	105	1	0.66	
ZDD845	1	4	3	1.00	1m @ 2.23 g/t Au
ZDD845	15	16	1	0.52	
ZDD848	1	2	1	0.56	
ZDD848	17	18	1	4.59	1m @ 4.59 g/t Au
ZDD848	23	24	1	0.44	
ZDD848	29	30	1	1.45	1m @ 1.45 g/t Au
ZDD848	46	47	1	24.73	1m @ 24.73 g/t Au
ZDD848	70	71	1	1.22	1m @ 1.22 g/t Au

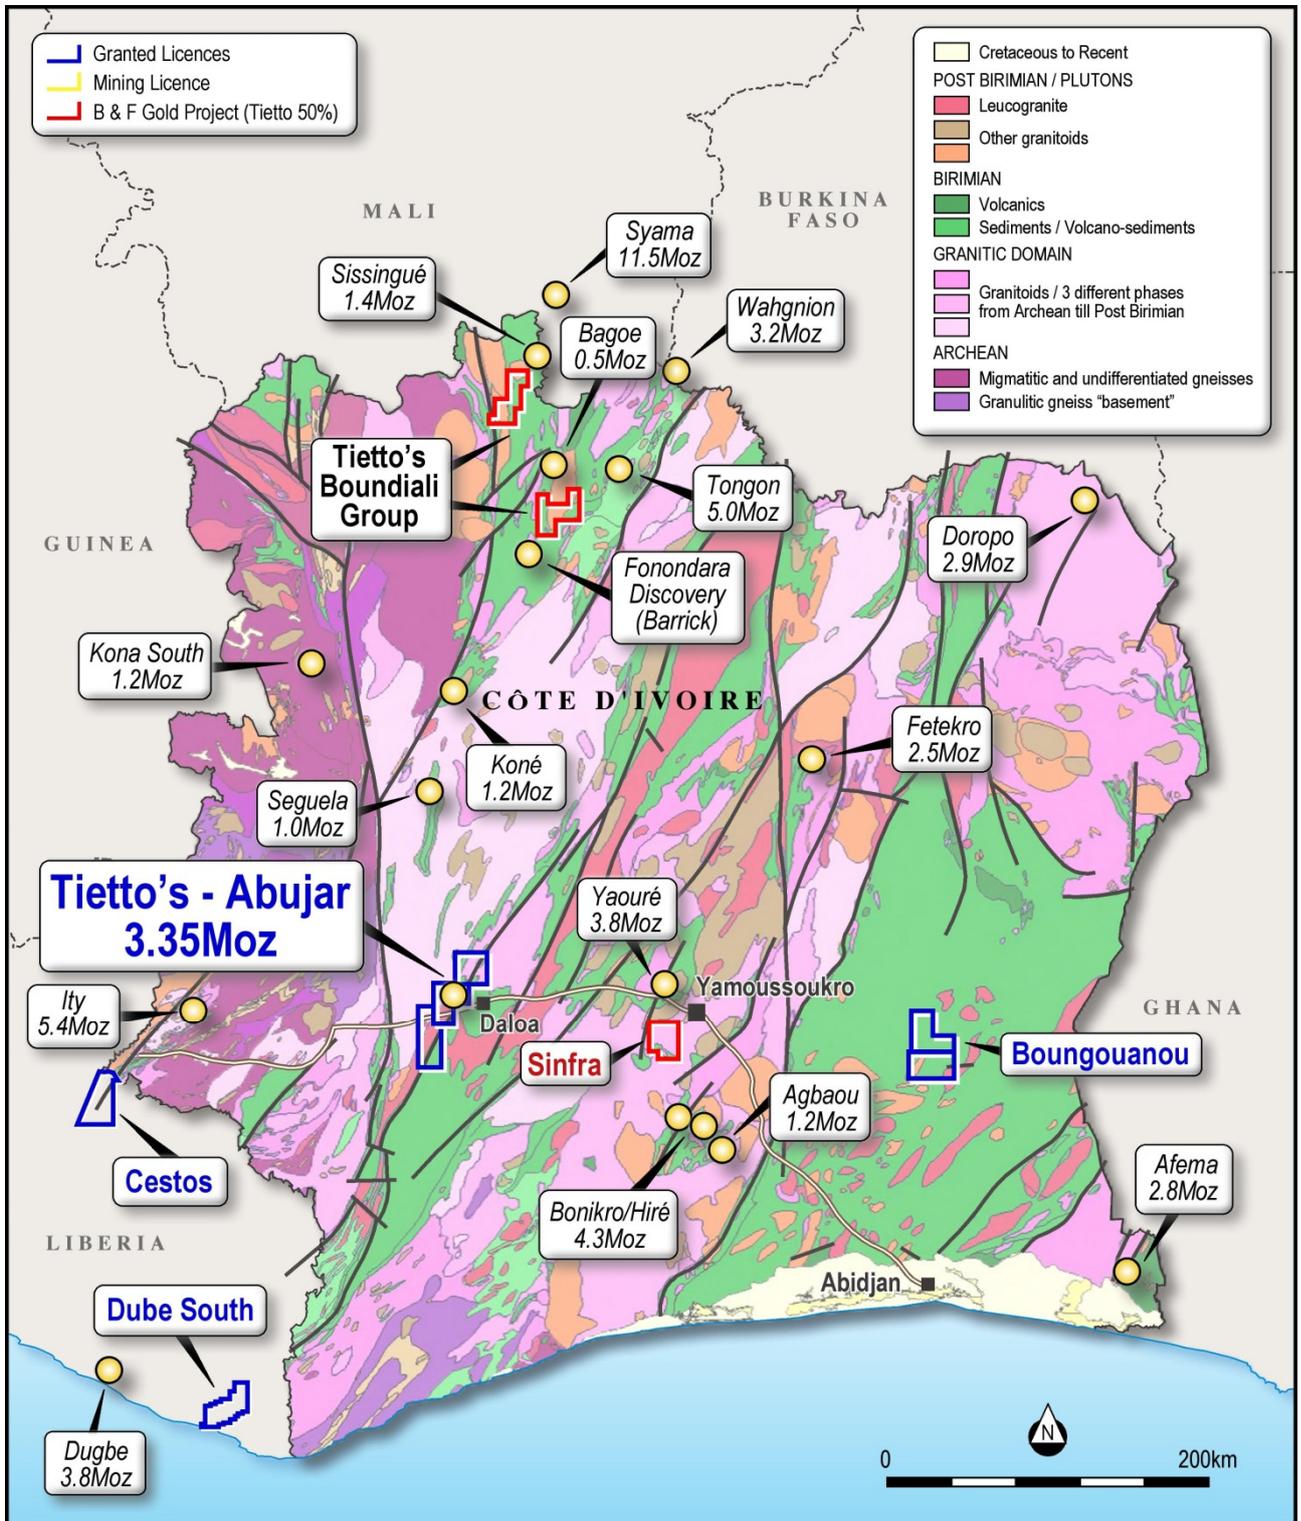


Figure 3: Plan view showing location of Tietto's Projects

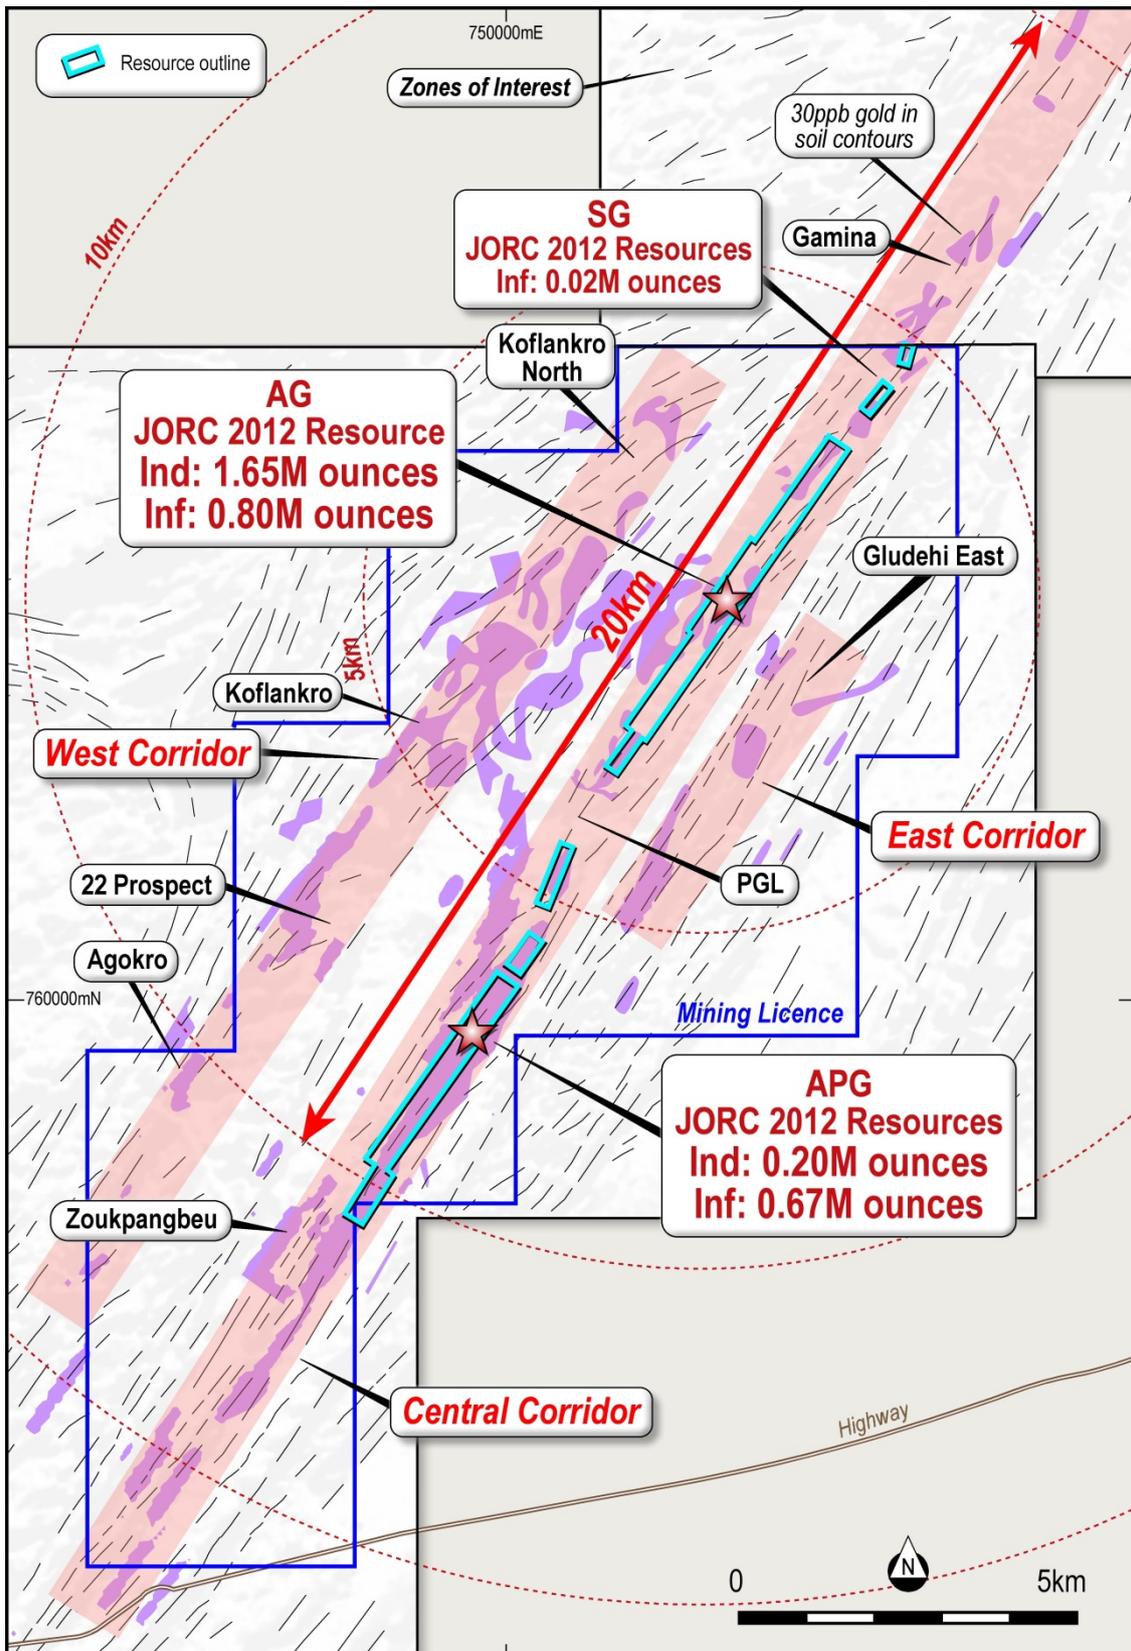


Figure 4: Plan view showing Abujar Project

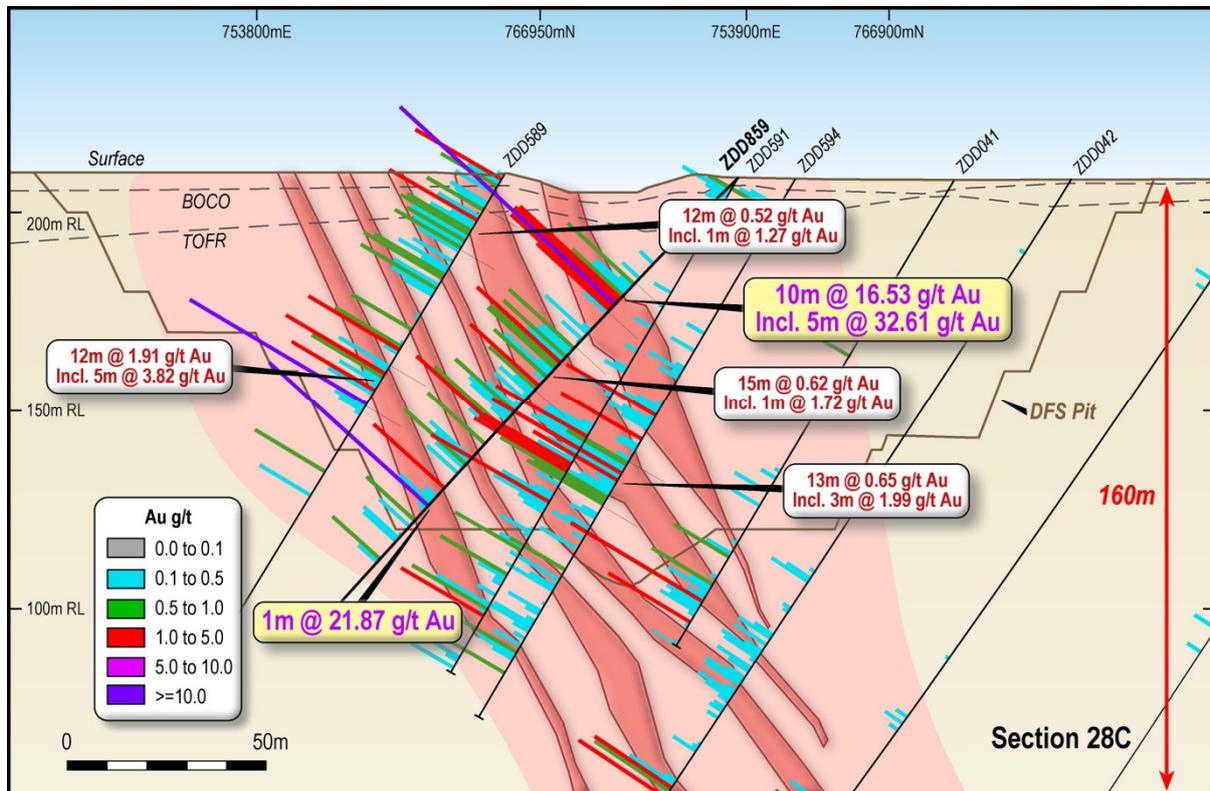


Figure 5: Oblique cross section showing latest drill results at AG (section 28C +/-12.5m)

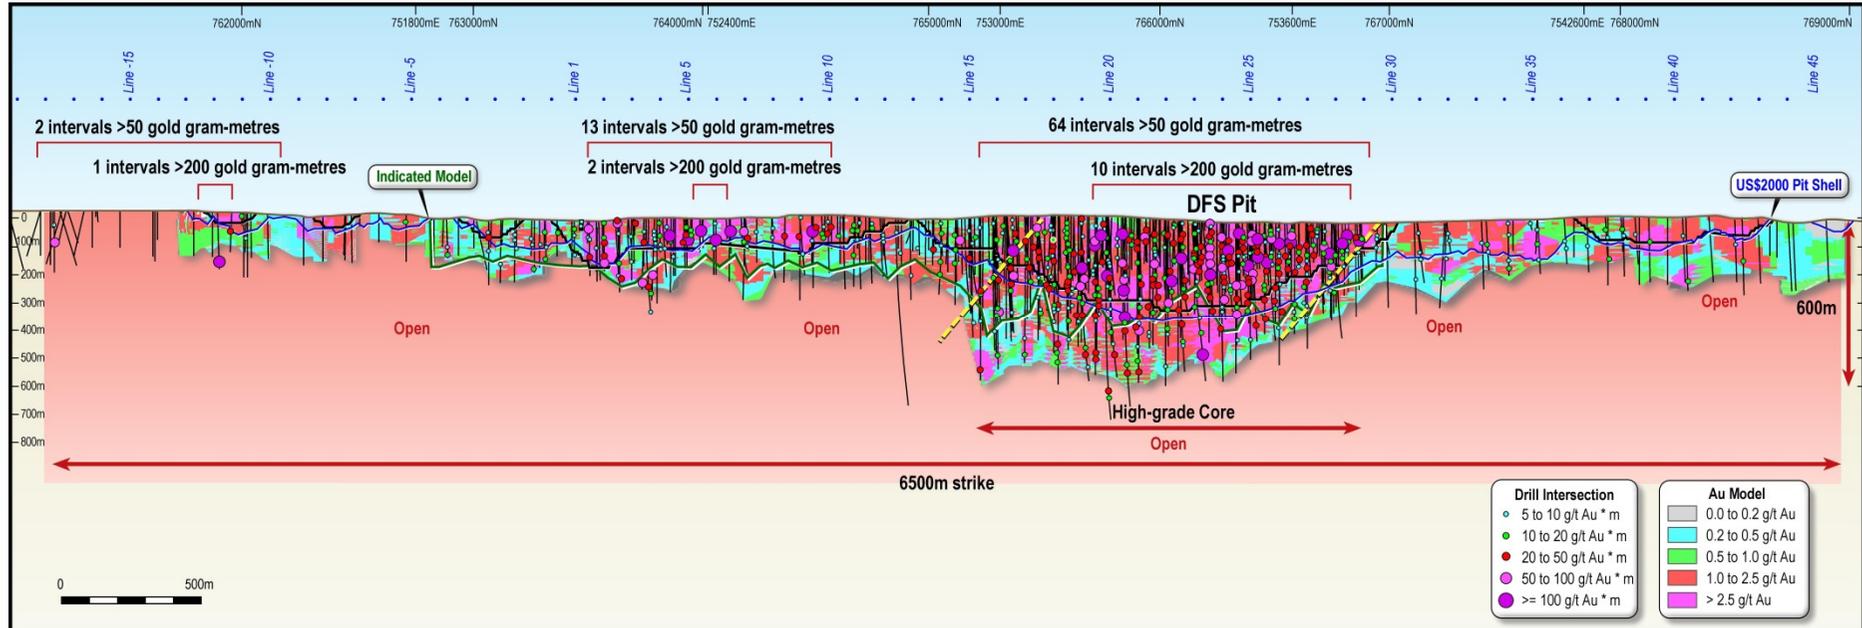


Figure 6: Oblique long section showing latest drill results at AG

Abujar Gold Project, Côte d'Ivoire

The Abujar Gold Project is located approximately 30km from the major regional city of Daloa in central western Côte D'Ivoire. It is close to good regional and local infrastructure to facilitate exploration and development being only 15km from nearest tarred road and grid power.

The Abujar Gold Project is comprised of three contiguous exploration tenements, Middle, South and North tenement, with a total land area of 1,114km², of which less than 10% has been explored. It features an NNE-orientated gold corridor over 70km striking across three tenements.

In December 2020, a gold exploitation (mining) licence within the Abujar Middle exploration tenement was granted. The mining tenement covers an area of 120.36km².

Tietto is well placed to grow its resource inventory. It has substantially advanced the project since starting exploration in mid-2015 with the identification of 3.35 million ounces Indicated and Inferred JORC 2012 Mineral Resources and has completed metallurgical test work with the delivery of a 4Mtpa DFS on 5 October 2021. Tietto is fully funded and is targeting first gold at Abujar in Q4 CY2022.

Abujar Mineral Resources

Results of the independent Mineral Resources estimate for the Project are tabulated in the Statement of Mineral Resources below, which are reported in line with the requirements of the 2012 JORC Code; as such the Statement of Mineral Resources is suitable for public reporting. The Statement of Mineral Resources shown in Table 13.

Within AG, the Mineral Resource is reported at a cut of grade of 0.25 g/t Au within a pit shell that used a gold price of 2,000 USD per troy ounce, and 1.0 g/t Au below the pit shell. The cut off grades were based on estimated mining and processing costs and recovery factors and are detailed in JORC Table 1. It is highlighted that while a 2,000 USD per ounce pit shell was utilised the cut-off grades were estimated based on the gold price of 1,800 USD per troy ounce which is 1.25 times the consensus forecast as of June, 2021.

Within APG, the Mineral Resource is reported at a cut of grade of 0.30 g/t Au within a pit shell that used a gold price of 2,000 USD per troy ounce, and 1.0 g/t Au below the pit shell. The cut off grades were based on estimated mining and processing costs and recovery factors and are detailed in JORC Table 1. It is highlighted that while a 2,000 USD per ounces pit shell was utilised the cut-off grades were estimated based on the gold price of 1,800 USD per troy ounce which is 1.25 times the consensus forecast as of June, 2021.

There is no change to the South Gamina Resource (October 21, 2020) which is reported to a depth of 120m and not reported at depths below 120m.

Table 13: Statement of Mineral Resources by Deposit as at 12 July, 2021. Reported at 0.25 g/t Au cut off within pit shells; and 1.0 g/t Au cut off below the pit shells for AG, and reported at 0.3 g/t Au cut off within pit shells; and 1.0 g/t Au cut off below the pit shells for APG, and 0.3 g/t Au to a depth of 120m for SG.

Area	Class	Oxide			Transition			Fresh			Total		
		Quantity (Mt)	Au (g/t)	Au (Moz)	Quantity (Mt)	Au (g/t)	Au (Moz)	Quantity (Mt)	Au (g/t)	Au (Moz)	Quantity (Mt)	Au (g/t)	Au (Moz)
AG	Indicated	0.5	1.2	0.02	2.1	1.3	0.09	32.4	1.5	1.54	35.0	1.5	1.65
	Inferred	0.4	1.0	0.01	1.7	0.9	0.05	13.3	1.7	0.74	15.3	1.6	0.80
	Total	0.9	1.1	0.03	3.8	1.1	0.14	45.6	1.5	2.28	50.3	1.5	2.45
APG	Indicated	0.5	0.7	0.01	1.9	0.7	0.05	6.0	0.7	0.14	8.4	0.7	0.20
	Inferred	1.2	0.7	0.03	5.2	0.7	0.11	22.0	0.7	0.52	28.4	0.7	0.67
	Total	1.7	0.8	0.04	7.1	0.7	0.16	28.0	0.7	0.67	36.7	0.7	0.87
SG	Inferred	0.0	0.7	0.001	0.10	0.8	0.001	0.4	1.6	0.02	0.5	1.4	0.02
Grand Total		2.6	0.9	0.07	11.0	0.9	0.30	74.0	1.2	2.97	87.5	1.2	3.35

Note:

1. The Mineral Resources has been compiled under the supervision of Mr. Jeremy Clark who is a sub-consultant to RPM and a Registered Member of the Australian Institute of Mining and Metallurgy. Mr. Clark has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that he has undertaken to qualify as a Competent Person as defined in the JORC Code.
2. All Mineral Resources figures reported in the table above represent estimates at 12 July, 2021. Mineral Resource estimates are not precise calculations, being dependent on the interpretation of limited information on the location, shape and continuity of the occurrence and on the available sampling results. The totals contained in the above table have been rounded to reflect the relative uncertainty of the estimate. Rounding may cause some computational discrepancies.
3. Mineral Resources are reported in accordance with the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The Joint Ore Reserves Committee Code – JORC 2012 Edition).
4. The Mineral Resources have been reported at a 100% equity stake and not factored for ownership proportions.

The total resource at AG and APG is reported at varying cut-off grades are provided in Table 14 below. However, RPM recommends that the Mineral Resource be reported using the criteria shown in Table 13.

It is highlighted that Table 14 is not a Statement of Mineral Resources and does not include the use of pit shells to report the quantities rather the application of various cut off grades. As such variations with Table 13 will occur and a direct comparison is not able to be completed.

Table 14: AG and APG Mineral Resources at varying cut off grades

COG	AG Indicated			AG Inferred			APG Indicated			APG Inferred			Total		
	Quantity (Mt)	Au (g/t)	Au (Moz)	Quantity (Mt)	Au (g/t)	Au (Moz)	Quantity (Mt)	Au (g/t)	Au (Moz)	Quantity (Mt)	Au (g/t)	Au (Moz)	Quantity (Mt)	Au (g/t)	Au (Moz)
0.1	46.1	1.2	1.8	44.5	0.8	1.2	11.9	0.6	0.2	66.3	0.5	1.1	168.7	0.8	4.4
0.2	44.1	1.2	1.8	41.4	0.9	1.2	11.7	0.6	0.2	62.1	0.6	1.1	159.3	0.8	4.3
0.3	39.2	1.4	1.7	35.3	1.0	1.1	10.4	0.7	0.2	52.3	0.6	1.0	137.2	0.9	4.1
0.4	32.8	1.6	1.7	27.7	1.2	1.1	7.8	0.8	0.2	38.9	0.7	0.9	107.2	1.1	3.8
0.5	27.4	1.8	1.6	22.0	1.4	1.0	5.7	0.9	0.2	26.0	0.8	0.7	81.2	1.3	3.4
0.6	23.1	2.0	1.5	17.2	1.6	0.9	4.2	1.0	0.1	16.6	1.0	0.5	61.0	1.6	3.1
0.7	19.4	2.3	1.4	13.7	1.8	0.8	3.1	1.2	0.1	11.8	1.2	0.4	48.1	1.8	2.8
0.8	16.7	2.5	1.4	11.6	2.0	0.8	2.4	1.3	0.1	8.5	1.3	0.4	39.1	2.1	2.6
0.9	14.7	2.8	1.3	9.9	2.3	0.7	1.9	1.4	0.1	6.9	1.4	0.3	33.4	2.3	2.4
1	13.1	3.0	1.3	8.6	2.4	0.7	1.5	1.5	0.1	5.5	1.6	0.3	28.7	2.5	2.3
1.1	11.9	3.2	1.2	7.6	2.6	0.6	1.2	1.7	0.1	3.8	1.8	0.2	24.5	2.7	2.1
1.2	10.8	3.4	1.2	6.8	2.8	0.6	0.9	1.8	0.1	3.0	1.9	0.2	21.5	2.9	2.0
1.3	9.9	3.6	1.1	6.2	3.0	0.6	0.8	1.9	0.0	2.6	2.0	0.2	19.5	3.1	2.0
1.4	9.2	3.8	1.1	5.6	3.1	0.6	0.7	2.0	0.0	2.4	2.1	0.2	17.8	3.3	1.9
1.5	8.5	4.0	1.1	5.2	3.3	0.5	0.6	2.1	0.0	1.9	2.3	0.1	16.2	3.5	1.8
1.6	7.9	4.1	1.0	4.8	3.4	0.5	0.5	2.2	0.0	1.5	2.5	0.1	14.7	3.7	1.7
1.8	7.0	4.4	1.0	4.1	3.7	0.5	0.4	2.4	0.0	1.2	2.7	0.1	12.7	4.0	1.6
1.9	6.6	4.6	1.0	3.8	3.9	0.5	0.3	2.4	0.0	1.1	2.8	0.1	11.8	4.1	1.6
2	6.2	4.8	1.0	3.5	4.0	0.5	0.3	2.5	0.0	1.0	2.9	0.1	11.0	4.3	1.5
2.5	4.8	5.5	0.8	2.5	4.7	0.4	0.1	3.2	0.0	0.6	3.2	0.1	7.9	5.1	1.3
3	3.8	6.3	0.8	2.0	5.3	0.3	0.1	3.5	0.0	0.3	3.9	0.0	6.1	5.8	1.1

Abujar Ore Reserves

A total of 34.4 Mt of Open Cut Ore Reserves at 1.3 g/t Au grade for 1.45Moz were estimated as at 30 September 2021 by RPM, refer Table 15 (refer ASX release 5 October 2021). As no mining has taken place at the site, the reporting date reflects the completion of the technical work supporting the estimate.

Table 15: Open Cut Ore Reserve Estimate as at 30 September 2021

Deposit	Proved			Probable			Total		
	Quantity	Au	Au	Quantity	Au	Au	Quantity	Au	Au
	Mt	g/t	Moz	Mt	g/t	Moz	Mt	g/t	Moz
AG	0	0	0	31.3	1.4	1.38	31.3	1.4	1.38
APG	0	0	0	3.2	0.7	0.07	3.2	0.7	0.07
Total	0	0	0	34.4	1.3	1.45	34.4	1.3	1.45

Notes:

- The Ore Reserves has been compiled under the supervision of Mr. Igor Bojanic who is a full time employee of RPM and a Fellow of the Australian Institute of Mining and Metallurgy. Mr. Bojanic has sufficient experience that is relevant to the style of mineralisation, type of deposit and mining method under consideration and to the activity, which he has undertaken, to qualify as a Competent Person as defined in the JORC Code.*
- The following marginal cut-off grades determined based on a US\$ 1,407 per troy ounce gold price, and costs and mining and metallurgical modifying factors estimated as part of the DFS.*
- Marginal cut-off grades for AG: Oxide 0.29 g/t Au, Transition 0.29 g/t Au and Fresh 0.30 g/t Au.*
- Marginal cut-off grades for APG: Oxide 0.32 g/t Au, Transition 0.32 g/t Au and Fresh 0.33 g/t Au (as greater haulage distance to AG ROM pad)*
- Ore Reserve estimates are not precise calculations, being dependent on the interpretation of limited information on the location, shape and continuity of the occurrence and on the available sampling results. The quantities contained in the above table have been rounded to three significant figures to reflect the relative uncertainty of the estimate. Rounding may cause values in the table to appear to have computational errors.*
- All Ore Reserve estimates are on a dry basis.*
- The Ore Reserves have been reported at a 100% equity stake and not factored for ownership proportions.*

Section 1 of the JORC Code, 2012 Edition – Table 1

Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Samples at AG and APG project areas were collected using drilling techniques including Air Core Drilling (AC), Reverse Circulation (RC), and Diamond Drilling (DD). Holes were generally angled at 60° to 90° towards northwest at AG to optimally intersect the mineralised zones however within APG the recent holes were drilled to the North East due to the reinterpreted westerly dip of the mineralisation. AC samples were collected every 1m from cyclone, and 2m composite samples which is combined with two 1/3 of each one meter sample were sent for assaying. No Aircore samples were used in the estimates reported in the Report. RC samples were collected as 1m samples from the cyclone, which were subsequently spear sampled to form 2 m samples which were subsequently sent to the laboratory. All one meter samples were split using a riffle splitter with 1/4 of the same retained in the plastic bags, the remainder was re-split with 1/4 retained in calico bag and the remainder discarded. Diamond core was logged both for geological and mineralised structures as noted above. The core was then cut in half using a diamond brick cutting saw on 1m intervals. Typically the core was sampled to geological intervals as defined by the geologist within the even two metre sample intervals utilised. The right hand side of the core was always submitted for analysis with the left side being stored in trays on site. No QAQC was completed during the 2015 drilling program, however the vast majority of the data is sourced from the 2016-2020 drilling which implemented definitive QAQC program, to provide verification of the sample procedure, the sample preparation and the analytical precision and accuracy of the primary laboratory. Sampling and QAQC procedures were carried out to industry standards upon the advice of RPM. Sample preparation was completed by independent international accredited laboratories ALS Ghana in 2016 and Intertek Minerals Ltd in 2018 to 2020. Following cutting or splitting, the samples were bagged by the Client employees and then sent to the laboratory for preparation. These samples were subsequently sent to Ghana for analysis via 30g fire assay in 2016-2017

Criteria	JORC Code explanation	Commentary
		<i>(ALS Ghana) and 150g fire assay in 2018-2020 (Intertek Ghana).</i>
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> • AC drilling size is 89 mm, RC drilling comprising 105mm diameter face sampling bit. Diamond drilling carried out with mostly NTW and some HQ sized equipment. PQ-size rods and casing were used at the top the holes to stabilise the collars although no samples were taken from the PQ size core.
Drill sample recovery	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • Within the Diamond drilling typically core recoveries ranged between 85% and 100% for all holes with no significant issues noted. All 2019 and 2020 holes have recoveries above 95% in the majority of the mineralised areas. • Some low recovery are associated with intensely fractured or faulted intervals and the more intensely weathered upper zone however These low recoveries are not considered material to the total Mineral Resource currently estimated. • AC, RC samples were visually checked for recovery, moisture and contamination. RPM notes that it has relied on information for the majority of holes for sample recovery based on drilling plods however considers sample recovery suitable and notes that the majority of the Mineral Resources reported are underpinned by diamond holes. • No relationship exists between sample recovery and grade.
Logging	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • All holes were field logged by company geologists. Lithological, alteration and mineralogical nomenclature of the deposit as well as sulphide content were recorded. No geotechnical and structural data measured has been recorded until the last 10 holes of the 2019 program and the 2020 holes. • Photography and recovery measurements were carried out by assistants under a geologist's supervision. The logging for all RC holes is also recorded on a logging "chip-board", where the chips for each metre are glued to a board to form a visual log of the entire hole • All drill holes were logged in full. • Logging was qualitative and quantitative in nature.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-</i> 	<ul style="list-style-type: none"> • HQ and NTW core was cut in half using a core saw. Typically the core was sampled to major geological intervals as defined by the geologist within the even two metre sample intervals utilised. All samples were collected from the same side of the core. • AC, RC samples were collected as 1m samples from the cyclone, which were subsequently composited using as spear samples to form 2 m samples. • Sampling of diamond core and AC, RC chips

Criteria	JORC Code explanation	Commentary
	<p><i>sampling stages to maximise representivity of samples.</i></p> <ul style="list-style-type: none"> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<p>used industry standard techniques. Sample preparation for the 2020 drilling is detailed below; previous releases detail the 2016 and 2018 drilling results. After drying the sample is subject to a primary crush to 2mm. Sample is split through a riffle splitter until 250gm is left (this involves 4-5 splits through the riffle splitter).</p> <ul style="list-style-type: none"> • The 250gm sample is milled through an LM5 using a single puck to 90% <75 micron • Milled sample is homogenised through a matt roll with a 150gm routine sample collected using a spoon around the quadrants and sent to Ghana for analysis and the remaining 100gm kept at Intertek for checks. • Field QC procedures involved the use of 2 types certified reference materials (1 in 20) which is certified by Geostats Ltd, • Primary RC duplicates: Generated from the first splitter off the rig and inserted 5% (1 in 20 samples). This sample is collected from a spear sample from the reject material of the primary split. • Primary DD duplicate: Generated by cutting the remaining half core into a ¼ and sampled. • Coarse blank samples: Inserted 1 in every 20 samples • Laboratory Internal Duplicates and Standards • Sample sizes are considered appropriate to correctly represent the moderately nuggetty gold mineralisation based on: the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and assay value ranges for Au.
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometres, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • The analytical techniques used Fire Assay on 150g pulp samples. • No geophysical tools were used to determine any element concentrations used in this Mineral Resource estimate. • Sample preparation checks for fineness were carried out by the laboratory as part of internal procedures to ensure the grind size of 2mm was being attained. Laboratory QAQC includes the use of internal standards using certified reference material, and pulp replicates. No anomalous assays were noted in information provided to RPM or from discussions with the Client. • The QAQC results confirm that acceptable levels of accuracy and precision have been established for the Classifications applied.
<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> 	<ul style="list-style-type: none"> • The Company has developed logging and sampling procedures that is based on the African experience of the local teams and subsequently reviewed by RPM during the site visits that confirmed the processes and protocols implemented giving the results a high level of confidence. The Company

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<p>geologists log the core and RC samples according to the existing lithological, alteration and mineralogical nomenclature of the deposit as well as sulphide content. Photography and recovery measurements were carried out by assistants under a geologist's supervision. The logging for all RC holes is also recorded on a logging "chip-board", where the chips for each metre are glued to a board to form a visual log of the entire hole</p> <ul style="list-style-type: none"> Twinned holes have not been drilled as not considered appropriate as the Company has been responsible for all holes. Logging records were mostly registered in physical format and were input into a digital format. The core photographs, collar coordinates and down the hole surveys were received in digital format. Assay values that were below detection limit were adjusted to equal half of the detection limit value. Un-sampled intervals were assumed to have no mineralisation and they were therefore set to blank in the database, however these are minimal. The selective original data review and site visit observations carried out by RPM did not identify any material issues with the data entry or digital data. In addition RPM considers that the onsite data management system meets industry standard which minimizes potential 'human' data-entry errors and no systematic fundamental data entry errors or data transfer errors.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> All drill hole and trench collar locations were surveyed utilising the differential GPS methods by third party surveyors. RPM notes that the DGPS system utilised is typically within a 10 cm accuracy range which is suitable for the classification applied. The Client's drilling teams utilised the Reflex EZ-shot instrument to measure deviations in azimuth and inclination angles for all holes; however, vertical holes were not surveyed. The first measurement is taken at 5 m depth, and then at approximately every 30 to 50m depth interval and at the end of the hole. Small scale artisanal mining has been undertaken on several areas within the project. This mining is restricted typically to the upper 10m of the oxide material however is variable in depth and extent with recent underground mining occurring in the fresh rock. For AG area, the latest provided topographic survey models based on satellite imagery. In addition two key areas with known underground mining were depleted a further 20m. For AGP area, no significant UG mining has been undertaken

Criteria	JORC Code explanation	Commentary
		as such the latest topography was utilised as the depletion.
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • Drill hole collars were generally spaced on an approximate 100 m by 50 m grid in both deposits with recent drilling including infill drilling on 50m by 50m spacing within AG with some closer spacing in the central core of AG. • The drill hole spacing and distribution is considered sufficient to establish the degree of continuity appropriate for the Inferred and Indicated Mineral Resource estimation procedures. A combined composited file of the 5 largest lodes with the AG area was created for constructing variogram. Object 40 was also investigated which returned very similar variograms. • The most prevalent sample lengths inside the mineralised wireframes was 1m and 2 m, and as a result, 2m was chosen as the composite length. The samples inside the mineralised wireframes were then composited to 2 m lengths
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • No bias was interpreted to be introduced as most drill holes are angled to northwest in AG, which is approximately perpendicular to the orientation of the mineralised trends are interpreted being comprised of southeast-dipping lodes striking 30° dipping at varying angles of inclination typically between 60° and 80°. • APG has recently been reinterpreted to have a westerly dipping orientation, as such recent holes have been drilled to the southeast. All previous holes were drilled to the northwest, however given the large drill spacing this is not consider to be a bias in the sampling and was considered during interpretation.
Sample security	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • Chain of custody is managed by the Client's senior site geologists and geotechnicians. Samples are stored in a core shed at site and samples were delivered to the laboratory by client geologists. Client employees have no further involvement in the preparation or analysis of the samples.
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • A review of sampling techniques was carried out on each site visit by RPM in July 2016 and July 2018 and again in October 2019.

Section 2 of the JORC Code, 2012 Edition – Table 1

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or</i> 	<ul style="list-style-type: none"> • The Project is contained within three adjacent exploration licenses (Zoukougbeu, Zahibo and Issia licenses) which are currently held by third party companies, of which Tietto or its wholly owned

Criteria	JORC Code explanation	Commentary
	<p><i>national park and environmental settings.</i></p> <ul style="list-style-type: none"> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i> 	<p>subsidiaries are part owners. All resource are contained within the Zahibo tenement.</p> <ul style="list-style-type: none"> The tenements are in good standing.
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> No exploration programs have been conducted by other parties on the Project. The license area was not historically known as a prospective region for gold, but recent artisanal workings revealed the presence of primary gold mineralisation in artisanal pits and small scale underground mining.
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> The AG-APG Deposits are located within the Proterozoic Birimian rocks of the Man shield. It is situated on the Daloa 1:200,000 geologic sheet, 30km west of Daloa. It is located in the Hana-Lobo belt, east of the Sassandra fault that marks the boundary between the Man shield (Archean) and Eburnean domain. The regional trend is NNE to NE. The AG-APG deposits resemble typical shear zone deposits of the West African granite-greenstone terrane. The deposits themselves are associated with a major regional shear zone and are developed in a granodiorite host. Mineralisation may be spatially related to the emplacement of intrusives. The gold mineralisation is mesothermal in origin and occurs as free gold in quartz vein stockworks and zones of silicification, associated with pyrite and chalcopyrite. The gold mineralisation is found in linear zones with the contacts showing evidence of shearing. Free gold is frequently observed. Alteration is weak to strong depending on the development of the system. Two types of deformation are present in the drill cores: ductile deformation and brittle deformation. The gold mineralisation is related to deformed granodiorite, in shear zones, with sulphides (mainly pyrite and minor chalcopyrite) associated with visible gold. Alteration is characterized by chlorite, sericite, calcite, secondary quartz and disseminated pyrite. This assemblage is well developed in schistose, foliated rocks with presence of quartz veins or veinlets.
Drill hole information	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length</i> <i>If the exclusion of this information is justified on</i> 	<ul style="list-style-type: none"> Drill hole locations are shown on the map within the body of this Mineral Resource report and the ASX release. All information has been included in the appendices. No RC or DD drill hole information has been excluded however no AC drilling is utilised.

Criteria	JORC Code explanation	Commentary
	<i>the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Intervals are shown in detail. Drilling intervals are predominantly 1m and 2m. AC, RC samples were collected as 1m samples from the cyclone, which were subsequently spear samples to form 2 m samples which were subsequently sent to the laboratory Metal equivalent values are not being reported.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> Most drill holes are angled to northwest at AG, which is approximately perpendicular to the orientation of the mineralised trends as all deposits have similar styles of mineralisation which was interpreted as being comprised of southeast-dipping lodes striking 30° dipping at varying angles of inclination typically between 60° and 80°. APG has recently been reinterpreted to the westerly dip with changes to drilling orientation completed at such. Sections are provided in the main body of the report and the press release however exploration results are not being reported
Diagrams	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> Relevant diagrams have been included within the Mineral Resource report main body of report and ASX release However exploration results are not being reported
Balanced Reporting	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> All drill hole and trench collar locations were surveyed utilising the differential GPS methods by third party surveyors. DGPS system utilised it typically within 10 cm accuracy range. Drilling teams utilised the Reflex EZ-shot instrument to measure deviations in azimuth and inclination angles for all holes; however, vertical holes were not surveyed. The first measurement is taken at 6 m depth, and then at approximately every 30m depth interval and at the end of the hole.
Other substantive exploration data	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or</i> 	<ul style="list-style-type: none"> All interpretations for each deposit are consistent with observations made and information gained during drilling at the project. Feasibility studies are underway with a PFS completed in Q1 2021 and a DFS expected at the end of Q3 2021. Work completed to date has not identified

Criteria	JORC Code explanation	Commentary
	<i>contaminating substances.</i>	any potential deleterious or contaminating substances.
Further work	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large- scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Further infill and extensional drilling is planned and is in the process of being executed • Diagrams accompany this release