

1 April 2021

## ASX Announcement

**More impressive assay results received for the Carlow Castle Q1 2021 drill campaign:**

**Hole ARC277 returns 14m @ 7.03g/t Au, 2.61% Cu and 0.28% Co from 123m.**

### Highlights

- Latest assay results from the Q1 2021 RC drilling campaign completed 10 March 2021. Of the 55-hole program, we continue to receive assay results from the Main Carlow Castle Zone on both the East and West areas expanding the high-grade Gold-Copper-Cobalt mineralized zones.
- Most recent assays received are for the 10 holes ARC271 to ARC280, returning some excellent results, including:
- RC hole ARC277; East end of Main Zone, outstanding Au - Cu grades and widths further growing the resource at depth
  - 14m @ 7.03g/t Au, 2.61% Cu, 0.28% Co from 123m, including;  
3m @ 25.8g/t Au, 5.25% Cu, 0.46% Co from 129m, including;  
1m @ 66.8g/t Au, 6.52% Cu, 0.53% Co from 129m
- RC hole ARC276; East end of Main Zone, outstanding gold grades and widths further growing the resource at depth
  - 3m @ 2.82g/t Au, 0.16% Cu, 0.003% Co from 124m, including;  
1m @ 6.58g/t Au, 0.03% Cu, 0.004% Co from 126m, and
  - 18m @ 3.46g/t Au, 0.66% Cu, 0.33% Co from 201m, including;  
2m @ 13.95g/t Au, 1.32% Cu, 1.59% Co from 201m, and  
1m @ 14.95g/t Au, 1.28% Cu, 0.66% Co from 209m

- RC hole ARC272; East part of Main Zone, excellent gold grades
  - 3m @ 13.3g/t Au, 0.77% Cu, 0.31% Co from 267m, including;  
1m @ 38.4g/t Au, 2.05% Cu, 0.63% Co from 269m
- RC hole ARC280; West end of Main Zone, multiple zones of excellent gold grades further growing the resource
  - 3m @ 2.13g/t Au, 0.19% Cu, 0.06% Co from 72m, and
  - 6m @ 2.97g/t Au, 0.55% Cu, 0.04% Co from 96m, including;  
1m @ 11.5g/t Au, 0.65% Cu, 0.01% Co from 98m
- Senior Carlow Castle Project Team in now place to deliver Project One Million under the leadership of Executive Director Boyd Timler with Exploration Manager Allan Younger and newly appointed Project Manager Steve Boda.
- The Carlow Castle 10,500m Q1 2021 RC drill campaign was expanded to 55 holes. Table 1 summarizes all the important assay results from the first 27 holes received to-date from this program. There remains 28 holes awaiting assay results that should be received over the next few weeks. Of the results received, most were extensional targets on the Main Zone, giving us vital information on the predictability of the implied high grade ore shoots. These results are validating our thinking on the mineralization controls of this ore body.
- The Company has scheduled a Q2 2021 campaign including some 1,500m of diamond drill coring and a minimum of 10,000m of RC drilling, targeting both in-fill and step-out resource definition and some near resource targets from our recently completed DDIP geophysical survey.

**Artemis Resources Limited** (“Artemis” or “the Company”) (ASX:ARV, Frankfurt: ATY, US OTCQB: ARTTF) is pleased to provide an update on drill programmes currently underway at its 100%-owned Carlow Castle Gold and Copper Project in the west Pilbara region of Western Australia.

**Boyd Timler, Executive Director commented:** “As with the previous 11 March 2021 ASX release of assay results from the Q1 2021 drilling program, Carlow Castle drilling continues to return exceptional grades and widths as we expand the mineralized envelope of the Main Zones. These results are defining discrete high-grade gold and copper mineralized shoots within the ore body, helping to expand the mineral resource potential and assisting the targeting of further drilling planned in Q2 2021.

The Company remains excited with these results as it continues to grow the resource potential of Carlow Castle which will be incorporated into a new mineral resource estimation, commencing shortly.

Artemis Resources is building a team of senior technical personnel that understands what is required to progress an advanced stage project like Carlow Castle. As Executive Director I am excited with leading a technical team that is gaining insight into the orebody controls, maximizing the mineral resource potential with a focused, mature, knowledgeable view and utilizing the expertise of our business partners like CSA Global and Resource Potentials.”


### **Summary of Drilling at Carlow Castle**

The Q1 2021 drilling campaign at Carlow Castle completed 10,500m of RC drilling with 55 holes. Of this, results for the first 27 holes have been returned, with assays pending for the remaining 28 holes. The most recent results are from holes located on **Figure 1** and **Figure 2**, with **Table 1** highlighting the significant intercepts from these 27 RC holes.

Holes ARC272 ARC276 and ARC277 were targeting high-grade mineralized shoots in the Eastern Zone of the Main 1.2km structure, with ARC280 targeting a shallowly plunging mineralized shoot on the Western Zone. **Figure 2** spatially locates the significant results on a gold grade contour long-section produced with Leapfrog software. These results have validated the interpreted plunges of the high-grade zones.


ARC272 is interesting in that it has returned a significantly high-grade result were a potential plunging zone was anticipated.

Most importantly, these results are returning high grade gold and copper assays on the main shoots and the continued occurrence of the lower grade gold-copper-cobalt “halo zone” around the high-grade zones.

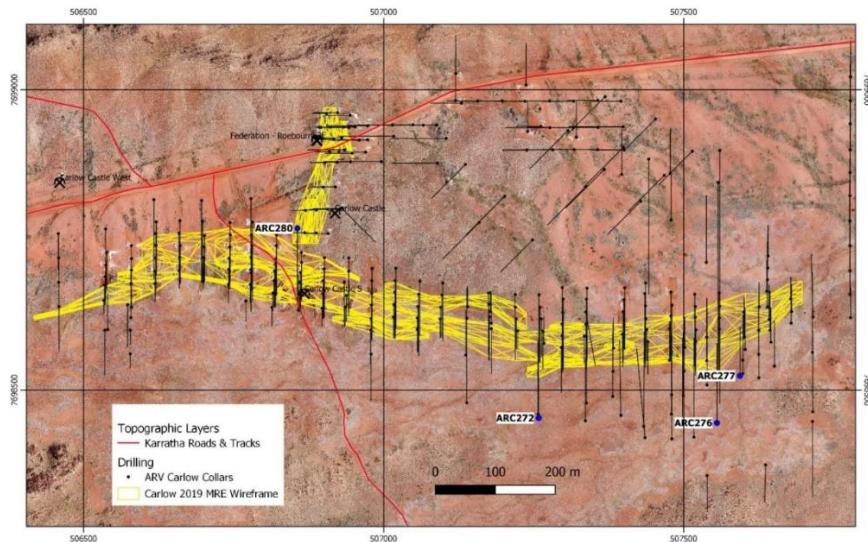

**Figure 1:** Carlow Castle current drilling programme map showing current reverse circulation (RC) hole locations for ARC272, ARC276, ARC277, ARC280 on the Main Zone, east and west areas


Carlow Castle Gold – Copper Project: Long-Section view looking North

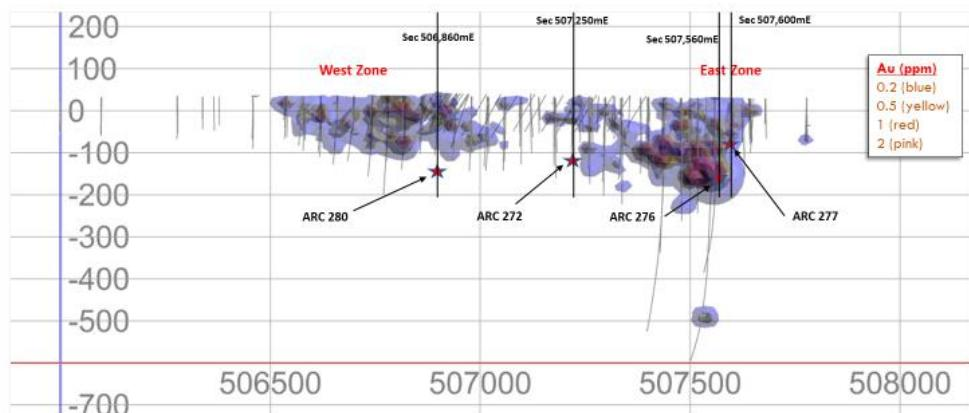

**Figure 2:** Carlow Castle Main Zone; 3D Isometric Leapfrog image of Au mineralization contours, looking north. Showing location of (RC) hole locations for ARC272, ARC276, ARC277, ARC280 on the Main Zone, east and west areas


**Figures 3 – 4 – 5** are north-south cross-sections looking eastward on the Main Zone. These holes have all extended the high-grade mineralization down dip on their respective sections.

ARC277 has extended the mineralization a further +30m down dip with **14m @ 7.03g/t Au** and with a significant **Cu** result of **2.61%**.

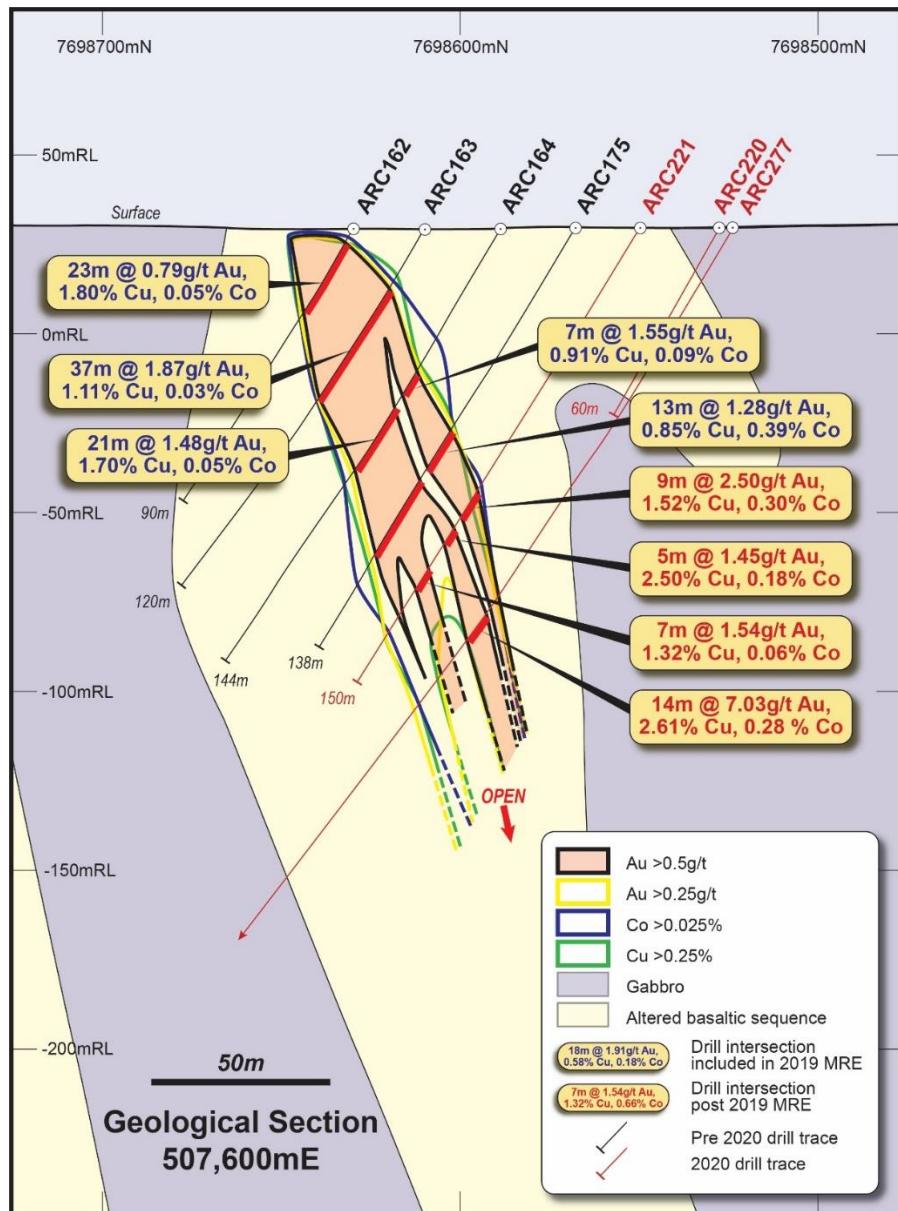

**Figure 3: Cross-section view of the Carlow Castle Main Eastern Zone on section 507,600mE. Hole ARC272 has extended the high-grade shoot down dip a further 30m**

ARC276 is 40m west of ARC277, confirming the ore body dip on this section and deepening the resource further 30m with a result of **17m @ 3.63g/t Au**.

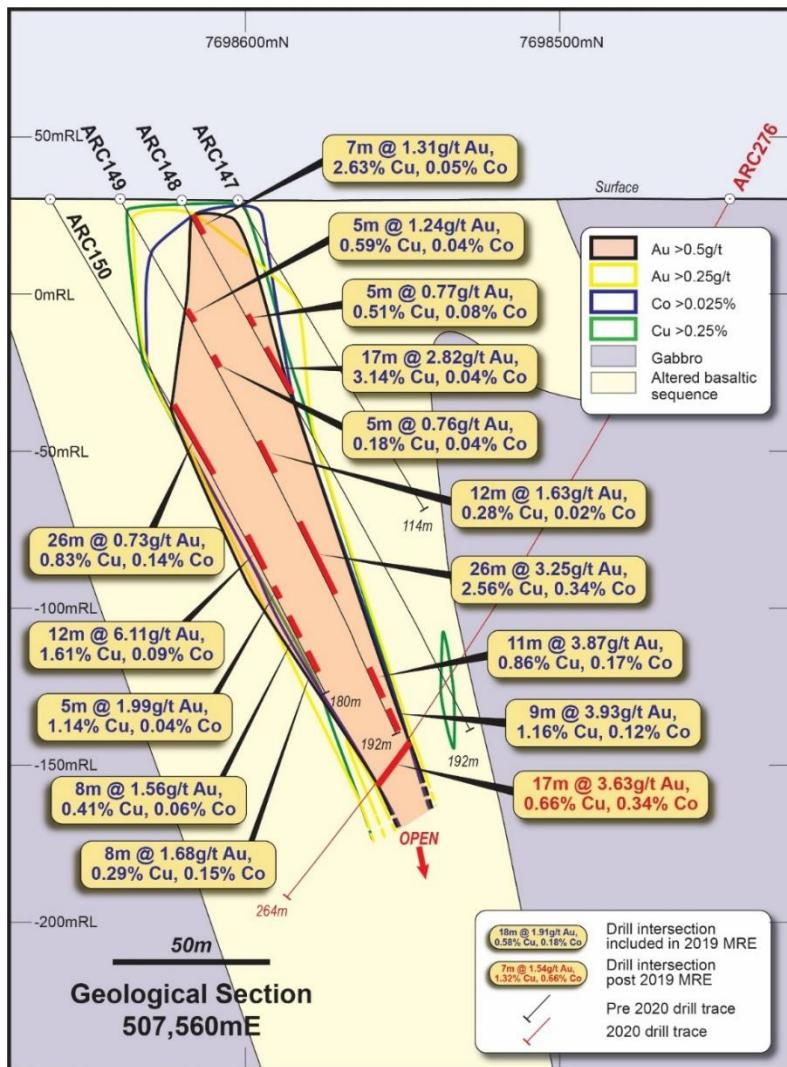


**Figure 4:** Cross-section view of the Carlow Castle Main Eastern Zone on section 507,560mE. Hole ARC276 has extended the high-grade shoot down dip a further 30m and being drilled normal to the dip direction

ARC280 was drilled from the north side of the western Main Zone. The shallower assay results have extended new sub-parallel mineralized shoots further north than previously seen. This hole has also confirmed structure and grade continuity some 75m deeper than previously drilled on this section.

The results shown here, plus the remaining 28 RC holes awaiting assay results will be added to the Q4 2020 drilling campaign (11,113m of drilling in 73 holes) significantly expanding the Carlow Castle drill hole database. Once consolidated, consultants CSA Global will complete an updated structural model for the Carlow Castle deposit and a new resource estimation in Q2 2021.

Artemis Resources has just released a Q1 2021 Investors Presentation. The sectional data of these recent drilling results displayed above dovetail into the Investor Presentation slides to best explain the Carlow Castle story.

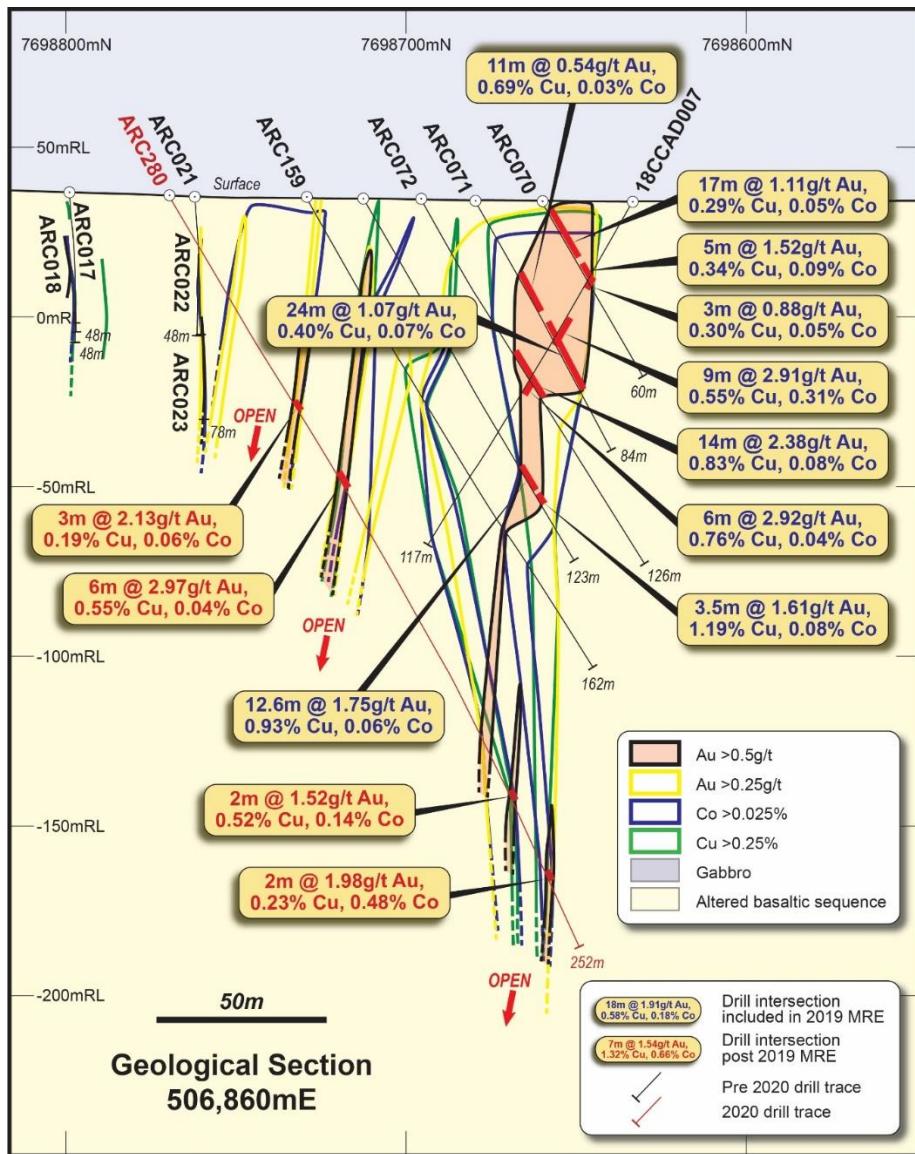

**Figure 5: Cross-section view of the Carlow Castle Main Western Zone on section 506,860mE. Hole ARC280 has extended the high-grade shoots down dip further to the north and a further +75m down dip**

## COMPETENT PERSONS STATEMENT:

The information in this announcement that relates to Exploration Results and Exploration Targets is based on information compiled or reviewed by Allan Younger, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Younger is an employee of Artemis Resources Limited. Mr Younger has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Younger consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears.

## About Artemis Resources

Artemis Resources (ASX: ARV; FRA: ATY; US: ARTTF) is a Perth-based exploration and development company, led by an experienced team that has a singular focus on delivering shareholder value from its Pilbara gold projects – the Greater Carlow Gold Project in the West Pilbara and the Paterson Central exploration project in the East Pilbara.

For more information, please visit [www.artemisresources.com.au](http://www.artemisresources.com.au)

This announcement was approved for release by the Board.

For further information contact:

Alastair Clayton  
Executive Director  
[alastair.clayton@artemisresources.com.au](mailto:alastair.clayton@artemisresources.com.au)

Boyd Timler  
Executive Director  
[boyd.timler@artemisresources.com.au](mailto:boyd.timler@artemisresources.com.au)

**Table 1:** Recent Carlow Castle Q1 2021 drilling assay results received to-date; averaged over significant drill intercept intervals bases on 1m assay samples, intersections defined by either >0.5g/t Au or >0.5%Cu, max 3m internal dilution. NSI = no significant intercept.

Hole_ID	Comments	m From	m To	m	Au g/t	Cu %	Co %
ARC255		2	4	2	0.76	<b>1.42</b>	0.03
ARC255		18	19	1	0.9	0.89	0.1
ARC255		49	50	1	0.94	<b>1.83</b>	0.14
ARC255		57	58	1	0.68	<b>1.96</b>	0.12
ARC255		64	66	2	0.89	<b>2.18</b>	0.18
ARC255		86	87	1	<b>6.11</b>	<b>4.24</b>	<b>0.47</b>
ARC255		109	115	6	<b>2.98</b>	<b>2.32</b>	<b>0.27</b>
ARC255	incl	112	115	3	<b>4.23</b>	<b>2.56</b>	<b>0.43</b>
ARC255		120	122	2	0.55	<b>2.01</b>	0.14
ARC255		133	136	3	1.44	<b>1.71</b>	0.05
ARC255		140	143	3	0.9	<b>2.09</b>	<b>0.29</b>
ARC256		125	130	5	<b>2.42</b>	<b>1.37</b>	<b>0.2</b>
ARC257		3	8	5	0.03	0.03	0.17
ARC257		41	47	6	0.49	<b>1.56</b>	0.12
ARC258	NSI						
ARC259		171	172	1	0.88	0.03	0.01
ARC260		83	84	1	0.65	0.005	0.001
ARC261		66	67	1	0.62	0.006	0.001
ARC262		191	192	1	<b>2.65</b>	0.01	0.001
ARC263		248	252	4	1.49	0.66	0.07
ARC264	NSI						
ARC265		144	147	3	<b>6.83</b>	0.81	<b>0.2</b>
ARC265	including	145	146	1	<b>19.55</b>	<b>2.06</b>	<b>0.56</b>
ARC265		205	208	3	<b>4.18</b>	<b>1.15</b>	0.25
ARC265		244	248	4	<b>2.05</b>	0.42	0.03
ARC265		273	274	1	1.11	0.77	0.05
ARC266		166	170	4	1.48	0.34	0.05
ARC267		146	147	1	1.84	<b>1.06</b>	0.02
ARC267		158	159	1	0.64	0.7	0.01
ARC267		175	176	1	<b>2.39</b>	0.21	0.04
ARC267		180	182	2	<b>3.06</b>	<b>2.48</b>	0.1
ARC267		218	225	7	0.85	0.3	0.05
ARC268		70	72	2	0.02	0.03	0.004
ARC269	NSI						
ARC270	NSI						
ARC271		153	154	1	0.6	0.7	0.003
ARC271		158	161	3	0.6	0.6	0.003
ARC271		192	193	1	0.58	<b>1.93</b>	0.007
ARC271		250	251	1	0.71	<b>1.73</b>	0.09
ARC271		258	259	1	<b>6.83</b>	0.09	0.009
ARC272		239	248	9	0.37	0.95	0.006
ARC272		267	270	3	<b>13.3</b>	0.77	<b>0.31</b>
ARC272	Including	269	270	1	<b>38.4</b>	<b>2.05</b>	<b>0.63</b>
ARC273		218	219	1	<b>5.23</b>	<b>2.54</b>	0.008
ARC273		228	229	1	0.51	0.63	0.005
ARC273		263	264	1	0.54	0.527	0.01
ARC274		77	78	1	<b>2.58</b>	0.65	<b>0.26</b>
ARC274		138	140	2	1.01	<b>1.53</b>	0.02
ARC275	NSI						
ARC276		126	127	3	<b>2.82</b>	0.16	0.003
ARC276	Including	126	127	1	<b>6.58</b>	0.03	0.004
ARC276		201	219	18	<b>3.46</b>	0.66	<b>0.33</b>
ARC276	Including	201	203	2	<b>13.95</b>	<b>1.32</b>	<b>1.59</b>
ARC276	And	209	210	1	<b>14.95</b>	<b>1.28</b>	<b>0.66</b>
ARC276		223	226	3	0.53	0.43	0.1
ARC277		123	137	14	<b>7.03</b>	<b>2.61</b>	<b>0.28</b>
ARC277	Including	129	132	3	<b>25.8</b>	<b>5.25</b>	<b>0.46</b>
ARC277	Including	129	130	1	<b>66.8</b>	<b>6.52</b>	<b>0.53</b>
ARC278		84	85	1	1.31	0.38	0.01
ARC279		173	174	1	0.61	0.15	0.06
ARC280		13	15	2	1.01	0.12	0.03
ARC280		38	39	1	1.78	0.2	0.02
ARC280		72	75	3	<b>2.13</b>	0.19	0.06

ARC280		96	102	6	2.97	0.55	0.04
ARC280	Including	98	99	1	11.5	0.65	0.01
ARC280		113	115	2	0.94	0.19	0.04
ARC280		184	185	1	1.3	0.19	0.44
ARC280		189	190	1	1.45	0.31	0.1
ARC280		203	205	2	1.52	0.52	0.14
ARC280		230	232	2	1.98	0.23	0.48
ARC281	pending						
ARC282	pending						
ARC283	pending						
ARC284	Partially Completed	NSI					
ARC285	NSI						
ARC286	pending						
ARC287	pending						
ARC288	pending						
ARC289	pending						
ARC290	pending						
ARC291	pending						
ARC292	pending						
ARC293	pending						
ARC294	pending						
ARC295	pending						
ARC296	pending						
ARC297	pending						
ARC298	pending						
ARC299	pending						
ARC300	pending						
ARC301	pending						
ARC302	pending						
ARC303	pending						
ARC304	pending						
ARC305	pending						
ARC306	pending						
ARC307	pending						
ARC308	pending						
ARC309	pending						

**Table 2:** Carlow Castle drill collar information.

Hole Id	Type	Z50MGA East	Z50MGA North	RL (m)	Depth (m)	Dip	Azimuth
ARC001	RC	506929.95	7698920.09	40.28	72	-60	270
ARC002	RC	506959.14	7698916.27	39.75	90	-60	270
ARC003	RC	506909.93	7698896.80	39.14	54	-60	270
ARC004	RC	506925.68	7698896.50	39.24	78	-60	270
ARC005	RC	506888.51	7698919.80	40.25	60	-60	90
ARC006	RC	506947.24	7698894.26	39.03	90	-60	270
ARC007	RC	506911.18	7698937.79	41.59	48	-60	270
ARC008	RC	506933.10	7698937.94	41.14	78	-60	270
ARC009	RC	506904.79	7698960.57	42.71	48	-60	270
ARC010	RC	506922.98	7698961.93	42.84	78	-60	270
ARC011	RC	506917.24	7698917.58	40.60	48	-60	270
ARC012	RC	506902.24	7698878.73	38.33	48	-60	270
ARC013	RC	506922.61	7698879.32	38.36	72	-60	270
ARC014	RC	506944.97	7698880.09	38.84	90	-60	270
ARC015	RC	506899.23	7698837.97	38.58	48	-60	270
ARC016	RC	506919.31	7698838.32	41.38	78	-60	270
ARC017	RC	506869.79	7698799.07	36.64	48	-60	270
ARC018	RC	506887.95	7698799.83	37.70	48	-60	270
ARC019	RC	506906.80	7698800.96	39.10	60	-60	270
ARC020	RC	506927.68	7698801.91	41.30	90	-60	270
ARC021	RC	506868.38	7698761.99	35.54	48	-60	270
ARC022	RC	506887.74	7698761.44	36.24	48	-60	270
ARC023	RC	506907.53	7698760.64	37.49	78	-60	270
ARC024	RC	506579.85	7698699.77	34.80	60	-60	180
ARC025	RC	506619.19	7698698.13	34.79	66	-60	180
ARC026	RC	506659.40	7698699.29	34.97	60	-60	180
ARC027	RC	506699.06	7698699.67	34.80	60	-60	180

ARC028	RC	506742.04	7698701.18	34.55	60	-60	180
ARC029	RC	506944.14	7698957.64	42.43	84	-60	270
ARC030	RC	506952.30	7698938.33	40.81	90	-60	270
ARC031	RC	506973.27	7698916.87	39.68	102	-60	270
ARC032	RC	506969.77	7698896.34	39.26	108	-60	270
ARC033	RC	506895.77	7698937.59	41.27	23	-60	90
ARC033a	RC	506893.23	7698937.48	41.35	90	-60	90
ARC034	RC	506973.31	7698940.16	40.47	137	-60	270
ARC036	RC	506579.18	7698677.42	34.66	60	-60	180
ARC037	RC	506579.80	7698718.95	35.06	84	-60	180
ARC038	RC	506579.56	7698740.73	35.44	120	-60	180
ARC039	RC	506777.66	7698676.15	34.67	60	-60	180
ARC040	RC	506778.78	7698700.75	34.92	84	-60	180
ARC041	RC	506779.34	7698720.74	35.06	120	-60	180
ARC042	RC	506780.18	7698740.84	35.26	150	-60	180
ARC043	RC	506897.41	7698636.05	33.75	60	-60	180
ARC044	RC	506898.75	7698660.97	34.02	84	-60	180
ARC045	RC	506899.47	7698682.47	34.15	126	-60	180
ARC046	RC	506900.75	7698701.73	34.15	162	-60	180
ARC047	RC	507477.90	7698581.08	29.79	60	-60	180
ARC048	RC	507478.81	7698623.51	30.78	114	-60	180
ARC049	RC	507478.89	7698663.21	30.84	144	-60	180
ARC050	RC	507321.28	7698921.04	35.26	120	-60	0
ARC051	RC	507237.30	7699007.97	37.79	136	-60	0
ARC052	RC	507119.90	7698982.04	38.80	162	-60	0
ARC053	RC	507120.27	7699027.22	41.43	126	-60	0
ARC054	RC	507239.93	7698930.55	36.32	102	-60	0
ARC055	RC	506536.05	7698688.90	34.65	78	-60	180
ARC056	RC	506537.23	7698708.54	34.91	90	-60	180
ARC057	RC	506538.58	7698729.57	35.07	120	-60	180
ARC058	RC	506619.04	7698677.50	34.60	60	-60	180
ARC059	RC	506619.96	7698720.27	34.95	120	-60	180
ARC060	RC	506659.80	7698720.78	35.00	84	-60	180
ARC061	RC	506660.86	7698740.46	35.30	126	-60	180
ARC062	RC	506700.16	7698720.64	35.02	84	-60	180
ARC063	RC	506700.76	7698738.61	35.31	120	-60	180
ARC064	RC	506741.50	7698676.08	34.75	60	-60	180
ARC065	RC	506742.69	7698719.49	35.01	102	-60	180
ARC066	RC	506743.53	7698738.36	35.25	126	-60	180
ARC067	RC	506817.45	7698682.40	34.68	84	-60	180
ARC068	RC	506818.23	7698698.12	34.79	120	-60	180
ARC069	RC	506819.53	7698717.79	35.00	24	-60	180
ARC069a	RC	506821.17	7698740.74	35.24	162	-59	180
ARC070	RC	506859.97	7698659.95	34.30	60	-60	180
ARC071	RC	506860.65	7698679.67	34.44	84	-60	180
ARC072	RC	506861.28	7698695.73	34.57	126	-60	180
ARC073	RC	506935.81	7698638.23	33.73	60	-60	180
ARC074	RC	506937.98	7698657.32	33.72	84	-60	180
ARC075	RC	506941.87	7698698.15	33.99	150	-60	180
ARC076	RC	507400.58	7698609.30	30.48	66	-60	180
ARC077	RC	507400.50	7698650.77	31.23	162	-60	180
ARC078	RC	506815.36	7698661.73	34.44	60	-60	180
ARC079	RC	507478.02	7698559.54	29.86	108	-60	0
ARC080	RC	507262.21	7698939.00	35.53	84	-60	270
ARC081	RC	506781.50	7698779.75	36.00	264	-60	180
ARC082	RC	506620.49	7698740.67	35.31	150	-60	180
ARC083	RC	506934.49	7698679.81	33.85	150	-60	180
ARC084	RC	506979.13	7698619.15	33.21	72	-60	180
ARC085	RC	506979.64	7698641.44	33.61	112	-60	180
ARC086	RC	506980.15	7698660.88	33.67	142	-60	180
ARC087	RC	506980.26	7698682.07	33.58	196	-60	180
ARC088	RC	507016.43	7698621.50	33.25	70	-60	180
ARC089	RC	507017.15	7698642.72	33.28	112	-60	180
ARC090	RC	507018.63	7698663.13	33.48	150	-60	180
ARC091	RC	507019.24	7698682.15	33.39	192	-60	180
ARC092	RC	507056.17	7698600.99	32.85	72	-60	180
ARC093	RC	507056.24	7698620.13	32.91	114	-60	180
ARC094	RC	507057.26	7698639.31	33.03	150	-60	180
ARC095	RC	507058.55	7698659.65	33.05	204	-60	180

ARC096	RC	507399.31	7698630.48	30.83	168	-60	180
ARC097	RC	507398.34	7698593.01	30.44	108	-60	180
ARC098	RC	507476.26	7698602.49	29.74	96	-60	180
ARC099	RC	506534.82	7698675.09	34.35	66	-60	180
ARC100	RC	506533.66	7698649.43	34.61	42	-60	180
ARC101	RC	506744.20	7698758.65	35.66	156	-60	180
18CCAD001	DDH	506701.45	7698757.33	35.65	151.9	-60	180
18CCAD002	DDH	506778.93	7698694.92	34.86	128.1	-60	180
18CCAD003	DDH	506698.19	7698680.96	34.86	119.7	-75	0
18CCAD004	DDH	506819.62	7698709.68	34.97	141	-60	180
18CCAD005	DDH	506863.16	7698712.42	34.65	123	-60	180
18CCAD006	DDH	506901.24	7698720.42	34.82	168.2	-60	180
18CCAD007	DDH	506857.87	7698633.28	33.98	117.3	-60	0
18CCAD008	DDH	506932.99	7698937.93	41.15	81.2	-60	270
18CCAD009	DDH	506942.27	7698937.24	41.00	79.5	-60	270
18CCAD010	DDH	507480.50	7698641.39	30.88	171	-60	180
18CCAD011	DDH	507476.27	7698549.65	30.03	100.4	-50	0
18CCAD012	DDH	506935.00	7698900.00	41.00	122.9	-60	270
ARC102	RC	507479.97	7698492.34	30.12	186	-60	360
ARC103	RC	507140.08	7698638.94	32.47	66	-60	360
ARC104	RC	507138.77	7698619.69	32.23	100	-60	360
ARC105	RC	507178.05	7698631.01	32.15	66	-60	360
ARC106	RC	507179.40	7698611.33	31.75	100	-60	360
ARC107	RC	507020.40	7698703.17	33.95	200	-60	180
ARC108	RC	507060.44	7698681.49	33.40	180	-60	180
ARC109	RC	507094.07	7698618.31	32.60	60	-60	180
ARC110	RC	507094.96	7698637.99	32.89	100	-60	180
ARC111	RC	507097.26	7698658.11	32.80	140	-60	180
ARC112	RC	507098.84	7698678.28	33.79	192	-60	180
ARC113	RC	507223.16	7698598.49	31.26	60	-60	180
ARC114	RC	507220.82	7698618.44	31.74	100	-60	180
ARC115	RC	507219.45	7698638.04	31.98	174	-60	180
ARC116	RC	507219.21	7698659.19	32.03	198	-60	180
ARC117	RC	507265.20	7698598.10	31.05	126	-60	180
ARC118	RC	507262.90	7698618.54	31.55	126	-60	180
ARC119	RC	507260.44	7698637.96	31.79	180	-60	180
ARC120	RC	507258.82	7698658.86	31.83	222	-60	180
ARC121	RC	507297.44	7698590.75	30.89	108	-60	180
ARC122	RC	507297.49	7698610.02	31.04	144	-60	180
ARC123	RC	507298.51	7698629.51	31.13	180	-60	180
ARC124	RC	507299.36	7698651.48	31.63	234	-60	180
ARC125	RC	507337.15	7698610.00	30.86	144	-60	180
ARC126	RC	507337.06	7698629.99	30.91	180	-60	170
ARC127	RC	507337.99	7698651.49	31.21	234	-60	180
ARC128	RC	507338.98	7698669.59	31.51	240	-60	180
ARC129	RC	507440.31	7698580.64	30.10	108	-60	180
ARC130	RC	507438.51	7698601.02	30.07	102	-60	180
ARC131	RC	507436.87	7698618.95	30.38	156	-60	180
ARC132	RC	507436.29	7698640.15	30.91	204	-60	180
ARC133	RC	507435.33	7698660.76	31.04	228	-60	180
ARC134	RC	507401.86	7698670.28	31.51	204	-60	180
ARC135	RC	507520.18	7698581.17	29.61	100	-60	180
ARC136	RC	507520.37	7698600.39	29.77	108	-60	180
ARC137	RC	507519.26	7698620.81	30.16	168	-60	180
ARC138	RC	507519.31	7698639.04	30.47	228	-60	180
ARC139	RC	507518.47	7698659.64	30.58	240	-60	180
ARC140	RC	506458.87	7698639.22	34.32	150	-60	180
ARC141	RC	506458.53	7698679.20	34.50	120	-60	180
ARC142	RC	506458.47	7698720.23	34.81	120	-60	180
ARC143	RC	506457.91	7698760.55	35.38	120	-60	180
ARC144	RC	506540.10	7698600.73	34.52	120	-60	360
ARC145	RC	506579.86	7698638.21	34.62	120	-60	360
ARC146	RC	506578.83	7698620.55	34.42	162	-60	360
ARC147	RC	507559.44	7698601.35	29.30	114	-60	180
ARC148	RC	507559.35	7698620.40	29.53	192	-60	180
ARC149	RC	507559.90	7698639.73	29.80	192	-60	180
ARC150	RC	507559.33	7698661.84	30.00	179	-60	180
ARC151	RC	506620.28	7698760.51	35.54	144	-60	180
ARC152	RC	506620.98	7698780.26	35.91	174	-60	180

ARC153	RC	506658.93	7698761.24	35.63	162	-60	180
ARC154	RC	506660.45	7698782.15	36.06	198	-60	180
ARC155	RC	506698.20	7698781.25	36.02	192	-60	180
ARC156	RC	506743.89	7698779.09	35.86	210	-60	180
ARC157	RC	506779.69	7698758.49	35.55	180	-60	180
ARC158	RC	506821.59	7698757.99	35.51	198	-60	180
ARC159	RC	506862.77	7698729.18	34.78	160	-60	180
ARC160	RC	506941.80	7698719.90	35.28	180	-60	180
ARC161	RC	506980.51	7698702.55	34.08	180	-60	180
ARC162	RC	507600.15	7698629.93	29.29	90	-60	180
ARC163	RC	507600.96	7698609.92	29.02	90	-60	360
ARC164	RC	507601.33	7698588.60	29.43	120	-60	360
ARC165	RC	507267.14	7698578.07	30.96	90	-60	360
ARC166	RC	507296.25	7698571.22	30.83	150	-60	180
ARC167	RC	507334.40	7698590.07	30.70	90	-60	180
ARC168	RC	507014.61	7698941.39	39.07	114	-60	270
ARC169	RC	507048.86	7698941.57	38.16	120	-60	270
ARC170	RC	507088.67	7698941.13	37.69	120	-60	270
ARC171	RC	507129.79	7698977.82	38.67	102	-60	270
ARC172	RC	507639.72	7698638.41	29.10	84	-60	360
ARC173	RC	507642.44	7698617.75	29.00	114	-60	360
ARC174	RC	507643.99	7698599.74	28.90	130	-60	360
ARC175	RC	507602.60	7698567.75	29.47	138	-60	360
ARC176	RC	507179.52	7698602.41	31.70	150	-60	180
ARC177	RC	507176.30	7698621.93	32.26	144	-60	180
ARC178	RC	507175.39	7698643.09	32.40	186	-60	180
ARC179	RC	507174.97	7698661.71	33.13	200	-60	180
ARC180	RC	507645.43	7698579.89	29.17	114	-60	360
ARC181	RC	507678.56	7698651.72	28.72	72	-60	360
ARC182	RC	507679.90	7698630.58	28.96	90	-60	360
ARC183	RC	507679.21	7698611.67	29.02	114	-60	360
ARC184	RC	507517.08	7698421.77	30.67	330	-60	360
ARC185	RC	507640.80	7698723.54	29.45	102	-60	360
ARC186	RC	507640.13	7698703.37	29.33	114	-60	360
ARC187	RC	507639.70	7698683.63	29.31	126	-60	360
ARC188	RC	507638.81	7698664.55	29.01	102	-60	360
ARC189	RC	507480.18	7698418.86	30.14	330	-60	360
ARC190	RC	505597.89	7698459.26	30.19	102	-60	180
ARC191	RC	505597.56	7698498.15	30.41	102	-60	180
ARC192	RC	505597.72	7698538.71	30.46	108	-60	180
ARC193	RC	505598.35	7698578.08	31.45	96	-60	180
ARC194	RC	505599.13	7698618.80	32.58	96	-60	180
ARC195	RC	505998.22	7698699.11	33.06	102	-60	180
ARC196	RC	505998.31	7698740.52	33.95	96	-60	180
ARC197	RC	505999.01	7698779.66	35.26	102	-60	180
ARC198	RC	505998.58	7698818.62	36.63	114	-60	180
ARC199	RC	506096.57	7698451.15	32.09	102	-60	180
ARC200	RC	506098.36	7698488.64	32.13	108	-60	180
ARC201	RC	506278.74	7698700.08	34.17	102	-60	180
ARC202	RC	506278.76	7698739.96	34.45	102	-60	180
ARC203	RC	506278.79	7698783.46	34.85	102	-60	180
ARC204	RC	506277.79	7698820.49	35.19	120	-60	180
ARC205	RC	506339.04	7698500.84	33.08	48	-60	180
ARC206	RC	506338.15	7698540.51	33.43	60	-60	180
ARC207	RC	506338.18	7698579.33	33.90	90	-60	180
ARC208	RC	506378.52	7698619.50	34.17	80	-60	180
ARC209	RC	506365.12	7698639.77	34.26	96	-60	180
ARC210	RC	506577.70	7698560.35	34.28	48	-60	180
ARC211	RC	506577.92	7698599.71	34.46	48	-60	180
ARC214	RC	506978.94	7698559.98	33.05	156	-60	180
ARC215	RC	506978.39	7698599.97	32.81	114	-60	180
ARC216	RC	507257.45	7698459.80	31.66	246	-60	0
ARC217	RC	507297.79	7698670.69	31.58	282	-60	180
ARC218	RC	507338.14	7698478.57	31.17	276	-70	0
ARC219	RC	507479.71	7698460.18	30.24	270	-60	0
ARC220	RC	507598.54	7698527.51	29.49	60	-60	0
ARC221	RC	507598.73	7698549.84	29.45	150	-60	0
ARC222	RC	506573.34	7698642.27	34.54	138	-60	180
ARC223	RC	507156.74	7698981.23	38.04	102	-60	270

ARC224	RC	507197.60	7698981.29	37.08	100	-60	270
ARC225	RC	507235.47	7698980.93	37.04	102	-60	270
ARC226	RC	507276.55	7698981.44	37.30	102	-60	270
ARC227	RC	507316.39	7698980.90	36.51	102	-60	270
ARC228	RC	507356.68	7698982.38	36.07	102	-60	270
ARC229	RC	507395.57	7698980.96	35.30	102	-60	270
ARC230	RC	507238.64	7698899.72	36.72	80	-60	270
ARC231	RC	507281.81	7698900.10	35.08	102	-60	270
ARC232	RC	507317.41	7698900.47	34.72	102	-60	270
ARC233	RC	507356.66	7698900.32	34.71	102	-60	270
ARC234	RC	507400.78	7698899.93	33.87	108	-60	270
ARC235	RC	507778.11	7699021.45	31.66	120	-60	0
ARC236	RC	507777.74	7698981.95	30.40	120	-60	0
ARC237	RC	507777.56	7698943.33	30.51	120	-60	0
ARC238	RC	507777.64	7698900.10	30.03	120	-60	0
ARC239	RC	507777.35	7698862.17	29.54	120	-60	0
ARC240	RC	507777.06	7698823.61	29.06	120	-60	0
ARC241	RC	507776.99	7698781.52	28.57	120	-60	0
ARC242	RC	507777.13	7698740.44	28.39	120	-60	0
ARC243	RC	507777.14	7698698.65	28.43	300	-60	0
ARC244	RC	507777.18	7698659.53	29.54	120	-60	0
ARC245	RC	507778.07	7698620.67	29.76	100	-60	0
ARC246	RC	507625.78	7698638.78	29.06	80	-60	0
ARC247	RC	507625.21	7698599.48	29.08	120	-60	0
ARC248	RC	507625.13	7698559.76	29.29	160	-60	0
ARC249	RC	507625.29	7698520.43	30.01	210	-60	0
ARC250	RC	507651.24	7698539.99	29.80	150	-60	0
ARC251	RC	507382.98	7698569.96	30.40	100	-60	0
ARC252	RC	507382.38	7698531.21	30.71	160	-60	0
ARC253	RC	507381.76	7698489.48	30.95	210	-60	0
ARC254	RC	507436.73	7698678.37	31.11	260	-60	180
20CCAD001	DDH	507501.70	7698571.22	29.56	100	-60	0
20CCAD002	DDH	507500.54	7698531.47	30.00	160	-60	0
20CCAD003	DDH	507560.17	7698898.69	32.34	840.1	-60	180
20CCAD004	DDH	507499.35	7698490.78	30.04	210	-60	0
20CCAD005	DDH	507498.30	7698452.16	30.23	270	-60	0
20CCAD006	DDH	507538.43	7698588.26	29.49	100	-60	0
20CCAD007	DDH	507557.34	7698845.69	31.20	551.3	-55	180
20CCAD008	RC/DDH	507441.86	7698884.65	32.90	450	-60	180
20CCAD008W	Wedge				422	-60	180
20CCAD009	DDH	507538.53	7698549.06	29.84	207.4	-60	0
20CCAD010	DDH	507538.95	7698508.58	29.84	250	-60	0
ARC255	RC	507277.05	7698936.91	35.58	150	60.42	270.28
ARC256	RC	507316.17	7698936.91	35.57	150	-59.1	270.54
ARC257	RC	507357.10	7698937.44	35.15	150	-58.7	269.76
ARC258	RC	507899.33	7698819.96	27.98	250	59.09	0.79
ARC259	RC	507899.50	7698738.33	27.90	250	59.44	2.87
ARC260	RC	507898.99	7698658.30	28.88	250	-59.3	359.55
ARC261	RC	507715.60	7698621.50	29.41	200	58.65	358.34
ARC262	RC	507714.49	7698562.85	30.07	252	58.15	0.02
ARC263	RC	507715.19	7698463.92	32.16	270	-60	0
ARC264	RC	507636.62	7698375.58	31.19	120	58.81	181.58
ARC265	RC	507433.41	7698439.54	30.14	300	58.41	0.41
ARC266	RC	507435.65	7698420.81	30.73	300	60.19	354.64
ARC267	RC	507395.29	7698458.05	31.08	252	60.38	359.08
ARC268	RC	507477.74	7698860.86	32.33	150	60.72	0.12
ARC269	RC	507479.09	7698783.06	31.27	150	-60	0
ARC270	RC	507396.84	7698859.24	33.41	150	-60	0
ARC271	RC	507138.63	7698478.88	32.05	282	-60	0
ARC272	RC	507258.32	7698453.57	31.57	294	-65	0
ARC273	RC	507336.23	7698449.00	31.24	300	-70	0
ARC274	RC	507136.76	7698558.33	31.99	150	-60	0

ARC275	RC	507539.16	7698357.71	31.24	120	60.00	-	180
ARC276	RC	507555.49	7698445.44	30.80	264	60.00	-	0
ARC277	RC	507593.79	7698523.83	29.63	162	60.00	-	0
ARC278	RC	507399.03	7698938.41	34.40	180	60.00	-	270
ARC279	RC	507066.02	7698941.17	38.24	252	60.00	-	270
ARC280	RC	506856.30	7698769.49	35.49	252	60.00	-	180
ARC281	RC	506778.88	7698818.82	36.63	222	60.00	-	180
ARC282	RC	506696.52	7698815.54	36.75	264	60.00	-	180
ARC283	RC	506617.02	7698817.07	36.78	264	60.00	-	180
ARV284	RC	506536.57	7698768.45	35.76	252	-60	-	180
ARV285	RC	506535.12	7698599.63	34.46	150	-60	-	180
ARV286	RC	506770.44	7698648.25	34.64	66	-60	-	180
ARV287	RC	506813.76	7698637.62	34.22	60	-60	-	180
ARV288	RC	507307.16	7698932.06	35.56	180	-60	-	225
ARV289	RC	507369.05	7698988.60	36.15	180	-60	-	225
ARV290	RC	507336.75	7698838.65	33.52	180	-60	-	225
ARV291	RC	507367.69	7698867.34	33.95	180	-60	-	225
ARV292	RC	507399.36	7698903.90	33.89	180	-60	-	225
ARV293	RC	507159.08	7698779.00	34.40	170	-60	-	225
ARV294	RC	507201.71	7698822.83	33.60	180	-60	-	225
ARV295	RC	507714.70	7698447.93	31.45	252	-60	-	180
ARV296	RC	507453.16	7698951.38	33.99	150	-60	-	225
ARV297	RC	507537.78	7698712.75	30.54	222	-60	-	0
ARV298	RC	507428.53	7698814.50	32.12	156	-60	-	225
ARV299	RC	507016.72	7698922.54	38.76	180	-60	-	270
ARV300	RC	506996.01	7698880.55	39.22	186	-60	-	270
ARV301	RC	507104.18	7698919.04	37.28	186	-60	-	270
ARV302	RC	508320.20	7699102.56	25.91	150	-60	-	180
ARV303	RC	508319.76	7699049.55	25.69	150	-60	-	180
ARV304	RC	507467.86	7698857.61	32.31	168	-60	-	225
ARV305	RC	507514.37	7698897.69	32.61	156	-60	-	225
ARV306	RC	507089.54	7698878.00	35.97	149	-60	-	270
ARV307	RC	507136.34	7698875.76	36.62	160	-60	-	225
ARV308	RC	506929.47	7698803.28	41.56	160	-60	-	135
ARV309	RC	507248.18	7698750.03	32.36	150	-60	-	225

## JORC Code, 2012 Edition – Table 1

### SECTION 1 SAMPLING TECHNIQUES AND DATA

(Criteria in this section apply to all succeeding sections.)

Criteria	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Reverse circulation drilling was used to obtain 1 m samples.</li> <li>Samples were collected on a 1m basis and stockpiled.</li> <li>The single metre samples of any composite sample reporting greater than 0.1g/t Au were retrieved and assayed.</li> <li>All samples were pulverized produce a 50 g charge for fire assay.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Reverse Circulation drilling by KTE Drilling.</li> <li>Diamond drilling by Topdrill.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Drilling recoveries for Reverse circulation drilling were excellent, with all samples dry.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Artemis Reverse Circulation drilling has been logged;</li> <li>Diamond core processing is ongoing</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>The RC drilling rig was equipped with a rig-mounted cyclone and static cone splitter, which provided one bulk sample of approximately 20-30 kilograms, and a representative sub-sample of approximately 2-4 kilograms for every metre drilled.</li> <li>The sample size of 2-4 kilograms is appropriate and representative of the grain size and mineralisation style of the deposit.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>ALS (Perth) were used for all analysis of drill samples submitted by Artemis. The laboratory techniques below are for all samples submitted to ALS and are considered appropriate for the style of mineralisation defined within the Carlow Castle Project area:</li> <li>Samples above 3Kg riffle split.</li> <li>Pulverise to 95% passing 75 microns</li> <li>50-gram Fire Assay (Au-AA26) with ICP finish - Au.</li> <li>4 Acid Digest ICP-AES Finish (ME-ICP61) – Ag, Al, As, Ba, Be, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, K, La, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Sr, Th, Ti, Ti, U, V, W, Zn.</li> <li>Ore Grade 4 Acid Digest ICP-AES Finish (ME-OG62)</li> <li>Standards were used for external laboratory checks by Artemis.</li> <li>Duplicates were used for external laboratory checks by Artemis.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>Electronic data capture, storage and transfer as .csv. Routine QC checks performed by contractor and independent geophysical consultant. Data were found to be of high quality and in accordance with contract specifications</li> <li>Laboratory standards and blank samples were inserted at regular intervals and some duplicate samples were taken for QC checks.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>A Garmin GPSMap62 hand-held GPS was used to define the location of the drill hole collars. Standard practice is for the GPS to be left at the site of the collar for a period of 5 minutes to obtain a steady reading. Collar locations are considered to be accurate to within 5m.</li> <li>Hole collars surveyed by licensed surveyors on completion of the drilling.</li> <li>Zone 50 (GDA 94).</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Current drill hole spacing is variable and dependent on specific geological, and geochemical targets.</li> <li>No sample compositing has been used for drilling completed by Artemis. All results reported are the result of 1 metre downhole sample intervals.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>Drill holes were designed to be perpendicular to the strike of known mineralisation. Due to the structural and geological complexity of the area, it is mineralisation of unknown orientation can be intersected.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>The chain of custody is managed by the supervising geologist who places calico sample bags in polyweave sacks. Up to 10 calico sample bags are placed in each sack. Each sack is clearly labelled with:</li> </ul>

Criteria	Commentary
	<ul style="list-style-type: none"> <li>○ Artemis Resources Ltd</li> <li>○ Address of laboratory</li> <li>○ Sample range</li> <li>● Samples were delivered by Artemis personnel to the transport company in Karratha and shrink wrapped onto pallets.</li> <li>● The transport company then delivers the samples directly to the laboratory.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>● Data is validated upon up-loading into the master database. Any validation issues identified are investigated prior to reporting of results.</li> </ul>

## SECTION 2 REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section.)

Criteria	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>● Drilling by Artemis was carried out on E47/1797 – 100% owned by Artemis Resources Ltd. This tenement forms a part of a broader tenement package that comprises the West Pilbara Project.</li> <li>● This tenement is in good standing.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>● The most significant work to have been completed historically in the Carlow Castle area, including the Little Fortune and Good Luck prospects, was completed by Open Pit Mining Limited between 1985 and 1987, and subsequently Legend Mining NL between 1995 and 2008.</li> <li>● Work completed by Open Pit consisted of geological mapping, geophysical surveying (IP), and RC drilling and sampling.</li> <li>● Work completed by Legend Mining Ltd consisted of geological mapping and further RC drilling.</li> <li>● Legend also completed an airborne ATEM survey over the project area, with follow up ground-based FLTEM surveying. Re-processing of this data was completed by Artemis and was critical in developing drill targets for the completed RC drilling.</li> <li>● Compilation and assessment of historic drilling and mapping data completed by both Open Pit and Legend has indicated that this data compares well with data collected to date by Artemis. Validation and compilation of historic data is ongoing.</li> <li>● All exploration and analysis techniques conducted by both Open Pit and Legend are considered to have been appropriate for the style of deposit.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>● The Carlow Castle Co-Cu-Au prospect includes a number of mineralised shear zones, located on the northern margin of the Andover Intrusive Complex. Mineralisation is exposed in numerous workings at surface along numerous quartz rich shear zones. Both oxide and sulphide mineralisation are evident at surface associated with these shear zones.</li> <li>● Sulphide mineralisation appears to consist of Chalcopyrite, chalcocite, cobaltite, pyrrhotite and pyrite</li> </ul>
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>● Drill hole information is contained within this release.</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>● All intervals reported are composed of 1 metre down hole intervals for Reverse Circulation drilling, and sample intervals are used for Diamond core are 1m intervals only and not length weighted.</li> <li>● No upper or lower cut-off grades have been used in reporting results.</li> <li>● No metal equivalent calculations are used in this report.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>● True widths of mineralisation have not been calculated for this report, and as such all intersections reported are down-hole thicknesses.</li> <li>● A better understanding of the deposit geometry will be achieved on thorough interpretation of the data. True thicknesses may be reported at a later date if warranted. Due to the moderately to steeply dipping nature of the mineralised zones, it is expected that true thicknesses will be less than the reported down-hole thicknesses.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>● Appropriate plans are shown in the text.</li> </ul>

Criteria	Commentary
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>Reporting of results in this report is considered balanced.</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Targeting for the RC drilling completed by Artemis was based on compilation of historic exploration data, and the surface expression of the targeted mineralised shear zones and associated historic workings.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>The results at the Carlow Castle Co-Cu-Au project warrant further drilling. The drill programme results to date are considered excellent.</li> <li>An IP programme and detailed low level aeromagnetic survey are scheduled to be completed in the coming weeks.</li> </ul>