



Seven Mile Hill and Mt Celia Exploration Update

ASX ANNOUNCEMENT

24 May 2017

**Australian Securities
Exchange Code: TBR**

Board of Directors:

Mr Otakar Demis
*Chairman and Joint Company
Secretary*

Mr Anton Billis
Managing Director

Mr Gordon Sklenka
Non-Executive Director

Mrs Lyndall Vaughan
Joint Company Secretary

Tribune Resources Ltd (ASX code: TBR) is pleased to provide the attached update on its Seven Mile Hill and Mt Celia Projects.

For further information, please contact:

Lyndall Vaughan
E: lyndall.vaughan@tribune.com.au

Ph: +61 8 9474 2113

Suite G1, 49 Melville Parade
South Perth WA 6151

T: +61 8 9474 2113

F: +61 8 9367 9386

E: tribune@tribune.com.au

W: www.tribune.com.au

ABN: 11 009 341 539

Tribune Resources
Western Australian Exploration Update

The Company's focus remains the prolific East Kundana JV project, however work continues from time to time on the Seven Mile Hill and Mt Celia Projects.

Seven Mile Hill Project (Rand's Interest 50% and Tribune's Interest 50%)

Recent Exploration

The Company recently completed a rotary air blast (RAB) drilling programme testing the south western portion of the project area. This area had seen only light exploration in the past, including wide spaced (400m by 50m) auger soil sampling and reconnaissance (800m by 100m) vertical RAB drilling. This drilling and sampling had outlined several low order anomalies that had never been followed up.

A total of 439 holes for 11,468.5m were drilled on 800m spaced lines, with holes angled towards grid east at intervals that gave almost full drill coverage. The holes were drilled to blade bit refusal, resulting in most holes ending in relatively fresh bedrock. Logging of the holes revealed a remarkably varied geological sequence. Rocks intersected included epclastics of the Black Flag Formation, mafic volcanics, granite, carbonaceous shale and the Kurrawang Formation conglomerates and sandstones. Previous interpretation of the detailed magnetic data did not indicate such a wide variety of lithologies.

Several of the holes intersected low order gold mineralisation, and given the wide spaced nature of the drilling these may be of some importance. The table below lists the values above 0.10g/t Au.

Table 1
Seven Mile Hill Anomalous Results

Hole	From	To	g/t Au
KWR459	44	48	0.10
KWR462	44	48	0.11
KWR542	36	40	0.12
KWR458	32	36	0.20

Geology

The Seven Mile Hill Project is located within the central portion of the Archaean Norseman-Wiluna Greenstone belt. The rocks of the area are mafic and felsic volcanics along with epiclastics of the Black Flag Group and the clastic sedimentary rocks of the Kurrawang Formation. Weathering of the rocks is commonly 40-50m deep. An exception to this is in porphyry, where the depth of weathering is quite shallow, and commonly 10m.



Photo showing typical grid line from the recent drilling.

Table 2

Seven Mile Hill Drill Collar Table

Hole ID	MGA E	MGA N	RL	Depth	Dip	Mag Az
KWR324	341024	6585420	379	45	-60	70
KWR325	341045	6585421	379	46	-60	70
KWR326	341059	6585440	379	47	-60	70
KWR327	341084	6585448	379	41	-60	69
KWR328	341098	6585456	379	18.5	-60	70
KWR329	341110	6585462	379	16	-60	70
KWR330	341118	6585462	379	43	-60	70
KWR331	341140	6585470	380	33	-60	70
KWR332	341155	6585477	380	23	-60	70
KWR333	341173	6585484	380	31	-60	70
KWR334	341192	6585489	380	33	-60	70
KWR335	341203	6585502	380	36	-60	70
KWR336	341223	6585504	381	30	-60	70
KWR337	341236	6585506	381	37	-60	70
KWR338	341259	6585512	381	39	-60	70

KWR339	341280	6585518	381	51	-60	70
KWR340	341306	6585523	381	49	-60	69
KWR341	341328	6585539	381	49	-60	70
KWR342	341351	6585545	381	45	-60	69
KWR343	341375	6585554	381	70	-60	70
KWR344	341410	6585568	382	64	-60	70
KWR345	341441	6585578	382	52	-60	70
KWR346	341468	6585586	381	51	-60	70
KWR347	341490	6585601	381	45	-60	70
KWR348	341511	6585607	381	42	-60	70
KWR349	341533	6585614	381	45	-60	70
KWR350	341555	6585621	382	43	-60	70
KWR351	341581	6585631	383	26	-60	70
KWR352	341592	6585635	383	21	-60	70
KWR353	341601	6585637	384	21	-60	70
KWR354	341613	6585642	384	18	-60	70
KWR355	341619	6585644	384	14	-60	70
KWR356	341628	6585647	385	13	-60	70
KWR357	341636	6585651	385	18	-60	70
KWR358	341645	6585655	385	18	-60	70
KWR359	341654	6585658	385	14	-60	70
KWR360	341663	6585662	386	7	-60	70
KWR361	341670	6585663	386	8	-60	70
KWR362	341675	6585665	386	5	-60	70
KWR363	341679	6585666	386	3	-60	70
KWR364	341680	6585667	386	4	-60	70
KWR365	341683	6585668	386	6	-60	70
KWR366	341689	6585671	386	9	-60	70
KWR367	341695	6585673	386	4	-60	70
KWR368	341697	6585674	386	4	-60	70
KWR369	341702	6585674	386	5	-60	70
KWR370	341705	6585676	386	5	-60	70
KWR371	341710	6585675	386	8	-60	70
KWR372	341719	6585679	387	15	-60	70
KWR373	341728	6585682	387	7	-60	70
KWR374	341734	6585684	387	9	-60	70
KWR375	341741	6585687	387	11	-60	70
KWR376	341749	6585693	387	15	-60	70
KWR377	341757	6585695	387	19	-60	70
KWR378	341766	6585701	387	32	-60	70
KWR379	341792	6585714	388	24	-60	70
KWR380	341801	6585716	388	19	-60	70
KWR381	341815	6585718	388	25	-60	70
KWR382	341826	6585722	388	24	-60	70
KWR383	341844	6585724	388	22	-60	70
KWR384	341853	6585728	389	21	-60	70

KWR385	341869	6585735	389	28	-60	70
KWR386	341884	6585740	389	19	-60	70
KWR387	341895	6585744	389	20	-60	70
KWR388	341908	6585749	389	24	-60	70
KWR389	341921	6585766	389	34	-60	70
KWR390	341939	6585759	385	27	-60	70
KWR391	341954	6585768	391	19	-60	70
KWR392	341969	6585771	390	27	-60	70
KWR393	341984	6585777	389	29	-60	70
KWR394	341999	6585781	387	36	-60	70
KWR395	342014	6585788	389	37	-60	70
KWR396	342026	6585793	387	34	-60	70
KWR397	342044	6585798	388	35	-60	70
KWR398	342061	6585804	389	36	-60	70
KWR399	342075	6585812	388	25	-60	70
KWR400	342089	6585816	388	24	-60	70
KWR401	341307	6584636	368	47	-60	70
KWR402	341331	6584642	366	42	-60	70
KWR403	341356	6584648	370	44	-60	70
KWR404	341381	6584659	373	42	-60	70
KWR405	341402	6584664	369	45	-60	70
KWR406	341426	6584672	369	54	-60	70
KWR407	341452	6584679	371	46	-60	70
KWR408	341476	6584688	370	42	-60	70
KWR409	341488	6584694	369	36	-60	70
KWR410	341502	6584697	371	20	-60	70
KWR411	341512	6584707	364	18	-60	70
KWR412	341525	6584704	366	21	-60	70
KWR413	341537	6584713	368	24	-60	70
KWR414	341550	6584716	371	33	-60	70
KWR415	341561	6584719	366	31	-60	70
KWR416	341577	6584720	372	33	-60	70
KWR417	341590	6584727	372	34	-60	70
KWR418	341606	6584744	369	38	-60	70
KWR419	341630	6584745	369	19	-60	70
KWR420	341640	6584749	370	42	-60	70
KWR421	341663	6584758	370	30	-60	70
KWR422	341684	6584763	369	54	-60	70
KWR423	341714	6584771	375	67	-60	70
KWR424	341746	6584784	370	61	-60	70
KWR425	341783	6584799	367	64	-60	70
KWR426	341821	6584824	371	61	-60	70
KWR427	341870	6584836	371	54	-60	70
KWR428	341893	6584843	369	44	-60	70
KWR429	341919	6584855	369	41	-60	70
KWR430	341935	6584862	368	39	-60	70

KWR431	341958	6584868	369	33	-60	70
KWR432	341975	6584877	373	36	-60	70
KWR433	341993	6584884	370	34	-60	70
KWR434	342013	6584890	371	35	-60	70
KWR435	342046	6584896	375	21	-60	70
KWR436	342053	6584900	378	16	-60	70
KWR437	342068	6584905	373	11	-60	70
KWR438	342078	6584910	373	16	-60	70
KWR439	342088	6584916	372	16	-60	70
KWR440	342098	6584921	371	16	-60	70
KWR441	342111	6584924	368	23	-60	70
KWR442	342125	6584928	371	33	-60	70
KWR443	342142	6584932	371	26	-60	70
KWR444	342157	6584939	372	32	-60	70
KWR445	342171	6584946	372	19	-60	70
KWR446	342191	6584952	370	16	-60	70
KWR447	342209	6584961	372	20	-60	70
KWR447A	342197	6584955	373	16	-60	70
KWR448	342221	6584963	373	17	-60	70
KWR449	342233	6584967	371	14	-60	70
KWR450	342248	6584971	375	21	-60	70
KWR451	342258	6584978	374	11	-60	70
KWR452	342267	6584982	374	25	-60	70
KWR453	342282	6584986	374	19	-60	70
KWR454	342298	6584990	371	25	-60	70
KWR455	342315	6584996	373	25	-60	70
KWR456	342328	6585002	375	49	-60	70
KWR457	342346	6585010	378	46	-60	70
KWR458	342367	6585014	376	46	-60	70
KWR459	342390	6585025	377	57	-60	70
KWR460	342421	6585036	378	51	-60	70
KWR461	342445	6585044	377	57	-60	70
KWR462	342471	6585056	381	50	-60	70
KWR463	342495	6585063	385	26	-60	70
KWR464	342513	6585070	380	27	-60	70
KWR465	342540	6585080	387	21	-60	70
KWR466	342553	6585083	381	33	-60	70
KWR467	342571	6585091	387	23	-60	70
KWR468	342593	6585098	392	39	-60	70
KWR469	342613	6585106	388	21	-60	70
KWR470	342627	6585111	388	19	-60	70
KWR471	342651	6585122	394	21	-60	70
KWR472	342671	6585126	389	30	-60	70
KWR473	342689	6585133	387	27	-60	70
KWR474	342716	6585144	388	28	-60	70
KWR475	342731	6585149	385	30	-60	70

KWR476	342748	6585154	386	37	-60	70
KWR477	342768	6585161	384	36	-60	70
KWR478	341614	6583897	368	5	-60	70
KWR479	341624	6583898	369	10	-60	70
KWR480	341641	6583901	368	38	-60	70
KWR481	341667	6583914	372	33	-60	70
KWR482	341684	6583917	366	31	-60	70
KWR483	341706	6583926	366	16	-60	70
KWR484	341724	6583934	369	10	-60	70
KWR485	341735	6583939	372	9	-60	70
KWR486	341749	6583940	374	7	-60	70
KWR487	341762	6583943	370	10	-60	70
KWR488	341781	6583956	373	11	-60	70
KWR489	341789	6583957	367	15	-60	70
KWR490	341805	6583963	369	15	-60	70
KWR491	341812	6583962	366	18	-60	70
KWR492	341826	6583969	363	14	-60	70
KWR493	341836	6583975	368	6	-60	70
KWR494	341844	6583974	368	11	-60	70
KWR494A	341847	6583979	366	11	-60	70
KWR495	341859	6583984	363	13	-60	70
KWR496	341866	6583985	365	14	-60	70
KWR497	341872	6583986	363	15	-60	70
KWR498	341881	6583989	362	17	-60	70
KWR499	341895	6583995	369	29	-60	70
KWR500	341914	6584004	367	21	-60	70
KWR501	341926	6584009	366	22	-60	70
KWR502	341940	6584009	369	18	-60	70
KWR503	341948	6584013	361	14	-60	70
KWR504	341951	6584022	373	14	-60	70
KWR505	341966	6584024	363	16	-60	70
KWR506	341978	6584028	368	22	-60	70
KWR507	341991	6584030	366	28	-60	70
KWR508	342005	6584033	359	38	-60	70
KWR509	342028	6584041	362	50	-60	70
KWR510	342054	6584054	359	46	-60	70
KWR511	342086	6584065	369	58	-60	70
KWR512	342113	6584073	364	46	-60	70
KWR513	342135	6584083	364	40	-60	70
KWR514	342151	6584086	362	37	-60	70
KWR515	342169	6584094	364	33	-60	70
KWR516	342184	6584100	364	26	-60	70
KWR517	342198	6584106	363	27	-60	70
KWR518	342212	6584112	365	46	-60	70
KWR519	342235	6584118	365	35	-60	70
KWR520	342254	6584126	371	37	-60	70

KWR521	342273	6584129	371	14	-60	70
KWR522	342281	6584132	369	43	-60	70
KWR523	342305	6584148	364	38	-60	70
KWR524	342319	6584156	362	18	-60	70
KWR525	342327	6584159	366	35	-60	70
KWR526	342342	6584165	365	31	-60	70
KWR527	342358	6584170	364	29	-60	70
KWR528	342374	6584173	368	27	-60	70
KWR529	342392	6584177	371	27	-60	70
KWR530	342401	6584175	366	30	-60	70
KWR531	342421	6584180	369	42	-60	70
KWR532	342437	6584187	366	24	-60	70
KWR533	342447	6584188	367	37	-60	70
KWR534	342464	6584199	369	24	-60	70
KWR535	342475	6584205	365	25	-60	70
KWR536	342485	6584212	368	39	-60	70
KWR537	342503	6584222	367	38	-60	70
KWR538	342523	6584229	363	35	-60	70
KWR539	342537	6584237	368	47	-60	70
KWR540	342557	6584244	368	38	-60	70
KWR541	342578	6584252	368	35	-60	70
KWR542	342594	6584256	369	50	-60	70
KWR543	342619	6584263	371	51	-60	70
KWR544	342647	6584273	368	39	-60	70
KWR545	342666	6584276	375	4	-60	70
KWR546	342671	6584275	374	44	-60	70
KWR547	342692	6584284	376	44	-60	70
KWR548	342714	6584295	382	40	-60	70
KWR549	342737	6584299	382	18	-60	70
KWR550	342747	6584306	381	23	-60	70
KWR551	342753	6584310	378	33	-60	70
KWR552	342772	6584317	383	4	-60	70
KWR553	342776	6584315	381	3	-60	70
KWR554	342783	6584318	380	3	-60	70
KWR555	342784	6584321	384	40	-60	70
KWR556	342810	6584327	383	12	-60	70
KWR557	342814	6584330	386	3	-60	70
KWR558	342819	6584333	389	3	-60	70
KWR559	342821	6584334	386	6	-60	70
KWR560	342822	6584332	385	46	-60	70
KWR561	342848	6584342	381	24	-60	70
KWR562	342866	6584350	382	37	-60	70
KWR563	342888	6584360	377	24	-60	70
KWR564	342899	6584362	371	22	-60	70
KWR565	342914	6584367	373	34	-60	70
KWR566	342929	6584374	376	38	-60	70

KWR567	342948	6584378	375	40	-60	70
KWR568	342970	6584392	373	41	-60	70
KWR569	342983	6584401	372	39	-60	70
KWR570	342060	6583185	358	33	-60	70
KWR571	342074	6583190	356	29	-60	70
KWR572	342087	6583196	354	15	-60	70
KWR573	342097	6583200	351	15	-60	70
KWR574	342101	6583203	351	15	-60	70
KWR575	342112	6583210	357	15	-60	70
KWR576	342118	6583211	355	3	-60	70
KWR577	342121	6583213	357	21	-60	70
KWR578	342132	6583219	357	26	-60	70
KWR579	342143	6583224	356	14	-60	70
KWR580	342152	6583228	359	14	-60	70
KWR581	342158	6583228	354	24	-60	70
KWR582	342172	6583235	356	14	-60	70
KWR583	342182	6583237	357	18	-60	70
KWR584	342192	6583240	361	37	-60	70
KWR585	342209	6583253	355	48	-60	70
KWR586	342230	6583264	355	50	-60	70
KWR587	342254	6583274	359	55	-60	70
KWR588	342282	6583286	361	50	-60	70
KWR589	342301	6583296	352	50	-60	70
KWR590	342334	6583311	366	33	-60	70
KWR591	342346	6583314	358	27	-60	70
KWR592	342363	6583320	362	15	-60	70
KWR593	342370	6583320	360	22	-60	70
KWR594	342379	6583325	358	13	-60	70
KWR595	342385	6583326	360	22	-60	70
KWR596	342400	6583327	359	17	-60	70
KWR597	342431	6583338	360	18	-60	70
KWR598	342442	6583339	363	29	-60	70
KWR599	342454	6583344	356	27	-60	70
KWR600	342468	6583348	357	41	-60	70
KWR601	342484	6583354	358	13	-60	70
KWR602	342494	6583359	357	8	-60	70
KWR603	342497	6583360	353	7	-60	70
KWR604	342501	6583362	353	31	-60	70
KWR605	342515	6583370	360	34	-60	70
KWR606	342533	6583376	358	23	-60	70
KWR607	342546	6583382	362	14	-60	70
KWR608	342552	6583382	358	29	-60	70
KWR609	342565	6583389	360	18	-60	70
KWR610	342571	6583394	358	31	-60	70
KWR611	342584	6583400	356	17	-60	70
KWR612	342595	6583401	363	26	-60	70


KWR613	342606	6583407	359	16	-60	70
KWR614	342613	6583409	359	22	-60	70
KWR615	342630	6583413	355	14	-60	70
KWR616	342633	6583417	356	23	-60	70
KWR617	342640	6583419	359	18	-60	70
KWR618	342653	6583423	360	24	-60	70
KWR619	342667	6583426	360	30	-60	70
KWR620	342683	6583435	363	30	-60	70
KWR621	342696	6583440	363	36	-60	70
KWR622	342724	6583449	366	32	-60	70
KWR623	342723	6583449	361	35	-60	70
KWR624	342743	6583457	362	38	-60	70
KWR625	342756	6583461	362	14	-60	70
KWR626	342767	6583466	361	33	-60	70
KWR627	342789	6583472	367	28	-60	70
KWR628	342803	6583478	363	17	-60	70
KWR629	342812	6583480	370	19	-60	70
KWR630	342819	6583482	365	42	-60	70
KWR631	342842	6583487	367	39	-60	70
KWR632	342859	6583496	365	45	-60	70
KWR633	342880	6583505	367	48	-60	70
KWR634	342905	6583513	367	55	-60	70
KWR635	342931	6583524	368	43	-60	70
KWR636	342952	6583530	371	42	-60	70
KWR637	342970	6583538	373	5	-60	70
KWR638	342974	6583541	371	2	-60	70
KWR639	342975	6583542	372	3	-60	70
KWR640	342978	6583543	371	3	-60	70
KWR641	342981	6583545	372	3	-60	70
KWR642	342983	6583545	373	3	-60	70
KWR643	342985	6583548	371	2	-60	70
KWR644	342987	6583548	371	3	-60	70
KWR645	342989	6583548	370	3	-60	70
KWR646	342990	6583549	371	3	-60	70
KWR647	342994	6583550	370	45	-60	70
KWR648	343017	6583559	372	49	-60	70
KWR649	343042	6583565	374	42	-60	70
KWR650	343063	6583571	377	56	-60	70
KWR651	343091	6583585	376	9	-60	70
KWR652	343096	6583587	383	2	-60	70
KWR653	343097	6583587	381	2	-60	70
KWR654	343099	6583587	376	1	-60	70
KWR655	343100	6583586	379	2	-60	70
KWR656	343101	6583588	378	2	-60	70
KWR657	343102	6583589	376	2	-60	70
KWR658	343104	6583588	376	2	-60	70

KWR659	343107	6583590	377	4	-60	70
KWR660	343108	6583591	376	3	-60	70
KWR661	343111	6583591	376	3	-60	70
KWR662	343114	6583591	376	5	-60	70
KWR663	343117	6583593	377	2	-60	70
KWR664	343119	6583594	378	1	-60	70
KWR665	343121	6583596	377	3	-60	70
KWR666	343123	6583596	376	3	-60	70
KWR667	343126	6583597	378	3	-60	70
KWR668	343131	6583599	382	3	-60	70
KWR669	343137	6583600	381	3	-60	70
KWR670	343137	6583601	383	3	-60	70
KWR671	343141	6583603	384	3	-60	70
KWR672	343144	6583602	384	3	-60	70
KWR673	343146	6583602	380	3	-60	70
KWR674	343148	6583604	380	3	-60	70
KWR675	343152	6583606	385	18	-60	70
KWR676	343159	6583608	381	3	-60	70
KWR677	343163	6583609	381	3	-60	70
KWR678	343166	6583610	383	3	-60	70
KWR679	343168	6583610	383	4	-60	70
KWR680	343173	6583612	383	3	-60	70
KWR681	343177	6583614	383	3	-60	70
KWR682	341470	6586368	379	19	-60	70
KWR683	341480	6586375	374	17	-60	70
KWR684	341485	6586378	381	16	-60	70
KWR685	341492	6586387	381	22	-60	70
KWR686	341503	6586394	381	15	-60	70
KWR687	341508	6586397	379	29	-60	70
KWR688	341527	6586403	381	11	-60	70
KWR689	341536	6586410	383	3	-60	70
KWR690	341538	6586411	380	25	-60	70
KWR691	341550	6586417	377	44	-60	70
KWR692	341569	6586424	382	30	-60	70
KWR693	341582	6586425	377	28	-60	70
KWR694	341597	6586430	384	24	-60	70
KWR695	341613	6586434	381	34	-60	70
KWR696	341632	6586442	381	28	-60	70
KWR697	341645	6586442	380	1	-60	70
KWR698	341652	6586446	380	28	-60	70
KWR699	341665	6586453	381	29	-60	70
KWR700	341682	6586461	382	37	-60	70
KWR701	341706	6586469	385	1	-60	70
KWR702	341710	6586471	385	2	-60	70
KWR703	341710	6586471	382	1	-60	70
KWR704	341715	6586474	383	3	-60	70

KWR705	341717	6586477	386	55	-60	70
KWR706	341743	6586483	378	3	-60	70
KWR707	341746	6586483	377	3	-60	70
KWR708	341752	6586485	379	45	-60	70
KWR709	341776	6586497	383	17	-60	70
KWR710	341787	6586501	386	33	-60	70
KWR711	341797	6586499	387	10	-60	70
KWR712	341805	6586504	385	6	-60	70
KWR713	341808	6586505	385	4	-60	70
KWR714	341816	6586507	387	3	-60	70
KWR715	341819	6586510	388	40	-60	70
KWR716	341840	6586520	388	63	-60	70
KWR717	341871	6586529	394	60	-60	70
KWR718	341900	6586542	395	47	-60	70
KWR719	341923	6586551	392	45	-60	70
KWR720	341941	6586559	389	16	-60	70
KWR721	341949	6586560	391	20	-60	70
KWR722	341962	6586564	390	34	-60	70
KWR723	341978	6586570	394	46	-60	70
KWR724	342001	6586579	394	40	-60	70
KWR725	342034	6586583	394	41	-60	70
KWR726	342063	6586586	393	40	-60	70
KWR727	342107	6586611	392	38	-60	70
KWR728	342119	6586626	391	41	-60	70
KWR729	342134	6586631	391	40	-60	70
KWR730	342166	6586641	390	32	-60	70
KWR731	340770	6586145	374	42	-60	70
KWR732	340787	6586154	374	43	-60	70
KWR733	340807	6586164	373	10	-60	70
KWR734	340813	6586167	373	7	-60	70
KWR735	340817	6586168	373	49	-60	70
KWR736	340842	6586174	373	4	-60	70
KWR737	340844	6586174	373	3	-60	70
KWR738	340847	6586176	373	4	-60	70
KWR739	340849	6586176	373	4	-60	70
KWR740	340852	6586177	373	3	-60	70
KWR741	340862	6586180	373	3	-60	70
KWR742	340873	6586182	373	3	-60	70
KWR743	340887	6586184	373	3	-60	70
KWR744	340898	6586189	373	4	-60	70
KWR745	340908	6586193	373	3	-60	70
KWR746	340918	6586199	373	3	-60	70
KWR747	340927	6586203	373	3	-60	70
KWR748	340937	6586209	373	66	-60	70
KWR749	340968	6586222	373	67	-60	70
KWR750	340996	6586242	374	82	-60	70

KWR751	341038	6586254	374	80	-60	70
KWR752	341075	6586269	375	72	-60	70
KWR753	341114	6586285	376	78	-60	70
KWR754	341156	6586303	377	72	-60	70
KWR755	341190	6586319	377	46	-60	70
KWR756	341209	6586320	377	41	-60	70
KWR757	341229	6586323	377	48	-60	70
KWR758	341250	6586333	378	40	-60	70
KWR759	341269	6586338	378	42	-60	70
KWR760	341292	6586352	378	40	-60	70

Map Showing the Location of the Holes at Seven Mile Hill

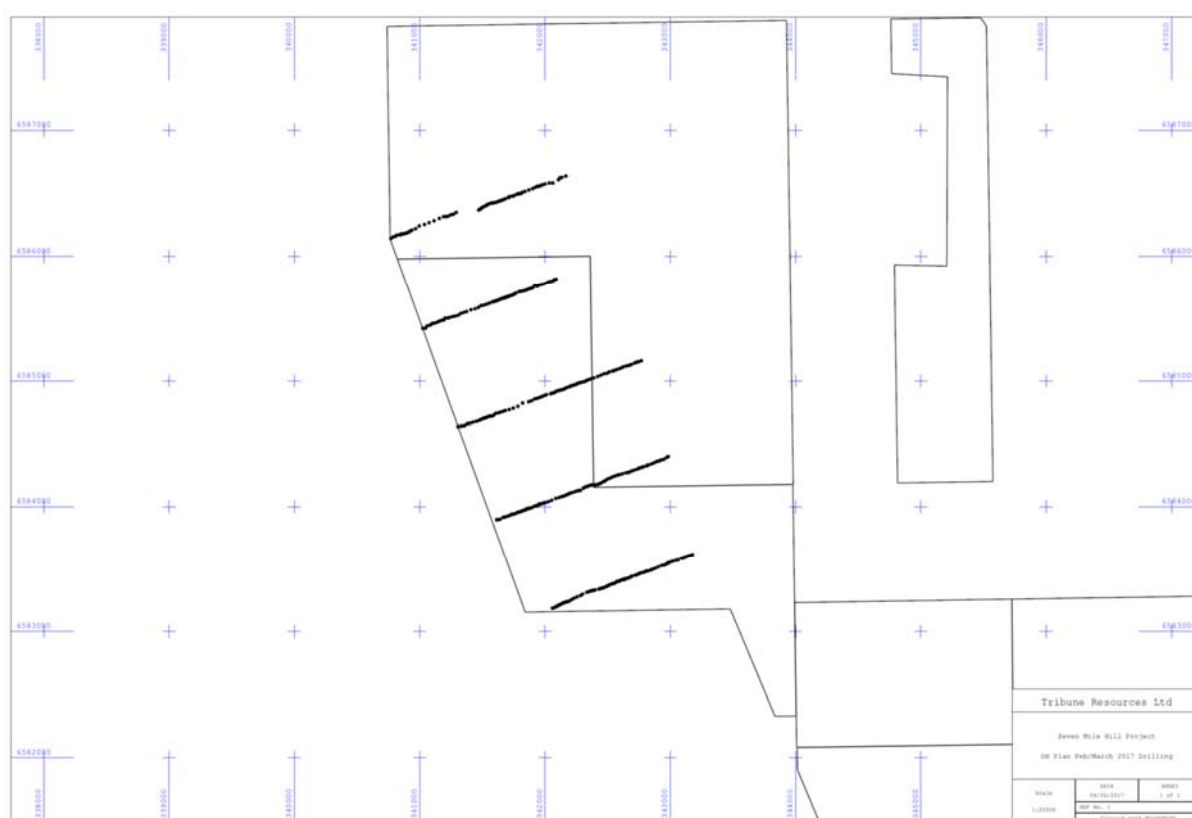

Next Steps

An updated geological interpretation is being completed and further work will be planned upon its completion. In addition there are a number of other structural and geochemical targets defined from previous exploration that require further exploration. Planning of this work is underway.

Mt Celia Project (Tribune's Interest 100%)

Some time ago the Company completed an infill auger drilling programme infill testing the previous reconnaissance sampling across the project area. Most of this area had seen no exploration, with a limited number of targets previously tested over the years, via wide spaced (400m by 40m) auger soil

sampling and reconnaissance (800m by 100m) vertical RAB drilling. This drilling and sampling had outlined several low order anomalies that had never been followed up.

The recent sampling infilled the existing samples at 200m by 40m, with a total of 483 holes were drilled. The holes were generally drilled to approximately 2m depth, with sampling preferentially collected in the zone of the greatest carbonate content of the soil. This zone in the soils are known for their best geochemical response in the region. All holes were drilled vertically. Logging of the holes revealed a variety of soil and rock types.

A programme of bedrock aircore drilling is being planned to test the various anomalies defined by the resent and previous auger programmes.

Attribution Statement

Information in this report pertaining to mineral resources and exploration results was compiled by Mr MP Sullivan who is a member of AusIMM Mr Sullivan is the chief geologist of Jemda Pty Ltd, geological consultants to the Company. Mr Sullivan has sufficient experience which is relevant to the style of mineralisation and the type of deposit that is under consideration and to the activity that he is undertaking to qualify as a competent person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Sullivan consents to the inclusion in the report of the matters based on his information in the form and context in which is appears.

Appendix Seven Mile Hill Project

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- Samples were collected via Rotary Air Blast (RAB) drill chips. - All drilling yielded samples on a metre basis. RAB drilling samples were commonly composited into intervals of 4m, from which approx. 2-3 kg is pulverised to produce a 50 g charge for aqua regia assay. - Duplicates and standard reference samples were regularly inserted into the sample string to check d=for consistency of sampling (duplicates) and laboratory errors (standards, blanks). - Sample preparation method is total material dried and pulverized to nominally 85% passing 75 µm particle size. Analysis of RAB samples is generally by Aqua Regia digest, followed by an AAS finish finish (DL 0.01 – UL 50 ppm Au). Samples exceeding the upper limit of the method were automatically re-assayed utilizing a high grade gravimetric method.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	RAB holes were typically 100mm in diameter.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Recoveries were logged onto paper logs during drilling. Recoveries were visually assessed. - Sample recoveries were maximised in RAB drilling via collecting the samples in a cyclone prior to sub sampling. RAB drillholes were stopped if significant water flows were encountered. - No relationship appears from the data between sample recovery and grade of the samples.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel,	- All drillholes were geologically logged. This logging appears to be of high quality and suitable for use in further studies. - Logging is qualitative in nature. - All samples / intersections are logged. 100% of relevant length intersections are

Criteria	JORC Code explanation	Commentary
	- etc) photography. - The total length and percentage of the relevant intersections logged.	logged.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- Non-core drill chip sample material is scooped off the samples stored on the ground, where sample is dry. In case of wet sample a representative 'grab' sample method is utilized. - The sample preparation technique is total material dried and pulverized to nominally 85% passing 75 µm particle size, from which a 50g charge was representatively riffle split off, for assay. - Standard check (known value) sample were commonly used in the drilling. The known values correspond closely with the expected values. A duplicate (same sample duplicated) were commonly inserted for every 40 or 50 samples taken. - The sample size is industry standard and appears suitable for the current programme.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- Various independent laboratories have assayed samples from the project over the years. In general they were internationally accredited for QAQC in mineral analysis. - No geophysical tools have been used to date. - The laboratories inserted blank and check samples for each batch of samples analysed and reports these accordingly with all results.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative Company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- No resampling apart from the original duplicates have been collected. - No twinned holes have been used to date. - Documentation of primary data is field log sheets (hand written). Primary data is entered into application specific data base. The data base is subjected to data verification program, erroneous data is corrected. Data storage is retention of physical log sheet, two electronic backup storage devices and primary electronic database.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- Survey control used is hand held GPS. No down hole surveys have been completed to date. As these areas contain drillholes to no more than 100m significant deviations in the RAB holes are not expected. - Grid systems are various local grid coordinates, converted into Map Grid of Australia (MGA) coordinates. - Topographic control is accurate to +/- 0.5 m.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore	- The drill spacing is variable but generally no greater than 800m by 40m. - The areas do not have drilling density sufficient for JORC Inferred category. Further infill will be required.

Criteria	JORC Code explanation	Commentary
	- Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	Apart from the reconnaissance RAB drilling, no sample compositing has been used.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- Apart from some historic vertical reconnaissance RAB drilling, the orientation of the drilling is approximately at right angles to the known mineralisation and so gives a fair representation of the mineralisation intersected. - No sampling bias is believed to occur due to the orientation of the drilling.
Sample security	The measures taken to ensure sample security.	Samples were delivered to the laboratory in batches at regular intervals. These are temporarily stored in a secure facility after drilling and before delivery.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	The Company engages independent consultants who regularly audit the data for inconsistencies and other issues. None have been reported to date.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Seven Mile Hill project is contained within a large number of tenements. Generally, these are Mining Leases, but some are Prospecting Licences as a part of the tenement package. The tenement details have been previously announced to the market. The Company holds a 50% interest in the project with Rand Mining Ltd holding the remainder.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	All work relating to previous exploration contained within this report was completed by the Company.
Geology	Deposit type, geological setting and style of mineralisation.	Details of the geology are found elsewhere in this report.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - eastings and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report,	- Details of the drilling, etc are found within the various tables and diagrams elsewhere in this report. - No material information, results or data have been excluded.

Criteria	JORC Code explanation	Commentary
	<i>the Competent Person should clearly explain why this is the case.</i>	
<i>Data aggregation methods</i>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	- Weighted averages were calculated by a simple weighting of from and to distances down each hole. Most samples are 4 metre samples, with a limited number of shorter intervals, such as at the end of a hole, etc. No top cuts were applied. Lower cut-offs were not used. - No aggregations of higher grade mineralisation have been used. - No metal equivalent values are used
<i>Relationship between mineralisation widths and intercept lengths</i>	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	- Details of geology, and selected cross sections are given elsewhere in this report - The tables above show drill widths not true widths.
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Details of geology, and selected cross sections are given elsewhere in this report.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	Details of the results, drilling, etc are reported elsewhere in this report.
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Details of geology, and selected cross sections are given elsewhere in this report.
<i>Further work</i>	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	- Proposed work included an updated geological interpretation and drilling of infill RAB drilling where warranted. The aim of such work is to increase confidence in the data and also to test for new anomalies. Budgets are being prepared for this work at present. - In addition a significant number of additional prospects are known to exist within the projects as defined by previous RAB and RC drilling intersections. These will form the second phase of exploration. - Various maps and diagrams are presented elsewhere in this report to highlight possible extensions and new targets.